

siteco



• Highly flexible thanks to multi-lumen version:
Lumen output can be adjusted via DIP switch

• Robust for demanding environments:
IP65 protection and IK08 impact resistance

• Perfect for 1:1 refurbishment with
maximum CO₂ and energy savings


• Versatile due to accessories such
as mounting brackets and reflectors

Highbay 42

The standard for universal applications.

Highbay 42


New Highbay family with multi-lumen.

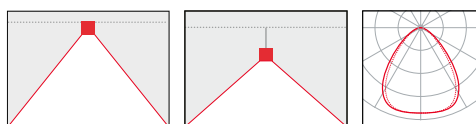

Technical product information

Colour temperature	4,000 K
Rated luminous flux	12,800 lm, 19,200 lm, 10,000 – 28,000 lm*
Luminous efficacy	up to 160 lm / W
Colour rendering index	CRI > 80
Rated input power	80 W, 120 W, 175 W
Beam angle	wide distribution
Control	ON / OFF
Protection rating	IP65
Protection class	I
Protection symbol	D
Impact resistance	IK08
Temperature range	-20 ... +40° C
Rated service life	50,000 h (L80 / B50)
Recommended mounting height	5 ... 15 m

* Multi-lumen: manually adjustable before installation via DIP switch.

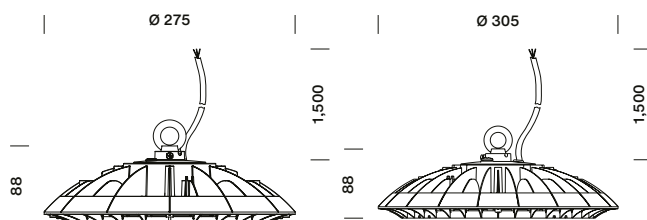

Choose your lumen output with a simple DIP switch:**

I	10,000 lm	III	20,000 lm
II	15,000 lm	IV	28,000 lm

** Multi-lumen version only



Highbay 42	Order Number
12,800 lm Ø 275 mm ON / OFF	51HP327A4FMA
19,200 lm Ø 275 mm ON / OFF	51HP327A4HMA
10,000 – 28,000 lm* Ø 305 mm ON / OFF	51HP32MB4MMA

* Multi-lumen: manually adjustable before installation via DIP switch.

Highbay 42 Accessories	Order Number
mounting bracket	59HP92001
reflector, PC	59HP91001
reflector, Aluminium	59HP91003

Contact.

Siteco GmbH

Georg-Simon-Ohm-Str. 50
83301 Traunreut, Germany
Tel. +49 8669 330
info@siteco.com

siteco.com