




Photometric test report

Family Rondel 31	Order number: 51WC10DA42A EAN: 4058352616758	LP number 59345_43
	Version enclosure, PC, transparent, opal, diffuse beam	serial documentation 18.11.2022
	Lamps LED 4000 K CRI ≥ 80	
	Controlgear ECG-DALI	
	Rated values <ul style="list-style-type: none"> Net luminous flux = 2550 lm Power consumption = 19.0 W Luminous efficacy = 134.2 lm/W 	
		

Luminous intensity in cd/klm C180-0 **Imax: 297 cd/klm**

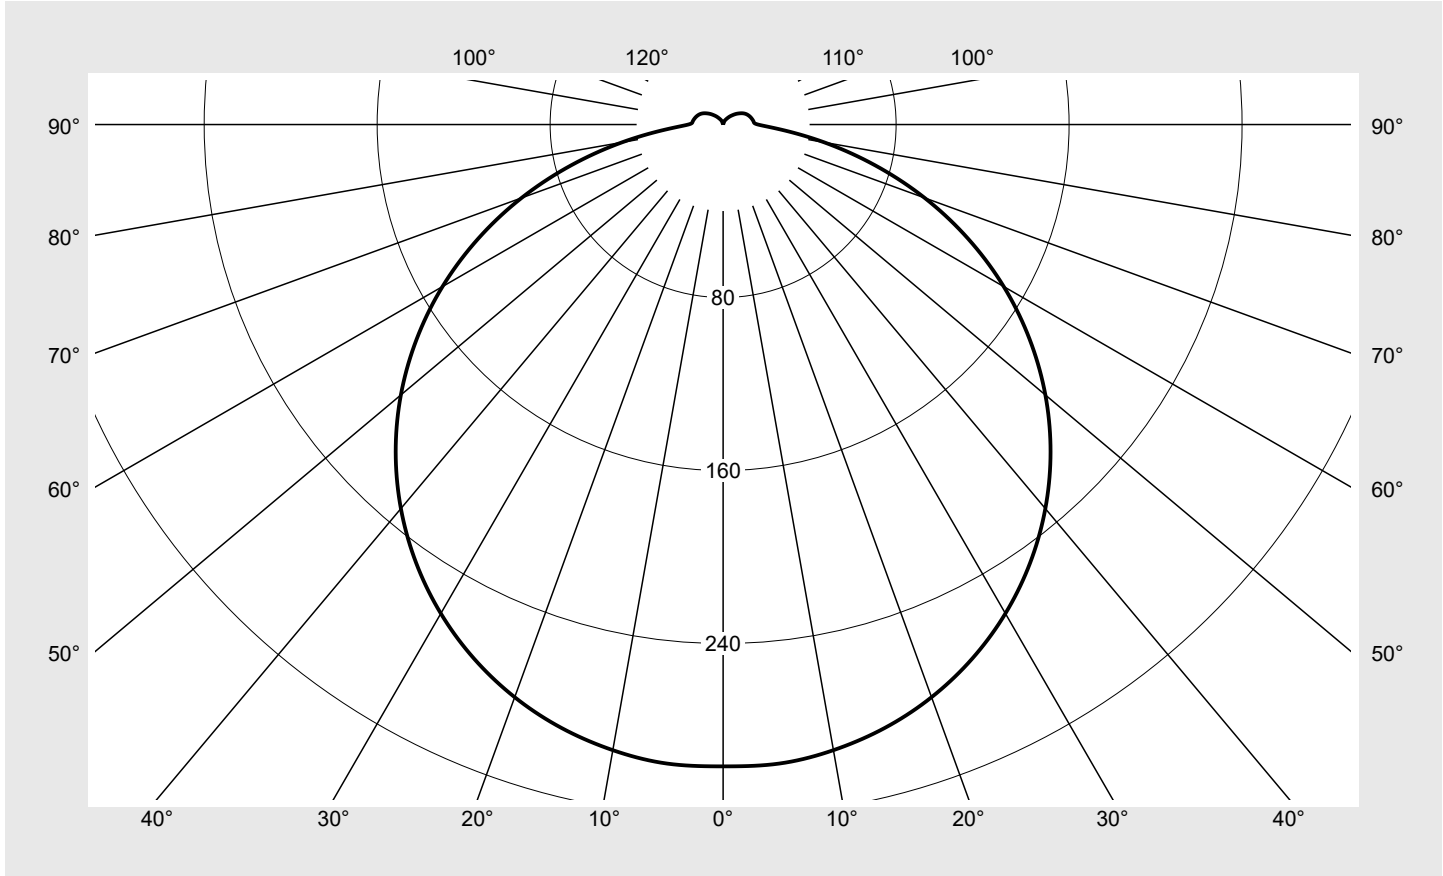

Classifications	
DIN 5040	A 4 1
CIE	N1=44 N2=75 N3=94 N4=94 N5=100

Luminaire light output ratios	
η_{LB}	100.0%
ϕ_u	94.2%
ϕ_o	5.8%

Measurement conditions
 DIN EN 13032 and DIN 5032

Photometric test report

Family Rondel 31	Order number: 51WC10DA42A EAN: 4058352616758	LP number 59345_43
----------------------------	---------------------------------------------------------------	------------------------------



Table of values for luminous intensities	Maximum luminous intensity
-------------------------------------------------	-----------------------------------

C-planes	0°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm		Luminous flux in lm/klm
0°	296.8	1.8	1.8
5°	296.7	14.2	15.9
10°	293.8	28.0	43.9
15°	288.9	41.0	84.9
20°	281.8	52.8	137.7
25°	272.6	63.1	200.9
30°	261.1	71.6	272.4
35°	247.5	77.8	350.2
40°	231.8	81.7	431.9
45°	214.2	83.0	514.9
50°	194.6	81.7	596.6
55°	173.0	77.7	674.3
60°	149.9	71.1	745.5
65°	125.1	62.1	807.6
70°	99.2	51.1	858.7
75°	72.7	38.5	897.2
80°	47.5	25.7	922.8
85°	26.9	14.7	937.5
90°	16.1	8.8	946.3
95°	14.2	7.7	954.1
100°	13.7	7.4	961.5
105°	13.1	7.0	968.4
110°	12.4	6.4	974.8
115°	11.6	5.8	980.6
120°	10.4	4.9	985.5
125°	9.0	4.0	989.6
130°	7.6	3.2	992.7
135°	6.1	2.4	995.1
140°	4.9	1.7	996.8
145°	3.8	1.2	998.0
150°	2.9	0.8	998.8
155°	2.2	0.5	999.3
160°	1.6	0.3	999.6
165°	1.3	0.2	999.8
170°	1.2	0.1	999.9
175°	1.2	0.1	1000.0
180°	1.2	0.0	1000.0

Photometric test report

Family Rondel 31	Order number: 51WC10DA42A EAN: 4058352616758	LP number 59345_43
----------------------------	---------------------------------------------------------------	------------------------------

UGR-Table	Standard room	siteco
------------------	----------------------	---------------

Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	View crosswise (C0)					View endwise (C90)					
x	y										
2H	2H	19.0	20.8	19.4	21.1	21.4	19.0	20.8	19.4	21.1	21.4
	3H	20.7	22.3	21.1	22.6	23.0	20.7	22.3	21.1	22.6	23.0
	4H	21.4	22.9	21.8	23.2	23.6	21.4	22.9	21.8	23.2	23.6
	6H	21.9	23.3	22.3	23.6	24.0	21.9	23.3	22.3	23.6	24.0
	8H	22.1	23.4	22.5	23.8	24.2	22.1	23.4	22.5	23.8	24.2
	12H	22.3	23.5	22.7	23.9	24.3	22.3	23.5	22.7	23.9	24.3
4H	2H	19.8	21.3	20.2	21.7	22.0	19.8	21.3	20.2	21.7	22.0
	3H	21.7	23.0	22.1	23.3	23.7	21.7	23.0	22.1	23.3	23.7
	4H	22.5	23.6	22.9	24.0	24.5	22.5	23.6	22.9	24.0	24.5
	6H	23.1	24.1	23.6	24.5	25.0	23.1	24.1	23.6	24.5	25.0
	8H	23.3	24.3	23.8	24.7	25.2	23.3	24.3	23.8	24.7	25.2
	12H	23.5	24.4	24.0	24.8	25.3	23.5	24.4	24.0	24.8	25.3
8H	4H	22.8	23.8	23.3	24.2	24.7	22.8	23.8	23.3	24.2	24.7
	6H	23.6	24.4	24.1	24.8	25.3	23.6	24.4	24.1	24.8	25.3
	8H	23.9	24.6	24.4	25.1	25.6	23.9	24.6	24.4	25.1	25.6
	12H	24.2	24.8	24.7	25.3	25.8	24.2	24.8	24.7	25.3	25.8
12H	4H	22.9	23.7	23.4	24.2	24.7	22.9	23.7	23.4	24.2	24.7
	6H	23.7	24.4	24.2	24.8	25.4	23.7	24.4	24.2	24.8	25.4
	8H	24.0	24.6	24.5	25.1	25.7	24.0	24.6	24.5	25.1	25.7

Luminance table	Max. for $\gamma \geq 65^\circ$	Photometric dimensions in mm: D = 350	H(C0) = 32 H(C90) = 32	H(C180) = 32 H(C270) = 32
------------------------	---------------------------------------------------	---------------------------------------	---------------------------	------------------------------

C-planes	0°
γ	Luminance in cd/m ²
45°	7190.1
50°	7044.6
55°	6855.4
60°	6610.6
65°	6276.4
70°	5823.4
75°	5188.6
80°	4370.5
85°	3503.7

Photometric test report

Family Rondel 31	Order number: 51WC10DA42A EAN: 4058352616758	LP number 59345_43
-----------------------------------	---------------------------------------------------------------	-------------------------------------

Luminance values in cd/m²

γ 65°
 γ 70°
 γ 75°
 γ 80°
 γ 85°

siteco

