

Photometric test report

Family
CITY-LIGHT ELEGANCE LED

Order number: **5XA5265EF14H000022**
EAN: **4058352635216**

LP number
57133_35



Version post-top- or mounting to wall arm
Optic asymmetric, wide distribution (ST1.2a)
Cover cover transparent, PMMA
Lamps LED 3000 K | CRI ≥ 70
Controlgear ECG SITECO iQ
Rated values Net luminous flux = 1470 lm
Power consumption = 10.5 W
Luminous efficacy = 140 lm/W

serial
documentation
07.07.2022

siteco

Luminous intensity in cd/klm


C180-0

C205-25

C210-30

C270-90

Imax: 838 cd/klm

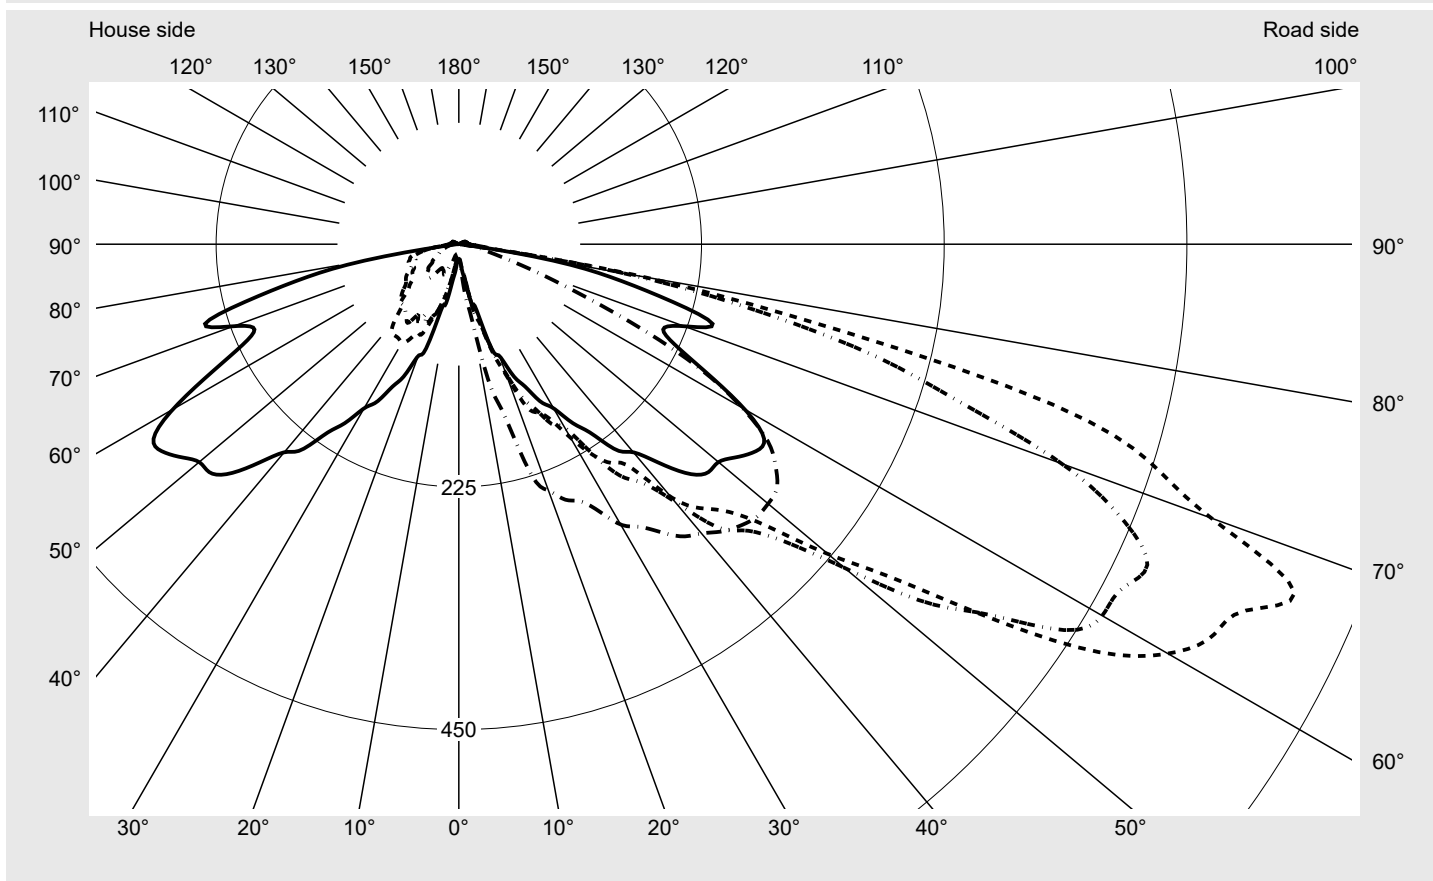

Luminaire output ratios

Eta	100.0%
Eta 0° - 90°	97.9%
Eta 90° - 180°	2.1%

Luminous intensity class acc. to EN13201-2

Class:	G1
Imax 70°	742.0
Imax 80°	184.9
Imax 90°	10.2
Imax >90°	9.5
Imax >95°	8.5


Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family CITY-LIGHT ELEGANCE LED	Order number: 5XA5265EF14H000022 EAN: 4058352635216	LP number 57133_35
--	--	------------------------------

Envelope curve in cd/klm **KMK 67.5°** **KMK 65°** **KMK 62.5°** **KMK 60°** **siteco**

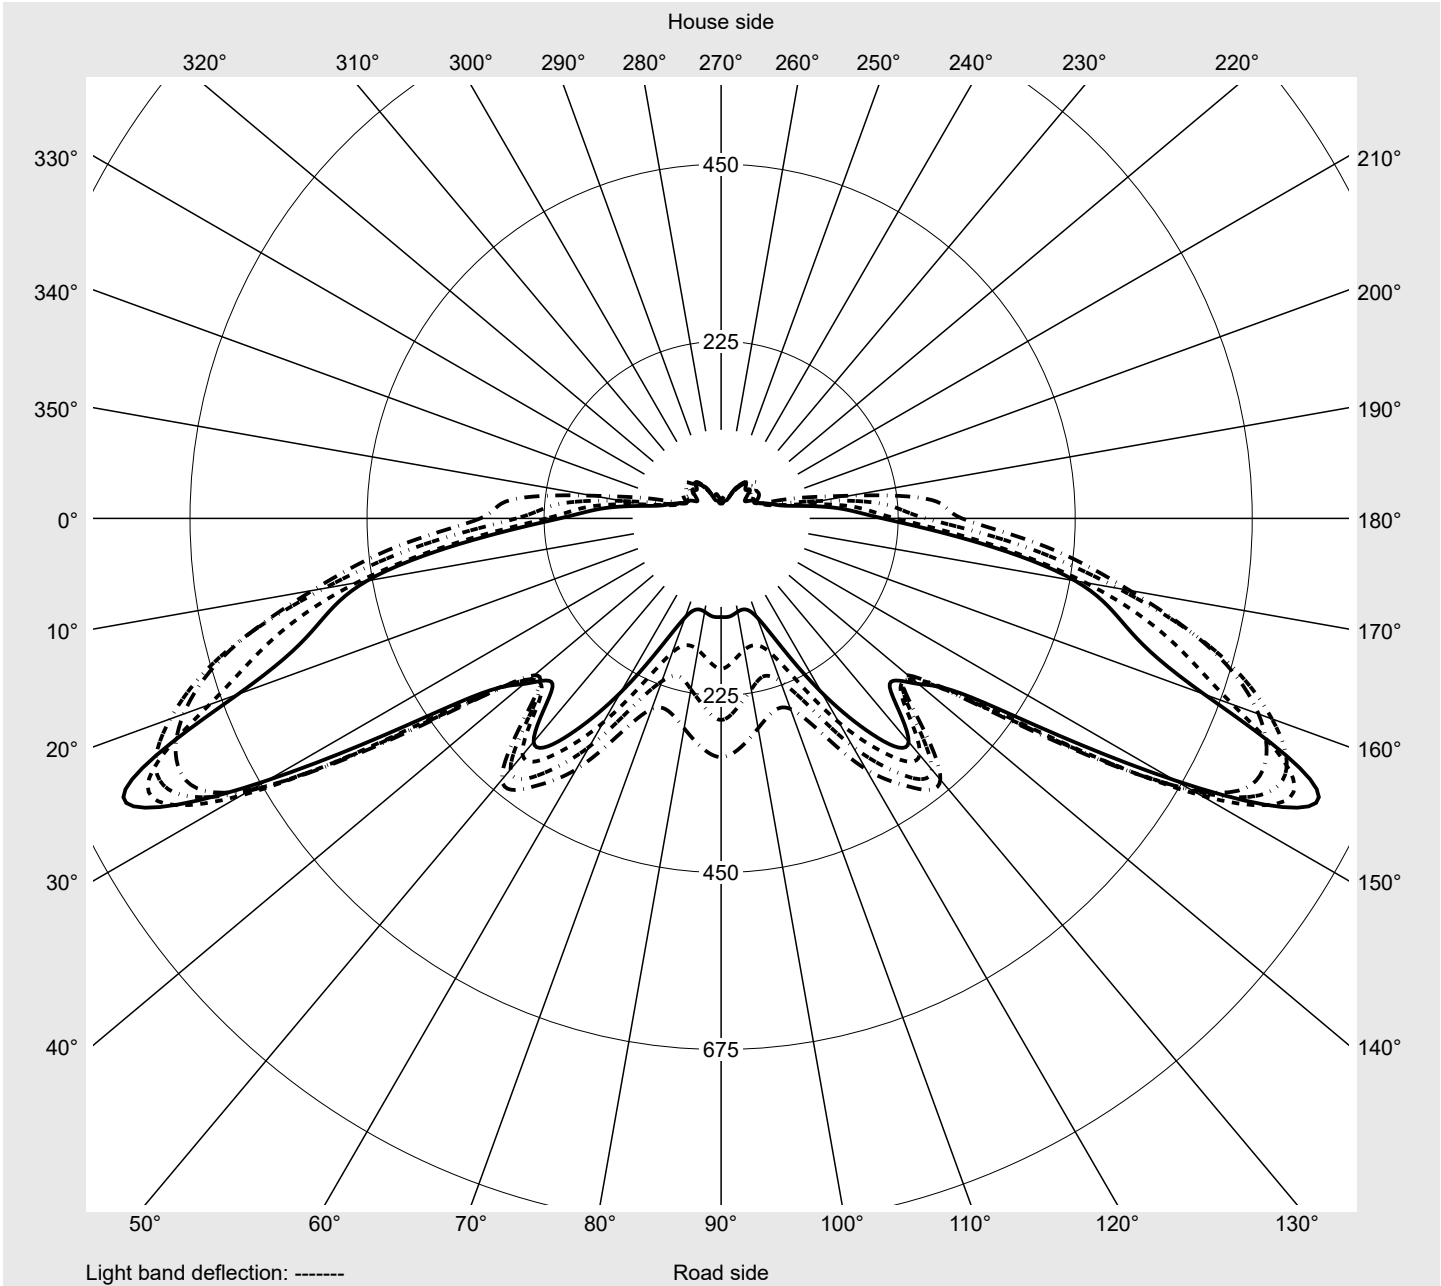

Photometric test report

Family CITY-LIGHT ELEGANCE LED	Order number: 5XA5265EF14H000022 EAN: 4058352635216	LP number 57133_35
Table of values for luminous intensities		Maximum luminous intensity
siteco		

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	14.6	14.6	14.6	14.6	14.6	14.6	14.6	14.6	14.6	14.6	14.6	14.6	14.6
2,5°	14.4	14.4	14.4	14.4	14.4	14.4	14.4	14.4	14.4	14.4	14.4	14.4	14.4
5,0°	15.8	16.1	16.4	16.4	17.1	17.4	18.1	18.1	18.4	19.0	19.7	20.4	21.3
7,5°	26.3	27.9	29.2	27.3	24.3	22.7	21.7	21.7	23.0	26.3	30.9	35.1	39.1
10,0°	36.8	34.5	36.1	36.8	35.5	32.5	28.6	31.5	40.1	51.2	60.4	64.4	69.6
12,5°	57.5	65.7	65.0	79.8	68.6	64.4	62.4	62.7	66.0	70.6	79.5	86.0	97.2
15,0°	62.4	66.3	75.8	84.1	83.4	76.8	75.8	77.5	84.4	103.8	112.6	125.4	141.8
17,5°	102.1	116.2	100.5	102.4	98.2	106.7	103.1	103.4	100.5	122.8	142.2	138.6	156.3
20,0°	110.3	130.0	136.6	141.2	138.6	130.3	127.4	119.2	109.7	139.2	152.0	156.3	186.5
22,5°	132.0	174.3	180.3	175.7	178.0	162.2	154.3	150.0	116.2	146.1	170.7	171.4	201.3
25,0°	145.8	169.1	167.8	182.9	172.0	172.0	169.1	162.2	122.1	158.6	181.6	178.3	220.3
27,5°	164.8	185.5	184.9	187.2	183.5	182.6	188.5	183.2	124.8	172.4	197.3	191.1	233.4
30,0°	175.7	203.2	206.5	229.5	221.6	207.2	196.3	184.5	134.3	194.4	227.9	222.6	268.6
32,5°	196.7	236.7	238.4	251.5	241.3	231.8	230.2	217.0	142.5	231.8	284.7	265.6	284.7
35,0°	214.1	251.8	241.7	249.2	237.7	247.6	262.7	238.0	158.6	248.9	304.4	295.5	317.2
37,5°	240.7	281.7	278.1	279.7	266.9	260.0	278.4	262.3	168.1	286.6	328.7	333.6	361.8
40,0°	251.8	291.6	285.7	303.1	296.8	306.0	311.6	264.3	187.8	301.4	360.2	357.6	380.2
42,5°	275.1	302.4	305.4	319.5	312.2	331.9	356.6	299.8	188.1	349.7	396.3	374.0	399.3
45,0°	300.8	319.5	334.6	353.6	341.8	350.0	375.3	306.3	210.8	348.7	418.0	401.6	410.7
47,5°	313.2	337.2	381.5	409.4	393.3	386.1	406.8	329.6	231.5	382.8	434.7	419.3	425.5
50,0°	314.2	363.1	433.7	455.4	446.2	446.9	466.9	371.0	264.0	379.9	444.9	429.8	424.5
52,5°	324.4	371.0	455.4	482.7	507.6	509.6	545.4	408.8	265.0	379.6	448.2	441.3	419.6
55,0°	335.2	393.3	461.6	515.2	577.5	607.4	598.2	436.7	297.1	366.4	454.4	446.2	410.7
57,5°	335.6	412.1	482.0	591.0	673.1	704.0	665.9	445.2	297.5	365.8	458.4	446.9	399.3
60,0°	306.0	414.7	527.3	645.8	726.9	759.1	688.8	446.5	310.3	348.4	433.4	416.0	368.1
62,5°	260.0	378.9	512.5	650.1	745.0	787.3	692.5	439.0	318.8	336.2	416.3	396.0	334.9
65,0°	221.6	330.6	470.2	588.7	692.1	804.1	704.3	429.5	318.5	326.7	392.4	364.8	299.4
67,5°	205.2	317.2	457.0	533.5	653.4	838.2	665.9	408.8	327.4	303.1	370.7	334.9	255.4
70,0°	222.3	337.2	460.7	517.1	643.9	742.0	595.3	370.7	309.3	267.3	327.0	295.5	213.1
72,5°	246.9	370.0	443.3	504.3	597.2	671.8	487.9	333.9	264.0	202.6	276.1	250.2	174.0
75,0°	203.2	311.9	388.4	450.5	536.8	562.8	398.3	267.6	173.0	114.9	210.1	202.9	149.7
77,5°	149.7	223.3	271.9	316.2	361.5	341.1	280.1	152.7	65.7	80.1	181.6	187.5	134.9
80,0°	92.6	110.6	147.8	179.6	184.9	172.0	156.6	79.1	59.1	69.0	96.5	97.8	61.4
82,5°	18.7	17.4	17.1	17.1	16.4	15.8	15.1	14.1	12.5	11.2	11.8	13.8	13.8
85,0°	12.5	12.8	13.1	13.8	13.5	13.5	12.8	11.8	10.8	9.2	9.9	11.8	12.1
87,5°	11.2	11.2	11.8	12.1	12.1	11.5	11.2	10.5	9.2	8.2	8.9	10.5	10.8
90,0°	9.5	9.9	10.2	10.2	10.2	10.2	9.9	9.2	8.2	7.2	7.9	9.2	9.5
92,5°	8.5	8.9	9.5	9.5	9.2	9.2	8.9	8.5	7.9	6.9	6.9	8.2	8.9
95,0°	8.2	8.2	8.9	8.9	8.5	8.2	8.2	7.9	7.2	6.6	6.9	7.6	8.2
97,5°	7.6	7.6	8.2	8.2	7.9	7.6	7.6	7.2	6.6	6.6	6.2	7.2	7.6
100,0°	6.9	6.9	7.6	7.6	7.2	7.2	7.2	6.6	6.6	5.9	6.2	6.9	7.2
102,5°	6.6	6.9	6.9	6.9	6.9	6.6	6.6	6.2	5.9	5.9	5.9	6.2	6.9
105,0°	6.2	6.2	6.2	6.6	6.6	6.2	6.2	5.9	5.9	5.6	5.6	6.2	6.6
107,5°	5.6	6.2	6.2	6.2	5.9	5.9	5.9	5.6	5.6	5.3	5.6	5.9	6.2
110,0°	5.6	5.6	5.6	5.6	5.6	5.6	5.3	5.3	5.3	5.3	5.3	5.6	5.9
112,5°	5.9	5.3	5.3	5.6	5.3	4.9	4.9	4.9	4.9	5.3	5.3	5.3	5.6

Photometric test report

Family CITY-LIGHT ELEGANCE LED	Order number: 5XA5265EF14H000022 EAN: 4058352635216	LP number 57133_35
Table of values for luminous intensities		Maximum luminous intensity
siteco		

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	14.6	14.6	14.6	14.6	14.6	14.6	14.6	14.6	14.6	14.6	14.6	14.6	14.6
2,5°	14.8	15.1	15.1	15.1	15.1	15.1	14.4	14.4	14.4	14.4	14.4	14.4	14.4
5,0°	22.3	22.7	23.0	23.3	24.0	23.6	15.8	15.4	15.1	15.1	15.1	14.8	14.8
7,5°	41.0	42.7	45.3	47.6	49.3	49.9	23.3	21.0	19.4	17.1	16.4	15.4	15.4
10,0°	70.3	69.6	71.6	73.9	74.9	73.5	37.4	35.5	34.5	29.9	26.6	21.3	17.1
12,5°	106.1	114.6	123.5	126.1	133.3	134.0	52.9	43.0	35.5	33.2	36.4	36.1	36.8
15,0°	151.4	154.6	156.6	160.2	165.5	165.5	63.7	93.2	74.5	56.5	52.2	47.9	42.7
17,5°	170.4	188.8	207.2	215.1	225.2	224.6	90.9	86.7	85.7	72.2	64.4	65.7	50.9
20,0°	202.6	209.8	219.3	228.2	241.3	243.0	125.4	117.5	98.2	87.7	76.2	71.6	64.7
22,5°	209.5	218.0	231.8	241.0	252.5	256.1	130.3	138.2	125.1	103.8	90.6	81.1	67.6
25,0°	237.1	246.6	247.2	251.5	262.0	262.7	150.0	125.1	120.2	108.7	90.6	71.6	58.4
27,5°	257.1	263.7	268.9	271.2	276.8	277.8	167.5	145.8	116.9	105.4	99.8	80.8	60.4
30,0°	288.3	292.5	289.3	287.6	297.8	300.1	206.9	148.4	128.7	110.0	105.1	75.8	58.8
32,5°	303.1	311.3	309.0	306.0	308.6	310.6	186.2	170.4	141.8	124.4	103.8	86.0	68.0
35,0°	333.6	339.8	327.4	316.2	323.1	325.7	234.4	178.3	154.6	126.1	103.4	84.4	80.4
37,5°	357.6	354.6	338.2	330.3	336.5	341.5	245.6	199.0	156.3	128.4	102.1	80.8	83.4
40,0°	376.6	360.8	348.0	341.1	347.7	350.0	265.0	206.5	168.1	133.6	92.6	77.8	84.1
42,5°	392.0	369.0	352.3	351.0	356.2	361.2	285.7	218.3	178.6	125.8	78.5	76.2	84.1
45,0°	408.4	377.9	359.9	357.9	366.4	369.0	322.4	224.3	179.6	118.2	76.2	76.2	84.1
47,5°	412.4	375.9	363.5	365.1	372.0	374.3	328.7	234.4	180.3	98.8	64.7	72.6	79.1
50,0°	401.9	371.7	360.5	363.5	372.0	374.3	335.9	234.1	174.0	88.0	59.8	68.0	73.9
52,5°	383.8	351.0	348.0	355.6	365.8	371.7	330.0	234.1	164.8	67.0	54.2	62.4	68.3
55,0°	360.2	327.7	326.7	337.2	351.6	358.5	338.8	231.5	148.1	65.3	51.5	59.8	66.3
57,5°	330.3	290.6	294.8	309.9	327.4	339.5	320.5	206.5	118.2	55.8	50.9	58.1	61.4
60,0°	300.1	257.7	254.5	270.9	291.6	303.4	268.6	166.1	99.8	57.5	49.3	55.2	57.5
62,5°	262.3	220.3	207.8	220.6	241.0	256.1	207.8	127.4	71.2	55.5	46.6	50.6	50.2
65,0°	227.2	181.2	166.8	169.7	181.6	191.1	169.1	102.8	64.7	54.8	48.3	48.3	44.7
67,5°	178.6	134.0	119.8	120.5	125.1	125.4	149.1	91.6	69.0	56.5	48.3	45.3	37.8
70,0°	144.8	104.1	82.7	77.5	79.8	80.8	158.9	101.5	76.2	59.1	49.6	42.7	34.1
72,5°	118.2	78.8	50.9	47.0	47.6	49.3	157.6	98.2	73.9	57.5	47.6	43.7	31.2
75,0°	96.2	58.8	37.1	32.8	31.5	31.5	115.9	75.8	60.7	50.2	46.3	43.7	32.5
77,5°	69.6	35.5	27.6	25.0	23.3	23.0	87.0	60.7	52.9	43.7	41.4	38.1	28.2
80,0°	35.5	22.0	20.4	19.7	19.4	19.0	59.4	48.3	46.0	39.4	35.8	31.5	26.3
82,5°	13.5	13.5	13.8	13.8	13.1	13.1	21.7	23.0	25.3	23.6	22.7	22.0	18.4
85,0°	12.1	12.1	12.1	12.1	11.8	11.8	12.8	13.1	12.8	12.8	12.1	11.8	11.5
87,5°	10.8	10.8	11.2	11.2	11.2	11.2	11.5	11.2	11.2	10.8	10.2	9.9	9.2
90,0°	9.9	10.2	10.2	9.9	9.9	9.9	9.9	9.5	9.2	8.9	8.2	8.2	7.6
92,5°	9.2	9.2	9.5	9.2	9.2	9.2	8.9	8.2	8.2	7.6	7.6	6.9	6.6
95,0°	8.5	8.5	8.9	8.5	8.5	8.5	7.9	7.6	7.6	6.9	6.9	6.2	5.9
97,5°	7.9	7.9	8.2	8.5	7.9	7.9	7.6	6.9	6.9	6.2	6.2	5.9	5.6
100,0°	7.6	7.6	7.9	7.9	7.9	7.9	6.9	6.9	6.2	6.2	5.6	5.6	4.9
102,5°	7.2	7.2	7.6	7.9	7.2	7.2	6.2	6.2	5.9	5.6	5.6	4.9	4.9
105,0°	6.9	7.2	7.2	7.2	7.2	7.2	6.2	5.6	5.6	5.3	4.9	4.9	4.3
107,5°	6.6	6.6	6.9	7.2	7.2	7.2	5.6	5.6	4.9	4.9	4.6	4.3	4.3
110,0°	6.2	6.6	6.6	6.6	6.6	6.6	4.9	4.9	4.9	4.6	4.3	4.3	3.9
112,5°	5.9	6.2	6.6	6.6	6.6	5.9	5.9	5.9	5.3	5.3	4.9	4.9	3.6

Photometric test report

Family CITY-LIGHT ELEGANCE LED	Order number: 5XA5265EF14H000022 EAN: 4058352635216	LP number 57133_35
Table of values for luminous intensities		Maximum luminous intensity
siteco		

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0,0°	14.6	14.6	14.6	14.6	14.6	14.6	14.6	14.6	14.6	14.6	14.6	0.0	0.0
2,5°	14.4	14.8	15.1	15.1	15.1	15.1	15.1	14.8	14.8	14.8	15.1	0.2	0.2
5,0°	14.8	15.1	15.1	14.8	15.1	15.1	14.8	14.8	14.8	14.8	14.4	0.4	0.6
7,5°	15.1	15.1	14.8	14.4	14.4	14.4	14.4	14.4	14.1	14.1	13.8	0.9	1.5
10,0°	15.8	14.8	14.1	13.8	13.8	13.8	13.8	13.1	12.8	12.8	12.5	1.7	3.2
12,5°	29.9	22.3	17.1	14.1	13.8	13.5	13.1	12.5	12.1	11.8	11.8	3.4	6.6
15,0°	37.1	37.8	34.1	28.2	21.7	14.1	13.8	12.5	11.5	11.5	11.2	5.3	11.9
17,5°	38.4	30.2	25.9	25.6	27.3	26.6	21.7	18.4	13.1	12.1	11.8	7.7	19.6
20,0°	44.7	38.1	33.2	30.2	28.2	21.3	15.1	19.0	23.3	22.3	19.0	10.2	29.8
22,5°	42.7	31.2	30.5	28.2	30.9	25.3	18.4	26.3	28.6	24.0	21.7	12.9	42.7
25,0°	39.1	31.8	28.2	26.9	27.6	24.3	19.4	25.6	27.9	29.2	30.2	14.8	57.5
27,5°	43.3	34.5	29.6	28.9	29.9	29.6	23.3	30.5	30.9	26.6	30.2	17.4	75.0
30,0°	46.3	42.0	36.8	32.8	30.2	26.6	24.3	28.2	32.2	28.6	28.2	20.8	95.7
32,5°	60.1	51.2	38.4	32.5	33.5	32.5	29.6	29.9	30.5	27.6	27.6	24.6	120.3
35,0°	80.4	70.9	56.8	49.3	45.6	37.4	28.6	31.5	29.9	26.9	26.9	28.4	148.7
37,5°	88.3	77.5	65.3	59.8	50.6	41.4	33.5	38.7	36.8	32.8	30.9	32.7	181.4
40,0°	86.0	77.8	67.0	60.7	52.9	40.7	35.8	43.0	44.0	39.7	39.4	36.4	217.8
42,5°	87.0	77.2	66.7	62.1	54.5	43.0	38.7	44.3	46.6	42.7	42.0	40.3	258.2
45,0°	85.0	78.5	68.0	63.0	55.2	44.3	37.4	41.7	45.3	41.7	40.7	44.1	302.2
47,5°	82.4	75.5	65.3	62.1	52.9	43.0	37.1	41.7	41.7	38.7	40.1	48.0	350.2
50,0°	76.5	74.5	64.0	61.1	51.9	42.0	36.8	39.1	41.0	37.4	36.8	51.8	402.0
52,5°	73.2	72.2	63.0	61.7	51.5	40.4	36.1	38.7	37.1	34.8	35.5	54.7	456.7
55,0°	69.0	71.2	62.1	58.8	49.9	39.4	33.8	35.1	35.8	30.9	30.2	57.7	514.4
57,5°	63.7	69.0	61.4	57.5	48.9	38.1	31.5	32.8	32.8	28.2	28.9	60.0	574.4
60,0°	58.1	64.4	57.8	54.5	47.3	37.8	30.2	30.2	31.2	26.3	25.6	60.2	634.6
62,5°	50.6	57.1	53.5	56.1	47.9	38.7	28.6	27.9	27.3	23.0	23.0	57.9	692.5
65,0°	45.0	51.5	49.3	55.5	50.2	41.0	28.6	25.6	25.3	21.3	20.4	54.5	747.0
67,5°	41.7	49.9	47.9	54.5	48.6	41.7	27.9	23.6	22.0	19.0	19.0	51.3	798.4
70,0°	36.8	45.6	47.3	51.5	47.0	39.7	27.9	22.3	20.7	17.4	16.4	48.1	846.4
72,5°	31.2	40.7	42.4	48.9	45.3	34.1	28.6	22.0	16.7	15.8	16.4	43.8	890.2
75,0°	28.6	37.1	36.4	38.7	34.5	26.6	24.0	21.3	16.4	13.8	13.1	36.4	926.7
77,5°	24.0	27.9	27.3	29.2	24.0	19.4	17.7	16.4	12.8	11.5	11.8	26.1	952.7
80,0°	20.7	19.7	18.7	21.3	18.7	17.7	15.4	14.1	11.2	10.2	9.9	15.7	968.4
82,5°	15.1	14.1	12.8	15.4	15.4	15.8	14.4	12.8	9.2	8.9	8.5	4.3	972.7
85,0°	9.5	8.2	7.2	9.5	9.5	9.5	9.5	9.5	7.6	6.9	6.6	3.0	975.7
87,5°	7.6	6.6	5.6	7.2	7.2	7.6	7.2	6.9	5.6	5.6	5.3	2.6	978.3
90,0°	6.6	5.3	4.6	5.3	5.6	5.6	5.3	5.3	4.6	4.3	3.9	2.2	980.6
92,5°	5.6	4.9	3.9	4.6	4.9	4.6	4.6	4.6	3.9	3.9	3.9	2.0	982.6
95,0°	5.3	4.6	3.9	4.3	4.6	4.3	4.3	3.9	3.9	3.6	3.3	1.9	984.4
97,5°	4.9	4.3	3.3	3.9	3.9	3.9	3.9	3.9	3.6	3.3	3.3	1.7	986.1
100,0°	4.9	4.3	3.6	3.6	3.9	3.9	3.6	3.9	3.3	3.3	3.3	1.6	987.7
102,5°	4.3	3.9	3.3	3.3	3.3	3.3	3.3	3.3	3.3	3.3	3.3	1.5	989.2
105,0°	4.3	3.6	3.3	3.3	3.3	3.3	3.3	3.3	3.0	2.6	2.6	1.4	990.6
107,5°	3.9	3.6	3.3	3.3	3.0	3.0	2.6	2.6	2.6	2.6	2.6	1.3	991.9
110,0°	3.6	3.6	3.0	2.6	2.6	2.6	2.6	2.6	2.6	2.6	2.6	1.2	993.1
112,5°	3.6	3.3	3.0	2.6	2.6	2.6	2.6	2.6	2.6	2.6	2.6	1.2	994.3

Photometric test report

Family CITY-LIGHT ELEGANCE LED	Order number: 5XA5265EF14H000022 EAN: 4058352635216	LP number 57133_35
--	--	------------------------------

Table of values for luminous intensities	Maximum luminous intensity	siteco
---	-----------------------------------	---------------

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
115,0°	5.9	4.9	4.9	4.9	4.9	4.6	4.6	4.6	4.6	4.9	4.9	5.3	5.3
117,5°	4.3	4.3	4.3	4.6	4.3	4.3	4.3	4.3	4.3	4.3	4.6	4.6	4.6
120,0°	4.3	3.6	3.6	3.6	3.6	3.6	3.6	3.6	3.6	3.6	3.6	3.6	3.9
122,5°	3.0	3.0	3.0	3.0	2.6	2.6	2.3	2.3	2.6	2.6	2.6	3.0	2.6
125,0°	2.0	2.0	2.0	2.0	2.0	1.6	1.6	1.6	1.6	1.6	1.6	2.0	2.0
127,5°	2.0	1.6	1.6	1.6	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3
130,0°	1.3	1.3	1.3	3.0	3.0	3.0	3.0	1.3	1.3	1.3	1.3	1.3	1.3
132,5°	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.0	1.0	1.3	1.0	1.0	1.0
135,0°	1.6	1.3	1.3	1.0	1.3	1.0	1.0	0.7	0.7	0.7	0.7	0.7	0.7
137,5°	1.3	1.3	1.3	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7
140,0°	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7
142,5°	1.0	1.0	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7
145,0°	1.0	1.0	1.0	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7
147,5°	1.0	1.3	1.0	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
165,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family CITY-LIGHT ELEGANCE LED	Order number: 5XA5265EF14H000022 EAN: 4058352635216	LP number 57133_35
		siteco

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
115,0°	5.6	5.9	5.9	5.9	5.9	3.9	4.6	4.3	4.3	4.3	3.6	3.6	3.6
117,5°	4.9	5.3	5.6	5.6	4.3	2.0	4.3	4.3	3.6	3.6	3.6	3.6	3.3
120,0°	3.9	4.3	4.6	4.6	3.3	2.0	3.6	3.6	3.0	3.0	3.0	3.0	3.0
122,5°	3.0	3.3	3.3	3.3	2.3	1.3	2.6	2.3	2.3	2.3	2.3	2.3	2.3
125,0°	2.0	2.0	2.0	2.0	1.3	0.7	2.0	2.0	2.0	2.0	2.0	2.0	2.0
127,5°	1.3	1.3	1.3	1.3	1.3	0.7	1.6	2.0	1.6	2.0	2.0	2.0	2.0
130,0°	1.3	1.3	1.3	1.3	1.0	0.7	1.6	1.3	1.3	1.6	1.6	2.0	1.6
132,5°	1.3	1.3	1.3	1.0	0.7	0.7	1.3	1.3	1.3	1.3	1.3	1.3	1.3
135,0°	0.7	0.7	0.7	0.7	0.7	0.7	1.3	1.3	1.3	1.3	1.3	1.3	1.3
137,5°	0.7	0.7	0.7	0.7	0.7	0.7	1.3	1.3	1.3	1.3	1.3	1.3	1.3
140,0°	0.7	0.7	0.7	0.7	0.7	0.7	1.0	1.0	1.3	1.3	1.3	1.3	1.3
142,5°	0.7	0.7	0.7	0.7	0.7	0.7	1.3	1.3	1.3	1.3	1.3	1.3	1.3
145,0°	0.7	0.7	0.7	0.7	0.7	0.7	1.3	1.3	1.3	1.3	1.3	1.3	1.3
147,5°	0.7	0.7	0.7	0.7	0.7	0.7	1.0	1.3	1.0	1.3	1.3	1.3	1.0
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
165,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
115,0°	3.3	3.3	3.0	2.6	2.6	2.6	2.6	2.6	2.6	2.6	2.6	1.1	995.4
117,5°	3.0	3.0	3.0	2.6	2.6	2.0	2.3	2.6	2.6	2.3	2.6	0.9	996.3
120,0°	2.6	2.6	2.6	2.3	2.0	2.0	2.0	2.0	2.0	2.0	2.6	0.8	997.1
122,5°	2.3	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0	0.6	997.6
125,0°	2.0	2.0	2.0	2.0	2.0	1.6	1.6	1.6	2.0	2.0	2.0	0.4	998.0
127,5°	2.0	2.0	2.0	2.0	2.0	1.6	1.6	1.6	1.6	1.6	2.0	0.3	998.4
130,0°	1.6	1.6	1.6	1.3	1.3	1.3	1.3	1.6	1.3	1.3	1.3	0.3	998.7
132,5°	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	0.2	999.0
135,0°	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	0.2	999.2
137,5°	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	0.2	999.4
140,0°	1.3	1.3	1.3	1.3	1.3	1.0	1.3	1.3	0.7	1.3	1.3	0.2	999.5
142,5°	1.3	1.3	1.3	1.3	1.3	1.3	1.0	1.0	1.3	1.3	1.3	0.2	999.7
145,0°	1.3	1.3	1.3	1.3	1.3	1.0	1.3	1.3	1.3	1.0	0.7	0.2	999.9
147,5°	1.3	1.0	1.0	1.0	1.0	1.0	1.0	1.0	0.7	1.0	1.3	0.1	1000.0
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
165,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family CITY-LIGHT ELEGANCE LED	Order number: 5XA5265EF14H000022 EAN: 4058352635216	LP number 57133_35
--	--	------------------------------

Dimming levels table	environmental temperature: 25°C	siteco
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W]
				start of lifetime	end of lifetime	average
100	254	254	1470	10.5	10.8	10.6
95	241	252	1395	10.0	10.3	10.2
90	229	250	1325	9.4	9.8	9.6
85	216	248	1250	8.9	9.2	9.0
80	203	246	1175	8.3	8.7	8.5
75	190	243	1100	7.8	8.1	8.0
70	178	241	1030	7.3	7.6	7.4
65	165	238	955	6.9	7.1	7.0
60	152	235	880	6.4	6.6	6.5
55	140	232	810	5.9	6.1	6.0
50	127	229	735	5.4	5.6	5.5
45	114	225	660	5.0	5.2	5.1
40	102	221	590	4.6	4.7	4.6
35	89	216	515	4.1	4.3	4.2
30	76	210	440	3.7	3.8	3.8
28	72	208	417	3.5	3.7	3.6