

Photometric test report

Family
LITEPOLE 1

Order number: 5XA5415KF14HP
EAN: 4058352836316

LP number
58099_23



Version post-top- or mounting to wall arm
Optic asymmetric, wide distribution (ST1.2a)
Cover cover transparent, PMMA
Lamps LED 4000 K | CRI ≥ 70
Controlgear ECG SITECO iQ
Rated values Net luminous flux = 4940 lm
Power consumption = 33.6 W
Luminous efficacy = 147 lm/W

serial
documentation
24.05.2022

siteco

Luminous intensity in cd/klm


C180-0

C205-25

C210-30

C270-90

Imax: 749 cd/klm

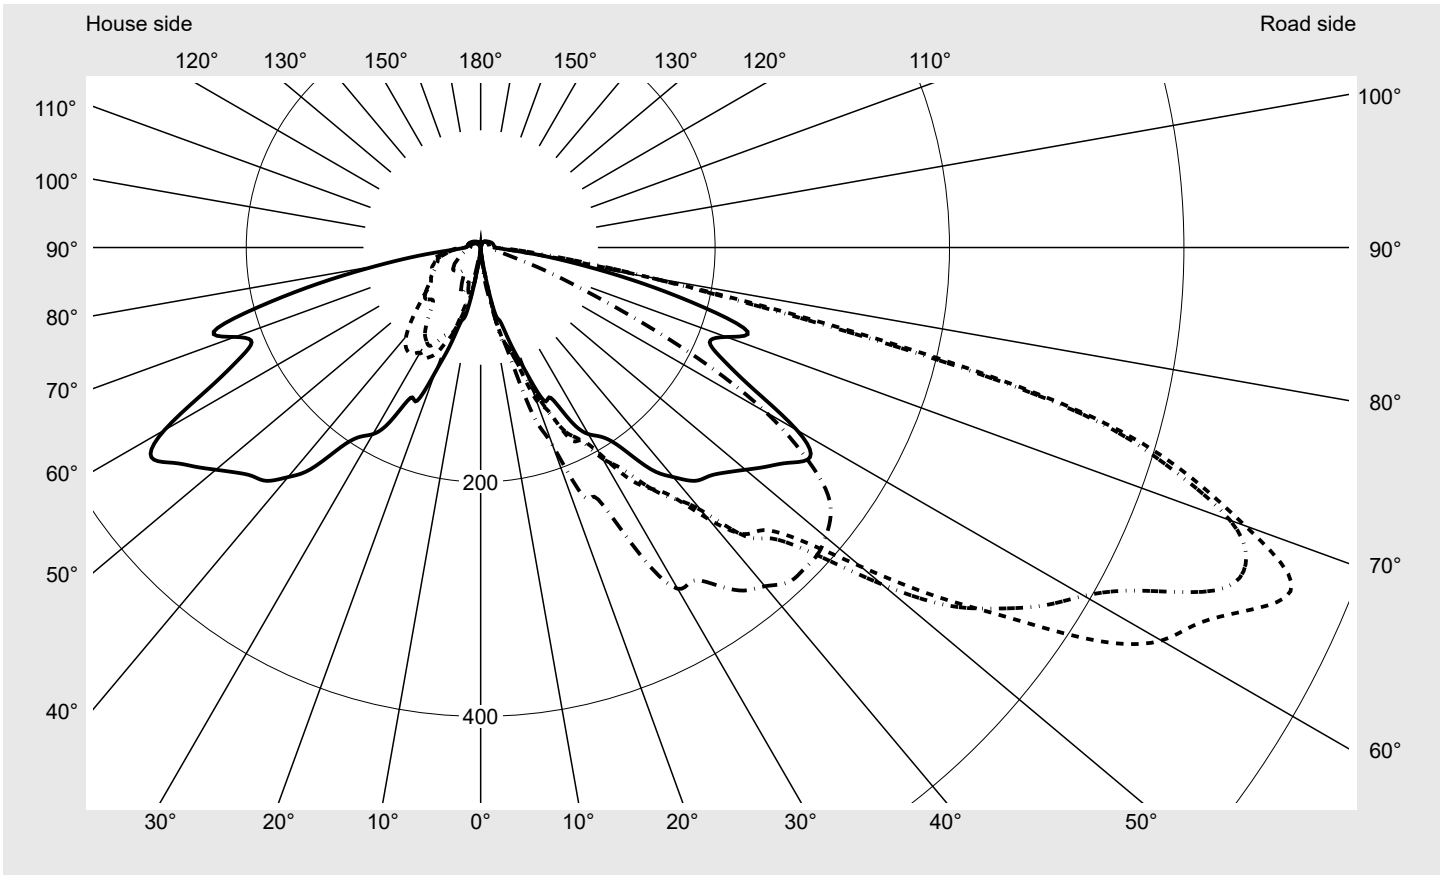

Luminaire output ratios

Eta	100.0%
Eta 0° - 90°	95.1%
Eta 90° - 180°	4.9%

Luminous intensity class acc. to EN13201-2

Class:	G1
Imax 70°	694.2
Imax 80°	167.2
Imax 90°	14.6
Imax >90°	12.0
Imax >95°	11.5


Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family LITEPOLE 1	Order number: 5XA5415KF14HP EAN: 4058352836316	LP number 58099_23
------------------------------------	---	-------------------------------------

Envelope curve in cd/klm **KMK 67.5°** **KMK 65°** **KMK 62.5°** **KMK 60°** **siteco**

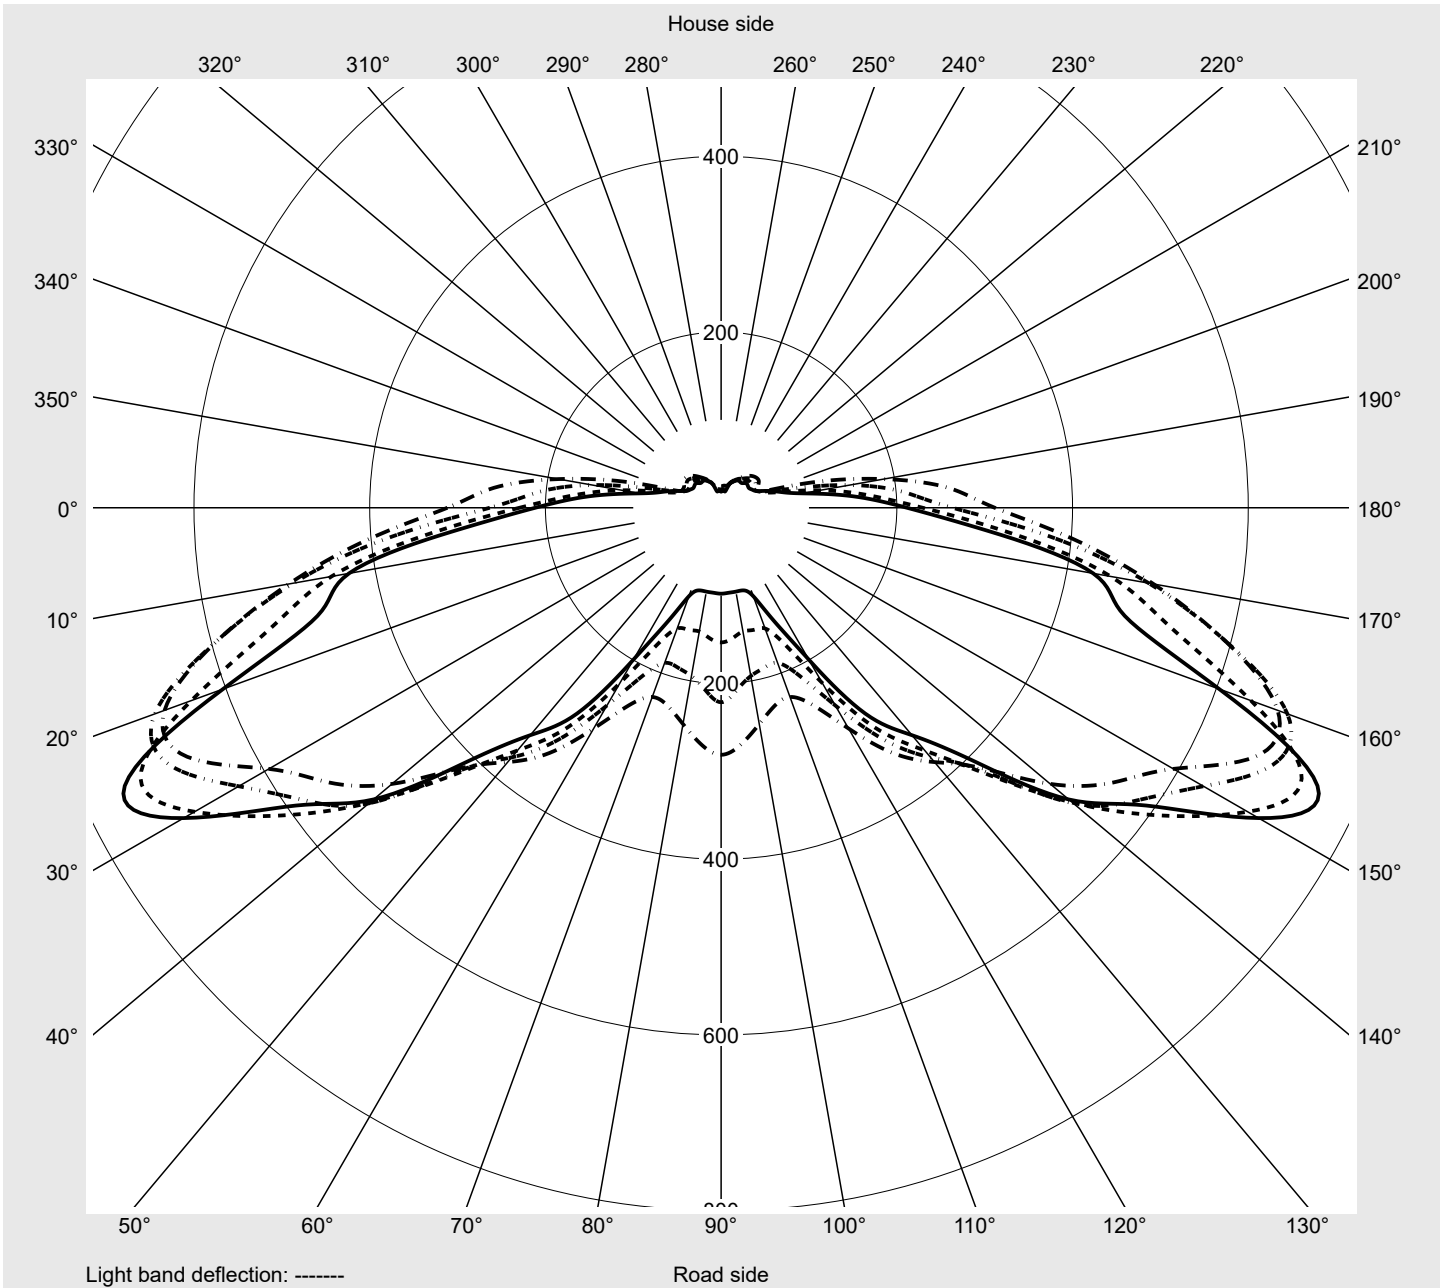

Photometric test report

Family LITEPOLE 1	Order number: 5XA5415KF14HP EAN: 4058352836316	LP number 58099_23
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4
2,5°	1.5	1.5	1.7	1.5	1.7	1.7	1.7	2.0	2.0	2.0	2.2	2.2	2.2
5,0°	3.1	3.5	3.9	4.6	5.0	5.7	6.3	7.0	7.6	8.3	8.7	8.7	9.4
7,5°	10.9	12.2	12.4	13.5	15.1	17.0	18.3	18.1	18.8	19.6	22.0	23.4	25.3
10,0°	32.1	33.0	31.7	32.1	33.8	33.4	32.5	32.3	33.0	34.7	37.1	39.1	42.4
12,5°	58.9	58.5	56.8	55.9	58.1	71.2	77.7	75.5	67.5	67.9	65.5	66.8	61.3
15,0°	66.1	72.7	80.8	90.2	80.6	86.9	87.3	86.9	88.6	91.5	90.4	91.9	92.3
17,5°	88.8	88.2	98.2	115.7	100.2	102.8	102.8	100.2	108.9	110.9	116.1	112.9	114.6
20,0°	112.9	114.8	125.5	128.4	118.5	138.2	125.7	116.8	116.1	124.4	140.1	145.2	143.9
22,5°	141.5	154.6	158.0	153.2	146.0	151.1	152.8	148.4	131.9	132.3	146.0	158.3	166.6
25,0°	141.5	143.9	168.5	168.3	162.2	180.1	174.6	172.2	166.1	162.9	153.7	160.0	177.0
27,5°	167.7	162.6	176.8	172.9	176.6	185.3	185.8	193.2	191.9	177.5	168.3	174.2	197.8
30,0°	183.8	187.3	205.4	198.4	192.5	203.2	207.8	198.4	211.5	211.1	200.6	197.1	217.6
32,5°	191.4	210.7	220.3	219.0	219.6	232.5	223.5	216.8	226.6	235.8	233.4	229.4	241.0
35,0°	207.8	212.4	237.7	227.9	224.2	250.6	249.3	248.0	251.9	251.0	258.2	256.9	261.7
37,5°	238.4	243.2	270.3	255.2	255.0	267.2	270.0	268.1	276.8	270.9	269.8	282.3	290.3
40,0°	255.6	256.5	276.4	272.7	290.3	302.6	292.7	291.0	298.4	306.5	288.4	291.9	308.9
42,5°	270.0	259.1	277.2	281.2	303.2	331.6	334.0	318.3	314.6	333.6	314.8	302.3	319.2
45,0°	275.7	270.7	305.8	317.8	327.4	341.0	351.0	355.4	353.4	349.9	334.9	315.9	324.4
47,5°	284.0	299.9	352.3	371.8	377.4	369.4	387.5	384.9	381.1	373.5	347.3	328.8	329.0
50,0°	294.9	332.0	402.5	419.1	432.4	423.5	447.3	425.2	387.5	382.5	363.0	342.5	331.6
52,5°	307.1	349.5	416.5	441.6	491.0	488.3	501.4	463.7	406.9	384.9	372.6	357.8	333.1
55,0°	320.2	362.2	422.6	486.4	548.1	550.8	537.0	498.6	435.9	395.1	379.8	363.5	328.3
57,5°	333.1	393.2	459.3	548.8	625.0	624.8	568.7	518.0	463.9	405.6	379.4	356.7	313.5
60,0°	311.5	400.8	499.7	597.3	674.1	670.6	594.4	545.1	489.0	418.9	377.9	340.8	290.1
62,5°	263.3	375.9	494.2	597.9	685.9	692.7	633.9	580.0	523.5	424.4	370.9	321.8	259.8
65,0°	229.4	330.9	450.3	531.3	641.8	729.1	692.0	610.6	522.2	429.4	360.6	305.6	230.3
67,5°	211.5	306.1	430.0	475.7	603.4	749.0	706.4	590.9	516.5	408.7	337.9	286.0	199.5
70,0°	223.1	325.5	445.5	484.6	571.5	694.2	680.4	553.2	465.6	379.2	319.8	264.8	176.2
72,5°	238.8	344.0	422.8	477.2	547.1	623.9	610.8	481.1	385.5	318.7	267.2	215.0	146.9
75,0°	196.7	305.4	372.6	421.8	488.3	511.5	502.7	367.4	272.2	221.6	216.8	189.0	130.8
77,5°	141.5	213.5	256.9	298.2	323.5	307.1	284.7	211.1	163.1	152.6	163.9	151.1	100.0
80,0°	90.6	114.4	136.0	167.2	158.0	143.2	144.5	134.5	113.5	84.5	70.3	60.9	40.8
82,5°	53.0	61.1	69.6	87.3	72.3	55.7	74.0	89.3	76.8	46.9	31.2	19.0	14.2
85,0°	26.0	29.5	31.7	35.1	24.9	27.3	38.6	43.4	29.7	17.9	12.4	11.4	10.0
87,5°	16.6	16.6	15.9	15.5	14.8	16.4	21.6	17.5	15.7	10.7	10.0	9.6	9.0
90,0°	13.1	12.4	12.2	12.0	12.0	11.8	10.5	10.3	9.4	9.0	9.0	8.5	8.5
92,5°	12.0	11.8	11.4	11.1	10.7	10.5	9.8	9.6	9.4	9.0	9.0	8.5	8.5
95,0°	11.5	11.4	11.3	10.9	10.5	10.1	9.7	9.3	9.2	8.8	8.5	8.4	8.1
97,5°	11.4	11.2	11.0	10.7	10.3	10.0	9.5	9.2	9.0	8.7	8.5	8.2	8.0
100,0°	11.3	11.1	10.9	10.5	10.2	9.9	9.4	9.1	8.9	8.6	8.4	8.2	8.0
102,5°	11.1	11.0	10.7	10.4	10.1	9.8	9.4	9.1	8.8	8.5	8.4	8.1	7.9
105,0°	11.0	10.8	10.6	10.3	10.0	9.6	9.2	8.9	8.7	8.4	8.3	8.0	7.9
107,5°	10.8	10.6	10.4	10.1	9.8	9.5	9.0	8.8	8.5	8.3	8.1	7.9	7.8
110,0°	10.6	10.4	10.1	9.9	9.6	9.3	8.9	8.6	8.4	8.2	8.0	7.8	7.7
112,5°	10.2	10.1	9.9	9.6	9.3	9.1	8.7	8.4	8.3	8.0	7.9	7.7	7.6

Photometric test report

Family LITEPOLE 1	Order number: 5XA5415KF14HP EAN: 4058352836316	LP number 58099_23
Table of values for luminous intensities		Maximum luminous intensity
		sITeco

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4
2,5°	2.4	2.4	2.4	2.4	2.6	2.6	1.3	1.3	1.3	1.3	1.3	1.3	1.3
5,0°	9.6	10.0	10.3	10.3	10.5	10.9	2.8	2.4	2.4	2.2	2.0	2.0	2.0
7,5°	27.9	29.9	30.8	31.7	31.7	31.0	9.0	7.9	6.3	5.2	4.6	4.1	4.1
10,0°	43.7	46.3	47.8	46.7	46.3	47.2	30.1	32.5	31.9	38.9	31.2	27.5	24.4
12,5°	61.8	64.8	67.5	68.3	69.6	71.6	50.9	51.5	45.4	45.2	47.4	44.3	39.1
15,0°	97.4	98.7	100.2	101.3	98.5	96.5	66.4	68.3	61.1	58.3	52.0	58.7	57.2
17,5°	120.9	130.8	138.0	146.3	153.0	151.9	85.1	80.3	82.3	76.0	74.2	73.8	65.9
20,0°	156.7	163.7	170.3	177.9	178.6	179.9	112.2	114.8	103.3	100.4	85.4	79.0	69.9
22,5°	177.0	185.3	193.0	209.8	223.8	230.1	118.3	114.6	116.6	112.6	97.1	81.6	68.8
25,0°	194.9	205.2	223.5	238.8	238.6	237.1	130.3	122.2	116.4	112.9	103.0	89.1	70.9
27,5°	218.1	221.4	245.8	266.5	281.2	296.9	160.7	133.4	116.1	116.8	106.3	94.5	72.3
30,0°	248.0	255.0	278.5	291.2	304.5	336.2	176.6	140.6	124.9	116.6	103.7	92.3	71.2
32,5°	265.0	277.2	292.7	297.8	312.2	337.1	181.2	148.4	134.0	121.6	107.6	88.4	65.5
35,0°	280.1	297.5	312.6	312.2	329.2	351.9	208.5	157.8	142.8	129.2	108.3	81.0	63.3
37,5°	297.3	314.3	325.0	327.4	342.7	368.9	229.6	174.9	149.1	134.0	105.2	72.0	63.7
40,0°	311.7	324.4	334.9	338.8	356.9	377.2	240.6	188.2	159.8	138.6	98.9	64.0	64.4
42,5°	323.1	328.1	341.0	349.5	365.9	387.7	259.1	201.5	168.5	138.2	89.7	60.7	65.3
45,0°	333.6	333.1	346.9	357.1	371.1	389.0	277.0	220.9	175.9	135.3	79.7	62.7	67.7
47,5°	334.7	331.8	349.9	361.5	373.7	389.0	287.5	233.1	182.3	127.1	70.5	64.2	67.9
50,0°	327.4	325.9	346.0	358.7	372.6	384.2	292.5	234.0	184.5	110.9	62.9	61.8	64.8
52,5°	312.2	306.9	332.9	347.1	362.6	376.3	299.9	235.8	182.5	96.9	55.9	57.8	60.9
55,0°	292.5	286.2	309.8	325.7	344.3	359.3	306.1	236.0	174.4	81.9	52.0	53.5	57.0
57,5°	272.4	259.6	276.6	294.5	312.6	324.8	299.3	222.9	149.1	67.0	50.2	50.6	54.6
60,0°	248.0	229.2	233.8	250.0	269.6	281.2	259.8	188.0	115.3	59.6	48.5	48.7	52.4
62,5°	210.9	188.0	188.6	194.5	208.0	221.4	207.8	148.9	85.1	54.6	45.6	45.6	48.0
65,0°	171.6	146.3	143.9	143.0	149.1	153.2	166.8	114.6	68.8	51.7	45.0	43.0	43.2
67,5°	141.9	107.2	97.4	96.9	97.1	97.8	150.4	94.3	69.6	56.1	45.0	41.0	38.9
70,0°	119.4	85.8	62.4	58.7	58.5	62.9	156.5	97.6	75.3	55.9	43.0	39.9	35.4
72,5°	96.1	64.8	41.7	35.1	33.4	35.8	153.9	98.9	76.0	53.0	41.9	38.4	33.2
75,0°	74.7	40.8	29.7	23.8	21.8	21.8	112.6	76.8	64.2	47.4	43.4	38.0	32.5
77,5°	49.1	25.5	21.0	17.0	16.2	16.2	88.0	60.7	52.4	42.1	39.9	34.7	30.3
80,0°	20.3	15.3	14.0	12.9	12.9	12.7	59.8	48.2	45.6	38.9	33.0	30.3	26.6
82,5°	12.2	11.4	10.5	10.0	10.3	10.5	41.7	36.7	35.8	31.9	28.6	27.5	24.2
85,0°	9.6	9.2	9.0	9.0	9.2	9.2	23.6	24.9	26.9	26.6	25.3	22.9	20.3
87,5°	8.5	8.5	8.3	8.3	8.3	8.3	17.2	19.2	21.6	22.3	21.0	19.4	17.9
90,0°	8.1	8.1	8.1	7.9	7.9	7.9	13.3	14.2	14.4	14.6	14.2	14.0	13.5
92,5°	8.1	8.1	8.1	7.9	7.9	7.9	12.0	12.0	12.0	12.0	11.8	11.8	11.6
95,0°	8.0	8.0	7.7	7.6	7.6	7.6	11.7	11.7	11.6	11.6	11.5	11.4	11.2
97,5°	7.9	7.7	7.6	7.6	7.5	7.5	11.5	11.5	11.5	11.4	11.3	11.2	11.1
100,0°	7.8	7.7	7.6	7.5	7.5	7.4	11.3	11.4	11.4	11.3	11.2	11.1	11.0
102,5°	7.8	7.6	7.5	7.4	7.4	7.4	11.2	11.3	11.3	11.2	11.1	11.0	11.0
105,0°	7.7	7.6	7.5	7.4	7.4	7.3	11.1	11.2	11.1	11.1	11.0	10.9	10.8
107,5°	7.6	7.5	7.4	7.3	7.3	7.2	10.9	10.9	10.9	10.9	10.8	10.6	10.5
110,0°	7.5	7.4	7.4	7.3	7.3	7.2	10.6	10.7	10.7	10.6	10.5	10.4	10.3
112,5°	7.4	7.4	7.3	7.3	7.2	7.2	10.3	10.4	10.4	10.3	10.2	10.1	9.9

Photometric test report

Family LITEPOLE 1	Order number: 5XA5415KF14HP EAN: 4058352836316	LP number 58099_23
Table of values for luminous intensities		Maximum luminous intensity
		sitEco

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0,0°	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	0.0	0.0
2,5°	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.7	1.5	1.5	1.7	0.0	0.0
5,0°	1.7	1.7	2.0	2.0	2.0	2.0	1.7	1.7	1.7	2.0	1.7	0.1	0.1
7,5°	3.9	3.7	3.7	3.5	3.3	3.1	3.3	3.3	3.3	3.1	3.1	0.5	0.6
10,0°	22.0	19.6	19.2	17.7	14.4	12.7	10.7	8.7	7.0	6.5	6.5	1.4	2.0
12,5°	33.6	26.9	23.8	25.3	22.9	23.8	24.9	27.1	28.4	30.3	31.0	3.0	5.0
15,0°	45.0	42.4	37.5	33.2	30.6	28.8	29.3	34.7	36.9	39.5	39.7	4.8	9.8
17,5°	62.0	58.7	47.8	47.4	44.3	40.4	32.3	34.3	34.3	34.3	34.5	7.1	17.0
20,0°	62.9	51.5	45.0	44.8	44.1	42.1	36.9	38.6	36.7	33.2	32.3	9.6	26.6
22,5°	57.6	45.4	38.9	37.8	36.9	36.7	33.8	36.2	39.5	41.0	42.8	12.2	38.8
25,0°	56.5	40.2	34.1	33.6	32.1	32.3	31.4	33.4	37.5	39.3	39.7	14.4	53.2
27,5°	53.7	39.1	33.4	31.7	30.3	30.3	31.4	33.0	34.7	35.6	34.9	17.2	70.4
30,0°	52.4	41.7	35.6	33.4	31.2	30.6	30.1	30.3	30.8	31.0	30.1	20.4	90.8
32,5°	50.9	47.4	41.0	35.4	33.8	32.5	30.8	28.6	27.7	27.5	26.6	23.4	114.2
35,0°	56.3	53.0	44.8	38.2	34.3	32.3	30.8	28.4	26.9	26.0	24.9	26.7	140.9
37,5°	62.0	60.0	51.7	44.8	38.9	34.9	31.7	28.6	26.9	26.0	24.9	30.6	171.5
40,0°	64.4	62.2	53.0	46.1	40.6	37.3	33.8	30.8	29.5	28.6	27.9	34.2	205.7
42,5°	65.3	62.9	54.1	47.8	41.0	37.3	34.3	31.7	30.3	29.9	29.3	37.5	243.2
45,0°	68.3	65.1	56.5	49.8	43.7	38.4	34.7	31.4	30.1	29.5	28.8	41.1	284.3
47,5°	68.3	66.4	58.3	51.7	45.6	39.9	35.4	32.3	31.2	30.3	29.3	45.1	329.5
50,0°	66.1	64.8	57.4	52.0	47.2	41.0	35.6	32.7	31.2	30.6	30.1	49.0	378.4
52,5°	62.4	60.9	54.8	49.6	45.8	39.9	34.7	32.1	30.3	30.3	29.7	52.0	430.4
55,0°	58.5	57.4	52.2	47.2	43.2	38.0	33.0	30.8	28.8	28.8	27.9	54.6	485.1
57,5°	55.9	54.6	50.0	45.4	40.4	36.2	31.7	28.8	27.5	27.3	26.6	57.0	542.1
60,0°	52.8	50.9	47.4	42.8	38.6	34.5	30.1	26.2	25.5	25.1	24.4	57.6	599.7
62,5°	49.1	47.2	43.9	40.4	37.8	33.4	29.7	24.0	23.4	22.9	22.3	56.2	655.9
65,0°	44.1	43.4	39.7	38.4	38.0	33.2	28.8	22.3	21.4	21.2	20.5	53.6	709.5
67,5°	39.5	39.5	36.7	36.7	35.8	33.0	29.5	20.1	19.6	19.4	18.3	50.8	760.4
70,0°	36.2	35.8	34.3	35.6	35.1	32.3	27.7	19.0	18.3	17.9	17.0	48.7	809.0
72,5°	33.2	32.7	32.1	31.9	33.2	29.9	24.7	19.4	17.0	16.4	15.7	44.6	853.6
75,0°	30.3	29.9	29.5	28.2	28.8	25.5	21.2	18.6	15.9	15.1	14.4	37.2	890.9
77,5°	26.4	26.0	24.9	23.1	22.9	19.9	17.0	14.8	14.6	13.8	13.1	25.7	916.6
80,0°	23.1	21.4	19.2	18.8	18.8	16.6	15.5	13.5	13.3	12.7	11.4	15.0	931.6
82,5°	21.6	18.3	16.4	15.3	15.7	14.8	14.6	13.3	12.4	11.6	10.5	9.0	940.7
85,0°	17.9	15.7	14.6	14.0	13.5	12.9	13.5	12.4	11.8	11.1	10.0	5.3	946.0
87,5°	15.7	14.2	13.3	12.7	12.2	12.0	12.4	11.6	11.1	10.7	9.2	3.8	949.8
90,0°	13.3	12.4	12.0	11.8	11.4	11.1	10.9	10.7	10.7	10.3	9.2	3.0	952.9
92,5°	11.4	11.1	11.4	11.4	10.9	10.9	10.7	10.5	10.5	9.8	8.7	2.8	955.7
95,0°	11.1	11.0	11.0	10.9	10.8	10.7	10.6	10.4	10.3	9.8	8.6	2.7	958.4
97,5°	11.0	10.9	10.9	10.9	10.8	10.7	10.5	10.4	10.3	9.8	8.6	2.7	961.1
100,0°	10.9	10.9	10.8	10.8	10.7	10.6	10.5	10.3	10.2	9.7	8.6	2.7	963.8
102,5°	10.8	10.8	10.7	10.7	10.6	10.5	10.3	10.2	10.1	9.6	8.5	2.6	966.4
105,0°	10.6	10.6	10.5	10.5	10.4	10.2	10.1	10.0	9.8	9.4	8.3	2.5	969.0
107,5°	10.4	10.3	10.2	10.1	10.0	9.9	9.7	9.6	9.5	9.1	8.0	2.5	971.4
110,0°	10.1	10.0	9.9	9.8	9.6	9.5	9.3	9.2	9.0	8.6	7.7	2.4	973.8
112,5°	9.7	9.6	9.5	9.3	9.2	9.0	8.9	8.7	8.6	8.3	7.4	2.3	976.0

Photometric test report

Family LITEPOLE 1	Order number: 5XA5415KF14HP EAN: 4058352836316	LP number 58099_23
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
115,0°	10.0	9.8	9.6	9.4	9.1	8.8	8.5	8.3	8.1	7.9	7.8	7.6	7.5
117,5°	9.6	9.5	9.3	9.1	8.9	8.6	8.3	8.1	7.9	7.8	7.7	7.5	7.4
120,0°	9.3	9.2	9.1	8.8	8.6	8.4	8.1	7.9	7.8	7.6	7.5	7.4	7.3
122,5°	9.0	8.9	8.7	8.6	8.4	8.2	7.9	7.7	7.6	7.5	7.4	7.3	7.2
125,0°	8.6	8.5	8.4	8.3	8.1	7.9	7.7	7.6	7.4	7.3	7.2	7.2	7.1
127,5°	8.3	8.2	8.1	8.0	7.8	7.7	7.5	7.4	7.3	7.2	7.1	7.0	7.0
130,0°	7.9	7.9	7.8	7.7	7.6	7.5	7.3	7.2	7.1	7.1	7.0	6.9	6.9
132,5°	7.6	7.6	7.5	7.4	7.4	7.3	7.2	7.1	7.0	6.9	6.9	6.8	6.8
135,0°	7.3	7.3	7.2	7.2	7.1	7.0	7.0	6.9	6.8	6.8	6.7	6.7	6.7
137,5°	7.0	7.0	7.0	6.9	6.9	6.8	6.8	6.7	6.7	6.6	6.6	6.5	6.5
140,0°	6.7	6.7	6.7	6.7	6.6	6.6	6.5	6.5	6.5	6.4	6.4	6.4	6.4
142,5°	6.4	6.4	6.5	6.4	6.4	6.4	6.4	6.4	6.3	6.3	6.3	6.3	6.3
145,0°	6.3	6.3	6.3	6.3	6.3	6.3	6.3	6.3	6.2	6.2	6.2	6.2	6.2
147,5°	6.0	6.0	6.1	6.1	6.1	6.1	6.1	6.1	6.0	6.1	6.0	6.1	6.1
150,0°	5.7	5.7	5.8	5.8	5.8	5.8	5.9	5.9	5.8	5.9	5.9	5.9	5.9
152,5°	5.4	5.4	5.5	5.5	5.5	5.5	5.6	5.6	5.6	5.6	5.6	5.7	5.7
155,0°	5.2	5.2	5.2	5.3	5.3	5.3	5.3	5.4	5.4	5.5	5.5	5.6	5.5
157,5°	4.9	4.9	4.9	4.9	4.9	4.9	5.0	5.0	5.1	5.1	5.2	5.2	5.1
160,0°	4.4	4.4	4.4	4.5	4.5	4.5	4.5	4.6	4.6	4.7	4.7	4.8	4.7
162,5°	3.9	3.9	3.9	4.0	4.0	4.0	4.0	4.0	4.1	4.1	4.2	4.2	4.1
165,0°	3.1	3.1	3.1	3.1	3.1	3.1	3.1	3.0	3.1	3.1	3.1	3.1	3.2
167,5°	2.6	2.5	2.5	2.5	2.5	2.5	2.5	2.4	2.4	2.4	2.4	2.4	2.5
170,0°	2.1	2.1	2.1	2.0	2.0	2.0	2.0	1.9	1.9	1.9	1.9	1.8	1.8
172,5°	1.7	1.6	1.6	1.6	1.6	1.6	1.6	1.5	1.5	1.5	1.4	1.4	1.6
175,0°	1.2	1.1	1.1	1.1	1.1	1.1	1.1	1.1	1.1	1.1	1.1	1.0	1.3
177,5°	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	1.1
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family LITEPOLE 1	Order number: 5XA5415KF14HP EAN: 4058352836316	LP number 58099_23
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
115,0°	7.4	7.3	7.2	7.2	7.2	7.2	10.0	10.1	10.1	10.0	9.9	9.7	9.6
117,5°	7.3	7.2	7.2	7.2	7.1	7.1	9.7	9.8	9.8	9.7	9.6	9.4	9.2
120,0°	7.2	7.2	7.2	7.1	7.1	7.1	9.4	9.5	9.4	9.3	9.2	9.0	8.8
122,5°	7.1	7.1	7.1	7.1	7.0	7.0	9.0	9.1	9.0	8.9	8.8	8.6	8.4
125,0°	7.0	7.0	7.0	7.0	7.0	6.9	8.7	8.6	8.6	8.5	8.4	8.2	8.1
127,5°	6.9	6.9	6.9	6.9	6.9	6.9	8.3	8.3	8.2	8.1	8.0	7.9	7.7
130,0°	6.8	6.9	6.8	6.8	6.8	6.8	7.9	7.9	7.9	7.8	7.6	7.5	7.3
132,5°	6.7	6.8	6.8	6.7	6.8	6.7	7.6	7.6	7.5	7.4	7.3	7.1	7.0
135,0°	6.6	6.7	6.6	6.6	6.6	6.6	7.3	7.2	7.2	7.1	6.9	6.8	6.6
137,5°	6.5	6.5	6.5	6.5	6.5	6.4	6.9	6.9	6.8	6.7	6.6	6.5	6.3
140,0°	6.4	6.4	6.4	6.4	6.3	6.2	6.6	6.6	6.5	6.4	6.3	6.2	6.0
142,5°	6.3	6.2	6.3	6.2	6.1	6.0	6.4	6.3	6.2	6.1	6.0	5.9	5.8
145,0°	6.1	6.1	6.2	6.1	6.0	5.9	6.2	6.1	6.1	6.0	5.9	5.7	5.6
147,5°	6.0	6.0	6.0	5.9	5.8	5.7	6.0	5.9	5.8	5.7	5.6	5.5	5.4
150,0°	5.9	5.9	5.7	5.6	5.6	5.5	5.7	5.6	5.6	5.5	5.4	5.3	5.2
152,5°	5.5	5.4	5.4	5.3	5.3	5.2	5.4	5.4	5.3	5.2	5.2	5.1	5.0
155,0°	5.3	5.1	4.9	5.0	5.0	4.9	5.1	5.2	5.1	5.1	5.1	5.1	4.8
157,5°	4.9	4.6	4.5	4.6	4.5	4.5	4.8	4.8	4.8	4.8	4.8	4.8	4.7
160,0°	4.4	4.1	4.0	4.1	4.1	4.1	4.4	4.4	4.4	4.4	4.4	4.5	4.5
162,5°	3.8	3.6	3.4	3.6	3.6	3.5	3.9	3.9	3.9	3.9	4.0	4.0	3.9
165,0°	3.1	2.9	2.8	2.8	2.8	2.8	3.1	3.1	3.1	3.1	3.1	3.2	3.2
167,5°	2.4	2.3	2.2	2.2	2.2	2.2	2.6	2.6	2.6	2.6	2.6	2.7	2.7
170,0°	1.7	1.6	1.6	1.6	1.6	1.6	2.1	2.1	2.1	2.1	2.1	2.2	2.2
172,5°	1.5	1.4	1.4	1.4	1.4	1.4	1.7	1.7	1.7	1.7	1.7	1.8	1.8
175,0°	1.3	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.3
177,5°	1.1	1.0	1.0	1.0	1.0	1.0	0.9	0.9	0.9	1.0	1.0	1.0	1.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family LITEPOLE 1	Order number: 5XA5415KF14HP EAN: 4058352836316	LP number 58099_23
Table of values for luminous intensities		Maximum luminous intensity
		sITeco

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
115,0°	9.4	9.3	9.1	9.0	8.8	8.6	8.5	8.3	8.2	7.9	7.1	2.2	978.2
117,5°	9.0	8.9	8.7	8.6	8.4	8.2	8.0	7.9	7.8	7.4	6.8	2.0	980.2
120,0°	8.6	8.4	8.3	8.1	8.0	7.8	7.6	7.4	7.3	7.1	6.5	1.9	982.2
122,5°	8.2	8.1	7.9	7.7	7.5	7.4	7.2	7.0	6.9	6.7	6.2	1.8	984.0
125,0°	7.9	7.6	7.5	7.3	7.1	7.0	6.8	6.6	6.5	6.4	5.9	1.7	985.7
127,5°	7.5	7.3	7.1	7.0	6.8	6.7	6.5	6.3	6.2	6.0	5.8	1.6	987.3
130,0°	7.1	6.9	6.8	6.6	6.5	6.3	6.1	5.9	5.8	5.7	5.4	1.5	988.8
132,5°	6.8	6.6	6.5	6.3	6.2	6.0	5.8	5.5	5.5	5.3	5.0	1.4	990.1
135,0°	6.5	6.3	6.2	6.0	5.9	5.7	5.5	5.2	5.2	5.0	4.7	1.3	991.4
137,5°	6.2	6.0	5.9	5.7	5.6	5.4	5.2	5.0	4.9	4.6	4.5	1.2	992.6
140,0°	5.9	5.7	5.6	5.5	5.3	5.2	5.0	4.7	4.6	4.3	4.2	1.1	993.6
142,5°	5.7	5.5	5.4	5.2	5.1	4.9	4.8	4.5	4.3	4.1	4.0	1.0	994.6
145,0°	5.5	5.3	5.2	5.1	4.9	4.8	4.7	4.3	4.1	4.0	3.9	0.9	995.5
147,5°	5.3	5.1	5.0	4.9	4.8	4.6	4.5	4.2	3.9	3.8	3.8	0.8	996.3
150,0°	5.1	5.0	4.9	4.8	4.6	4.4	4.3	4.0	3.7	3.6	3.6	0.7	997.1
152,5°	4.9	4.8	4.7	4.6	4.4	4.2	4.1	3.7	3.5	3.5	3.5	0.6	997.7
155,0°	4.8	4.7	4.6	4.5	4.3	4.2	3.9	3.6	3.5	3.4	3.3	0.6	998.3
157,5°	4.7	4.6	4.5	4.4	4.2	4.0	3.7	3.4	3.3	3.2	3.1	0.5	998.8
160,0°	4.6	4.5	4.4	4.3	4.0	3.7	3.4	3.1	3.0	3.0	2.9	0.4	999.2
162,5°	4.0	3.9	3.8	3.7	3.5	3.3	3.0	2.8	2.8	2.7	2.7	0.3	999.5
165,0°	3.3	3.2	3.1	3.1	2.9	2.7	2.5	2.4	2.3	2.3	2.3	0.2	999.7
167,5°	2.7	2.7	2.6	2.5	2.4	2.3	2.2	2.1	2.0	2.0	2.0	0.1	999.8
170,0°	2.2	2.2	2.1	2.1	2.0	1.9	1.9	1.8	1.7	1.7	1.7	0.1	999.9
172,5°	1.8	1.8	1.7	1.7	1.6	1.6	1.6	1.5	1.5	1.5	1.5	0.1	1000.0
175,0°	1.3	1.3	1.3	1.2	1.2	1.2	1.2	1.2	1.1	1.1	1.1	0.0	1000.0
177,5°	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	0.0	1000.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family LITEPOLE 1	Order number: 5XA5415KF14HP EAN: 4058352836316	LP number 58099_23
-----------------------------	---	------------------------------

Dimming levels table	environmental temperature: 25°C	siteco
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W]
				start of lifetime	end of lifetime	average
100	254	254	4940	33.6	35.9	34.8
95	241	252	4687	31.4	33.5	32.4
90	229	250	4454	29.4	31.4	30.4
85	216	248	4201	27.4	29.2	28.3
80	203	246	3948	25.5	27.1	26.3
75	190	243	3695	23.6	25.2	24.4
70	178	241	3462	21.9	23.3	22.6
65	165	238	3209	20.2	21.5	20.8
60	152	235	2956	18.5	19.6	19.0
55	140	232	2723	16.9	18.0	17.4
50	127	229	2470	15.3	16.2	15.8
45	114	225	2217	13.7	14.5	14.1
40	102	221	1984	12.3	13.0	12.6
35	89	216	1731	10.8	11.4	11.1
30	76	210	1478	9.3	9.8	9.6
25	63	203	1225	7.8	8.2	8.0
20	51	195	992	6.6	6.9	6.8
15	38	184	739	5.2	5.5	5.4
11	28	173	545	4.1	4.4	4.2