

Photometric test report

Family
DL® 50 mini LED

Order number: 5XA248A41F08GE
EAN: 4058352802090

LP number
59405_9



Version post-top or side-entry mounting
Optic asymmetric, extremely wide distribution (P1.0a)
Cover toughened safety glass
Lamps LED 4000 K | CRI ≥ 70
Controlgear ECG SITECO iQ
Rated values Net luminous flux = 5030 lm
 Power consumption = 31.2 W
 Luminous efficacy = 161.2 lm/W

serial
documentation
03.04.2023

siteco

Luminous intensity in cd/klm


C180-0

C185-5

C190-10

C270-90

Imax: 824 cd/klm

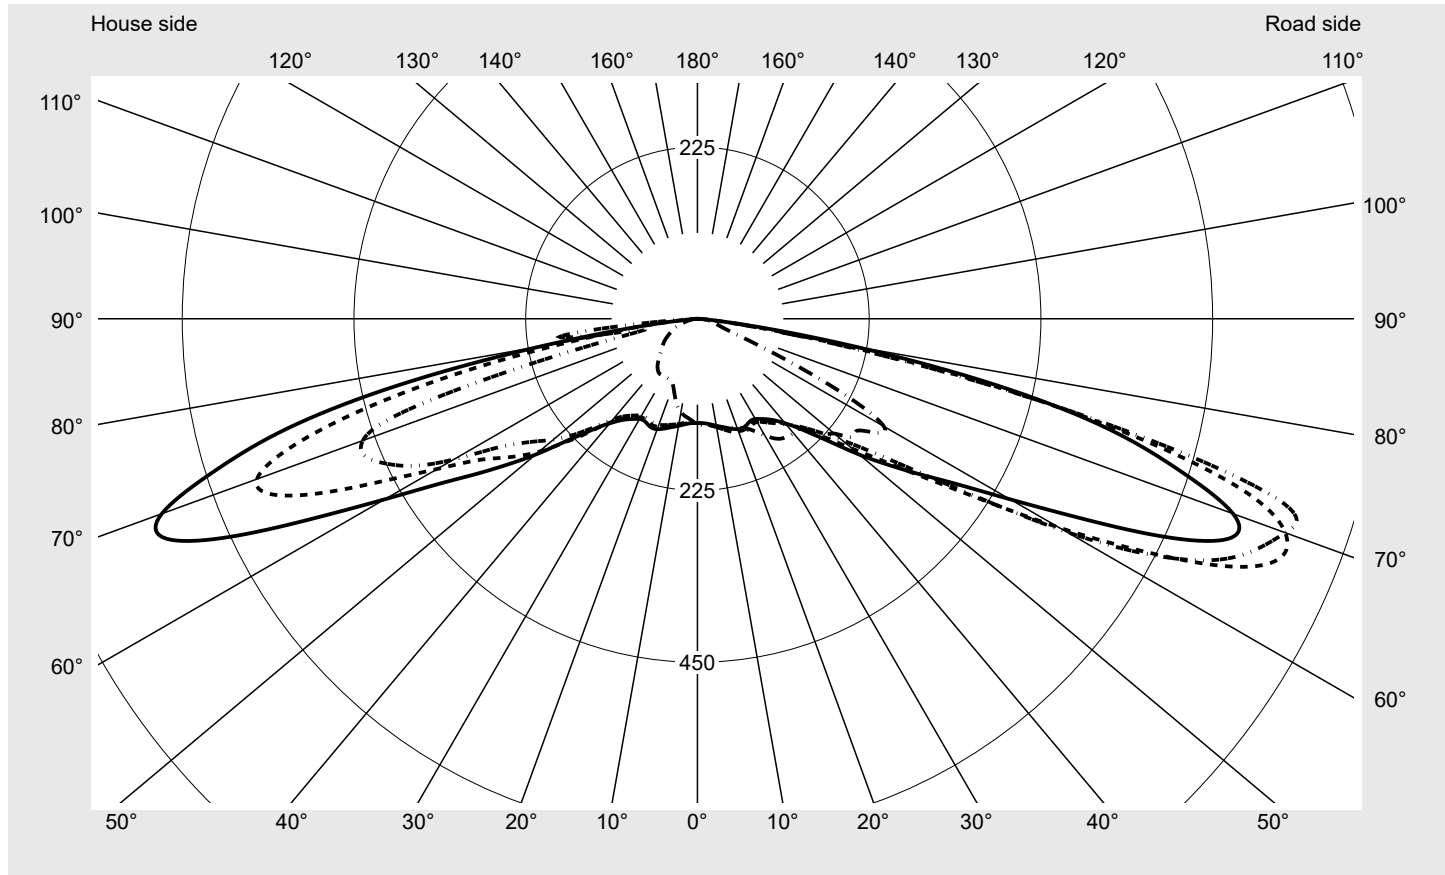

Luminaire output ratios

Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%

Luminous intensity class acc. to EN13201-2

Class:	---
Imax 70°	819.8
Imax 80°	208.9
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0


Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family DL® 50 mini LED	Order number: 5XA248A41F08GE EAN: 4058352802090	LP number 59405_9
----------------------------------	------------------------------------------------------------------	-----------------------------

Envelope curve in cd/klm **KMK 67.5°** **KMK 65°** **KMK 62.5°** **KMK 60°** **siteco**

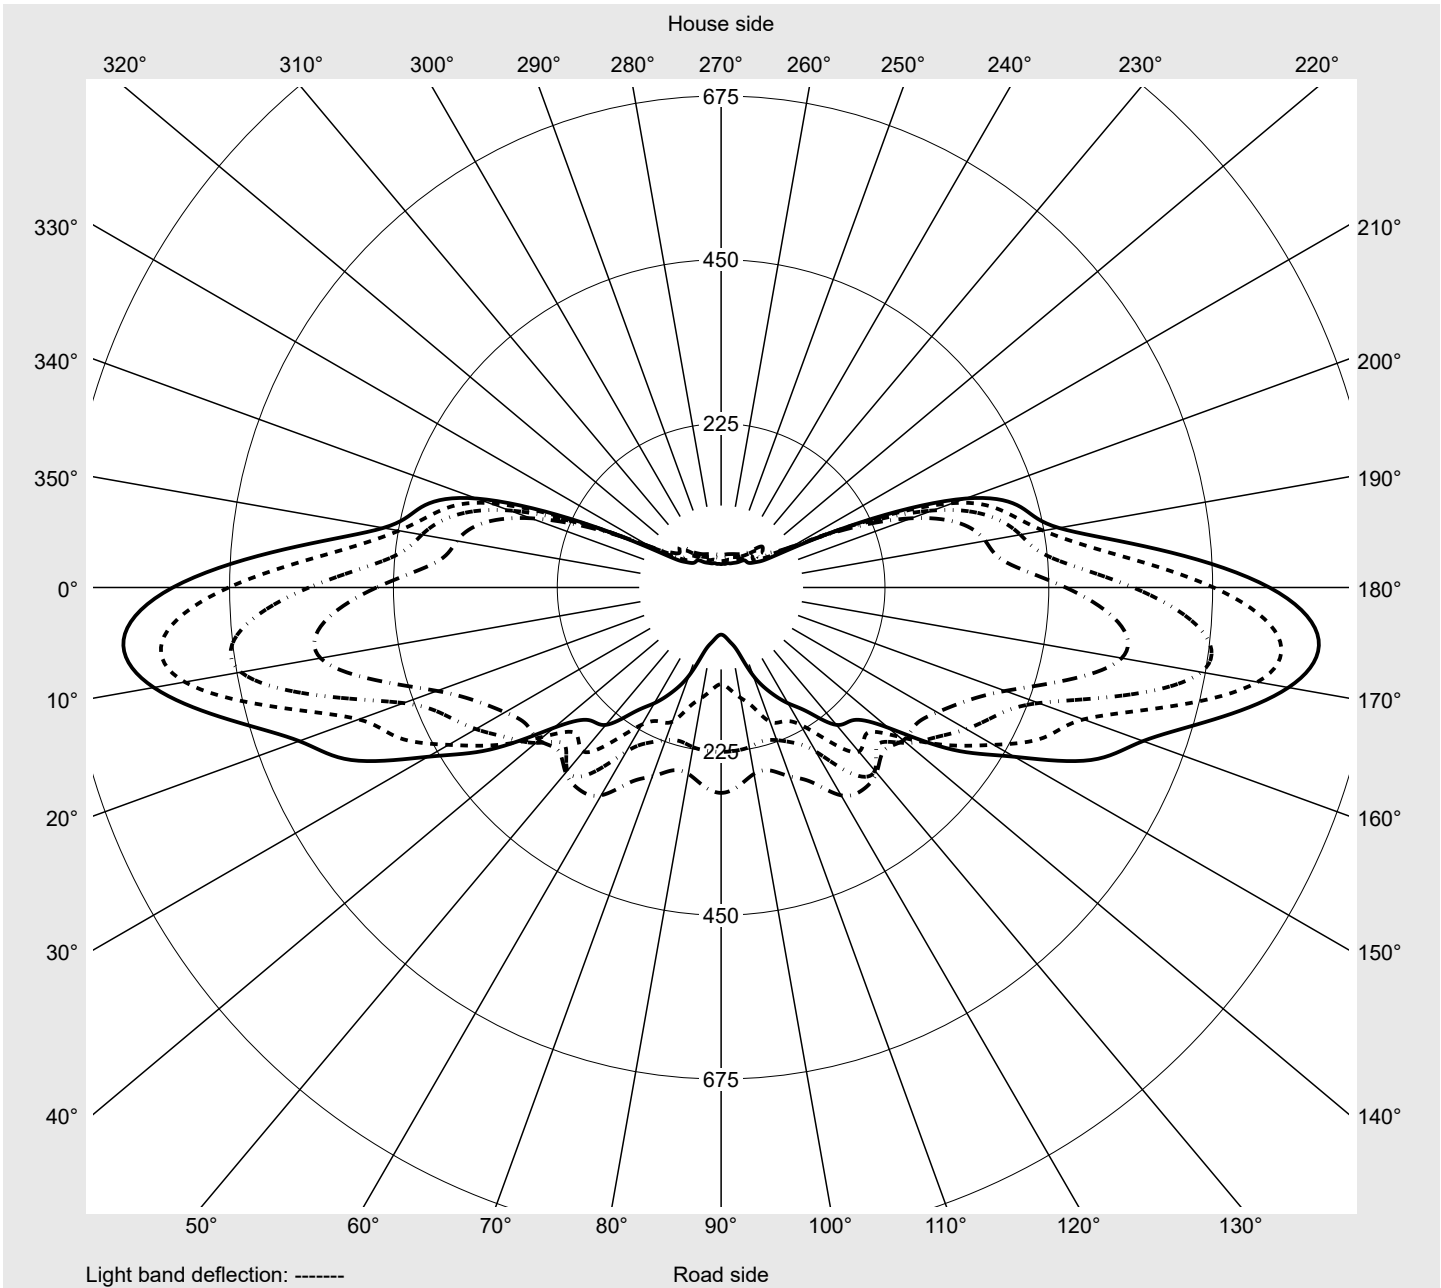

Photometric test report

Family DL® 50 mini LED	Order number: 5XA248A41F08GE EAN: 4058352802090	LP number 59405_9
Table of values for luminous intensities		Maximum luminous intensity
siteco		

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	136.7	136.7	136.7	136.7	136.7	136.7	136.7	136.7	136.7	136.7	136.7	136.7	136.7
2,5°	136.8	137.0	137.2	137.4	137.5	137.7	137.8	137.9	138.0	138.1	138.3	138.5	138.6
5,0°	137.8	138.4	138.8	139.2	139.4	139.7	139.9	140.1	140.1	140.1	140.0	140.0	140.0
7,5°	139.8	140.5	141.2	141.8	142.2	142.4	142.5	142.5	142.5	142.1	141.7	141.5	141.2
10,0°	142.4	143.4	144.3	145.1	145.6	145.8	145.7	145.3	145.0	144.5	144.1	143.9	143.7
12,5°	145.0	146.3	147.8	149.0	149.5	149.5	149.2	148.8	148.5	148.3	148.3	148.4	148.2
15,0°	147.9	149.9	151.7	153.3	154.1	154.1	153.7	153.4	153.5	153.7	153.7	153.4	152.8
17,5°	151.1	153.5	155.7	157.6	158.6	158.7	158.5	158.4	158.6	158.7	158.4	157.8	156.9
20,0°	153.9	156.6	158.9	161.3	162.4	162.6	162.8	162.9	163.1	163.1	162.6	161.8	160.7
22,5°	154.9	157.8	160.7	163.6	165.5	166.3	166.8	167.2	167.4	167.0	166.4	165.7	165.2
25,0°	153.2	156.0	159.2	163.2	166.3	168.4	170.2	171.1	171.3	170.9	170.7	170.6	170.7
27,5°	150.8	153.2	156.2	160.3	163.7	166.8	170.7	173.2	174.0	174.7	175.3	176.3	177.3
30,0°	151.7	153.7	156.1	159.0	161.1	164.1	169.0	173.6	176.7	178.7	180.5	182.4	185.3
32,5°	155.7	158.2	160.5	162.8	162.6	162.9	166.1	171.6	179.1	183.9	186.9	190.3	194.9
35,0°	160.9	163.7	166.4	168.7	167.7	167.9	166.0	169.3	179.4	189.4	193.0	197.2	203.9
37,5°	168.2	170.5	173.0	174.5	174.3	174.2	173.4	171.2	178.0	191.3	196.9	203.1	213.5
40,0°	178.8	179.6	180.6	180.9	180.5	181.2	182.3	180.3	178.1	189.8	201.0	212.6	227.7
42,5°	193.1	191.6	190.0	187.9	186.8	187.4	191.8	191.5	185.7	188.6	208.9	225.4	244.2
45,0°	213.9	209.2	203.6	197.5	194.4	193.4	198.7	203.2	199.0	192.5	220.8	242.1	260.1
47,5°	241.1	233.1	222.0	211.7	205.0	201.3	204.2	214.9	216.3	204.7	235.6	260.0	276.9
50,0°	276.9	264.8	247.7	234.2	221.7	214.5	216.2	229.0	237.9	227.3	255.2	283.5	304.1
52,5°	313.8	305.6	285.1	264.5	247.3	238.2	237.5	248.9	261.1	253.8	281.3	313.4	328.0
55,0°	355.0	361.8	344.3	315.2	291.4	277.2	270.0	273.4	282.3	282.0	311.3	328.3	330.9
57,5°	403.4	439.6	434.6	392.5	351.8	323.9	304.5	295.5	301.3	309.9	329.0	335.9	347.6
60,0°	473.2	547.3	558.6	491.3	415.3	369.9	342.7	327.0	326.5	316.6	332.1	339.1	329.6
62,5°	565.9	661.1	669.6	572.5	464.0	416.5	388.8	359.0	332.0	304.6	328.4	311.6	260.2
65,0°	676.3	767.7	747.8	633.7	529.5	488.3	432.1	377.2	318.8	283.1	294.2	257.3	217.4
67,5°	753.0	823.7	791.1	700.3	616.6	560.5	464.9	388.3	299.8	257.4	246.3	209.2	183.5
70,0°	746.8	819.5	819.8	758.7	688.2	619.3	515.7	407.7	294.7	229.7	190.0	158.5	121.9
72,5°	663.4	751.7	806.0	776.0	714.3	665.0	531.7	389.8	281.1	182.2	126.8	91.3	58.2
75,0°	557.3	589.1	614.4	627.9	637.0	572.6	390.4	268.0	182.0	120.0	74.9	47.7	38.0
77,5°	399.1	374.4	363.2	363.8	409.9	313.4	202.9	97.5	68.7	69.3	39.9	29.3	25.0
80,0°	208.9	172.9	157.6	172.7	158.4	155.0	84.1	47.0	40.9	42.6	23.7	18.3	16.0
82,5°	73.2	58.8	55.8	60.1	53.4	64.3	40.1	24.5	20.4	20.2	12.4	9.8	9.5
85,0°	14.5	13.6	13.1	17.4	16.8	14.3	9.2	7.5	6.4	6.2	5.8	5.0	4.0
87,5°	3.5	3.3	3.2	3.1	3.1	2.8	2.6	2.2	2.1	1.9	1.8	1.6	1.4
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family DL® 50 mini LED	Order number: 5XA248A41F08GE EAN: 4058352802090	LP number 59405_9
Table of values for luminous intensities		Maximum luminous intensity
siteco		

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	136.7	136.7	136.7	136.7	136.7	136.7	136.7	136.7	136.7	136.7	136.7	136.7	136.7
2,5°	138.8	139.0	139.2	139.4	139.6	139.6	136.6	136.3	135.9	135.7	135.3	135.1	134.8
5,0°	140.0	140.1	140.1	140.2	140.3	140.4	137.3	136.6	135.9	135.3	134.6	133.9	133.3
7,5°	140.9	140.8	140.7	140.8	140.9	140.9	138.9	137.9	136.8	135.8	134.7	133.6	132.7
10,0°	143.5	143.5	143.3	143.5	143.5	143.6	141.2	139.9	138.6	137.0	135.5	134.1	132.7
12,5°	147.7	147.2	146.6	146.2	146.0	146.0	143.5	141.9	140.3	138.5	136.6	134.9	133.1
15,0°	152.0	151.0	149.9	149.0	148.4	148.2	145.9	143.9	141.8	139.7	137.8	135.5	133.2
17,5°	155.7	154.4	152.8	151.2	150.0	149.7	148.6	146.1	143.4	140.7	138.1	135.4	132.5
20,0°	159.4	158.1	156.0	153.8	152.4	151.8	150.7	147.6	144.4	141.2	138.1	134.7	131.0
22,5°	164.3	163.0	160.7	158.0	155.9	154.9	151.4	148.1	144.9	141.5	138.0	133.8	128.4
25,0°	170.7	169.5	166.9	163.7	160.6	159.3	150.1	147.4	144.5	141.1	137.6	132.4	124.7
27,5°	178.5	178.4	176.3	172.7	169.4	167.1	148.2	145.9	143.3	140.1	136.3	129.5	119.1
30,0°	188.6	190.0	189.3	185.6	179.5	176.2	149.3	146.6	143.2	139.7	134.7	125.6	112.3
32,5°	200.4	204.0	204.5	199.0	190.2	185.5	153.1	150.2	146.0	141.3	133.2	120.0	105.1
35,0°	211.2	218.3	220.6	212.7	199.0	191.6	158.1	155.1	150.4	143.8	131.5	114.1	98.2
37,5°	227.2	235.9	236.2	224.8	205.3	194.2	165.5	161.7	156.3	146.8	128.7	107.9	92.2
40,0°	245.4	251.5	248.6	235.2	210.1	195.6	177.3	172.3	164.3	150.0	125.2	101.3	87.8
42,5°	260.0	264.6	258.6	243.6	213.9	196.2	194.3	187.6	175.0	154.6	120.8	94.8	85.0
45,0°	273.3	275.7	268.4	252.8	226.7	206.4	217.7	207.3	186.7	161.0	117.7	90.0	84.8
47,5°	292.1	294.7	290.3	274.6	245.1	225.1	242.7	227.4	199.3	169.4	117.2	86.7	86.9
50,0°	322.0	327.1	310.4	289.2	252.5	234.0	270.9	246.5	213.3	180.4	123.3	88.2	89.6
52,5°	333.1	331.3	326.4	309.2	275.8	254.2	295.3	263.5	231.0	196.5	135.3	93.0	92.0
55,0°	343.8	356.9	335.7	307.1	281.3	255.7	318.3	284.6	257.3	219.5	154.6	99.3	92.0
57,5°	365.9	331.2	312.3	297.3	291.1	277.6	346.0	316.5	293.5	246.7	174.5	106.9	89.1
60,0°	295.1	276.0	260.1	259.9	273.8	282.1	393.6	368.5	339.9	277.9	189.4	112.2	83.8
62,5°	235.2	223.1	218.5	222.6	225.0	225.8	457.7	417.3	380.3	309.2	199.5	110.6	77.0
65,0°	202.7	196.1	170.0	153.9	140.6	132.7	538.6	449.3	402.5	338.8	207.3	104.0	69.6
67,5°	158.2	128.7	92.8	77.0	68.2	64.7	601.9	471.0	426.2	357.1	212.0	93.9	61.5
70,0°	84.5	63.0	52.1	42.8	39.6	38.6	614.2	466.4	446.0	367.2	212.9	83.4	55.1
72,5°	44.2	40.4	37.1	32.2	30.3	29.8	557.3	399.8	429.1	344.4	178.5	68.3	47.8
75,0°	34.0	31.2	29.4	27.4	24.5	24.1	444.9	215.0	290.8	262.8	130.9	53.2	38.4
77,5°	23.9	22.4	21.2	19.7	18.3	18.2	300.0	82.4	170.8	162.6	82.5	42.4	29.8
80,0°	16.5	15.1	14.2	12.7	12.3	12.2	156.2	98.0	133.7	99.3	52.6	32.3	22.4
82,5°	9.1	7.9	7.2	6.5	6.0	6.0	72.9	182.1	124.7	57.8	33.9	22.8	15.8
85,0°	3.6	3.4	3.0	2.8	2.5	2.4	16.0	80.6	55.7	23.3	17.7	12.9	9.3
87,5°	1.2	1.1	1.1	1.0	1.0	0.9	3.9	5.6	5.0	4.2	4.7	4.0	3.4
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family DL® 50 mini LED	Order number: 5XA248A41F08GE EAN: 4058352802090	LP number 59405_9
Table of values for luminous intensities		Maximum luminous intensity
		sITeco

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0,0°	136.7	136.7	136.7	136.7	136.7	136.7	136.7	136.7	136.7	136.7	136.7	0.2	0.2
2,5°	134.5	134.3	134.2	134.0	134.0	134.1	134.1	134.1	134.2	134.4	134.5	1.6	1.8
5,0°	132.7	132.3	131.9	131.5	131.2	131.1	130.9	130.9	130.9	131.0	131.0	3.3	5.1
7,5°	131.8	131.0	130.3	129.6	129.1	128.8	128.5	128.3	128.2	128.2	128.3	4.9	10.0
10,0°	131.5	130.3	129.1	128.1	127.2	126.2	125.5	124.9	124.5	124.3	124.2	6.6	16.6
12,5°	131.4	129.5	127.7	125.8	124.0	122.3	120.8	119.8	119.0	118.7	118.6	8.2	24.8
15,0°	130.7	128.0	125.0	122.1	119.1	116.5	114.1	112.4	111.0	110.3	110.3	9.9	34.7
17,5°	129.1	125.2	120.8	116.3	112.2	108.6	105.8	103.5	102.0	101.3	101.1	11.5	46.3
20,0°	126.3	120.5	114.3	108.8	104.0	100.2	97.3	95.4	94.0	93.5	93.3	13.1	59.4
22,5°	121.4	113.6	106.2	100.2	95.7	92.8	90.8	89.7	89.2	89.0	89.0	14.7	74.0
25,0°	114.9	105.5	98.0	92.9	89.8	88.3	87.6	87.5	87.6	87.6	87.6	16.2	90.2
27,5°	107.4	97.6	91.2	88.0	86.9	86.6	86.8	87.0	87.2	87.2	87.1	17.7	108.0
30,0°	100.1	91.3	87.0	86.1	85.9	86.1	86.8	87.2	87.6	87.4	87.3	19.4	127.4
32,5°	93.2	86.8	85.7	85.6	85.8	86.4	87.3	88.1	88.3	87.8	87.4	21.3	148.6
35,0°	88.3	85.3	85.4	85.5	85.8	86.7	87.6	88.4	88.5	87.8	87.3	23.2	171.8
37,5°	85.6	85.4	85.4	85.2	85.7	86.4	87.0	87.1	86.9	85.7	85.1	25.3	197.1
40,0°	85.4	86.0	85.2	84.9	84.9	84.8	84.7	84.1	83.3	82.0	81.3	27.4	224.5
42,5°	86.2	86.1	84.9	83.9	82.9	81.8	80.9	79.7	78.4	76.9	76.2	29.8	254.3
45,0°	87.3	85.8	83.7	81.4	79.3	77.3	75.5	73.8	72.6	71.4	70.7	32.4	286.7
47,5°	88.5	85.9	81.6	78.1	75.0	72.9	70.9	69.0	67.3	66.1	65.6	35.7	322.4
50,0°	90.2	87.4	78.8	73.8	70.7	68.5	66.4	64.6	63.1	61.9	61.3	39.7	362.0
52,5°	91.2	86.9	76.0	69.8	66.5	64.3	62.1	60.3	58.9	57.9	57.3	44.2	406.2
55,0°	88.2	84.9	73.7	66.0	62.3	59.8	57.7	56.0	54.9	53.9	53.5	49.2	455.4
57,5°	82.7	83.5	70.2	61.5	57.5	55.2	53.4	51.9	50.9	49.8	49.5	54.7	510.1
60,0°	74.5	79.5	66.2	57.4	53.0	50.5	48.9	47.5	46.4	45.2	44.7	59.6	569.7
62,5°	65.9	71.2	61.9	53.2	48.7	46.0	44.3	43.0	42.0	41.0	40.5	63.2	632.9
65,0°	58.6	60.2	56.3	48.6	44.4	41.7	40.1	39.6	37.7	36.7	36.1	65.9	698.8
67,5°	52.4	49.8	48.8	43.1	39.4	37.0	35.2	34.6	32.9	32.6	32.1	66.8	765.6
70,0°	45.6	41.6	41.6	37.7	34.3	32.0	30.5	29.9	28.1	27.9	27.7	66.4	832.0
72,5°	39.0	34.7	34.0	32.1	29.2	27.1	25.4	24.8	23.4	22.6	22.5	62.2	894.2
75,0°	32.3	28.3	27.2	26.3	24.5	22.5	20.7	19.9	18.8	18.0	18.0	48.3	942.4
77,5°	25.0	22.1	20.8	20.4	19.1	17.4	15.9	15.0	14.2	13.6	13.6	29.2	971.7
80,0°	18.8	16.3	15.2	15.1	14.1	12.6	11.4	10.8	10.0	9.9	9.8	15.8	987.5
82,5°	13.1	11.3	9.8	10.1	9.4	8.7	7.4	6.8	6.2	6.2	6.3	8.6	996.1
85,0°	7.9	6.7	5.7	5.5	5.4	5.1	4.4	4.0	3.5	3.5	3.4	3.2	999.3
87,5°	3.0	2.7	2.5	2.3	2.1	2.1	1.8	1.7	1.5	1.5	1.4	0.7	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family DL® 50 mini LED	Order number: 5XA248A41F08GE EAN: 4058352802090	LP number 59405_9
----------------------------------	------------------------------------------------------------------	-----------------------------

Dimming levels table	environmental temperature: 25°C	siteco
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W]
				start of lifetime	end of lifetime	average
100	254	254	5030	31.2	32.2	31.7
95	241	252	4773	29.5	30.4	30.0
90	229	250	4535	27.9	28.7	28.3
85	216	248	4277	26.1	26.9	26.5
80	203	246	4020	24.3	25.2	24.8
75	190	243	3763	22.7	23.4	23.0
70	178	241	3525	21.2	21.9	21.5
65	165	238	3268	19.6	20.2	19.9
60	152	235	3010	18.0	18.6	18.3
55	140	232	2772	16.6	17.0	16.8
50	127	229	2515	15.1	15.5	15.3
45	114	225	2258	13.6	14.0	13.8
40	102	221	2020	12.2	12.6	12.4
35	89	216	1762	10.8	11.1	11.0
30	76	210	1505	9.3	9.6	9.4
25	63	203	1248	7.9	8.1	8.0
20	51	195	1010	6.8	6.9	6.8
15	38	184	753	5.5	5.6	5.6
11	29	175	574	4.5	4.6	4.6