

Photometric test report

Family
Silica® 21

Order number: 51MX33TAT7S
EAN: 4058352685587

LP number
59332_85



Version Suspended luminaire, with homogeneous illumination, prismatic cover, direct-/ indirect distribution, extremely wide distribution, UGR≤16 (L65≤3000cd/m²), tunable white

Lamps LED 6500 K | CRI ≥ 80

Controlgear ECG-DALI


Setting individual position

Rated values Net luminous flux = 5740 lm
Power consumption = 53.8 W
Luminous efficacy = 106.7 lm/W

serial documentation
03.05.2023



Luminous intensity in cd/klm C180-0 C270-90 **Imax: 358 cd/klm**

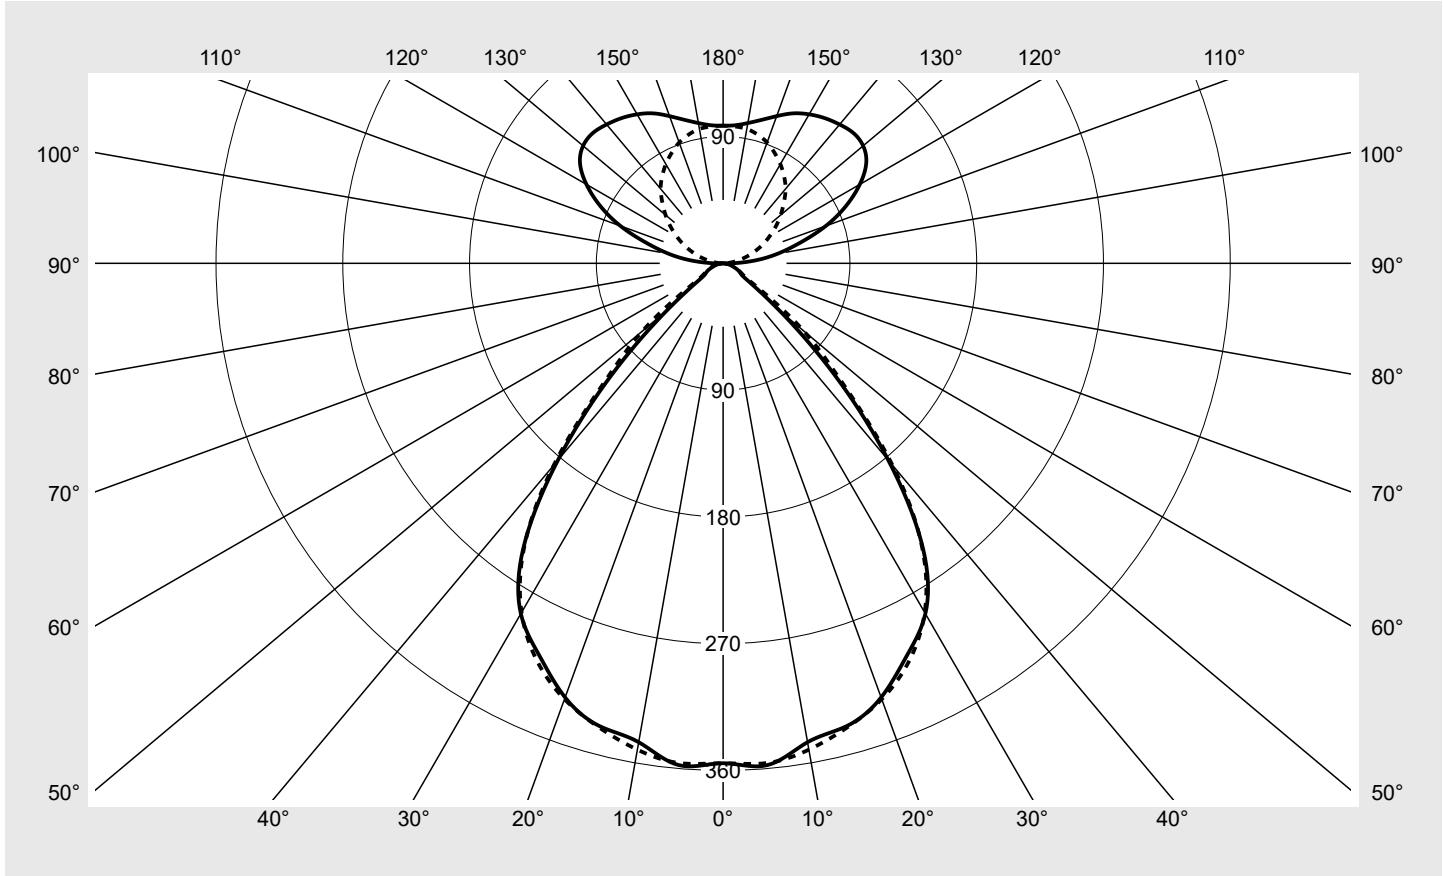

Classifications

DIN 5040	C 6 2
CIE	N1=78 N2=96 N3=99 N4=56 N5=100

Luminaire light output ratios

η_{LB}	100.0%
ϕ_u	56.2%
ϕ_o	43.8%

Measurement conditions
DIN EN 13032 and DIN 5032

Photometric test report

Family Silica® 21	Order number: 51MX33TAT7S EAN: 4058352685587	LP number 59332_85
Table of values for luminous intensities		Maximum luminous intensity



C-planes γ	0° 180°	15°	30°	45°	60°	75°	90° 270°	Phi-zone	Total Phi-zone
		165° 195° 345°	150° 210° 330°	135° 225° 315°	120° 240° 300°	105° 255° 285°			
Luminous intensity in cd/klm							Luminous flux in lm/klm		
0°	354.9	354.9	354.9	354.9	354.9	354.9	354.9	2.1	2.1
5°	357.6	358.3	358.1	358.3	357.8	357.0	356.1	17.1	19.2
10°	345.2	344.3	344.5	346.4	350.1	350.3	350.6	33.1	52.3
15°	340.0	338.8	336.2	336.1	338.1	341.2	341.0	48.0	100.3
20°	328.0	327.2	323.2	324.1	322.5	324.8	329.3	60.9	161.2
25°	307.9	308.7	306.4	306.5	306.8	306.6	312.0	71.2	232.5
30°	287.2	287.0	283.4	284.9	285.2	284.2	286.2	78.2	310.6
35°	247.5	247.0	244.6	246.0	246.7	245.6	246.4	77.4	388.0
40°	182.5	182.1	183.5	184.7	186.1	185.9	187.0	65.0	453.0
45°	111.7	111.4	112.8	114.1	115.4	116.9	119.1	44.3	497.3
50°	52.4	60.7	68.3	62.5	56.3	66.9	74.7	26.5	523.8
55°	21.3	28.6	27.1	30.9	23.3	32.2	30.0	12.6	536.4
60°	14.3	14.9	15.7	14.6	14.6	15.6	16.3	7.2	543.6
65°	11.8	11.7	12.2	11.9	12.4	12.3	12.4	6.0	549.6
70°	8.5	8.7	9.0	9.0	9.2	9.3	9.8	4.7	554.2
75°	5.9	6.2	6.8	6.5	6.6	7.0	7.1	3.5	557.7
80°	3.6	3.8	4.2	4.6	4.2	4.7	4.8	2.3	560.0
85°	1.8	1.8	1.8	2.1	2.2	2.6	2.7	1.2	561.2
90°	6.2	6.0	6.3	6.0	3.5	1.2	0.4	2.4	563.6
95°	22.4	22.9	24.7	23.8	15.7	8.2	4.2	9.9	573.5
100°	39.4	40.6	41.5	37.2	25.7	14.7	9.7	16.6	590.1
105°	56.7	58.1	58.0	51.0	35.4	22.2	16.2	23.0	613.1
110°	77.6	78.3	74.6	63.1	45.4	29.8	23.1	29.3	642.4
115°	96.2	95.7	89.3	74.3	55.1	37.6	30.6	34.4	676.8
120°	112.0	110.6	101.9	83.7	64.3	45.2	37.9	38.0	714.8
125°	124.0	121.0	110.5	92.7	72.3	52.4	45.6	39.9	754.8
130°	129.8	127.1	115.2	98.2	78.4	59.6	53.3	39.9	794.7
135°	130.8	128.1	117.0	101.7	82.9	66.3	61.0	38.2	832.9
140°	128.7	126.6	117.2	103.9	86.2	72.4	69.0	35.5	868.4
145°	125.8	124.5	116.6	104.5	89.3	78.0	75.4	32.1	900.6
150°	122.1	121.5	114.3	103.4	91.6	83.4	81.3	28.1	928.7
155°	117.5	116.9	110.1	102.0	93.3	88.1	86.5	23.6	952.4
160°	111.2	110.8	105.7	100.5	94.8	91.7	91.2	18.9	971.3
165°	105.4	104.8	102.1	98.7	96.3	94.6	94.6	14.1	985.4
170°	101.1	100.5	99.8	98.3	97.2	96.9	96.9	9.4	994.7
175°	98.4	98.3	97.7	97.5	97.5	97.5	97.5	4.7	999.4
180°	97.7	97.7	97.7	97.7	97.7	97.7	97.7	0.6	1000.0

Photometric test report

Family Silica® 21	Order number: 51MX33TAT7S EAN: 4058352685587	LP number 59332_85
-----------------------------	---------------------------------------------------------------	------------------------------

UGR-Table	Standard room	siteco
------------------	----------------------	---------------

Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	View crosswise (C0)					View endwise (C90)					
x	y										
2H	2H	15.4	16.3	16.3	17.2	18.3	15.6	16.5	16.5	17.4	18.5
	3H	15.3	16.1	16.2	17.0	18.1	15.6	16.4	16.5	17.3	18.4
	4H	15.3	16.0	16.2	16.9	18.1	15.6	16.3	16.5	17.2	18.4
	6H	15.2	15.8	16.1	16.8	17.9	15.6	16.2	16.5	17.1	18.3
	8H	15.1	15.7	16.1	16.7	17.9	15.5	16.0	16.4	17.0	18.2
	12H	15.0	15.6	16.0	16.5	17.8	15.5	16.0	16.4	17.0	18.2
4H	2H	15.2	15.9	16.1	16.8	17.9	15.3	16.0	16.2	16.9	18.1
	3H	15.2	15.8	16.1	16.7	17.9	15.4	16.0	16.3	16.9	18.1
	4H	15.2	15.7	16.1	16.7	17.9	15.4	16.0	16.4	16.9	18.1
	6H	15.2	15.6	16.1	16.6	17.8	15.5	15.9	16.5	16.9	18.1
	8H	15.1	15.5	16.1	16.5	17.8	15.5	15.9	16.5	16.9	18.1
	12H	15.1	15.4	16.1	16.4	17.7	15.5	15.9	16.5	16.8	18.1
8H	4H	15.1	15.5	16.0	16.4	17.7	15.3	15.7	16.2	16.6	17.9
	6H	15.1	15.5	16.1	16.5	17.7	15.4	15.7	16.4	16.7	18.0
	8H	15.1	15.4	16.1	16.4	17.7	15.5	15.8	16.5	16.8	18.1
	12H	15.1	15.3	16.1	16.3	17.6	15.6	15.8	16.6	16.8	18.1
12H	4H	15.0	15.3	16.0	16.3	17.6	15.2	15.5	16.2	16.5	17.8
	6H	15.1	15.3	16.1	16.3	17.6	15.3	15.6	16.4	16.6	17.9
	8H	15.1	15.3	16.1	16.3	17.6	15.4	15.7	16.5	16.7	18.0

Luminance table	Max. for $\gamma \geq 65^\circ$	Photometric dimensions in mm:	L = 1200 B = 50
------------------------	---------------------------------------------------	--------------------------------------	----------------------------------

C-planes	γ	Luminance in cd/m ²							
		0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°	
45°		15106.7	15074.0	15263.2	15443.0	15610.3	15809.5	16118.8	
50°		7801.6	9038.1	10164.1	9302.1	8383.0	9956.2	11114.7	
55°		3547.1	4778.0	4513.3	5156.1	3894.2	5377.3	4998.2	
60°		2745.3	2849.0	3011.4	2791.4	2801.7	2979.6	3114.3	
65°		2667.1	2646.2	2752.2	2684.9	2798.8	2794.5	2815.1	
70°		2385.9	2430.7	2529.1	2528.9	2568.9	2598.2	2732.2	
75°		2190.8	2273.9	2505.7	2393.0	2448.4	2573.3	2635.4	
80°		1978.9	2096.3	2312.2	2516.6	2334.3	2604.2	2666.5	
85°		1924.2	1950.5	2027.4	2346.8	2464.2	2819.9	2939.5	

Photometric test report

Family Silica® 21	Order number: 51MX33TAT7S EAN: 4058352685587	LP number 59332_85
------------------------------------	---------------------------------------------------------------	-------------------------------------



Luminance values in cd/m²

γ 65°	γ 70°	γ 75°	γ 80°	γ 85°
--------------	--------------	--------------	--------------	--------------

