

Photometric test report

Family
Licross® Spot 31

Order number: 51SL64DA45B
EAN: 4058352865736

LP number
59383_36



Version reflector, cover, polycarbonate, wide distribution, luminaire housing, aluminium, silver

Lamps LED 4000 K | CRI ≥ 90

Controlgear ECG-DALI

Setting factory setting: DIP-Step=7

Rated values Net luminous flux = 5250 lm
Power consumption = 43.7 W
Luminous efficacy = 120.1 lm/W


serial
documentation
12.07.2023

sitEco

Luminous intensity in cd/klm

C180-0

Imax: 1957 cd/klm

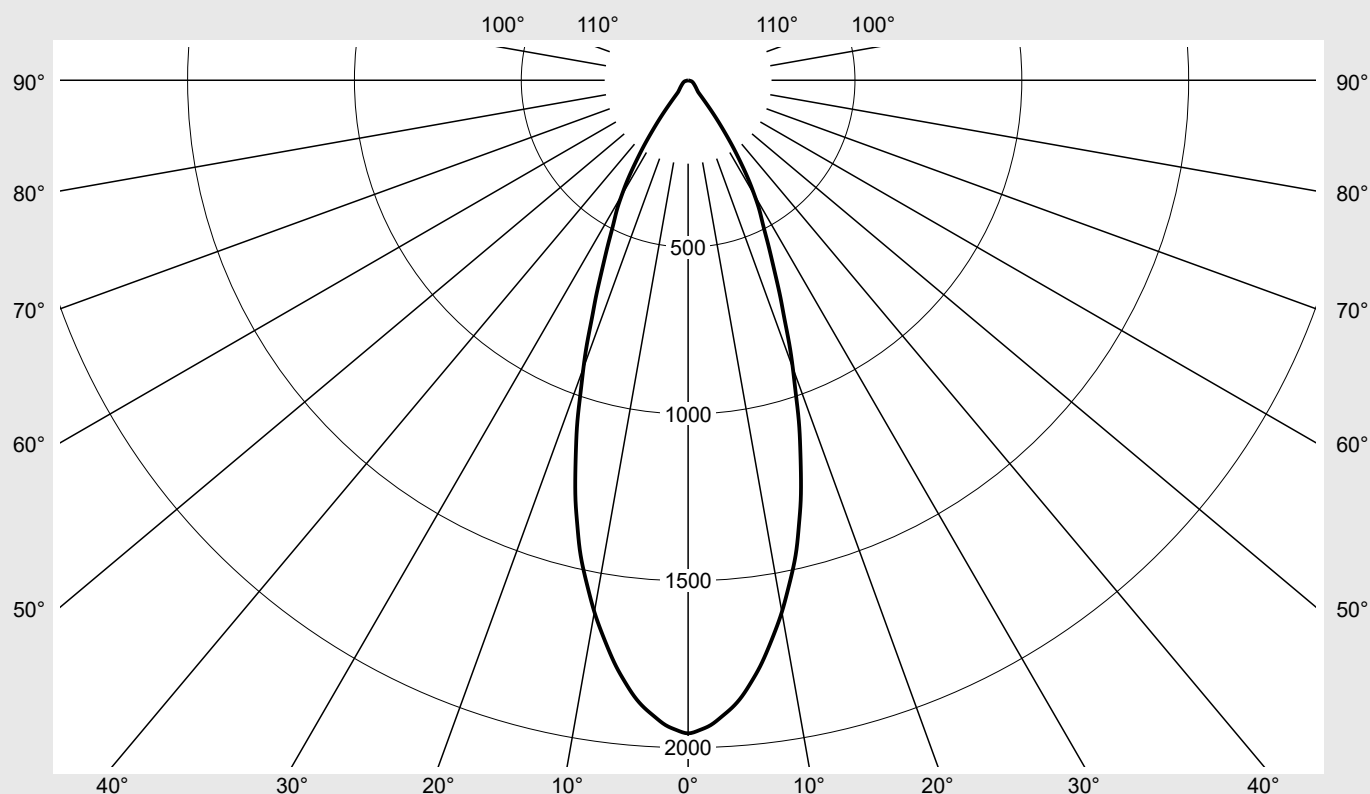

Classifications

DIN 5040 A 7 0
CIE N1=93 N2=97 N3=100
N4=100 N5=100

Luminaire light output ratios

η_{LB} 100.0%
 ϕ_u 100.0%
 ϕ_o 0.0%

Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family Licross® Spot 31	Order number: 51SL64DA45B EAN: 4058352865736	LP number 59383_36
Table of values for luminous intensities		Maximum luminous intensity
		sITeco

C-planes	0°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm		Luminous flux in lm/klm
0°	1957.2	0.5	0.5
1°	1947.9	3.7	4.2
2°	1933.7	7.4	11.6
3°	1910.2	11.0	22.6
4°	1885.0	14.4	37.0
5°	1853.1	17.7	54.7
6°	1812.8	20.8	75.5
7°	1769.9	23.7	99.1
8°	1720.6	26.3	125.4
9°	1670.0	28.6	154.0
10°	1618.0	30.8	184.8
11°	1560.5	32.7	217.5
12°	1503.8	34.3	251.8
13°	1443.5	35.6	287.4
14°	1372.9	36.4	323.8
15°	1303.8	37.0	360.8
16°	1226.3	37.1	397.9
17°	1149.0	36.8	434.7
18°	1073.5	36.4	471.1
19°	990.1	35.4	506.4
20°	917.2	34.4	540.8
21°	845.5	33.2	574.1
22°	770.3	31.6	605.7
23°	709.0	30.4	636.1
24°	648.2	28.9	665.0
25°	594.2	27.5	692.5
26°	547.0	26.3	718.8
27°	503.0	25.0	743.9
28°	468.0	24.1	768.0
29°	436.1	23.2	791.2
30°	397.9	21.8	813.0
31°	360.0	20.3	833.3
32°	318.2	18.5	851.8
33°	275.9	16.5	868.3
34°	236.3	14.5	882.8
35°	195.2	12.3	895.1
36°	158.3	10.2	905.3
37°	123.4	8.1	913.4
38°	90.3	6.1	919.5
39°	65.5	4.5	924.0
40°	49.4	3.5	927.5
41°	44.2	3.2	930.7
42°	41.5	3.0	933.7
43°	38.8	2.9	936.6
44°	37.0	2.8	939.4
45°	35.2	2.7	942.2
46°	33.5	2.6	944.8

C-planes	0°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm		Luminous flux in lm/klm
47°	31.9	2.6	947.4
48°	30.5	2.5	949.8
49°	29.1	2.4	952.3
50°	27.9	2.3	954.6
51°	26.6	2.3	956.9
52°	25.6	2.2	959.1
53°	24.6	2.2	961.2
54°	23.5	2.1	963.3
55°	22.7	2.0	965.4
56°	21.8	2.0	967.3
57°	21.0	1.9	969.3
58°	20.3	1.9	971.1
59°	19.5	1.8	973.0
60°	18.8	1.8	974.8
61°	18.2	1.7	976.5
62°	17.5	1.7	978.2
63°	16.9	1.7	979.9
64°	16.2	1.6	981.5
65°	15.6	1.6	983.0
66°	15.1	1.5	984.5
67°	14.5	1.5	986.0
68°	13.8	1.4	987.4
69°	13.2	1.3	988.7
70°	12.5	1.3	990.0
71°	11.9	1.2	991.3
72°	11.2	1.2	992.4
73°	10.5	1.1	993.5
74°	9.7	1.0	994.6
75°	8.8	0.9	995.5
76°	7.7	0.8	996.3
77°	6.2	0.7	997.0
78°	5.2	0.6	997.5
79°	4.6	0.5	998.0
80°	4.0	0.4	998.5
81°	3.5	0.4	998.8
82°	3.0	0.3	999.2
83°	2.4	0.3	999.4
84°	1.9	0.2	999.6
85°	1.5	0.2	999.8
86°	1.0	0.1	999.9
87°	0.6	0.1	1000.0
88°	0.2	0.0	1000.0
89°	0.1	0.0	1000.0
90°	0.1	0.0	1000.0

Photometric test report

Family Licross® Spot 31	Order number: 51SL64DA45B EAN: 4058352865736	LP number 59383_36
-----------------------------------	---	------------------------------

UGR-Table	Standard room	siteco
------------------	----------------------	---------------

Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	View crosswise (C0)					View endwise (C90)					
x	y										
2H	2H	22.4	23.5	22.7	23.8	24.1	22.4	23.5	22.7	23.8	24.1
	3H	23.0	24.0	23.4	24.3	24.7	23.0	24.0	23.4	24.3	24.7
	4H	23.3	24.2	23.7	24.6	24.9	23.3	24.2	23.7	24.6	24.9
	6H	23.5	24.3	23.9	24.6	25.0	23.5	24.3	23.9	24.6	25.0
	8H	23.6	24.2	24.0	24.6	25.0	23.6	24.2	24.0	24.6	25.0
	12H	23.6	24.2	24.0	24.6	25.0	23.6	24.2	24.0	24.6	25.0
4H	2H	22.5	23.4	22.9	23.8	24.1	22.5	23.4	22.9	23.8	24.1
	3H	23.3	24.1	23.8	24.5	24.9	23.3	24.1	23.8	24.5	24.9
	4H	23.8	24.4	24.2	24.8	25.3	23.8	24.4	24.2	24.8	25.3
	6H	24.0	24.5	24.4	24.9	25.4	24.0	24.5	24.4	24.9	25.4
	8H	24.0	24.5	24.5	25.0	25.4	24.0	24.5	24.5	25.0	25.4
	12H	24.1	24.5	24.6	24.9	25.4	24.1	24.5	24.6	24.9	25.4
8H	4H	23.9	24.4	24.4	24.8	25.3	23.9	24.4	24.4	24.8	25.3
	6H	24.1	24.5	24.6	25.0	25.5	24.1	24.5	24.6	25.0	25.5
	8H	24.2	24.5	24.7	25.0	25.6	24.2	24.5	24.7	25.0	25.6
	12H	24.2	24.5	24.8	25.0	25.6	24.2	24.5	24.8	25.0	25.6
12H	4H	23.9	24.3	24.4	24.7	25.2	23.9	24.3	24.4	24.7	25.2
	6H	24.1	24.4	24.6	24.9	25.5	24.1	24.4	24.6	24.9	25.5
	8H	24.2	24.5	24.7	25.0	25.5	24.2	24.5	24.7	25.0	25.5


Luminance table	Max. for $\gamma \geq 65^\circ$	Photometric dimensions in mm: D = 79
------------------------	---	---

C-planes	0°
γ	Luminance in cd/m²
45°	53257.3
50°	46427.5
55°	42381.2
60°	40297.7
65°	39647.4
70°	39229.3
75°	36495.4
80°	24690.5
85°	17905.2

Photometric test report

Family Licross® Spot 31	Order number: 51SL64DA45B EAN: 4058352865736	LP number 59383_36
--	---	-------------------------------------

Luminance values in cd/m² γ 65° γ 70° γ 75° γ 80° γ 85°

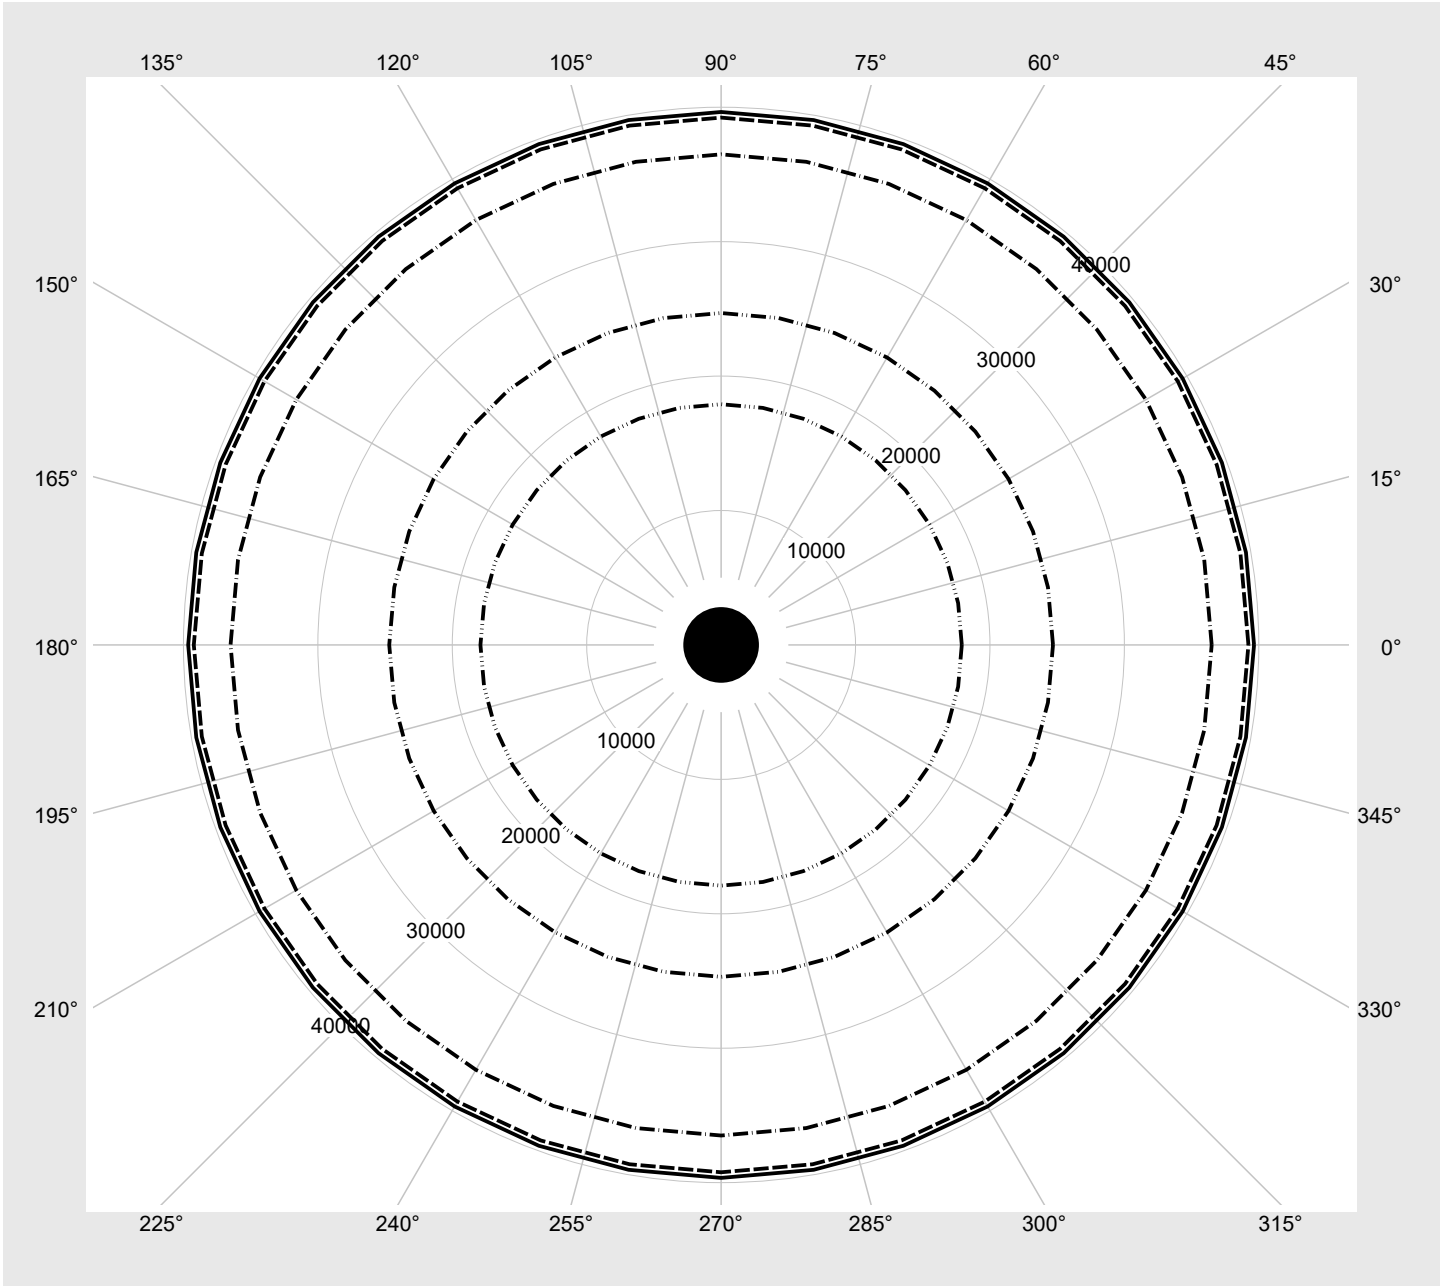

Photometric test report

Family Licross® Spot 31	Order number: 51SL64DA45B EAN: 4058352865736	LP number 59383_36
-----------------------------------	---	-------------------------------------

Multilumen Table	environmental temperature: 25°C	sITeco
-------------------------	---------------------------------	---------------

DIP-Step	Switch Setting			Luminous flux [lm]	Power consumption [W]
	1	2	3		
7	ON	ON	ON	5250	43.7
6	OFF	ON	ON	5040	41.6
5	ON	OFF	ON	4830	39.3
4	OFF	OFF	ON	4520	37.2
3	ON	ON	OFF	4410	35.0
2	OFF	ON	OFF	4180	32.8
1	ON	OFF	OFF	3930	30.6
0	OFF	OFF	OFF	3720	28.5