

Photometric test report

Family
Silica® 21

Order number: 51MX34DA37WB
EAN: 4058352889121

LP number
59283_59




Version Suspended luminaire, reflector, black, direct-/indirect distribution, asymmetric distribution
Lamps LED 3000 K | CRI ≥ 80
Controlgear ECG-DALI
Rated values Net luminous flux = 7680 lm
 Power consumption = 53.6 W
 Luminous efficacy = 143.3 lm/W

serial documentation
02.08.2023



Luminous intensity in cd/klm C180-0 C270-90 **Imax: 461 cd/klm**

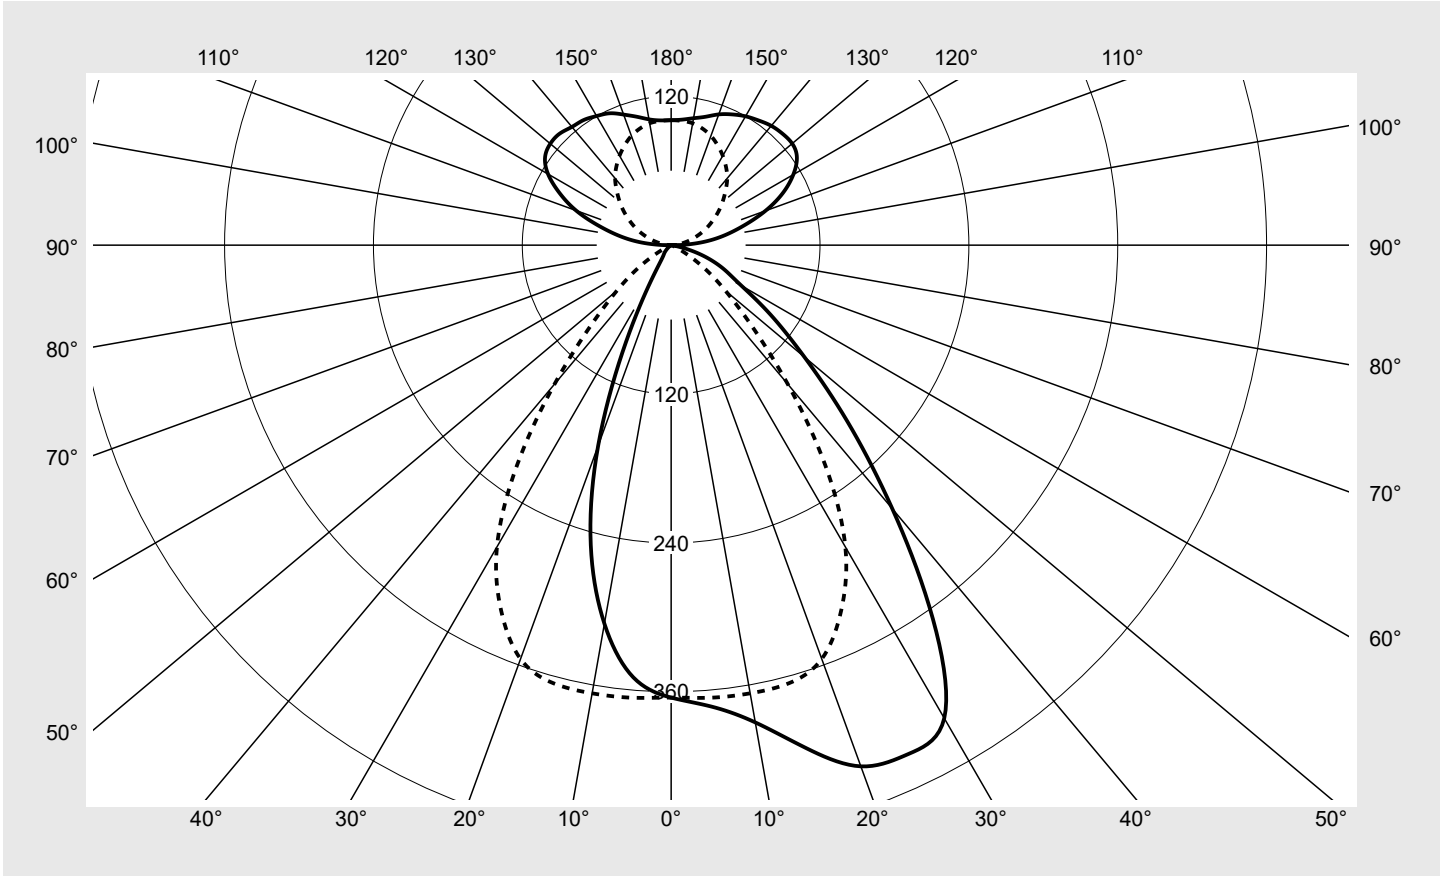

Classifications	
DIN 5040	C 6 2
CIE	N1=74 N2=94 N3=99 N4=56 N5=100

Luminaire light output ratios	
η_{LB}	100.0%
ϕ_u	56.1%
ϕ_o	43.9%

Measurement conditions
DIN EN 13032 and DIN 5032

Photometric test report

Family Silica® 21	Order number: 51MX34DA37WB EAN: 4058352889121	LP number 59283_59
Table of values for luminous intensities		Maximum luminous intensity
		sITeco

C-planes	0°	15° 345°	30° 330°	45° 315°	60° 300°	75° 285°	90° 270°
γ	Luminous intensity in cd/klm						
0°	364.7	364.7	364.7	364.7	364.7	364.7	364.7
5°	373.4	374.2	373.9	372.4	372.0	370.0	366.2
10°	390.7	390.9	390.3	389.7	385.4	375.2	366.9
15°	419.6	426.1	426.0	420.4	403.3	382.3	365.7
20°	447.1	456.4	458.5	446.1	411.0	376.9	355.0
25°	452.6	460.6	453.6	431.0	395.6	351.4	324.5
30°	440.3	439.8	430.3	390.5	349.9	308.3	280.9
35°	367.9	364.8	361.9	334.1	285.8	241.7	216.7
40°	277.4	282.5	289.0	275.8	227.9	175.0	146.3
45°	200.8	207.3	222.4	214.2	174.3	117.9	91.5
50°	140.2	148.6	163.4	159.9	127.4	79.2	57.1
55°	98.0	104.1	120.3	117.5	94.9	52.4	33.6
60°	65.5	71.2	86.2	87.8	71.3	30.8	14.6
65°	48.2	50.7	59.5	65.1	47.4	16.3	4.7
70°	32.8	36.4	42.5	43.7	27.4	8.4	1.8
75°	16.4	20.5	29.1	21.1	13.2	4.7	0.6
80°	2.7	3.9	8.6	8.4	6.0	1.9	0.3
85°	1.0	1.1	1.6	1.5	0.7	0.5	0.5
90°	5.1	4.9	5.2	5.1	3.1	1.0	0.4
95°	23.6	24.1	25.8	24.5	15.6	8.0	4.1
100°	42.3	43.3	43.7	38.5	25.8	14.5	9.5
105°	60.4	61.7	60.5	51.6	35.4	21.8	16.0
110°	80.9	81.7	76.3	63.6	45.4	29.6	23.0
115°	99.3	98.4	90.6	74.6	54.9	37.4	30.6
120°	113.7	112.0	102.2	83.3	64.1	44.9	38.1
125°	123.7	120.5	109.6	92.0	71.5	52.1	46.1
130°	127.4	124.7	113.0	96.3	77.5	59.5	54.0
135°	127.0	124.4	114.1	99.9	82.2	66.6	62.0
140°	125.6	123.2	114.1	102.3	86.1	73.2	70.3
145°	122.8	121.6	114.6	103.4	89.6	79.2	77.1
150°	119.9	119.3	113.7	103.5	92.3	85.0	83.2
155°	116.3	116.3	110.3	102.8	94.6	90.3	88.8
160°	112.2	112.1	106.9	101.9	96.9	93.8	93.7
165°	107.2	106.8	103.8	100.5	98.5	97.0	97.3
170°	103.9	102.9	102.2	100.5	99.8	99.7	99.8
175°	101.6	101.2	100.4	100.2	100.5	100.4	100.5
180°	100.7	100.7	100.7	100.7	100.7	100.7	100.7

Photometric test report

Family Silica® 21	Order number: 51MX34DA37WB EAN: 4058352889121	LP number 59283_59
Table of values for luminous intensities		Maximum luminous intensity
		sITeco

C-planes	105° 255°	120° 240°	135° 225°	150° 210°	165° 195°	180°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm						Luminous flux in lm/klm	
0°	364.7	364.7	364.7	364.7	364.7	364.7	2.2	2.2
5°	362.9	358.9	355.8	351.9	350.5	349.8	17.4	19.6
10°	356.4	346.7	334.3	322.3	312.5	309.9	34.3	53.9
15°	351.5	329.8	301.2	272.8	255.4	250.3	50.5	104.3
20°	332.5	299.0	251.5	205.7	180.6	172.0	63.8	168.1
25°	300.5	247.9	184.7	134.5	99.3	86.1	70.5	238.6
30°	246.1	187.5	119.2	65.0	36.4	29.2	70.5	309.2
35°	174.7	119.3	62.2	24.9	14.0	12.2	62.6	371.8
40°	109.6	67.1	27.5	12.3	9.3	8.7	51.8	423.6
45°	65.7	34.8	12.8	8.3	6.4	5.9	40.7	464.3
50°	38.9	17.2	7.5	5.5	3.9	3.3	30.8	495.1
55°	21.5	8.7	4.7	3.3	2.1	1.8	22.9	518.0
60°	8.2	4.3	2.8	2.0	1.5	1.3	16.4	534.4
65°	2.7	2.1	1.7	1.4	1.0	0.7	11.5	545.9
70°	1.1	1.1	0.9	0.8	0.6	0.3	7.8	553.7
75°	0.4	0.5	0.5	0.4	0.4	0.3	4.4	558.1
80°	0.2	0.3	0.3	0.3	0.2	0.2	1.4	559.5
85°	0.5	0.5	0.6	0.6	0.6	0.6	0.4	559.9
90°	1.0	3.1	5.1	5.2	4.9	5.1	2.0	562.0
95°	8.1	15.6	24.4	25.8	24.1	23.5	10.2	572.1
100°	14.5	25.6	38.0	43.6	43.3	41.9	17.2	589.3
105°	21.9	35.3	51.6	60.4	61.7	60.5	23.8	613.1
110°	29.6	45.2	63.5	76.5	81.3	81.5	29.9	643.0
115°	37.4	55.0	74.7	90.7	98.3	99.2	34.9	677.9
120°	45.0	63.8	83.7	102.6	112.6	114.6	38.2	716.1
125°	52.1	71.5	91.4	109.3	120.5	124.0	39.7	755.8
130°	59.5	77.1	96.8	112.7	124.3	127.2	39.3	795.1
135°	66.2	81.6	99.7	114.1	124.5	127.1	37.5	832.6
140°	72.6	85.5	102.0	114.8	123.0	124.4	35.0	867.6
145°	78.7	89.2	103.4	114.2	121.7	123.1	31.9	899.4
150°	84.6	92.4	103.1	112.6	119.8	120.2	28.1	927.5
155°	89.7	94.6	103.0	110.2	116.6	117.3	23.8	951.3
160°	94.2	96.3	102.1	107.0	111.6	112.0	19.2	970.5
165°	97.4	98.7	101.2	104.4	106.4	107.2	14.4	985.0
170°	99.8	100.1	101.3	102.3	102.9	103.0	9.6	994.6
175°	100.7	100.4	100.7	100.9	101.1	101.0	4.8	999.4
180°	100.7	100.7	100.7	100.7	100.7	100.7	0.6	1000.0

Photometric test report

Family Silica® 21	Order number: 51MX34DA37WB EAN: 4058352889121	LP number 59283_59
-----------------------------	--	------------------------------

siteco


UGR-Table		Standard room									
Room dimensions		View crosswise (C0)					View endwise (C90)				
x	y										
2H	2H	22.1	23.0	22.9	23.8	24.9	17.5	18.4	18.3	19.2	20.3
	3H	22.4	23.2	23.3	24.1	25.3	17.3	18.1	18.2	19.0	20.1
	4H	22.5	23.2	23.4	24.1	25.3	17.2	17.9	18.1	18.8	20.0
	6H	22.4	23.0	23.3	23.9	25.1	17.0	17.7	17.9	18.6	19.8
	8H	22.3	22.9	23.2	23.8	25.0	16.9	17.6	17.9	18.5	19.7
	12H	22.2	22.7	23.1	23.7	24.9	16.8	17.4	17.8	18.3	19.5
4H	2H	22.3	23.0	23.2	23.9	25.0	18.1	18.8	19.0	19.7	20.9
	3H	22.9	23.5	23.8	24.4	25.6	18.1	18.7	19.1	19.7	20.9
	4H	23.0	23.6	24.0	24.5	25.7	18.1	18.6	19.0	19.5	20.7
	6H	22.9	23.4	23.9	24.3	25.6	17.9	18.4	18.9	19.3	20.6
	8H	22.8	23.3	23.8	24.2	25.5	17.8	18.2	18.8	19.2	20.5
	12H	22.7	23.1	23.7	24.1	25.4	17.7	18.1	18.7	19.1	20.3
8H	4H	23.0	23.4	23.9	24.3	25.6	18.1	18.5	19.1	19.5	20.8
	6H	22.9	23.3	23.9	24.3	25.5	18.1	18.4	19.1	19.4	20.7
	8H	22.8	23.2	23.9	24.1	25.4	18.0	18.3	19.0	19.3	20.6
	12H	22.8	23.0	23.8	24.0	25.3	17.9	18.2	18.9	19.2	20.5
12H	4H	22.9	23.2	23.8	24.2	25.5	18.1	18.4	19.0	19.4	20.7
	6H	22.8	23.1	23.8	24.1	25.4	18.0	18.3	19.0	19.3	20.6
	8H	22.8	23.0	23.8	24.0	25.3	17.9	18.2	19.0	19.2	20.5

Luminance table		Max. for $\gamma \geq 65^\circ$											
		Photometric dimensions in mm: L = 1176 B = 49											
C-planes	0°	15° 345°	30° 330°	45° 315°	60° 300°	75° 285°	90° 270°	105° 255°	120° 240°	135° 225°	150° 210°	165° 195°	180°
γ	Luminance in cd/m ²												
45°	37847.1	39066.6	41924.1	40365.0	32848.9	22219.0	17240.8	12382.6	6567.9	2406.2	1567.6	1215.3	1109.8
50°	29067.9	30810.4	33888.8	33146.8	26408.9	16415.6	11845.9	8064.2	3571.3	1552.6	1140.8	806.4	677.6
55°	22763.6	24190.8	27955.8	27307.0	22040.1	12165.8	7803.0	5001.4	2028.8	1096.5	776.1	479.4	412.9
60°	17451.9	18977.7	22985.1	23414.0	18995.8	8209.6	3899.2	2185.5	1136.6	756.0	524.0	408.9	347.9
65°	15195.7	15999.0	18754.9	20544.0	14954.8	5133.1	1478.7	858.1	677.7	537.7	435.2	322.6	214.1
70°	12794.7	14194.0	16548.5	17025.4	10672.5	3279.9	694.4	413.8	416.2	369.4	305.5	220.6	135.2
75°	8452.8	10540.4	14977.7	10871.5	6786.5	2443.9	319.3	210.1	256.4	244.6	225.5	182.3	147.3
80°	2097.6	3013.3	6611.4	6464.8	4610.5	1421.4	202.6	191.1	225.6	231.8	220.3	191.1	174.2
85°	1477.2	1640.8	2520.1	2347.3	1120.9	731.0	721.8	756.9	822.7	880.8	912.9	896.1	902.2

Photometric test report

Family Silica® 21	Order number: 51MX34DA37WB EAN: 4058352889121	LP number 59283_59
------------------------------------	--	-------------------------------------

Luminance values in cd/m² γ 65° γ 70° γ 75° γ 80° γ 85° **siteco**

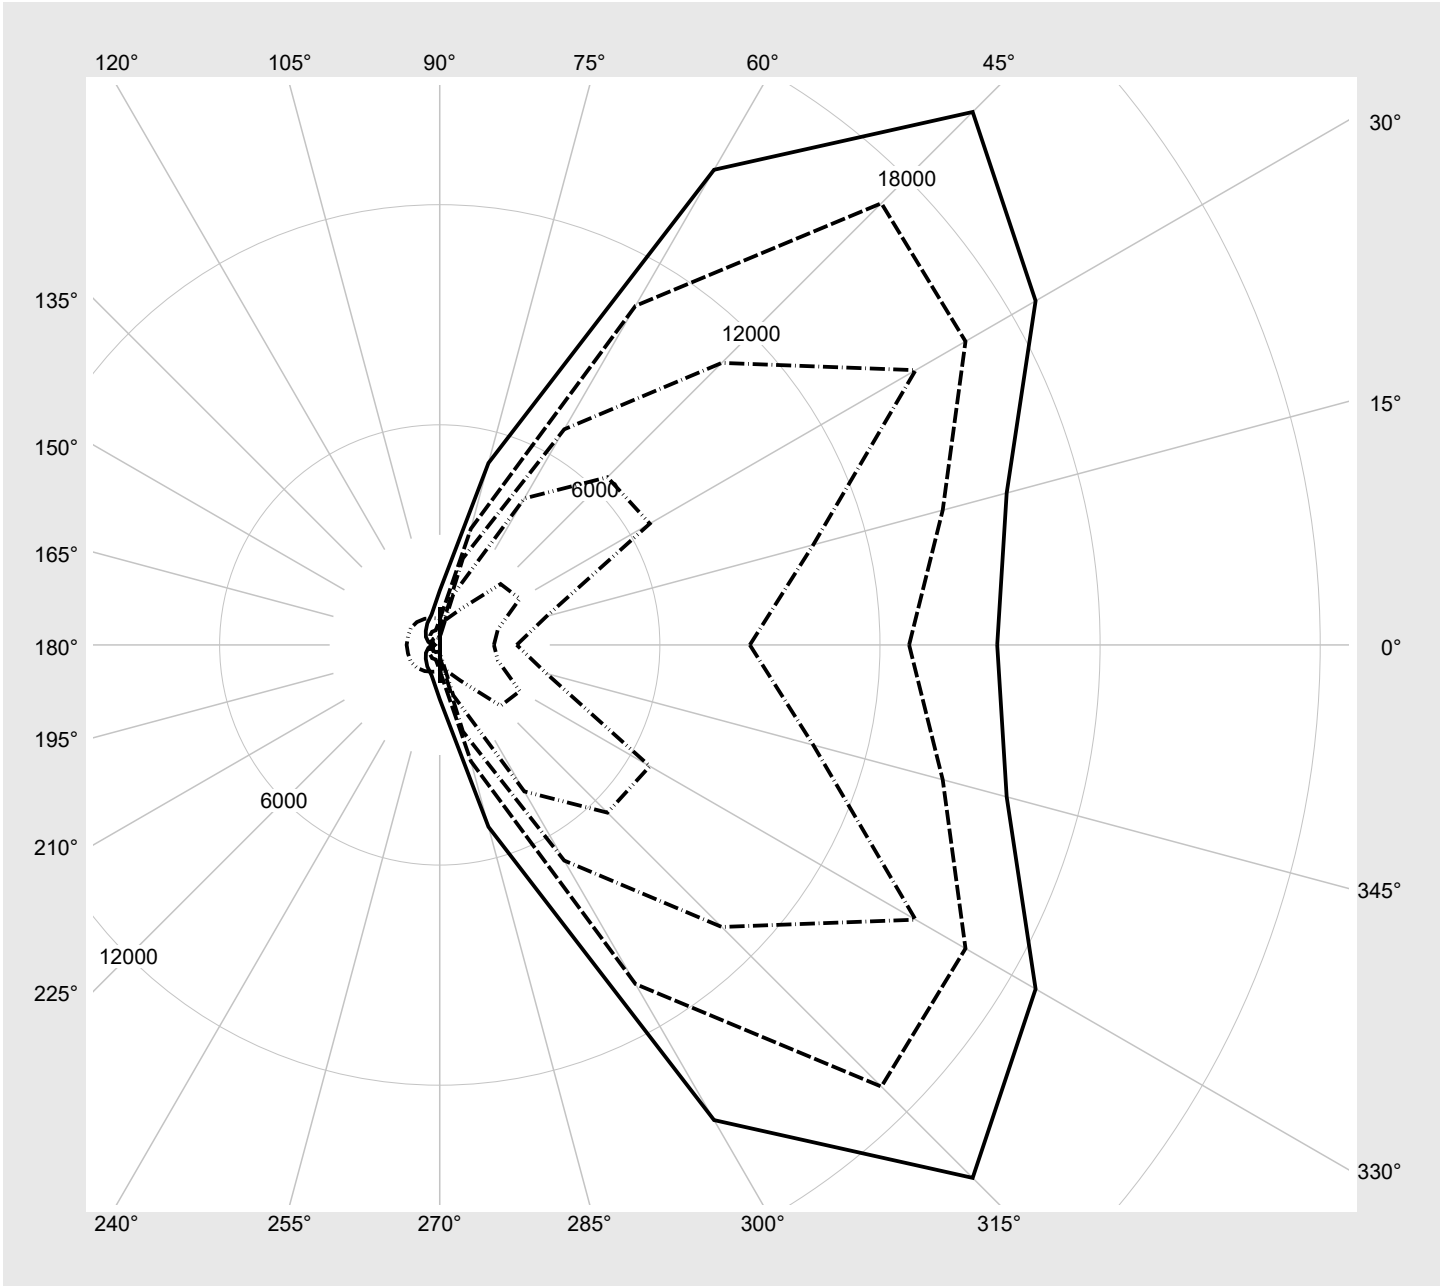

Photometric test report

Family Silica® 21	Order number: 51MX34DA37WB EAN: 4058352889121	LP number 59283_59
-----------------------------	--	------------------------------

Dimming levels table	environmental temperature: 25°C	sITeco
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	254	254	7680	53.6
95	240	252	7287	50.5
90	227	250	6918	47.8
85	213	248	6519	44.9
80	200	245	6144	42.2
75	187	243	5765	39.5
70	174	240	5384	36.8
65	161	237	4999	34.2
60	148	234	4610	31.6
55	135	231	4220	28.9
50	122	227	3826	26.2
45	110	223	3459	23.8
40	97	219	3059	21.2
35	85	214	2687	18.8
30	73	208	2313	16.3
25	60	201	1905	13.8
20	48	193	1525	11.3
15	36	182	1143	8.8
10	24	168	759	6.5
5	12	142	374	4.3
2	5	110	148	3.4