

Photometric test report

Family
Silica® 21



Order number: 51MX36DA47WB
EAN: 4058352884775

LP number
59280_76

serial
documentation
02.08.2023

Version Suspended luminaire, reflector, white, direct-/indirect distribution, wide distribution, UGR≤16 (L65≤3000cd/m²)

Lamps LED 4000 K | CRI ≥ 80

Controlgear ECG-DALI

Rated values Net luminous flux = 7060 lm
Power consumption = 40.3 W
Luminous efficacy = 175.2 lm/W


siteco

Luminous intensity in cd/klm

C180-0

C270-90

Imax: 422 cd/klm

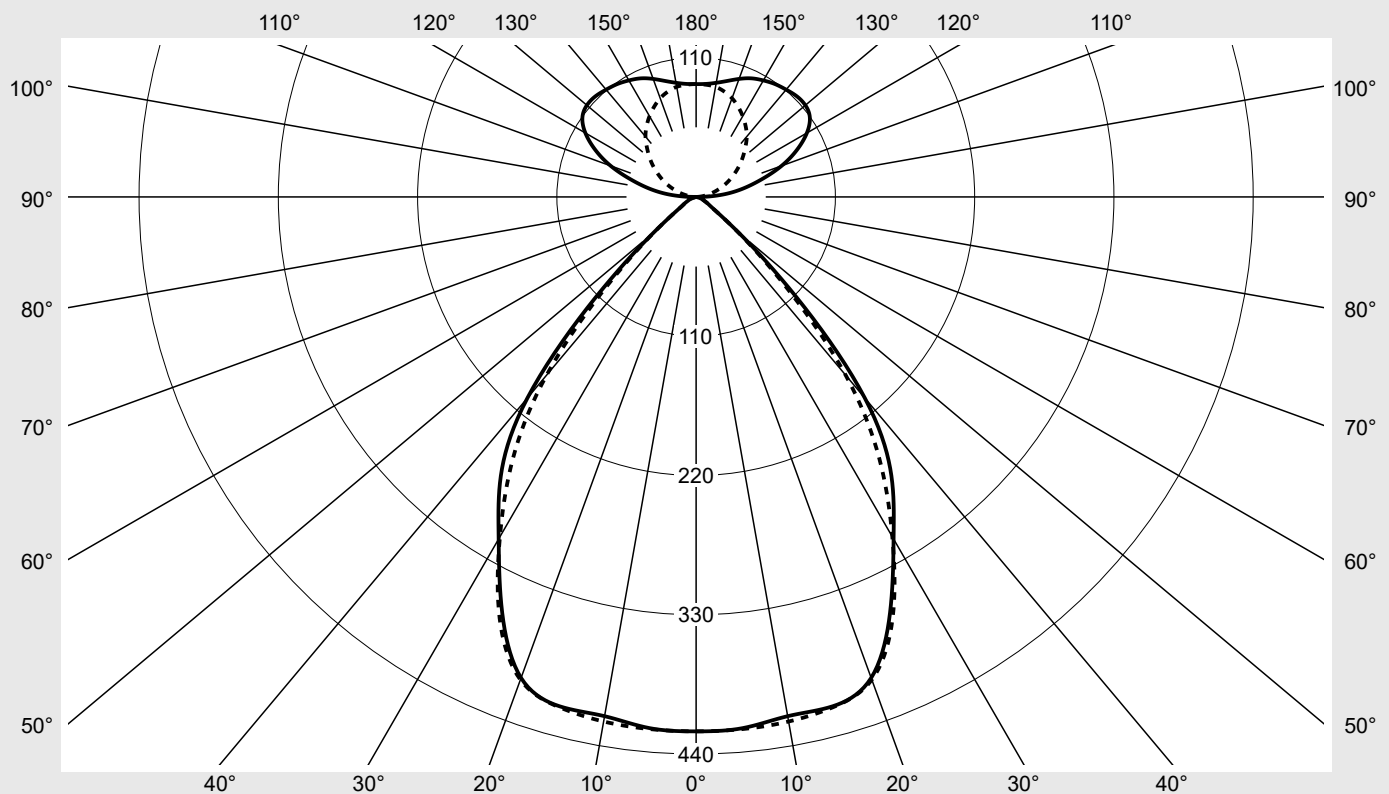

Classifications

DIN 5040 B 6 2
CIE N1=83 N2=98 N3=100
N4=61 N5=100

Luminaire light output ratios

η_{LB} 100.0%
 ϕ_u 61.1%
 ϕ_o 38.9%

Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family Silica® 21	Order number: 51MX36DA47WB EAN: 4058352884775	LP number 59280_76
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes γ	0° 180°	15°	30°	45°	60°	75°	90° 270°	Phi-zone	Total Phi-zone
		165° 195° 345°	150° 210° 330°	135° 225° 315°	120° 240° 300°	105° 255° 285°			
Luminous intensity in cd/klm								Luminous flux in lm/klm	
0°	422.1	422.1	422.1	422.1	422.1	422.1	422.1	2.5	2.5
5°	421.2	421.7	421.1	421.4	421.8	422.4	421.9	20.1	22.7
10°	416.4	415.9	416.6	418.5	420.4	419.5	420.7	39.8	62.5
15°	416.5	417.3	416.2	418.2	418.6	417.7	417.3	59.2	121.7
20°	404.3	408.0	408.5	410.6	406.7	404.4	405.8	76.3	198.0
25°	362.4	369.4	376.8	381.5	377.2	370.0	367.2	86.5	284.5
30°	311.9	316.7	317.8	318.8	318.6	312.7	309.9	86.6	371.1
35°	268.9	273.0	262.7	253.0	257.3	257.0	252.3	81.9	453.0
40°	207.2	211.8	206.6	199.5	199.2	191.4	183.8	70.7	523.7
45°	112.3	116.7	117.8	117.4	112.9	104.7	100.2	43.7	567.4
50°	43.9	46.6	49.7	52.0	48.4	44.4	42.8	19.9	587.3
55°	17.8	19.3	22.0	25.4	22.4	18.9	17.4	9.4	596.7
60°	10.9	11.5	12.5	13.7	12.5	11.2	10.7	5.7	602.4
65°	7.0	7.3	7.7	7.8	7.5	7.2	6.9	3.7	606.1
70°	4.8	4.9	4.6	4.4	4.5	4.8	4.7	2.4	608.5
75°	1.9	2.1	2.3	2.3	2.3	2.2	2.0	1.2	609.6
80°	0.9	0.9	0.9	0.9	1.0	1.0	1.0	0.5	610.2
85°	0.8	0.8	0.8	0.7	0.7	0.7	0.7	0.4	610.6
90°	4.5	4.3	4.6	4.5	2.7	0.9	0.3	1.8	612.3
95°	20.9	21.3	22.8	21.6	13.8	7.1	3.7	9.0	621.4
100°	37.3	38.3	38.6	33.8	22.7	12.8	8.4	15.2	636.6
105°	53.5	54.6	53.5	45.7	31.3	19.4	14.2	21.0	657.6
110°	71.9	72.1	67.6	56.3	40.1	26.2	20.3	26.5	684.1
115°	87.8	87.0	80.3	66.0	48.6	33.1	27.1	30.8	714.9
120°	101.0	99.4	90.6	73.9	56.6	39.8	33.7	33.8	748.7
125°	109.6	106.6	96.9	81.1	63.3	46.1	40.8	35.1	783.9
130°	112.6	110.2	99.9	85.4	68.4	52.7	47.8	34.8	818.6
135°	112.4	110.1	101.0	88.3	72.5	58.7	54.9	33.2	851.9
140°	110.6	108.9	101.3	90.4	76.0	64.5	62.2	31.0	882.8
145°	108.8	107.6	101.3	91.5	79.1	69.9	68.2	28.2	911.0
150°	106.2	105.8	100.1	91.4	81.7	75.0	73.6	24.8	935.9
155°	103.3	103.0	97.6	91.1	83.7	79.6	78.5	21.1	956.9
160°	99.2	99.0	94.6	90.3	85.5	83.2	82.9	17.0	973.9
165°	94.8	94.3	92.1	89.2	87.2	86.0	86.1	12.8	986.7
170°	91.5	91.1	90.5	89.3	88.4	88.3	88.3	8.5	995.2
175°	89.6	89.5	89.1	88.9	88.9	89.0	89.0	4.3	999.5
180°	89.1	89.1	89.1	89.1	89.1	89.1	89.1	0.5	1000.0

Photometric test report

Family Silica® 21	Order number: 51MX36DA47WB EAN: 4058352884775	LP number 59280_76
-----------------------------	--	------------------------------

UGR-Table	Standard room	siteco
------------------	----------------------	---------------

Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	View crosswise (C0)					View endwise (C90)					
x	y										
2H	2H	16.6	17.5	17.4	18.3	19.3	16.2	17.1	17.0	17.9	18.9
	3H	16.3	17.1	17.2	18.0	19.0	16.0	16.8	16.9	17.7	18.7
	4H	16.2	16.9	17.1	17.8	18.9	15.9	16.6	16.8	17.5	18.6
	6H	16.1	16.7	16.9	17.6	18.7	15.8	16.4	16.7	17.3	18.4
	8H	16.0	16.6	16.9	17.4	18.6	15.6	16.2	16.5	17.1	18.2
	12H	15.9	16.4	16.8	17.3	18.5	15.6	16.1	16.5	17.0	18.2
4H	2H	16.3	17.0	17.1	17.8	18.9	15.9	16.6	16.7	17.4	18.5
	3H	16.1	16.7	17.0	17.5	18.7	15.7	16.3	16.6	17.2	18.3
	4H	15.9	16.5	16.8	17.4	18.5	15.6	16.1	16.5	17.0	18.2
	6H	15.8	16.2	16.7	17.1	18.3	15.5	15.9	16.4	16.8	18.0
	8H	15.7	16.1	16.6	17.0	18.2	15.4	15.8	16.3	16.7	17.9
	12H	15.6	15.9	16.6	16.9	18.1	15.3	15.6	16.3	16.6	17.8
8H	4H	15.7	16.1	16.7	17.0	18.2	15.4	15.8	16.3	16.7	17.9
	6H	15.6	15.9	16.5	16.9	18.1	15.2	15.5	16.2	16.5	17.7
	8H	15.5	15.8	16.5	16.8	18.0	15.2	15.5	16.1	16.4	17.6
	12H	15.4	15.7	16.4	16.6	17.9	15.1	15.3	16.1	16.3	17.6
12H	4H	15.6	16.0	16.6	16.9	18.1	15.3	15.6	16.2	16.5	17.8
	6H	15.5	15.8	16.5	16.7	17.9	15.1	15.4	16.1	16.4	17.6
	8H	15.4	15.7	16.4	16.6	17.9	15.1	15.3	16.1	16.3	17.5

Luminance table	Max. for $\gamma \geq 65^\circ$	Photometric dimensions in mm:	L = 1176 B = 49
------------------------	---	--------------------------------------	----------------------------------

C-planes	γ	Luminance in cd/m ²							
		0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°	
45°		19465.0	20213.3	20416.2	20341.9	19553.2	18139.7	17366.9	
50°		8360.1	8877.6	9470.6	9909.7	9232.1	8456.0	8156.7	
55°		3794.3	4129.4	4699.9	5425.5	4787.3	4034.6	3711.6	
60°		2667.2	2806.2	3055.4	3355.0	3057.3	2748.6	2610.4	
65°		2040.0	2120.6	2233.7	2263.9	2184.4	2074.3	1990.2	
70°		1716.9	1763.2	1640.3	1580.5	1610.2	1711.6	1687.6	
75°		913.6	994.6	1065.6	1111.0	1103.9	1039.5	964.7	
80°		636.4	646.3	664.6	669.6	692.1	704.8	699.2	
85°		1075.4	1061.3	1055.7	1029.0	1029.0	1034.6	1031.8	


Photometric test report

Family Silica® 21	Order number: 51MX36DA47WB EAN: 4058352884775	LP number 59280_76
------------------------------------	--	-------------------------------------

Luminance values in cd/m²

γ 65°
 γ 70°
 γ 75°
 γ 80°
 γ 85°

siteco

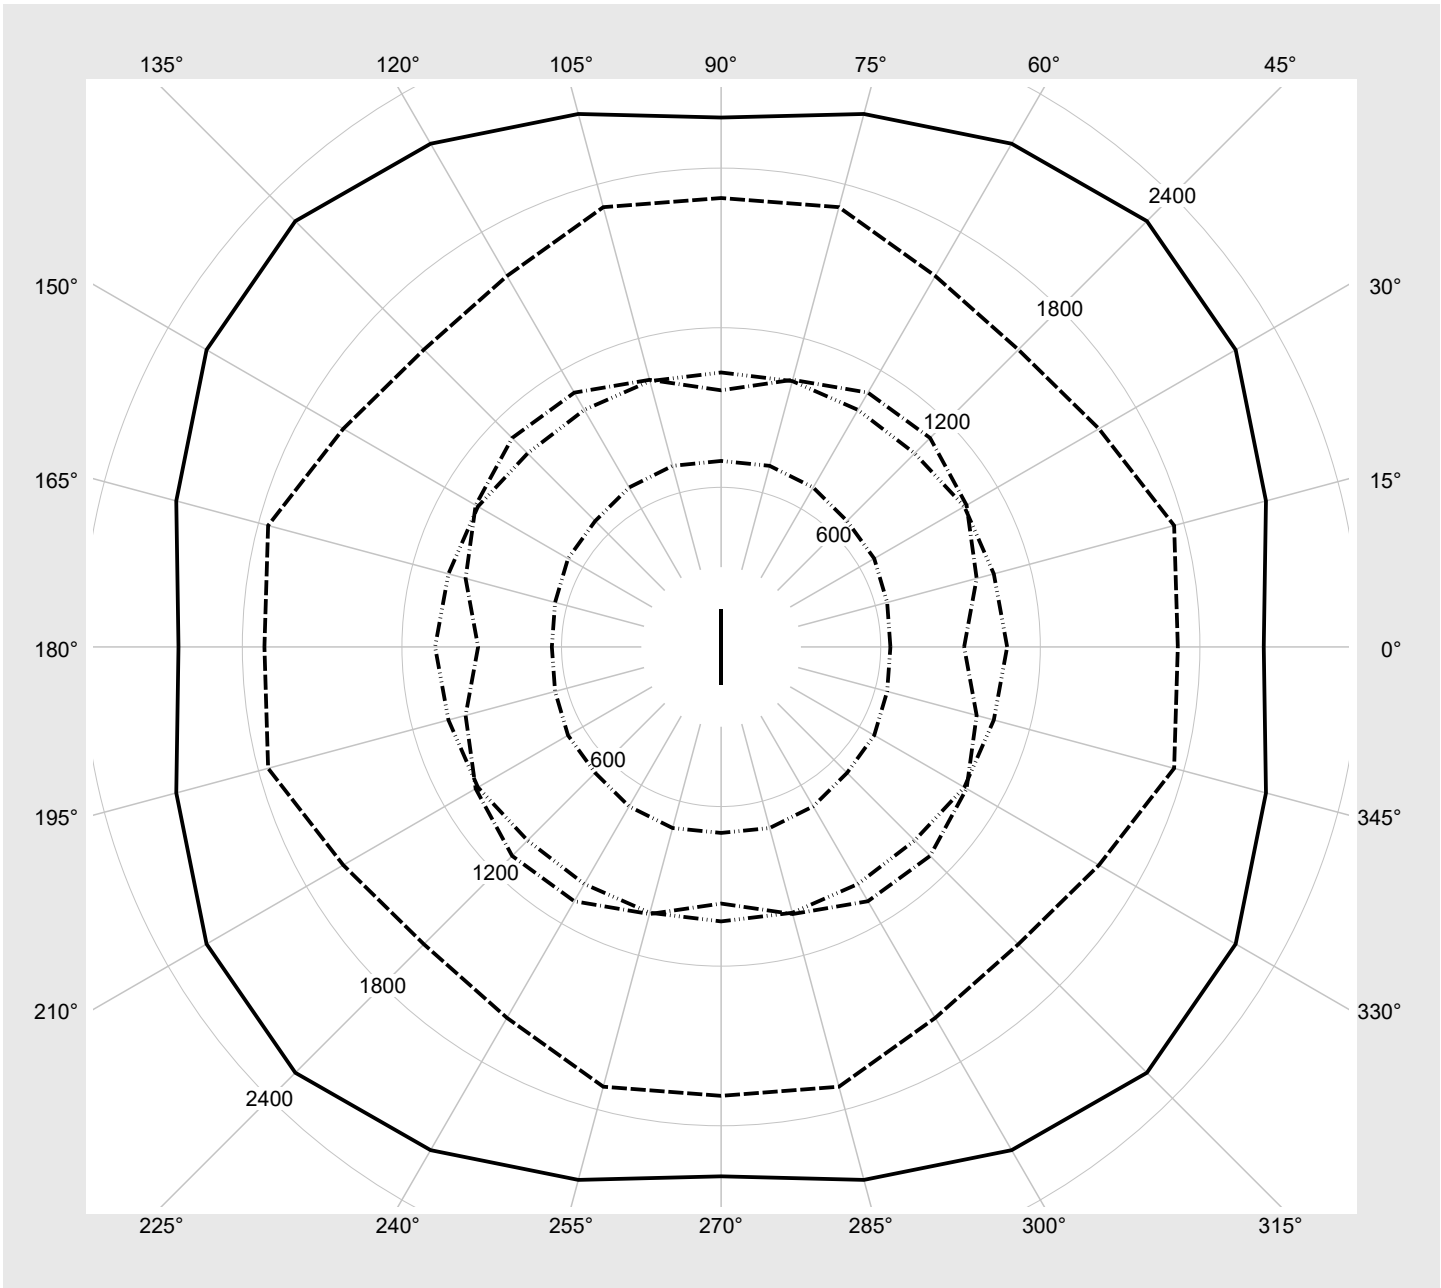

Photometric test report

Family Silica® 21	Order number: 51MX36DA47WB EAN: 4058352884775	LP number 59280_76
-----------------------------	--	------------------------------

Dimming levels table	environmental temperature: 25°C	sITeco
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	254	254	7060	40.3
95	241	252	6716	38.4
90	227	250	6344	36.1
85	214	248	5994	34.1
80	201	245	5643	32.1
75	188	243	5291	30.1
70	175	240	4937	28.2
65	162	238	4580	26.1
60	150	235	4249	24.3
55	137	231	3889	22.4
50	124	228	3527	20.4
45	111	224	3163	18.4
40	99	219	2825	16.6
35	86	214	2458	14.7
30	74	209	2116	12.9
25	62	202	1773	11.0
20	49	194	1401	9.0
15	37	183	1056	7.2
10	25	169	709	5.5
5	13	145	362	3.9
2	6	117	158	3.4