




Photometric test report

Family Licross® 21 Performance	Order number: 52TD16CN4C5M EAN: 4058352903087	LP number 58519_248
	Version cover frosted, direct-/ indirect distribution Lamps LED 4000 K CRI ≥ 80 Controlgear ECG-Multilumen CLOi Rated values Net luminous flux = 12610 lm Power consumption = 68.9 W Luminous efficacy = 183 lm/W	serial documentation 17.08.2023
		

Luminous intensity in cd/klm C180-0 C270-90 **Imax: 429 cd/klm**

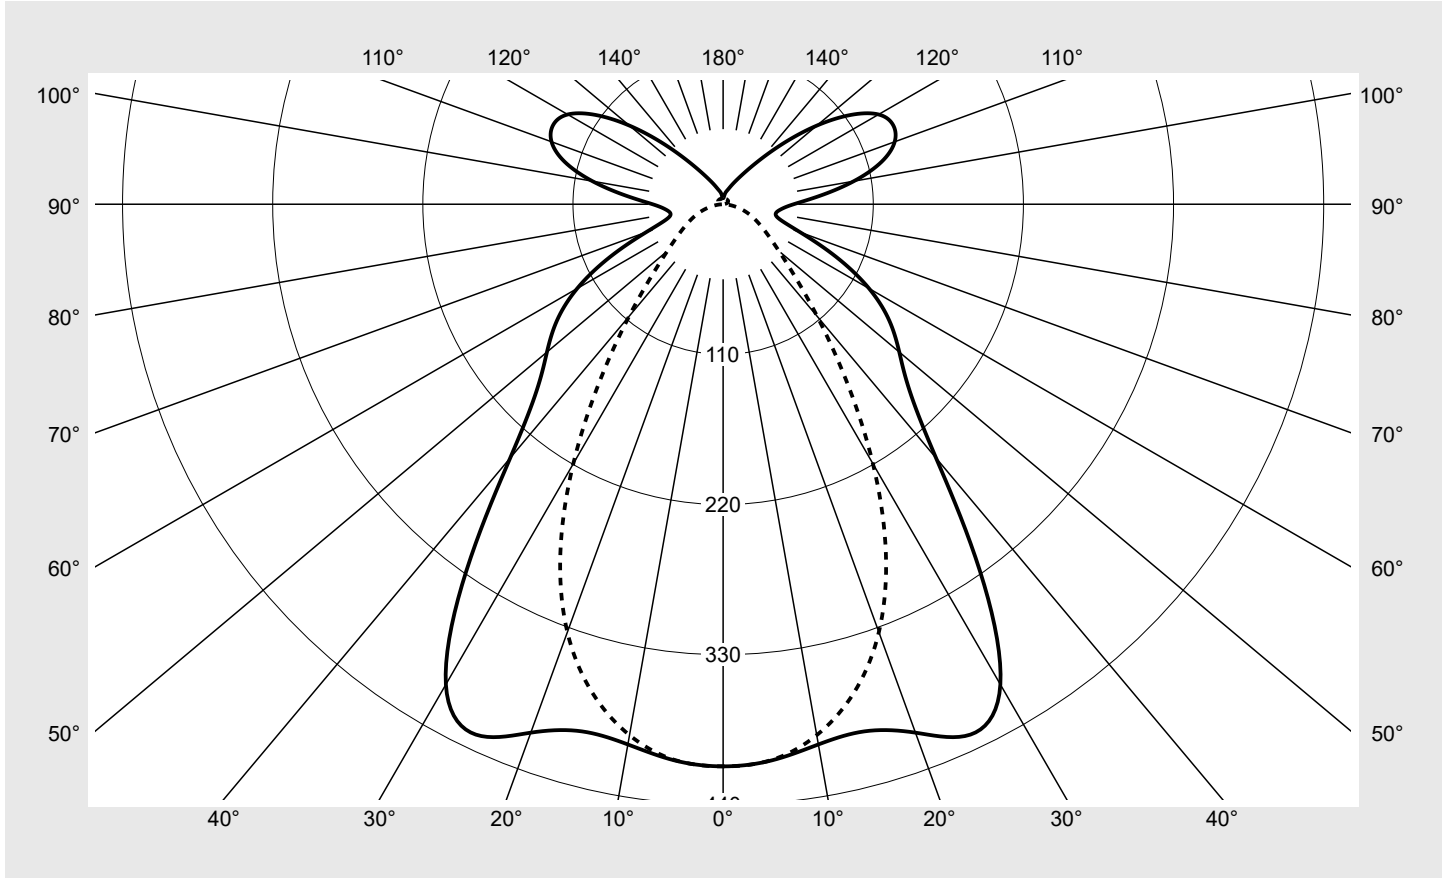

Classifications	
DIN 5040	B 5 1
CIE	N1=63 N2=86 N3=95 N4=78 N5=100

Luminaire light output ratios	
η_{LB}	100.0%
ϕ_u	78.1%
ϕ_o	21.9%

Measurement conditions
DIN EN 13032 and DIN 5032

Photometric test report

Family Licross® 21 Performance	Order number: 52TD16CN4C5M EAN: 4058352903087	LP number 58519_248
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes γ	0° 180°	15°	30°	45°	60°	75°	90° 270°	Phi-zone	Total Phi-zone
		165° 195° 345°	150° 210° 330°	135° 225° 315°	120° 240° 300°	105° 255° 285°			
Luminous intensity in cd/klm								Luminous flux in lm/klm	
0°	411.8	411.8	411.8	411.8	411.8	411.8	411.8	2.5	2.5
5°	409.0	407.3	405.0	406.4	408.3	408.3	408.7	19.5	21.9
10°	401.9	399.8	395.6	394.8	395.0	394.6	395.0	37.7	59.6
15°	399.8	396.0	386.0	378.7	373.7	370.5	370.4	54.1	113.8
20°	412.0	404.2	382.1	360.3	344.8	335.4	333.6	68.7	182.5
25°	428.7	419.7	386.2	342.0	307.4	287.4	282.2	81.0	263.5
30°	406.2	406.4	384.2	323.4	261.9	228.9	219.5	87.6	351.1
35°	328.1	339.8	351.8	297.2	211.1	168.2	156.8	84.4	435.5
40°	242.7	253.2	284.0	257.1	161.6	117.6	107.2	73.3	508.8
45°	193.2	191.3	206.1	202.2	118.6	81.5	73.7	60.3	569.1
50°	168.5	157.2	146.5	145.8	85.8	58.6	53.4	49.3	618.5
55°	148.6	133.1	107.2	99.9	62.9	44.3	40.9	40.6	659.0
60°	123.5	108.6	80.0	67.9	46.9	34.4	32.2	32.9	691.9
65°	91.5	81.0	59.1	47.5	36.1	27.0	25.4	25.6	717.5
70°	60.2	54.5	42.3	34.6	28.0	21.0	19.4	18.9	736.4
75°	43.1	39.2	31.3	26.2	21.7	15.5	13.5	14.3	750.7
80°	39.2	35.6	27.4	20.7	16.7	10.7	8.0	12.1	762.9
85°	42.5	38.8	29.2	19.4	12.9	6.9	3.4	11.8	774.7
90°	51.7	47.2	34.3	20.7	11.3	4.4	0.6	13.1	787.8
95°	71.3	64.2	44.5	24.7	12.8	5.2	1.1	17.1	804.9
100°	97.2	85.6	55.2	28.6	14.3	6.1	1.8	21.5	826.4
105°	120.2	103.0	65.3	32.5	15.7	6.9	2.8	25.1	851.6
110°	133.8	113.4	72.0	35.7	17.0	7.6	3.5	27.0	878.6
115°	137.4	116.7	75.1	37.4	17.7	8.2	3.9	27.0	905.5
120°	131.5	112.0	72.9	36.7	17.5	8.5	4.2	25.0	930.5
125°	114.0	97.3	64.4	33.4	16.5	8.4	4.4	20.9	951.4
130°	89.6	76.8	52.0	28.4	14.9	8.3	4.5	15.9	967.3
135°	64.2	55.4	38.9	22.9	13.2	7.9	4.4	11.1	978.4
140°	43.4	38.1	28.3	18.4	11.3	7.3	4.5	7.5	985.9
145°	29.7	26.7	21.1	14.9	9.5	6.3	4.4	5.0	990.9
150°	21.4	19.7	16.5	11.7	8.2	5.8	4.4	3.4	994.4
155°	16.0	15.0	12.7	9.4	8.0	5.2	4.3	2.3	996.7
160°	12.3	11.7	9.5	8.1	6.6	5.4	4.1	1.5	998.2
165°	10.0	9.6	7.9	6.6	5.9	4.7	4.5	1.0	999.2
170°	7.8	6.8	5.5	5.6	6.0	4.8	4.8	0.6	999.8
175°	4.9	4.4	4.8	4.8	4.9	4.9	5.2	0.2	1000.0
180°	4.5	4.5	4.5	4.5	4.5	4.5	4.5	0.0	1000.0

Photometric test report

Family Licross® 21 Performance	Order number: 52TD16CN4C5M EAN: 4058352903087	LP number 58519_248
--	--	-------------------------------

UGR-Table	Standard room	siteco
------------------	----------------------	---------------

Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	View crosswise (C0)					View endwise (C90)					
x	y										
2H	2H	20.2	21.5	20.8	22.0	22.7	15.8	17.0	16.4	17.6	18.3
	3H	21.0	22.1	21.6	22.7	23.4	16.3	17.4	16.9	18.0	18.7
	4H	21.3	22.3	21.9	22.9	23.7	16.5	17.6	17.2	18.2	18.9
	6H	21.6	22.5	22.3	23.2	24.0	16.7	17.7	17.4	18.3	19.1
	8H	21.9	22.7	22.6	23.4	24.2	16.7	17.6	17.4	18.3	19.1
	12H	22.2	22.9	22.9	23.6	24.5	16.7	17.6	17.4	18.3	19.1
4H	2H	20.2	21.3	20.8	21.9	22.6	16.4	17.4	17.1	18.1	18.8
	3H	21.1	22.0	21.8	22.7	23.4	17.1	17.9	17.8	18.6	19.4
	4H	21.5	22.3	22.2	23.0	23.8	17.4	18.2	18.1	18.9	19.7
	6H	22.0	22.7	22.7	23.4	24.2	17.7	18.4	18.4	19.1	19.9
	8H	22.4	22.9	23.1	23.7	24.6	17.8	18.4	18.5	19.1	20.0
	12H	22.9	23.4	23.6	24.1	25.0	17.8	18.4	18.6	19.1	20.0
8H	4H	21.5	22.1	22.2	22.8	23.7	17.7	18.3	18.4	19.0	19.9
	6H	22.1	22.6	22.9	23.4	24.3	18.1	18.6	18.9	19.4	20.3
	8H	22.6	23.1	23.4	23.8	24.7	18.3	18.8	19.1	19.5	20.5
	12H	23.3	23.7	24.1	24.5	25.4	18.5	18.8	19.2	19.6	20.6
12H	4H	21.4	22.0	22.2	22.7	23.6	17.7	18.2	18.5	19.0	19.9
	6H	22.1	22.5	22.9	23.3	24.2	18.3	18.7	19.1	19.5	20.4
	8H	22.6	23.0	23.4	23.8	24.7	18.5	18.9	19.3	19.7	20.6

Luminance table	Max. for $\gamma \geq 65^\circ$	Photometric dimensions in mm:	L = 1480	H(C0) = 36	H(C180) = 36
			B = 115	H(C90) = 0	H(C270) = 0


C-planes	γ	Luminance in cd/m ²							
		0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°	
	45°	15420.1	15394.3	16992.4	17348.5	10742.3	7896.9	7724.6	
	50°	14143.6	13317.1	12765.5	13295.1	8337.7	6164.2	6158.0	
	55°	13267.1	12003.8	9983.0	9800.9	6636.9	5125.7	5282.3	
	60°	11863.2	10558.6	8070.4	7274.4	5470.3	4466.9	4769.0	
	65°	9596.3	8614.3	6548.0	5652.6	4736.9	4037.0	4447.4	
	70°	7008.6	6451.4	5247.8	4665.5	4243.7	3715.3	4197.1	
	75°	5689.9	5278.6	4459.9	4109.8	3927.6	3399.6	3872.8	
	80°	6020.9	5601.7	4610.0	3916.3	3781.2	3140.0	3418.0	
	85°	7895.6	7392.9	6050.5	4675.3	3928.5	3046.7	2920.0	

Photometric test report

Family Licross® 21 Performance	Order number: 52TD16CN4C5M EAN: 4058352903087	LP number 58519_248
---	--	--------------------------------------

Luminance values in cd/m²

γ 65°
 γ 70°
 γ 75°
 γ 80°
 γ 85°

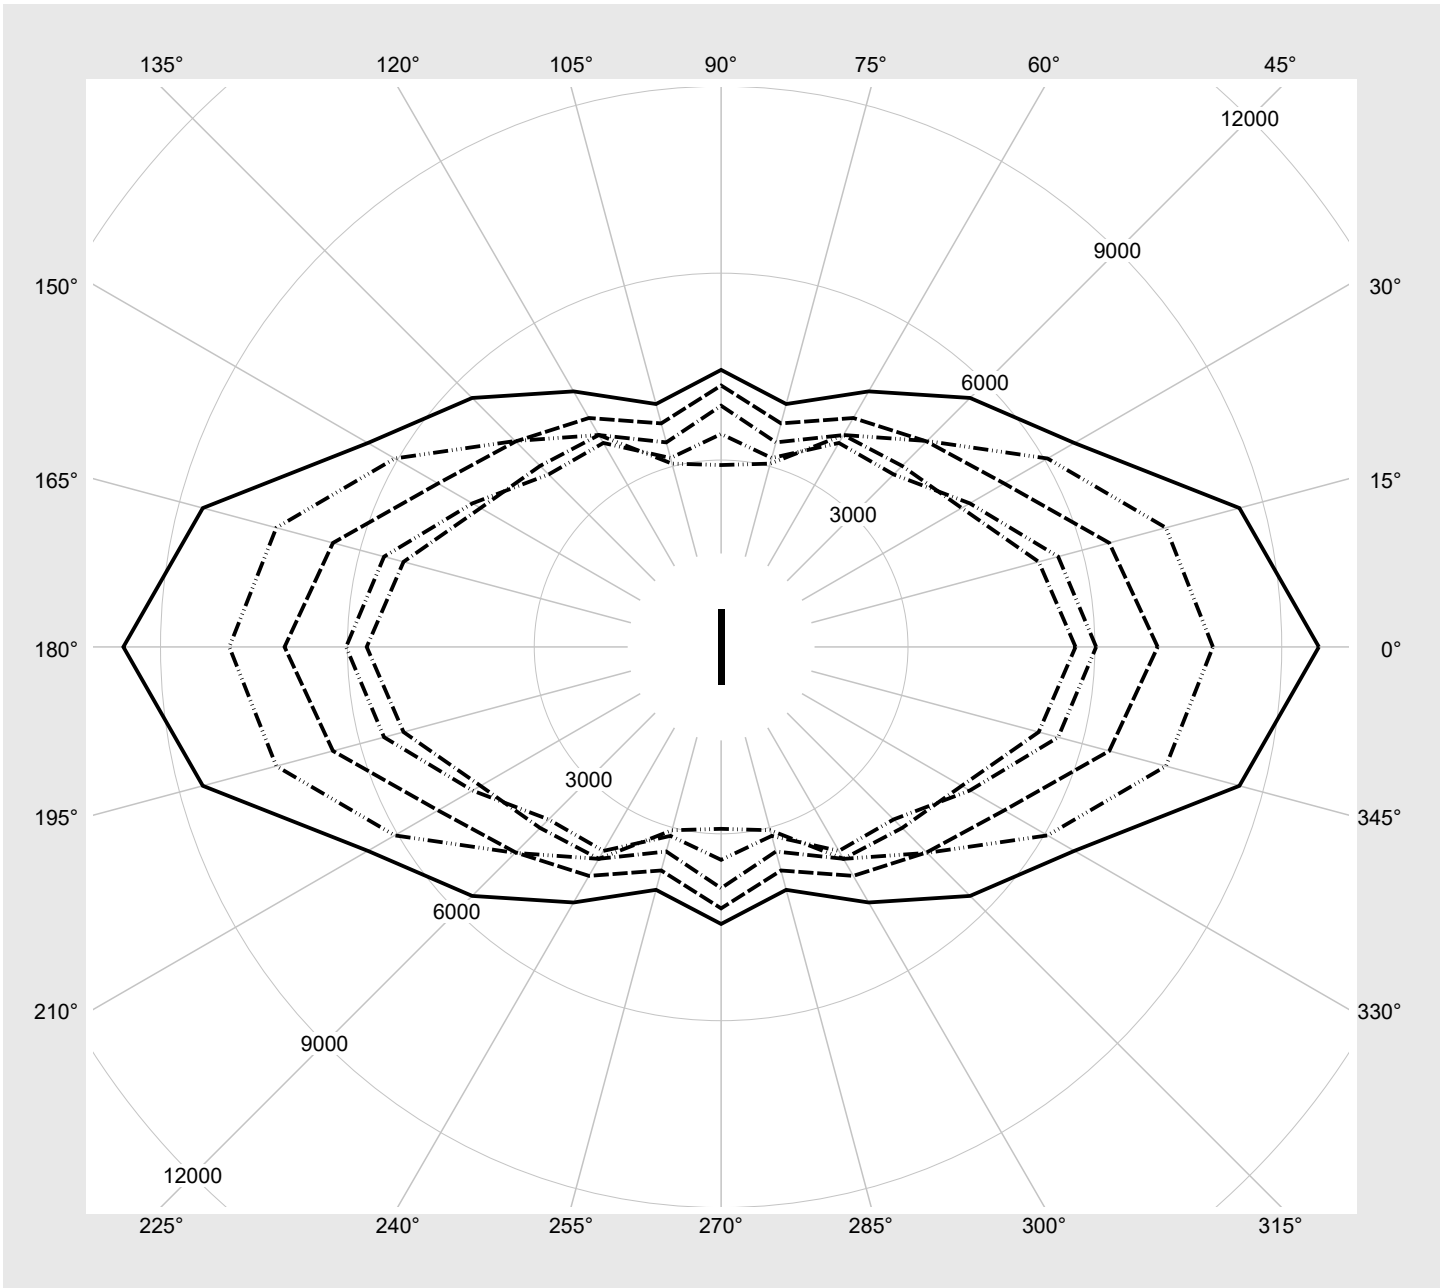

Photometric test report

Family Licross® 21 Performance	Order number: 52TD16CN4C5M EAN: 4058352903087	LP number 58519_248
--	--	--------------------------------------

Multilumen Table	environmental temperature: 25°C	siteco
-------------------------	---------------------------------	---------------

DIP-Step	Switch Setting			Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W]
	1	2	3			end of lifetime	average
1	A	C	E	12610	68.9	83.2	76.1
2	A	C	F	12180	66.3	80.2	73.2
3	A	D	E	11151	60.3	72.4	66.4
4	A	D	F	10101	54.3	65.0	59.6
5	B	C	E	9114	48.8	58.1	53.4
6	B	C	F	8127	43.3	51.8	47.6
7	B	D	E	7119	37.9	45.0	41.4
8	B	D	F	6111	32.5	38.3	35.4