
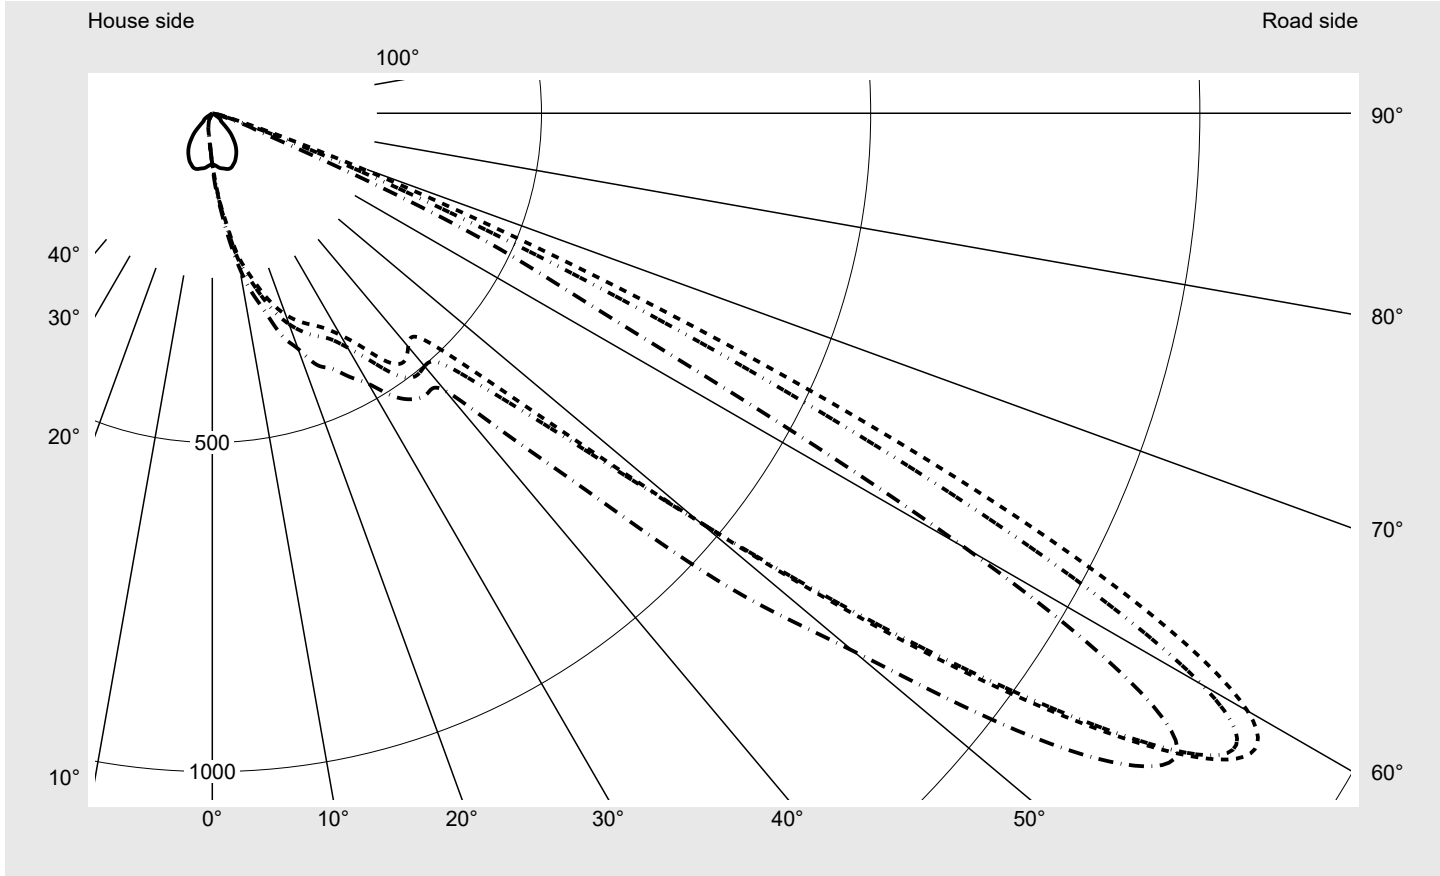


Photometric test report

Family Floodlight FL11	Order number: 5XA779425H01AA EAN: 4058352894514	LP number 59257_47
	Version standard bracket Optic asymmetric distribution PL33T with Back Light Control Cover toughened safety glass Lamps LED 3000 K CRI ≥ 70 Controlgear ECG-DALI Rated values Ta = 10 °C Net luminous flux = 117060 lm Power consumption = 1335.4 W Luminous efficacy = 87.7 lm/W	serial documentation 11.09.2023



Luminous intensity in cd/klm
C180-0
C240-60
C245-65
C270-90
Imax: 1827 cd/klm



Luminaire output ratios

Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%

Luminous intensity class acc. to EN13201-2

Class:	G6
Imax 70°	279.0
Imax 80°	8.4
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0


Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family Floodlight FL11	Order number: 5XA779425H01AA EAN: 4058352894514	LP number 59257_47
---	--	-------------------------------------

Envelope curve in cd/klm **KMK 57.5°** **KMK 55°** **KMK 52.5°** **KMK 50°** **siteco**

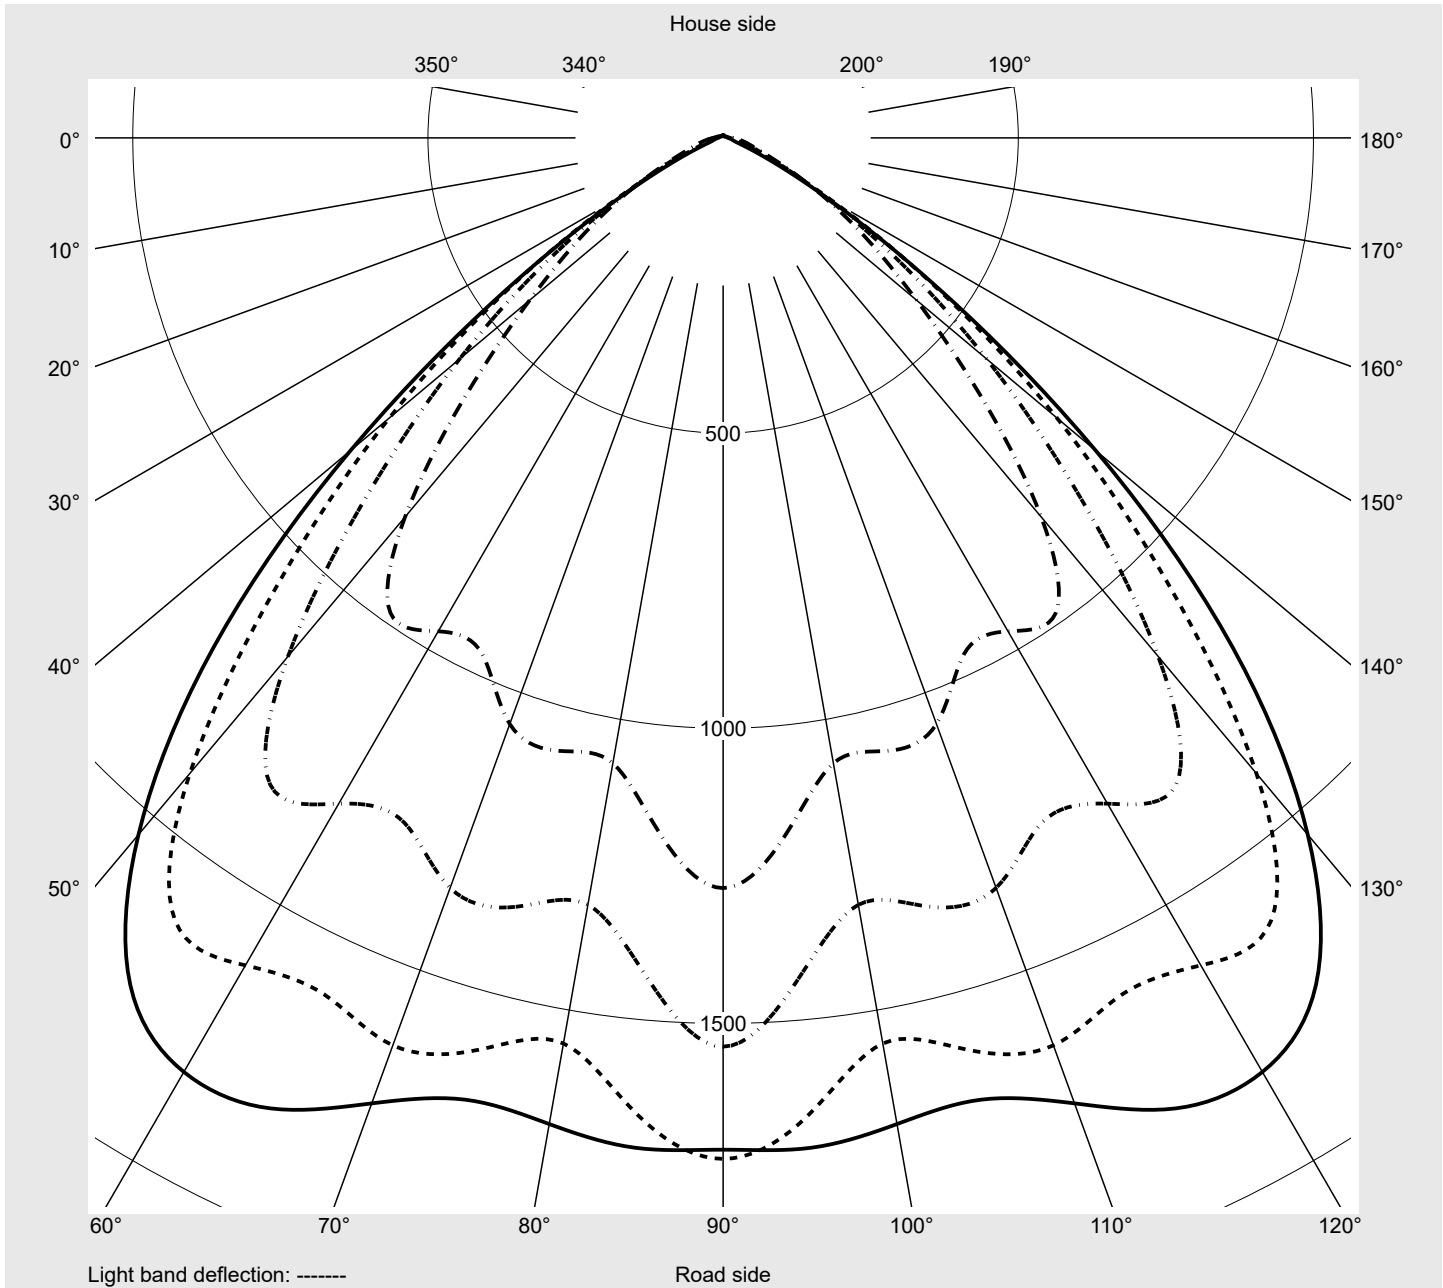

Photometric test report

Family Floodlight FL11	Order number: 5XA779425H01AA EAN: 4058352894514	LP number 59257_47
----------------------------------	--	------------------------------

siteco

Table of values for luminous intensities Maximum luminous intensity

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	77.6	77.6	77.6	77.6	77.6	77.6	77.6	77.6	77.6	77.6	77.6	77.6	77.6
2,5°	78.7	80.9	83.2	85.5	87.9	90.2	92.5	94.7	96.8	98.7	100.3	101.7	103.0
5,0°	81.0	85.9	91.1	96.3	101.7	106.8	111.9	116.8	121.5	125.9	130.1	133.8	137.2
7,5°	83.6	90.4	97.6	104.4	111.3	118.8	126.6	134.7	143.3	151.5	159.2	166.0	172.2
10,0°	85.0	93.4	102.2	112.3	123.9	136.3	148.9	161.9	174.6	186.3	197.0	206.8	216.2
12,5°	86.2	97.0	109.7	124.0	139.3	153.7	167.4	181.9	196.5	209.8	222.6	234.9	246.2
15,0°	87.7	100.9	115.8	132.0	147.8	163.1	179.8	198.2	215.3	231.3	246.7	261.5	275.2
17,5°	88.0	102.5	118.7	135.8	153.7	172.9	193.3	214.9	234.3	252.0	269.1	287.2	303.4
20,0°	86.8	102.5	120.0	138.8	159.2	181.7	205.9	229.0	248.3	266.7	286.7	307.2	325.5
22,5°	83.9	100.7	120.4	141.0	164.1	189.7	215.0	237.4	256.5	277.2	300.0	322.1	341.6
25,0°	81.0	98.7	119.7	142.3	167.0	193.6	218.5	239.8	261.7	285.3	309.5	332.5	354.2
27,5°	76.9	95.7	117.1	139.7	166.5	194.0	219.3	243.3	269.3	294.6	319.1	343.8	367.8
30,0°	72.6	91.8	112.3	135.8	164.6	194.3	222.7	251.6	282.1	309.9	335.5	362.4	388.9
32,5°	67.8	86.4	106.5	131.5	162.4	194.6	227.9	264.7	300.0	331.7	362.1	391.8	419.5
35,0°	62.3	79.9	100.0	125.5	156.6	193.0	233.1	277.3	318.4	357.3	393.6	428.5	459.5
37,5°	55.6	72.4	91.9	115.7	146.8	186.9	232.5	279.5	321.6	359.8	398.6	438.8	476.6
40,0°	48.1	63.8	82.2	103.6	133.9	179.0	230.4	276.2	310.9	343.2	379.9	420.0	462.9
42,5°	40.4	54.7	72.1	93.1	124.1	172.2	230.8	276.5	306.8	338.3	375.1	415.2	461.2
45,0°	28.5	39.1	53.5	74.9	107.3	161.3	226.4	277.5	311.4	364.8	435.7	495.8	538.7
47,5°	18.6	24.9	34.6	51.9	82.5	136.2	207.9	274.8	342.6	448.9	583.6	675.7	696.9
50,0°	16.9	24.4	35.1	48.6	70.6	115.0	191.5	295.6	427.8	615.6	838.2	982.4	965.1
52,5°	15.3	22.9	34.0	45.1	62.8	106.6	198.7	364.0	582.7	847.4	1146.7	1337.5	1302.2
55,0°	11.5	16.8	24.5	31.4	47.2	96.7	214.4	437.6	738.2	1063.3	1405.4	1618.5	1618.5
57,5°	8.2	10.7	14.5	18.4	31.5	79.5	202.9	448.3	823.7	1220.9	1540.7	1751.0	1827.0
60,0°	6.7	7.8	9.8	12.7	21.9	56.1	149.1	361.7	748.8	1177.8	1460.2	1699.7	1815.7
62,5°	6.1	6.9	8.4	10.6	15.5	34.4	88.1	222.4	499.7	869.7	1119.1	1425.2	1522.3
65,0°	5.7	6.3	7.5	9.1	11.8	22.2	51.1	117.7	270.5	520.5	769.3	1042.5	1025.9
67,5°	5.1	5.5	6.5	7.7	9.6	17.0	33.4	62.1	125.3	263.0	464.6	610.3	538.4
70,0°	4.5	4.9	5.5	6.2	7.7	11.0	16.8	26.2	47.4	102.5	209.4	279.0	215.6
72,5°	3.7	4.1	4.4	5.1	6.1	7.4	9.3	13.1	20.5	37.7	74.6	99.7	70.8
75,0°	3.0	3.2	3.5	4.1	4.9	6.3	7.2	9.1	12.2	17.4	28.3	36.6	27.1
77,5°	2.1	2.4	2.5	2.9	3.4	4.5	4.8	5.8	7.3	9.0	12.2	15.7	12.4
80,0°	1.5	1.9	1.9	1.9	2.2	2.6	2.9	3.5	4.0	5.0	7.3	8.4	6.1
82,5°	1.1	1.4	1.4	1.4	1.4	1.6	1.7	1.9	2.3	2.8	3.8	4.0	3.3
85,0°	0.6	0.8	0.8	0.6	0.7	0.8	0.9	1.0	1.0	1.2	1.5	1.7	1.6
87,5°	0.2	0.3	0.2	0.3	0.3	0.4	0.5	0.5	0.6	0.7	0.8	0.8	0.9
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Floodlight FL11	Order number: 5XA779425H01AA EAN: 4058352894514	LP number 59257_47
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	77.6	77.6	77.6	77.6	77.6	77.6	77.6	77.6	77.6	77.6	77.6	77.6	77.6
2,5°	104.1	105.1	105.9	106.5	107.0	112.3	76.6	74.7	72.8	71.0	69.1	67.4	65.8
5,0°	140.3	143.0	145.3	147.1	148.3	146.7	76.4	72.2	68.4	64.8	61.5	58.4	55.7
7,5°	177.7	182.2	185.7	188.5	190.4	191.5	77.2	71.2	65.4	60.2	55.6	51.7	48.3
10,0°	224.4	230.9	235.3	238.4	240.5	239.0	77.0	69.7	62.6	56.0	50.0	45.4	41.5
12,5°	255.6	262.6	268.6	273.4	277.0	279.4	76.3	67.5	59.2	51.9	45.6	40.6	36.7
15,0°	286.7	296.0	303.7	309.5	313.4	313.3	75.2	64.9	56.5	48.6	41.5	36.0	32.0
17,5°	317.0	327.9	336.9	343.9	349.0	355.4	74.5	61.9	51.7	44.0	36.8	31.6	27.7
20,0°	340.8	353.5	364.8	373.4	379.7	380.7	72.2	59.2	48.8	39.8	32.2	27.3	24.0
22,5°	359.1	374.1	386.5	397.4	406.1	413.1	69.7	56.9	44.7	35.3	27.8	23.4	20.0
25,0°	373.2	389.3	403.5	416.3	425.0	427.8	66.5	53.0	40.9	31.3	24.2	19.5	16.5
27,5°	386.3	403.2	421.5	435.9	444.5	451.3	61.6	48.1	36.6	27.1	20.4	16.2	13.6
30,0°	411.0	431.7	450.0	463.4	472.8	474.6	56.4	43.3	32.3	23.5	17.2	13.7	11.6
32,5°	444.8	466.8	485.4	495.9	502.4	508.8	51.3	38.6	28.3	20.0	14.9	12.0	10.4
35,0°	484.4	504.1	515.2	522.8	527.6	530.1	46.0	34.1	24.3	17.1	13.1	10.8	9.4
37,5°	504.3	520.2	527.4	530.7	535.1	536.6	40.8	29.9	20.5	14.7	11.6	10.0	8.5
40,0°	501.6	525.3	535.5	542.1	547.5	550.1	35.2	25.6	17.5	12.9	10.6	9.4	7.9
42,5°	515.5	563.6	583.8	597.2	621.6	660.8	29.8	21.3	15.1	11.4	9.6	8.5	7.4
45,0°	597.2	675.0	705.3	720.2	788.4	826.2	22.0	17.2	13.2	10.4	8.8	7.5	6.6
47,5°	732.9	825.1	861.2	872.8	964.4	1068.6	15.1	12.6	10.9	9.3	8.1	6.8	6.0
50,0°	965.1	1056.6	1075.0	1075.7	1188.4	1270.7	12.9	10.8	9.4	8.0	7.0	6.1	5.3
52,5°	1279.2	1352.0	1348.1	1319.2	1433.7	1539.3	11.4	9.5	8.2	7.0	5.9	5.3	4.7
55,0°	1600.4	1635.8	1599.0	1557.7	1661.2	1729.4	9.2	8.1	7.1	6.3	5.3	4.6	4.2
57,5°	1813.9	1740.4	1686.7	1696.2	1717.1	1713.9	7.0	6.3	5.9	5.5	4.7	4.2	3.8
60,0°	1735.8	1537.9	1506.4	1585.6	1431.2	1321.6	6.0	5.4	5.2	4.7	4.2	3.9	3.7
62,5°	1317.0	1096.2	1102.2	1162.6	929.0	734.3	5.4	4.9	4.7	4.2	3.8	3.7	3.6
65,0°	787.3	613.8	652.3	654.1	523.1	453.2	5.1	4.7	4.4	4.0	3.7	3.6	3.5
67,5°	368.9	284.2	292.2	239.9	192.2	140.2	4.7	4.2	3.9	3.7	3.5	3.4	3.3
70,0°	132.6	123.6	117.9	81.6	62.4	60.8	4.3	3.9	3.6	3.4	3.3	3.3	3.3
72,5°	44.5	48.6	40.3	24.6	18.7	16.9	3.4	3.1	3.0	3.0	3.0	3.1	3.1
75,0°	20.0	21.0	14.3	9.3	9.1	10.9	2.6	2.2	2.1	2.3	2.5	2.6	2.8
77,5°	11.0	11.0	7.5	5.5	5.6	6.0	1.7	1.5	1.5	1.7	2.0	2.1	2.2
80,0°	5.1	5.1	4.3	3.5	3.5	4.0	1.2	1.1	1.1	1.2	1.4	1.6	1.7
82,5°	2.9	3.0	2.7	2.3	2.3	2.5	0.7	0.7	0.8	0.9	1.1	1.2	1.4
85,0°	1.4	1.4	1.4	1.4	1.3	1.4	0.5	0.5	0.6	0.7	0.9	1.0	1.1
87,5°	0.9	1.0	1.0	1.0	1.0	0.9	0.3	0.4	0.5	0.6	0.7	0.8	0.9
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Floodlight FL11	Order number: 5XA779425H01AA EAN: 4058352894514	LP number 59257_47
Table of values for luminous intensities		Maximum luminous intensity
		sITeCO

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0,0°	77.6	77.6	77.6	77.6	77.6	77.6	77.6	77.6	77.6	77.6	77.6	0.1	0.1
2,5°	64.2	62.7	61.3	60.0	58.9	58.1	57.4	56.8	56.4	56.1	56.1	1.0	1.1
5,0°	53.1	50.8	48.8	47.1	45.7	44.5	43.6	42.9	42.5	42.1	42.0	2.1	3.2
7,5°	45.3	42.7	40.5	38.8	37.4	36.2	35.5	35.0	34.8	34.7	34.7	3.5	6.7
10,0°	38.5	36.1	34.1	32.6	31.2	30.3	29.8	29.7	29.8	29.8	29.9	5.3	11.9
12,5°	33.8	31.5	29.7	28.0	27.1	26.5	26.3	26.3	26.3	26.0	26.0	7.1	19.0
15,0°	29.3	27.2	25.3	24.1	23.4	23.1	22.9	22.8	22.8	22.8	22.6	9.1	28.2
17,5°	25.0	23.4	21.7	20.6	20.1	20.0	20.0	19.6	19.0	19.1	19.2	11.3	39.4
20,0°	21.4	19.5	18.3	17.7	17.5	17.5	17.1	16.4	16.3	16.2	16.2	13.4	52.9
22,5°	17.4	16.1	15.4	14.8	15.0	14.6	14.1	13.8	13.6	13.5	13.5	15.5	68.3
25,0°	14.5	13.4	12.5	12.4	12.2	11.8	11.5	11.2	11.0	10.9	10.9	17.4	85.7
27,5°	12.2	10.8	10.2	10.3	9.4	9.3	9.1	8.8	8.5	8.4	8.3	19.3	105.0
30,0°	10.4	9.1	9.0	8.2	7.9	7.6	7.4	7.2	6.9	6.7	6.7	21.6	126.6
32,5°	9.0	8.3	8.0	7.1	6.8	6.7	6.5	6.4	6.2	6.1	6.1	24.3	151.0
35,0°	8.2	7.9	6.9	6.6	6.3	6.1	6.0	5.9	5.8	5.8	5.8	27.2	178.2
37,5°	7.6	7.4	6.4	6.1	5.9	5.8	5.7	5.7	5.6	5.6	5.6	29.0	207.2
40,0°	7.1	6.4	6.0	5.6	5.5	5.4	5.4	5.3	5.3	5.3	5.2	30.1	237.2
42,5°	6.7	5.8	5.3	5.1	5.0	5.0	5.0	5.0	5.0	5.0	5.0	32.6	269.8
45,0°	6.0	5.3	4.8	4.7	4.7	4.7	4.7	4.8	4.8	4.7	4.7	38.5	308.3
47,5°	5.2	4.7	4.4	4.3	4.4	4.5	4.5	4.6	4.6	4.6	4.6	47.6	356.0
50,0°	4.6	4.1	4.0	4.1	4.1	4.2	4.4	4.4	4.5	4.5	4.5	62.6	418.5
52,5°	4.1	3.8	3.7	3.8	3.9	4.1	4.3	4.4	4.4	4.5	4.5	82.5	501.1
55,0°	3.8	3.5	3.6	3.7	3.9	4.1	4.3	4.5	4.5	4.6	4.6	101.9	602.9
57,5°	3.5	3.4	3.5	3.7	3.9	4.1	4.4	4.7	4.8	4.8	4.9	112.8	715.8
60,0°	3.4	3.2	3.4	3.6	3.8	4.1	4.5	4.8	5.0	5.1	5.1	105.9	821.7
62,5°	3.3	3.1	3.2	3.4	3.7	4.0	4.4	4.8	5.2	5.3	5.4	80.2	901.9
65,0°	3.2	3.2	3.3	3.5	3.8	4.1	4.5	4.8	5.1	5.3	5.3	51.0	952.9
67,5°	3.3	3.5	3.8	4.1	4.3	4.6	4.8	5.1	5.3	5.4	5.4	25.8	978.7
70,0°	3.4	3.8	4.3	4.6	4.9	5.1	5.2	5.4	5.6	5.6	5.7	11.2	989.9
72,5°	3.4	3.9	4.2	4.5	4.8	5.1	5.3	5.4	5.6	5.7	5.7	4.5	994.4
75,0°	3.1	3.7	4.0	4.3	4.6	4.9	5.1	5.3	5.4	5.5	5.6	2.3	996.6
77,5°	2.5	2.9	3.2	3.5	3.8	4.1	4.3	4.5	4.6	4.7	4.7	1.4	998.0
80,0°	1.9	2.2	2.5	2.7	3.0	3.2	3.4	3.6	3.7	3.8	3.9	0.9	998.8
82,5°	1.5	1.7	1.9	2.1	2.3	2.5	2.7	2.9	3.0	3.1	3.1	0.6	999.4
85,0°	1.2	1.4	1.5	1.7	1.8	2.0	2.2	2.3	2.4	2.5	2.5	0.4	999.8
87,5°	1.0	1.1	1.3	1.4	1.5	1.6	1.8	1.9	2.0	2.0	2.1	0.2	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Floodlight FL11	Order number: 5XA779425H01AA EAN: 4058352894514	LP number 59257_47
----------------------------------	--	------------------------------

siteco

Dimming levels table environmental temperature: 10°C

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	----	----	----	----
100	253	254	116788	1330.0
95	234	251	111271	1226.8
90	216	248	105290	1129.0
85	201	245	99681	1048.1
80	184	242	93481	955.9
75	170	239	87942	880.5
70	157	236	82126	811.3
65	143	233	76187	737.6
60	130	229	70348	669.2
55	118	226	64174	607.1
50	104	221	58423	533.6
45	93	217	52589	477.0
40	82	213	46995	420.7
35	71	207	41228	364.1
30	60	201	35180	308.1
25	49	194	29610	252.7
20	39	185	23543	203.1
15	28	173	17290	149.0
10	19	159	11743	104.6
5	9	132	5870	56.3
1	2	77	1584	20.6

Dimming levels table environmental temperature: 25°C

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	----	----	----	----
95	----	----	----	----
90	----	----	----	----
85	----	----	----	----
80	----	----	----	----
78	174	240	86895	894.8
75	166	239	83954	852.4
70	152	235	78315	778.5
65	139	232	72709	710.5
60	126	228	66920	643.0
55	115	225	61547	584.6
50	101	220	55885	513.1
45	90	216	50132	457.1
40	79	211	44637	401.3
35	68	206	39025	345.0
30	58	200	33488	294.9
25	47	192	27796	240.1
20	37	184	22179	191.2
15	27	172	16532	142.4
10	18	157	11260	98.5
5	9	132	5817	55.7
1	2	77	1571	20.3

Photometric test report

Family Floodlight FL11	Order number: 5XA779425H01AA EAN: 4058352894514	LP number 59257_47
----------------------------------	--	------------------------------

Luminousfluxs table



Temperature °C	Luminous flux lm	Power consumption W
10.0	117060.0	1335.4
25.0	87350.0	901.8