
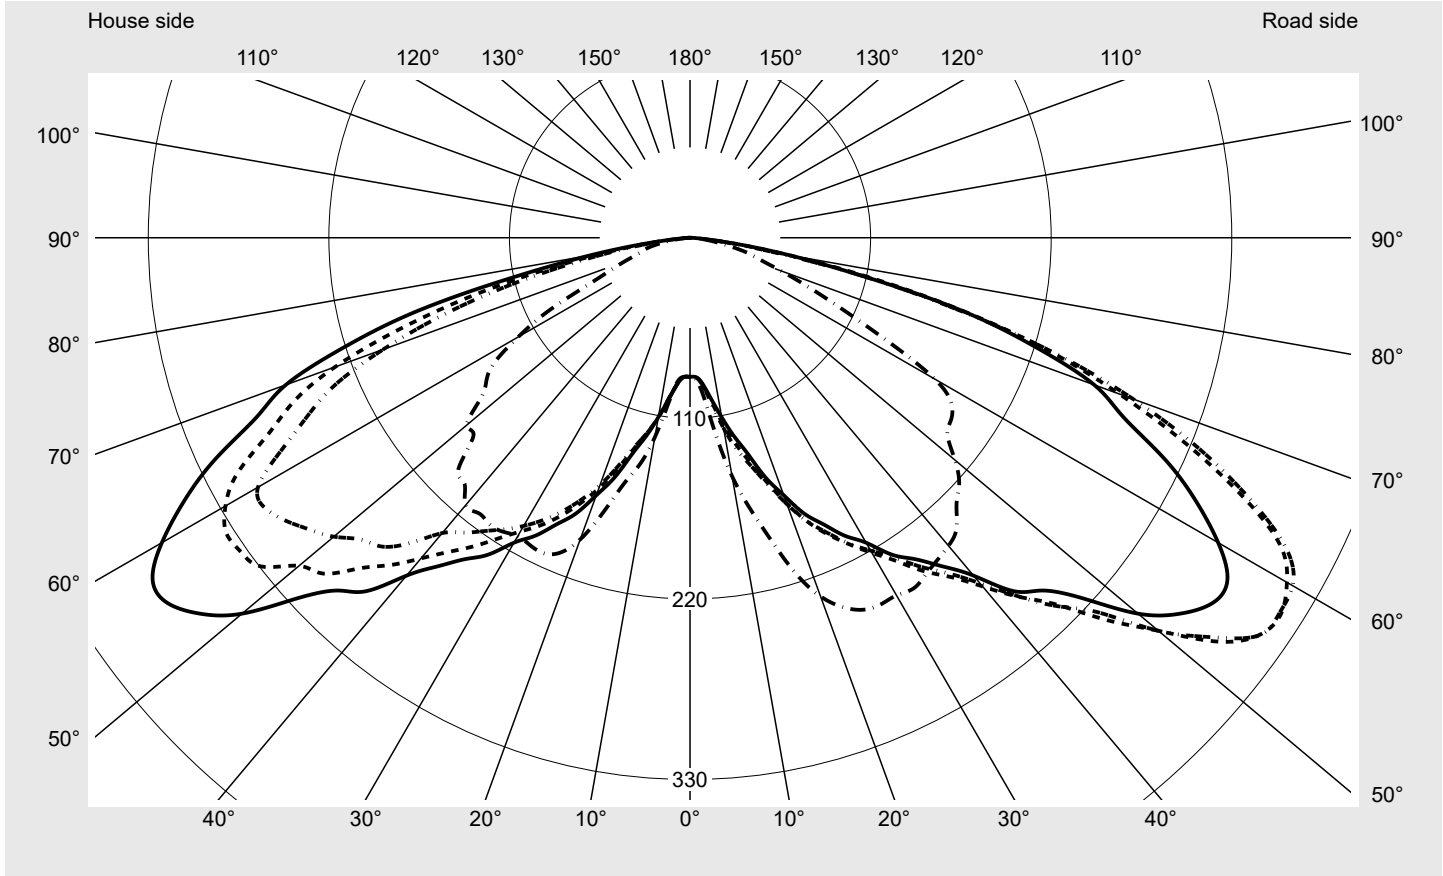


# Photometric test report

<b>Family</b> <b>DL® 20 LED</b>	<b>Order number: 5XA512832R008P</b> <b>EAN: 4058352546376</b>	<b>LP number</b> <b>59488_25</b>
	<b>Version</b> post-top mounting <b>Optic</b> asymmetric, extremely wide distribution (P1.0a) <b>Cover</b> toughened safety glass <b>Lamps</b> LED 2200 K   CRI ≥ 70 <b>Controlgear</b> ECG Plus <b>Rated values</b> Net luminous flux = 4220 lm Power consumption = 43.6 W Luminous efficacy = 96.8 lm/W	<b>serial documentation</b> <b>07.12.2023</b>



**Luminous intensity in cd/klm** C180-0 C190-10 C195-15 C270-90 **Imax: 427 cd/klm**



Luminaire output ratios	
Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%


Luminous intensity class acc. to EN13201-2	
Class:	G6
Imax 70°	291.0
Imax 80°	62.7
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0

**Measurement conditions**  
DIN EN 13032 and DIN 5032

# Photometric test report

<b>Family</b> <b>DL® 20 LED</b>	<b>Order number: 5XA512832R008P</b> <b>EAN: 4058352546376</b>	<b>LP number</b> <b>59488_25</b>
------------------------------------	--	-------------------------------------

**Envelope curve in cd/klm**      **KMK 57.5°**   **KMK 55°**   **KMK 52.5°**   **KMK 50°**      **siteco**

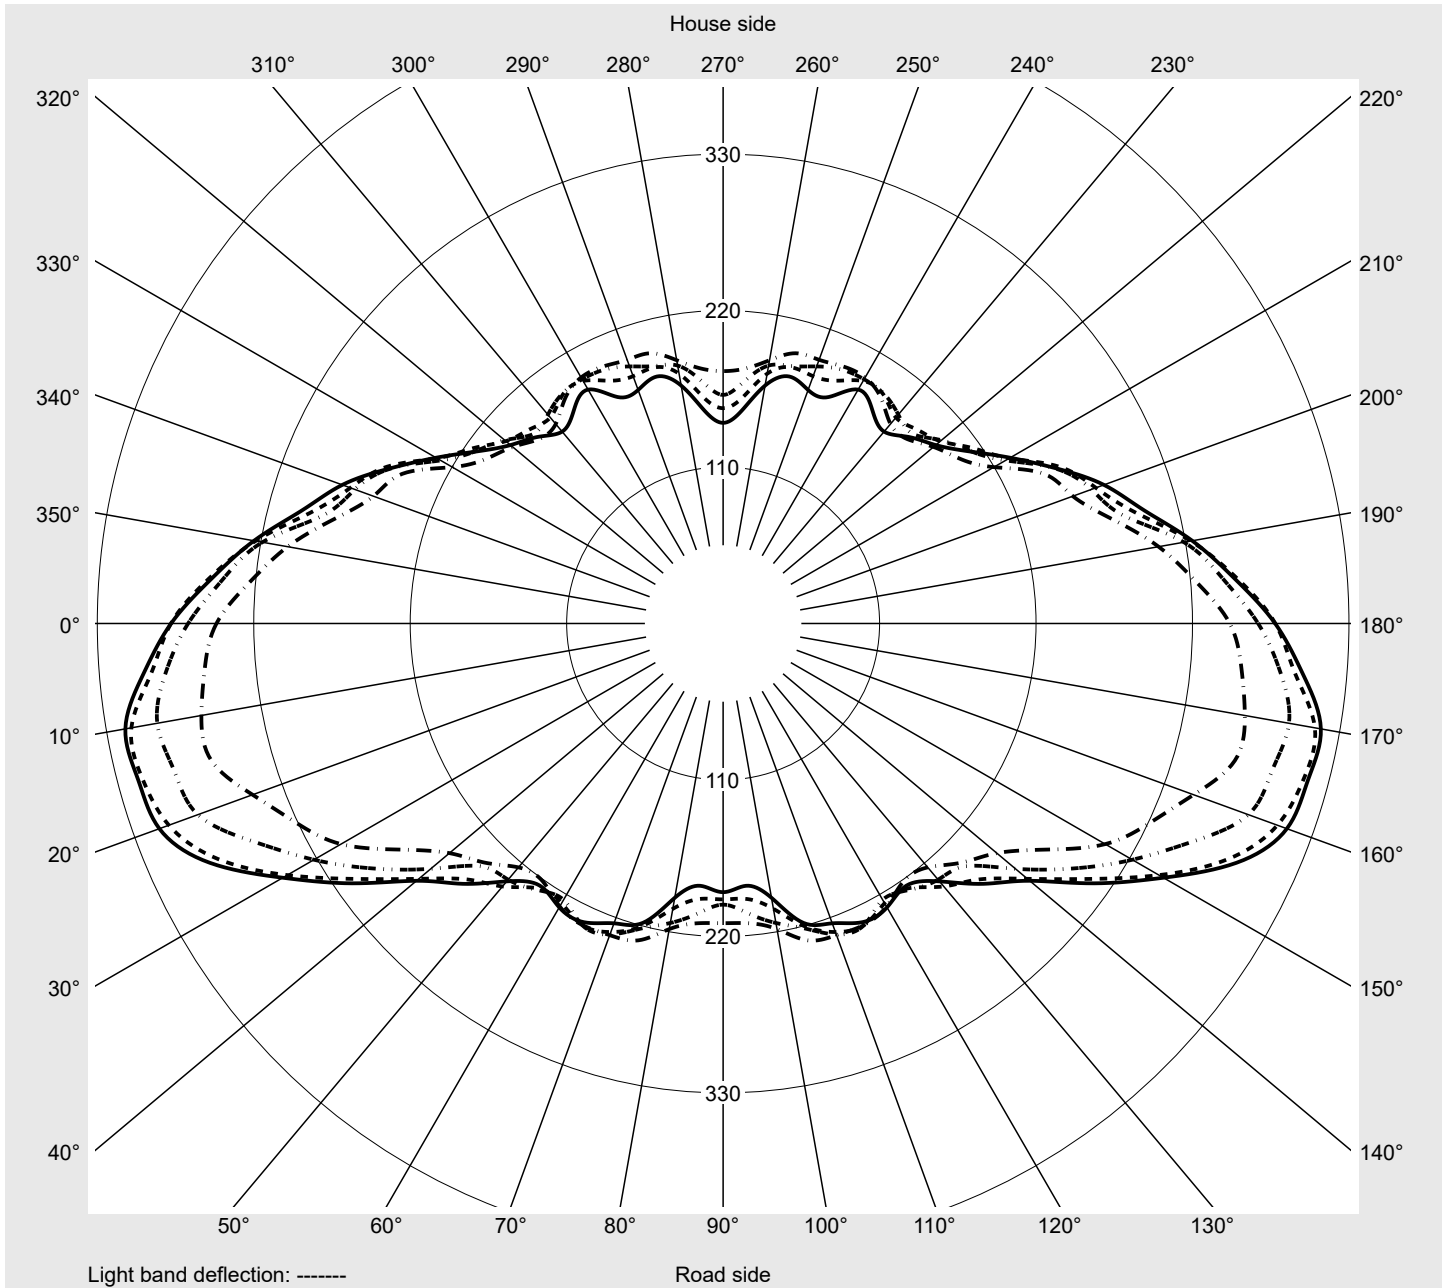

## Photometric test report

<b>Family</b> <b>DL® 20 LED</b>	<b>Order number: 5XA512832R008P</b> <b>EAN: 4058352546376</b>	<b>LP number</b> <b>59488_25</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
<b>siteco</b>		

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
$\gamma$	Luminous intensity in cd/klm												
0,0°	84.7	84.7	84.7	84.7	84.7	84.7	84.7	84.7	84.7	84.7	84.7	84.7	84.7
2,5°	85.0	85.0	85.0	85.2	85.3	85.2	85.4	85.5	85.6	85.8	85.9	85.9	86.3
5,0°	89.6	90.0	90.3	90.7	91.2	91.5	92.1	92.8	93.3	94.0	94.6	95.0	95.9
7,5°	99.2	100.0	100.9	102.4	103.9	105.3	107.1	108.9	110.4	112.3	113.5	114.8	116.5
10,0°	111.0	113.0	115.1	117.8	120.6	123.2	126.3	128.3	130.1	132.8	133.7	135.2	138.1
12,5°	123.8	126.0	128.8	132.2	135.0	137.9	141.4	142.9	144.3	146.7	147.1	148.7	152.2
15,0°	136.5	139.0	141.6	144.0	145.8	149.2	153.2	155.7	158.6	162.2	163.6	166.4	170.9
17,5°	153.2	154.7	156.3	157.7	160.1	164.8	170.0	174.1	178.6	183.3	186.6	191.1	196.4
20,0°	166.9	170.5	172.1	172.8	175.4	180.4	185.2	188.7	191.6	194.3	199.1	205.0	210.5
22,5°	181.9	185.6	187.3	187.0	189.0	192.2	195.0	197.4	198.3	199.7	205.0	211.5	217.2
25,0°	192.7	198.4	199.6	198.4	199.5	200.0	201.1	203.7	203.4	203.7	209.1	215.5	221.9
27,5°	204.8	209.3	210.6	209.9	209.4	206.7	206.3	208.8	209.1	208.8	212.2	219.0	227.0
30,0°	214.5	219.4	221.7	220.0	216.5	213.4	211.2	212.8	215.2	212.8	216.1	223.7	231.4
32,5°	228.9	232.4	233.4	230.7	227.6	223.1	216.4	218.2	222.3	218.5	219.7	227.9	235.4
35,0°	239.0	245.8	247.9	244.5	242.1	232.3	225.2	226.8	229.3	223.7	222.1	228.7	235.2
37,5°	252.2	260.1	260.4	257.5	258.2	248.8	237.4	237.1	234.5	227.7	226.7	231.0	235.0
40,0°	268.7	277.0	277.2	274.7	277.0	262.4	250.3	247.3	240.1	233.8	232.7	234.4	239.7
42,5°	292.0	292.6	296.7	296.4	294.2	278.8	260.6	251.5	243.8	233.0	234.0	234.8	237.4
45,0°	303.9	311.1	316.0	317.5	313.1	292.9	276.4	260.2	246.0	232.1	231.5	233.3	235.5
47,5°	325.4	337.3	344.8	337.9	328.1	311.5	289.8	267.6	245.4	230.2	228.4	226.4	229.5
50,0°	356.2	365.9	372.5	372.5	352.0	331.3	310.2	277.1	251.2	237.6	223.8	221.2	229.8
52,5°	376.2	393.3	404.0	399.6	393.0	363.4	332.2	300.3	268.3	241.3	235.1	228.6	224.3
55,0°	388.2	403.7	422.5	422.6	414.7	391.8	353.8	313.1	279.3	254.5	241.3	227.2	227.0
57,5°	388.1	409.2	426.7	425.7	421.8	398.1	357.5	318.5	281.4	258.8	236.7	224.9	230.4
60,0°	371.5	398.9	419.8	423.9	418.9	391.5	349.4	304.2	268.0	244.3	218.8	215.6	225.7
62,5°	347.5	376.5	405.2	409.3	399.8	375.5	330.2	279.9	244.1	213.1	188.6	193.0	198.9
65,0°	319.1	340.2	370.3	376.1	367.6	347.2	308.8	252.6	215.5	183.9	160.5	170.1	162.8
67,5°	285.9	303.0	326.3	335.6	331.5	310.6	275.2	221.8	195.7	160.5	130.9	142.4	125.7
70,0°	262.1	266.9	278.4	287.3	291.0	272.8	233.9	190.1	169.6	132.3	99.9	110.8	95.1
72,5°	219.8	223.5	229.2	231.6	238.8	229.8	187.3	155.5	138.1	105.1	82.1	80.2	68.6
75,0°	171.0	169.4	171.8	167.8	172.9	173.4	139.2	116.0	108.9	84.3	63.9	56.5	52.5
77,5°	107.7	114.4	112.8	108.2	107.3	109.5	86.8	71.4	76.7	57.3	44.4	39.5	37.5
80,0°	61.9	62.7	61.1	54.6	54.0	59.6	39.6	34.0	43.6	27.7	22.9	22.2	22.8
82,5°	27.6	27.0	26.5	24.1	22.0	27.1	15.6	14.5	22.1	10.9	10.3	11.0	12.2
85,0°	8.1	7.4	6.9	6.6	6.3	9.8	6.0	5.4	9.0	4.8	4.5	4.6	4.9
87,5°	2.2	2.1	2.1	2.0	2.0	2.2	1.8	1.8	2.0	1.6	1.6	1.6	1.7
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

## Photometric test report

<b>Family</b> <b>DL® 20 LED</b>	<b>Order number: 5XA512832R008P</b> <b>EAN: 4058352546376</b>	<b>LP number</b> <b>59488_25</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
<b>siteco</b>		

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	84.7	84.7	84.7	84.7	84.7	84.7	84.7	84.7	84.7	84.7	84.7	84.7	84.7
2,5°	86.4	86.4	86.7	86.7	86.7	86.8	84.8	84.8	84.9	84.8	84.7	84.8	84.6
5,0°	96.3	96.6	97.3	97.2	97.5	97.9	89.6	89.5	89.4	89.1	89.1	89.1	88.9
7,5°	117.4	118.4	119.8	119.9	120.4	121.4	98.8	98.7	98.8	99.0	99.4	99.7	100.2
10,0°	139.0	140.9	143.9	144.6	146.0	147.5	110.7	110.8	111.1	111.6	112.6	114.0	115.4
12,5°	153.7	156.9	162.1	164.1	166.6	169.1	122.7	122.2	122.2	122.4	123.3	125.1	126.6
15,0°	173.0	177.0	182.5	184.8	187.8	190.7	135.3	133.6	132.5	131.8	132.5	134.7	136.5
17,5°	199.9	204.5	209.3	211.2	213.0	214.6	150.5	148.1	146.0	145.5	147.5	150.7	152.8
20,0°	216.7	222.7	227.0	230.6	232.2	232.5	165.4	162.4	160.3	160.5	162.6	165.8	167.2
22,5°	225.4	232.4	237.2	242.2	244.1	243.6	178.4	175.3	172.6	172.5	173.0	173.6	174.6
25,0°	231.4	237.6	241.5	247.2	250.0	250.0	190.2	187.1	183.8	182.3	179.6	178.8	180.8
27,5°	236.4	240.6	243.5	250.0	253.2	251.7	200.9	197.6	193.9	190.7	185.4	183.9	184.8
30,0°	239.3	241.7	244.2	250.1	252.8	251.6	211.6	206.6	202.7	197.8	193.1	189.9	188.4
32,5°	240.5	244.3	245.8	248.2	252.1	253.3	223.2	217.1	210.6	205.6	199.9	194.5	189.5
35,0°	242.0	245.8	245.8	245.5	248.1	250.4	236.4	229.4	218.1	212.5	205.7	196.8	191.8
37,5°	240.8	243.3	242.8	243.9	245.7	247.5	247.4	241.1	226.4	218.5	214.8	203.6	197.9
40,0°	243.0	242.9	241.3	243.1	244.3	244.9	261.9	255.0	234.8	228.5	223.3	210.2	207.7
42,5°	242.3	243.5	242.7	241.5	242.8	240.3	281.1	270.4	252.1	239.3	232.4	212.9	206.9
45,0°	241.1	241.5	237.4	239.2	235.1	229.6	294.1	284.8	265.9	246.2	233.5	216.3	200.5
47,5°	243.2	235.3	231.2	233.6	225.9	222.4	314.7	302.8	272.1	255.9	241.4	216.3	199.9
50,0°	233.9	233.2	230.6	218.2	211.6	210.7	334.0	310.9	283.3	261.7	248.9	219.8	202.4
52,5°	234.1	232.7	222.0	213.8	204.7	197.7	353.3	329.0	292.0	275.6	257.8	229.3	211.7
55,0°	234.0	230.8	220.2	203.7	194.5	194.0	362.8	333.8	300.6	278.9	260.8	232.3	214.8
57,5°	231.7	224.3	217.9	195.8	185.1	188.9	361.1	334.9	306.7	284.9	258.2	233.1	211.0
60,0°	217.5	209.8	211.0	180.9	164.1	172.2	349.9	326.7	303.9	279.1	249.8	222.2	196.9
62,5°	193.3	185.0	177.2	155.6	136.2	133.9	331.1	310.9	280.8	253.3	227.8	197.5	169.3
65,0°	160.7	156.3	135.0	118.7	107.7	101.0	305.6	283.8	257.2	230.6	203.7	173.9	146.0
67,5°	124.5	131.5	97.5	88.5	87.9	77.4	277.9	261.6	233.8	209.2	186.1	154.9	127.6
70,0°	87.1	97.6	70.5	67.2	69.1	58.9	247.4	230.1	198.8	177.6	161.3	133.7	108.4
72,5°	60.3	63.7	51.4	50.1	50.1	45.1	206.9	186.0	159.9	143.6	134.8	108.6	85.2
75,0°	46.9	44.6	41.7	40.4	36.9	37.2	154.2	138.8	118.3	105.8	102.4	79.7	60.4
77,5°	34.8	31.9	32.1	30.5	28.3	26.8	102.4	91.8	76.9	70.0	71.0	51.1	38.7
80,0°	22.4	21.2	21.6	21.1	19.0	17.3	56.8	52.6	44.7	39.6	42.9	23.7	20.2
82,5°	12.3	11.6	12.2	11.8	10.7	10.3	25.8	24.7	21.0	18.6	22.1	11.7	9.3
85,0°	5.1	5.0	5.0	5.0	4.7	4.7	7.4	7.3	6.5	6.3	8.4	5.0	4.0
87,5°	1.6	1.5	1.6	1.5	1.4	1.4	2.2	2.2	2.1	2.0	2.1	1.8	1.7
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

## Photometric test report

Family <b>DL® 20 LED</b>	Order number: <b>5XA512832R008P</b> EAN: <b>4058352546376</b>	LP number <b>59488_25</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
		<b>siteco</b>

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0,0°	84.7	84.7	84.7	84.7	84.7	84.7	84.7	84.7	84.7	84.7	84.7	0.1	0.1
2,5°	84.6	84.6	84.6	84.5	84.6	84.6	84.5	84.7	84.6	84.5	84.8	1.0	1.1
5,0°	89.0	88.8	88.7	88.5	88.4	88.2	88.0	88.0	87.8	87.8	88.1	2.2	3.3
7,5°	100.8	101.2	101.5	101.8	102.1	102.0	102.0	102.1	101.8	101.8	102.1	3.8	7.1
10,0°	116.9	118.3	119.2	120.2	121.8	122.0	122.2	123.0	122.4	122.4	123.3	5.9	13.0
12,5°	128.2	130.5	131.7	133.5	136.3	136.6	137.5	140.0	139.9	140.4	141.4	8.2	21.2
15,0°	137.6	140.2	141.8	143.8	147.4	148.5	150.0	152.9	153.0	153.6	154.9	10.8	32.0
17,5°	153.6	155.4	157.5	160.0	164.8	167.2	169.4	172.7	173.5	174.0	175.1	14.1	46.1
20,0°	167.3	167.9	170.0	173.7	179.3	183.5	186.8	190.7	193.5	195.0	195.5	17.5	63.6
22,5°	174.8	174.7	177.2	182.0	186.7	192.1	197.8	201.7	206.1	207.7	207.8	20.6	84.2
25,0°	179.9	178.4	182.3	187.5	191.3	197.2	203.4	207.7	211.9	212.9	211.9	23.6	107.8
27,5°	182.1	181.5	187.1	192.0	193.6	200.1	208.0	212.2	217.6	216.3	211.1	26.5	134.2
30,0°	184.4	184.0	190.7	193.8	194.9	201.6	209.0	216.0	221.5	216.5	209.9	29.3	163.5
32,5°	185.6	187.1	193.6	195.0	197.3	202.3	210.2	217.7	221.3	217.0	212.3	32.2	195.7
35,0°	189.4	191.3	197.1	196.9	200.2	202.8	210.3	217.0	219.5	215.4	213.0	35.1	230.8
37,5°	195.1	196.5	197.6	198.7	202.4	205.4	210.6	217.3	217.0	213.1	211.5	38.1	268.8
40,0°	201.9	193.2	195.9	198.5	203.8	207.5	213.6	219.6	218.8	214.9	212.8	41.4	310.2
42,5°	196.5	191.5	193.9	196.4	203.0	208.2	210.4	217.9	212.7	208.0	203.3	44.3	354.5
45,0°	189.1	187.4	186.8	190.8	200.7	204.8	203.1	209.4	205.5	200.9	199.6	46.8	401.3
47,5°	190.3	182.9	185.2	190.8	196.7	200.7	200.7	198.1	201.3	190.2	179.0	49.5	450.8
50,0°	193.1	183.3	183.1	193.5	199.7	199.4	197.3	196.7	187.9	180.0	177.4	52.5	503.3
52,5°	200.5	188.5	191.6	197.2	198.2	197.0	192.3	187.4	184.1	170.9	160.7	56.2	559.5
55,0°	199.4	192.8	189.0	196.5	196.9	188.3	185.0	186.4	178.3	159.7	151.4	59.0	618.5
57,5°	195.1	185.3	176.1	183.0	189.9	175.7	174.7	179.8	169.8	150.2	141.0	60.2	678.6
60,0°	180.8	174.5	161.1	169.4	176.8	161.4	161.1	163.6	151.7	128.5	120.8	58.9	737.6
62,5°	155.4	148.2	135.0	146.4	149.8	136.7	145.6	139.5	120.9	102.7	98.8	54.5	792.1
65,0°	137.5	125.2	108.7	112.1	107.6	103.9	116.2	104.2	87.5	76.1	70.6	48.4	840.5
67,5°	124.8	105.1	87.0	87.7	79.7	79.3	91.9	76.6	57.6	55.2	53.7	42.5	883.0
70,0°	105.0	84.0	64.3	68.2	53.1	55.2	67.3	55.8	44.5	42.9	42.8	36.0	919.0
72,5°	81.5	66.9	46.6	44.5	37.3	37.1	46.8	40.8	37.2	35.0	33.9	29.1	948.1
75,0°	62.9	52.4	34.8	29.8	29.2	29.8	31.9	32.3	32.5	29.9	29.4	22.2	970.3
77,5°	45.9	34.6	22.1	21.7	21.9	22.9	23.3	25.7	26.7	24.3	23.7	15.1	985.3
80,0°	26.9	17.1	13.5	14.1	15.2	16.0	16.1	17.6	18.4	16.9	16.1	8.6	993.9
82,5°	13.3	7.7	7.0	7.7	9.1	9.2	9.2	9.9	10.4	9.6	9.3	4.1	998.0
85,0°	6.4	3.7	3.5	3.7	4.0	4.1	4.0	4.1	4.2	4.0	3.9	1.5	999.5
87,5°	2.0	1.5	1.5	1.5	1.5	1.5	1.3	1.3	1.3	1.2	1.2	0.5	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

## Photometric test report

<b>Family</b> DL® 20 LED	<b>Order number: 5XA512832R008P</b> <b>EAN: 4058352546376</b>	<b>LP number</b> 59488_25
-----------------------------	--	------------------------------

<b>Dimming levels table</b>	environmental temperature: 25°C	<b>sITeco</b>
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Luminous flux [lm]	Power consumption [W] start of lifetime	Power consumption [W] end of lifetime	Power consumption [W] average
100	254	4220	43.6	44.8	44.2
95	240	4004	41.1	42.2	41.7
90	227	3803	38.8	39.8	39.3
85	213	3584	36.3	37.3	36.8
80	200	3378	34.2	35.0	34.6
75	187	3171	32.0	32.8	32.4
70	173	2946	29.6	30.3	30.0
65	160	2736	27.4	28.1	27.8
60	148	2540	25.4	26.1	25.8
55	135	2325	23.3	23.9	23.6
50	122	2109	21.2	21.7	21.4
45	109	1892	19.1	19.5	19.3
40	97	1689	17.2	17.6	17.4
35	85	1484	15.3	15.6	15.4
30	72	1261	13.2	13.6	13.4
25	60	1053	11.5	11.7	11.6
20	48	843	9.7	9.8	9.8
15	36	632	7.8	7.9	7.8
11	27	472	6.5	6.6	6.6