
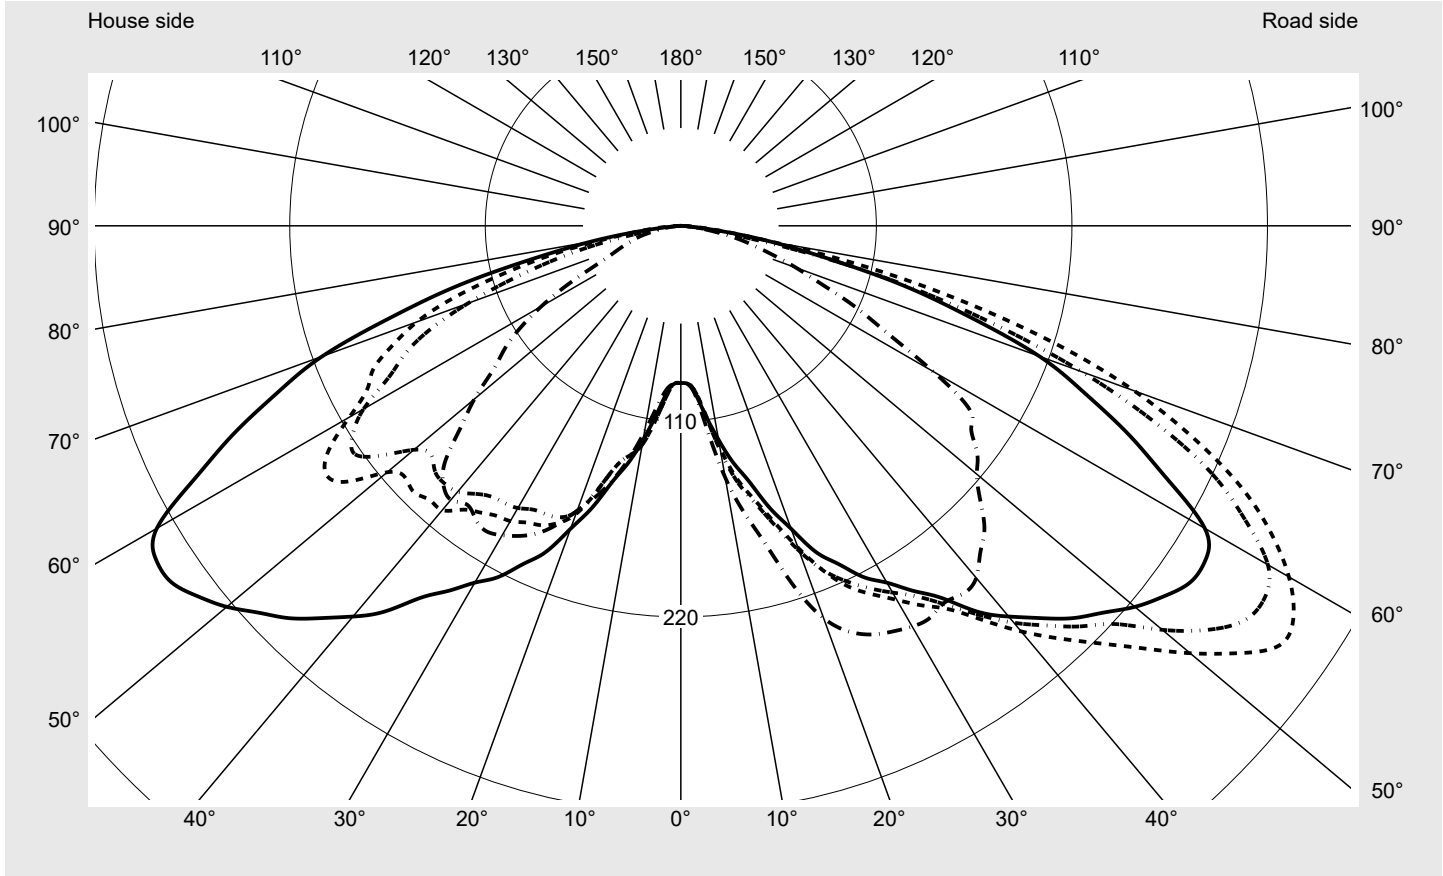


Photometric test report

Family DL® 20 LED 	Order number: 5XA51283WA008P EAN: 4058352271902	LP number 59487_27
	Version post-top mounting Optic asymmetric, wide distribution (ST1.2a) Cover toughened safety glass Lamps LED 3000 K CRI ≥ 70 Controlgear ECG Plus Rated values Net luminous flux = 4200 lm Power consumption = 34.3 W Luminous efficacy = 122.4 lm/W	serial documentation 07.12.2023

Luminous intensity in cd/klm C180-0 C205-25 C210-30 C270-90 **Imax: 411 cd/klm**



Luminaire output ratios

Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%

Luminous intensity class acc. to EN13201-2

Class:	G6
Imax 70°	272.5
Imax 80°	53.2
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0


Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family DL® 20 LED	Order number: 5XA51283WA008P EAN: 4058352271902	LP number 59487_27
------------------------------------	--	-------------------------------------

Envelope curve in cd/klm **KMK 55°** **KMK 52,5°** **KMK 50°** **KMK 47,5°** **siteco**

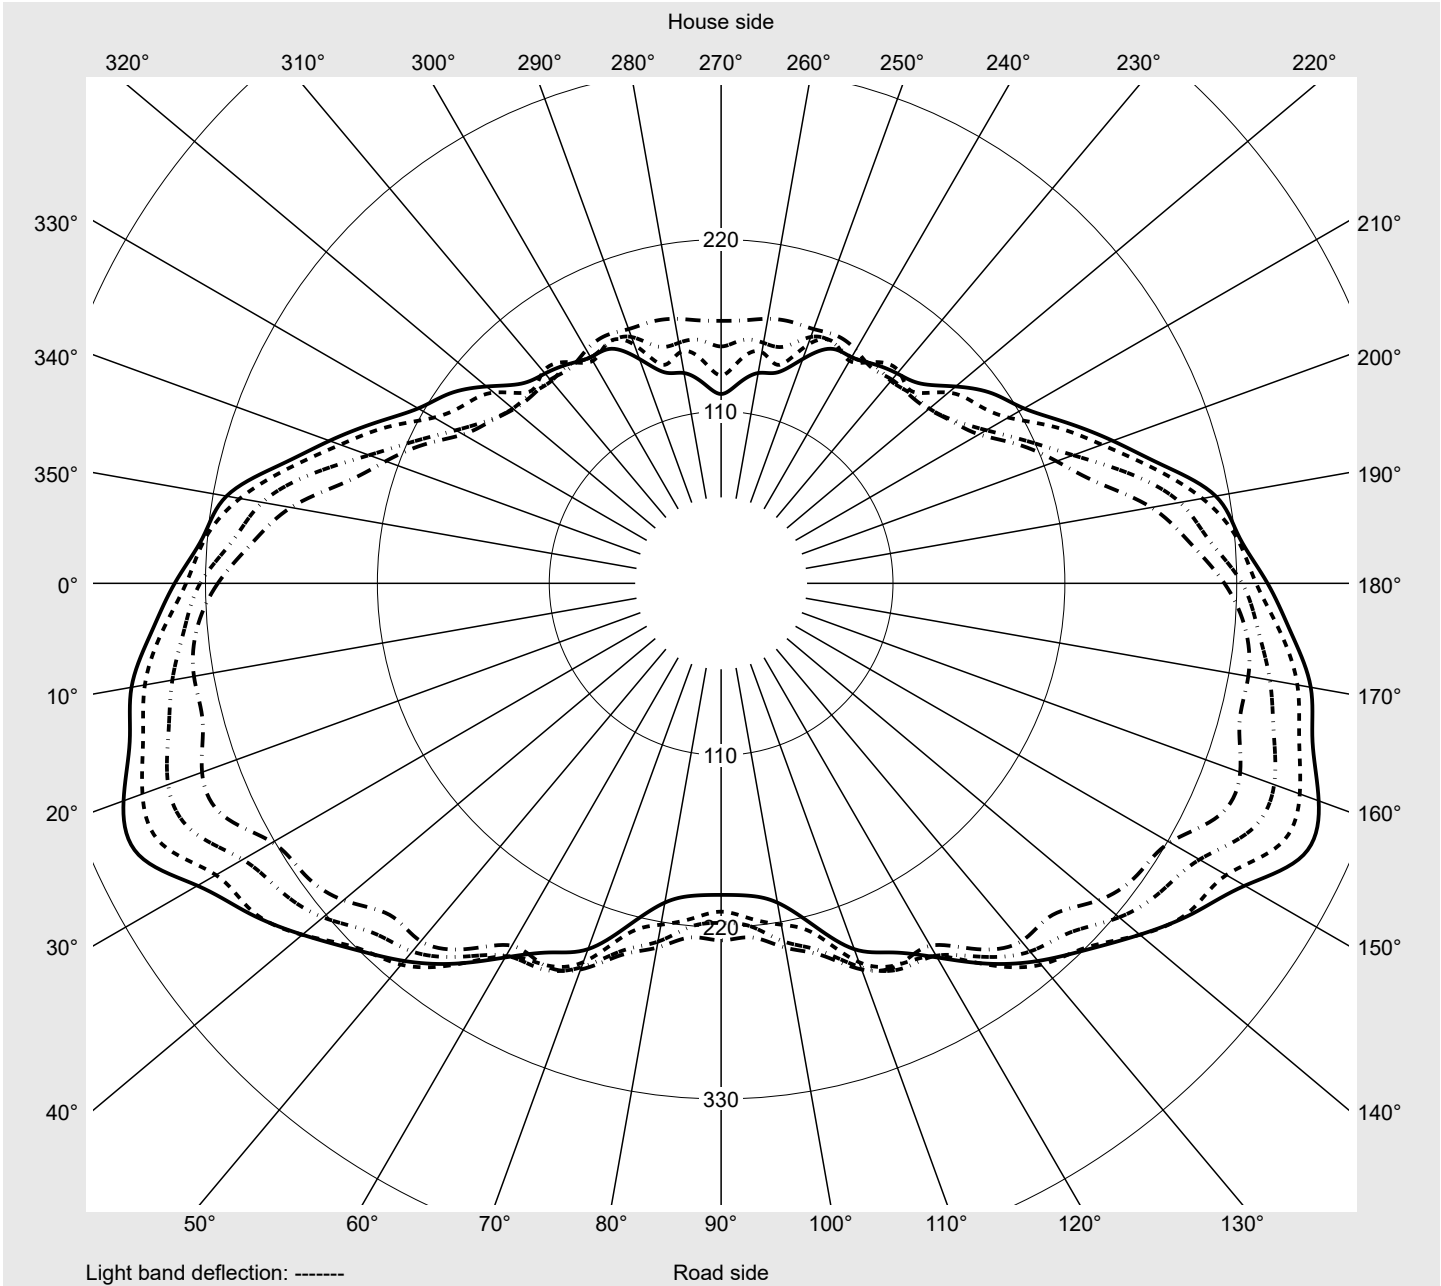

Photometric test report

Family DL® 20 LED	Order number: 5XA51283WA008P EAN: 4058352271902	LP number 59487_27
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	88.5	88.5	88.5	88.5	88.5	88.5	88.5	88.5	88.5	88.5	88.5	88.5	88.5
2,5°	89.1	88.8	88.7	88.8	88.8	88.8	89.0	89.0	88.9	89.0	89.1	89.2	89.2
5,0°	95.0	95.0	94.4	94.2	94.0	93.8	93.8	93.9	94.0	94.2	94.4	94.7	95.0
7,5°	107.9	107.4	106.9	107.2	107.3	107.3	108.0	108.7	109.4	110.4	111.2	112.2	113.4
10,0°	122.1	122.9	123.4	124.9	125.9	126.9	128.8	129.7	130.6	132.5	133.3	134.4	136.6
12,5°	136.6	137.9	140.2	142.4	143.9	145.6	147.8	148.0	148.8	150.6	150.3	151.3	153.8
15,0°	149.2	151.9	154.9	157.0	157.6	159.3	161.5	161.8	163.4	166.0	166.0	167.2	170.6
17,5°	166.4	168.4	171.4	172.3	172.7	174.8	177.1	179.2	183.1	187.2	189.2	191.7	195.8
20,0°	181.4	185.4	188.4	189.2	190.3	192.7	194.5	196.9	200.8	203.5	206.5	209.8	213.8
22,5°	198.6	202.0	205.4	206.2	208.6	210.1	209.8	210.1	211.3	211.7	215.4	219.4	223.3
25,0°	209.9	214.8	217.9	219.7	223.8	224.1	220.7	219.6	218.7	217.8	221.6	226.1	230.2
27,5°	222.8	227.4	229.3	230.9	235.0	233.7	229.8	228.3	225.1	225.2	228.7	232.4	236.4
30,0°	231.8	237.9	239.9	240.8	243.6	243.0	238.2	235.4	233.0	231.6	236.0	239.0	242.0
32,5°	243.5	250.4	252.6	251.0	253.2	253.3	247.2	244.2	243.2	239.9	241.4	243.5	247.4
35,0°	255.5	265.0	265.7	263.7	263.4	263.4	260.3	256.0	255.8	250.0	249.8	250.7	250.1
37,5°	273.4	285.9	282.5	279.6	280.8	279.7	275.9	272.9	267.3	263.8	261.5	258.5	255.2
40,0°	286.9	301.4	304.8	299.5	300.3	297.8	291.5	288.8	281.6	272.6	267.6	264.3	260.5
42,5°	299.3	315.0	322.9	317.0	321.4	314.8	305.0	301.1	293.2	283.4	277.4	272.3	261.8
45,0°	312.1	322.8	330.4	331.6	333.3	332.1	318.6	307.2	298.2	289.6	283.1	273.2	261.4
47,5°	322.1	336.9	342.6	343.5	353.5	351.7	331.6	325.2	315.5	300.1	299.0	285.8	267.8
50,0°	333.4	345.0	356.7	366.1	376.7	374.0	353.5	343.8	332.6	316.0	307.6	291.8	275.2
52,5°	342.4	359.3	374.5	383.0	394.1	394.9	373.3	366.1	349.9	329.8	318.6	298.0	275.5
55,0°	349.7	366.3	383.2	391.9	407.0	411.3	387.0	368.5	349.8	331.5	315.5	297.1	276.5
57,5°	349.9	363.2	378.2	392.7	410.1	408.7	389.4	364.3	344.6	322.1	301.2	279.9	269.2
60,0°	340.4	354.4	369.2	386.1	402.5	395.0	381.3	354.5	330.9	303.2	275.1	253.3	247.9
62,5°	308.5	331.8	352.4	366.5	381.2	374.3	357.7	326.0	303.9	273.2	249.2	235.2	226.2
65,0°	278.1	300.7	316.7	333.1	343.1	347.8	329.5	296.4	276.9	248.5	224.6	215.0	195.2
67,5°	245.9	260.8	278.7	298.7	308.0	312.3	288.5	263.1	247.3	212.8	192.2	177.8	155.7
70,0°	214.7	218.9	232.0	256.8	272.5	271.5	240.0	222.3	211.1	170.2	150.1	136.7	118.2
72,5°	170.3	180.3	189.5	209.5	223.5	221.7	186.3	173.9	161.8	132.2	115.0	99.9	87.6
75,0°	129.4	136.2	139.7	150.5	162.7	164.5	134.2	124.1	119.8	94.3	76.8	68.9	63.7
77,5°	84.1	91.7	89.7	93.7	104.1	107.1	80.8	75.0	77.3	55.3	46.0	41.3	40.1
80,0°	51.7	51.9	48.0	46.2	49.9	53.2	33.9	36.4	41.0	24.0	23.0	22.8	23.5
82,5°	23.2	23.6	22.2	20.6	22.4	25.5	13.7	16.2	19.6	10.1	10.0	10.6	11.6
85,0°	6.0	6.0	6.0	6.0	7.3	10.7	5.4	7.3	9.1	4.5	4.3	4.4	4.7
87,5°	2.0	2.0	2.0	1.9	1.9	2.4	1.8	1.7	1.7	1.6	1.6	1.5	1.6
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family DL® 20 LED	Order number: 5XA51283WA008P EAN: 4058352271902	LP number 59487_27
------------------------------------	--	-------------------------------------

siteco

Table of values for luminous intensities	Maximum luminous intensity
---	-----------------------------------

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	88.5	88.5	88.5	88.5	88.5	88.5	88.5	88.5	88.5	88.5	88.5	88.5	88.5
2,5°	89.3	89.3	89.4	89.4	89.3	89.2	88.9	88.9	89.1	89.0	89.1	89.2	89.1
5,0°	95.3	95.5	95.9	96.0	96.0	96.2	95.9	96.3	96.8	97.0	97.1	97.1	97.0
7,5°	114.1	114.8	115.9	116.2	116.5	116.9	108.5	109.1	109.9	110.3	110.7	111.0	111.0
10,0°	137.6	139.1	141.4	141.9	142.8	143.8	122.7	123.4	124.3	124.4	124.8	125.0	124.9
12,5°	154.6	156.8	160.6	161.9	163.9	165.6	135.1	134.1	134.2	133.1	132.3	132.2	132.0
15,0°	171.6	174.9	179.5	181.2	183.7	186.1	147.0	144.2	142.8	141.2	139.7	139.6	139.1
17,5°	197.6	201.3	206.8	208.7	210.9	213.3	163.3	160.1	158.5	157.4	156.2	155.7	154.2
20,0°	217.8	222.9	228.2	230.9	233.2	234.9	180.7	177.8	175.7	174.5	172.5	170.9	168.2
22,5°	229.6	235.6	240.4	244.8	246.9	247.0	195.8	192.5	188.2	185.5	181.1	177.5	174.5
25,0°	237.2	243.2	246.8	252.2	254.6	253.6	208.5	203.2	196.4	192.4	185.8	179.1	176.3
27,5°	243.6	249.3	251.5	257.0	259.0	257.3	219.9	212.2	204.1	197.0	188.2	180.0	177.5
30,0°	248.1	251.6	253.3	258.6	261.3	260.3	229.3	219.8	210.1	200.7	191.8	183.3	179.4
32,5°	250.8	253.5	256.5	260.6	261.5	261.3	238.2	230.6	217.0	205.1	193.4	184.8	178.6
35,0°	251.6	255.3	258.9	260.7	259.9	258.7	248.7	239.2	223.2	209.3	196.9	185.9	180.1
37,5°	255.6	257.3	260.4	261.7	259.4	260.9	260.3	247.0	231.5	217.8	201.3	190.0	182.0
40,0°	262.6	262.4	261.7	260.2	260.1	258.5	274.1	257.4	239.5	223.2	208.8	195.3	186.1
42,5°	267.2	267.0	258.6	253.4	249.5	249.3	283.3	267.7	246.0	225.6	209.2	196.7	189.5
45,0°	266.6	267.0	254.6	243.7	238.6	241.5	295.2	268.4	246.4	227.0	212.1	195.5	185.0
47,5°	269.3	263.0	246.2	236.8	227.5	228.5	301.0	279.6	249.3	228.5	210.0	190.6	180.6
50,0°	272.3	261.4	243.3	232.9	220.5	217.4	313.7	298.2	270.9	239.8	215.7	196.0	181.8
52,5°	269.2	258.0	232.4	221.8	215.4	210.1	331.4	312.8	285.8	259.4	236.4	212.2	199.8
55,0°	260.7	249.2	226.1	207.5	200.7	199.4	333.1	321.4	292.5	266.7	243.6	223.9	211.9
57,5°	248.6	231.5	221.9	193.0	182.3	192.8	324.6	302.6	280.6	258.2	234.8	218.9	207.6
60,0°	233.2	208.6	194.3	174.6	161.0	163.9	308.1	283.8	270.6	239.5	215.3	206.0	191.9
62,5°	211.0	184.4	158.7	148.5	139.5	131.3	289.1	265.4	245.6	221.5	198.8	185.6	171.6
65,0°	183.8	160.4	128.4	126.1	118.6	108.9	260.0	241.7	221.3	205.2	190.9	171.6	151.9
67,5°	150.3	133.3	100.8	100.3	97.5	85.7	232.2	215.5	203.1	187.5	175.4	153.0	133.3
70,0°	112.0	99.3	77.8	78.8	76.7	69.1	203.4	186.8	176.9	170.2	157.9	127.3	116.4
72,5°	80.4	69.5	60.4	59.6	56.6	54.0	160.4	150.2	142.9	139.9	133.0	99.2	93.1
75,0°	56.7	48.6	47.0	44.1	42.0	41.9	116.1	110.2	104.7	106.2	102.0	73.1	64.7
77,5°	37.8	33.1	32.6	33.3	31.8	31.4	79.5	74.8	68.9	74.3	72.9	48.1	41.4
80,0°	22.8	20.7	20.9	21.4	20.8	19.9	47.3	43.9	37.9	40.3	43.4	23.3	22.9
82,5°	12.2	11.3	11.8	11.7	11.3	11.1	22.0	20.4	17.3	18.6	23.9	10.2	11.2
85,0°	4.8	4.8	5.1	5.0	4.9	4.9	6.0	6.3	6.0	7.2	12.1	5.2	4.9
87,5°	1.5	1.5	1.6	1.4	1.4	1.4	2.0	2.0	2.0	1.9	2.7	1.8	1.7
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family DL® 20 LED	Order number: 5XA51283WA008P EAN: 4058352271902	LP number 59487_27
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0,0°	88.5	88.5	88.5	88.5	88.5	88.5	88.5	88.5	88.5	88.5	88.5	0.1	0.1
2,5°	89.1	89.1	89.1	88.9	88.9	88.8	88.8	88.9	88.7	88.7	89.0	1.1	1.2
5,0°	96.7	96.5	95.9	95.4	94.8	94.1	93.6	93.2	92.5	92.2	92.5	2.3	3.5
7,5°	110.7	110.2	109.5	108.5	107.7	106.2	105.1	104.2	102.8	102.4	102.6	3.9	7.4
10,0°	124.4	124.2	123.3	122.5	122.0	120.4	119.3	119.1	117.7	117.2	117.7	6.1	13.4
12,5°	131.4	132.1	131.9	131.9	132.9	132.4	132.9	133.7	133.0	133.1	133.8	8.4	21.9
15,0°	138.2	139.3	140.1	140.5	142.3	143.0	144.5	146.4	146.4	147.1	148.1	11.0	32.8
17,5°	152.1	152.1	152.8	153.3	154.7	156.0	157.2	158.6	159.5	160.1	160.0	14.2	47.0
20,0°	165.1	163.1	163.5	164.0	164.6	167.1	169.2	170.3	172.0	171.6	170.5	17.7	64.7
22,5°	171.4	168.9	169.5	170.3	171.3	175.5	178.1	178.9	182.7	183.4	181.8	20.9	85.6
25,0°	173.5	170.8	172.7	173.5	174.3	180.2	184.0	185.0	189.9	192.6	190.8	24.0	109.6
27,5°	173.6	172.2	175.8	177.6	177.9	183.4	188.1	190.7	196.1	197.9	196.7	27.0	136.7
30,0°	174.9	173.5	178.6	182.9	182.9	186.9	190.4	194.2	199.7	201.4	201.0	30.0	166.6
32,5°	174.7	173.5	180.8	184.4	185.0	187.3	192.5	198.1	202.7	202.9	203.7	33.0	199.6
35,0°	173.3	174.4	181.5	185.6	186.5	188.3	194.2	199.5	201.8	202.1	201.4	36.0	235.6
37,5°	174.5	176.0	183.3	189.9	190.9	190.1	196.1	202.1	203.2	200.3	197.6	39.4	275.0
40,0°	179.5	179.6	185.1	190.4	191.5	192.3	198.9	202.1	203.8	202.5	201.2	42.9	317.9
42,5°	178.5	177.1	181.1	183.0	188.5	188.5	195.7	195.7	199.8	199.5	197.6	45.8	363.7
45,0°	175.1	173.4	176.1	178.1	178.3	181.1	188.7	188.0	187.8	189.1	187.5	48.1	411.8
47,5°	173.4	170.5	170.1	168.3	172.5	174.9	173.2	173.3	171.9	169.0	168.0	50.4	462.1
50,0°	174.0	171.7	169.1	170.4	167.0	169.8	167.8	156.9	156.3	156.3	151.6	53.4	515.6
52,5°	189.9	173.5	177.1	172.9	164.4	170.3	162.5	144.8	150.2	143.9	133.1	56.9	572.5
55,0°	196.0	180.8	175.3	171.1	167.1	165.6	152.8	139.8	136.7	128.5	121.2	58.9	631.4
57,5°	191.0	175.2	161.9	155.6	160.3	154.5	140.2	129.5	123.3	113.1	107.3	58.7	690.0
60,0°	175.3	161.7	143.8	142.2	148.1	140.1	125.6	115.5	107.1	96.7	90.5	56.5	746.5
62,5°	159.2	137.0	125.3	128.8	123.2	116.5	109.7	100.5	90.2	77.4	72.0	52.5	799.0
65,0°	141.4	119.2	106.0	111.5	96.4	90.6	93.7	78.0	66.1	58.5	53.7	47.7	846.7
67,5°	127.9	100.8	85.8	87.6	72.2	69.7	74.2	59.2	45.9	43.2	42.3	41.9	888.6
70,0°	110.1	75.8	59.5	66.7	46.1	47.3	55.7	42.1	35.2	35.4	35.7	35.2	923.8
72,5°	86.3	58.3	39.8	39.2	30.1	31.4	37.8	30.6	28.7	28.4	29.7	28.0	951.8
75,0°	65.3	44.3	27.1	24.2	23.7	23.4	26.2	25.4	23.9	23.5	24.8	20.7	972.5
77,5°	48.8	32.1	17.4	16.9	18.0	18.3	18.6	19.5	19.5	18.6	18.1	13.9	986.4
80,0°	31.4	16.4	10.7	11.3	12.5	13.5	13.2	13.7	13.9	13.2	12.3	7.8	994.2
82,5°	18.1	7.0	6.3	6.8	7.7	8.0	7.9	8.4	8.7	8.0	7.8	3.8	998.0
85,0°	9.0	3.6	3.4	3.4	3.8	3.8	3.7	3.8	3.9	3.7	3.5	1.5	999.5
87,5°	2.1	1.6	1.6	1.5	1.6	1.4	1.4	1.4	1.3	1.2	1.2	0.5	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family DL® 20 LED	Order number: 5XA51283WA008P EAN: 4058352271902	LP number 59487_27
-----------------------------	--	------------------------------

Dimming levels table	environmental temperature: 25°C	siteco
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Luminous flux [lm]	Power consumption [W] start of lifetime	Power consumption [W] end of lifetime	Power consumption [W] average
100	254	4200	34.3	35.1	34.7
95	241	3998	32.5	33.4	33.0
90	227	3778	30.6	31.5	31.0
85	214	3573	29.0	29.7	29.4
80	201	3366	27.2	27.9	27.6
75	188	3158	25.5	26.1	25.8
70	174	2932	23.7	24.3	24.0
65	162	2738	22.1	22.7	22.4
60	149	2526	20.5	21.0	20.8
55	136	2311	18.9	19.3	19.1
50	123	2096	17.2	17.6	17.4
45	111	1895	15.7	16.0	15.8
40	98	1678	14.1	14.4	14.2
35	86	1475	12.7	12.9	12.8
30	73	1254	11.1	11.4	11.2
25	61	1049	9.7	9.9	9.8
20	49	843	8.2	8.4	8.3
15	37	635	6.8	6.9	6.8
14	34	582	6.5	6.5	6.5