

## Photometric test report

Family  
DL® 20 LED

Order number: 5XA51283WS008P  
EAN: 4058352271988

LP number  
59489\_19



Version	post-top mounting
Optic	symmetric, wide distribution (PL1.2s)
Cover	toughened safety glass
Lamps	LED 3000 K   CRI ≥ 70
Controlgear	ECG Plus
Rated values	Net luminous flux = 4250 lm Power consumption = 34.3 W Luminous efficacy = 123.9 lm/W

serial  
documentation  
07.12.2023

siteco

Luminous intensity in cd/klm


C180-0

C230-50

C235-55

C270-90

Imax: 324 cd/klm

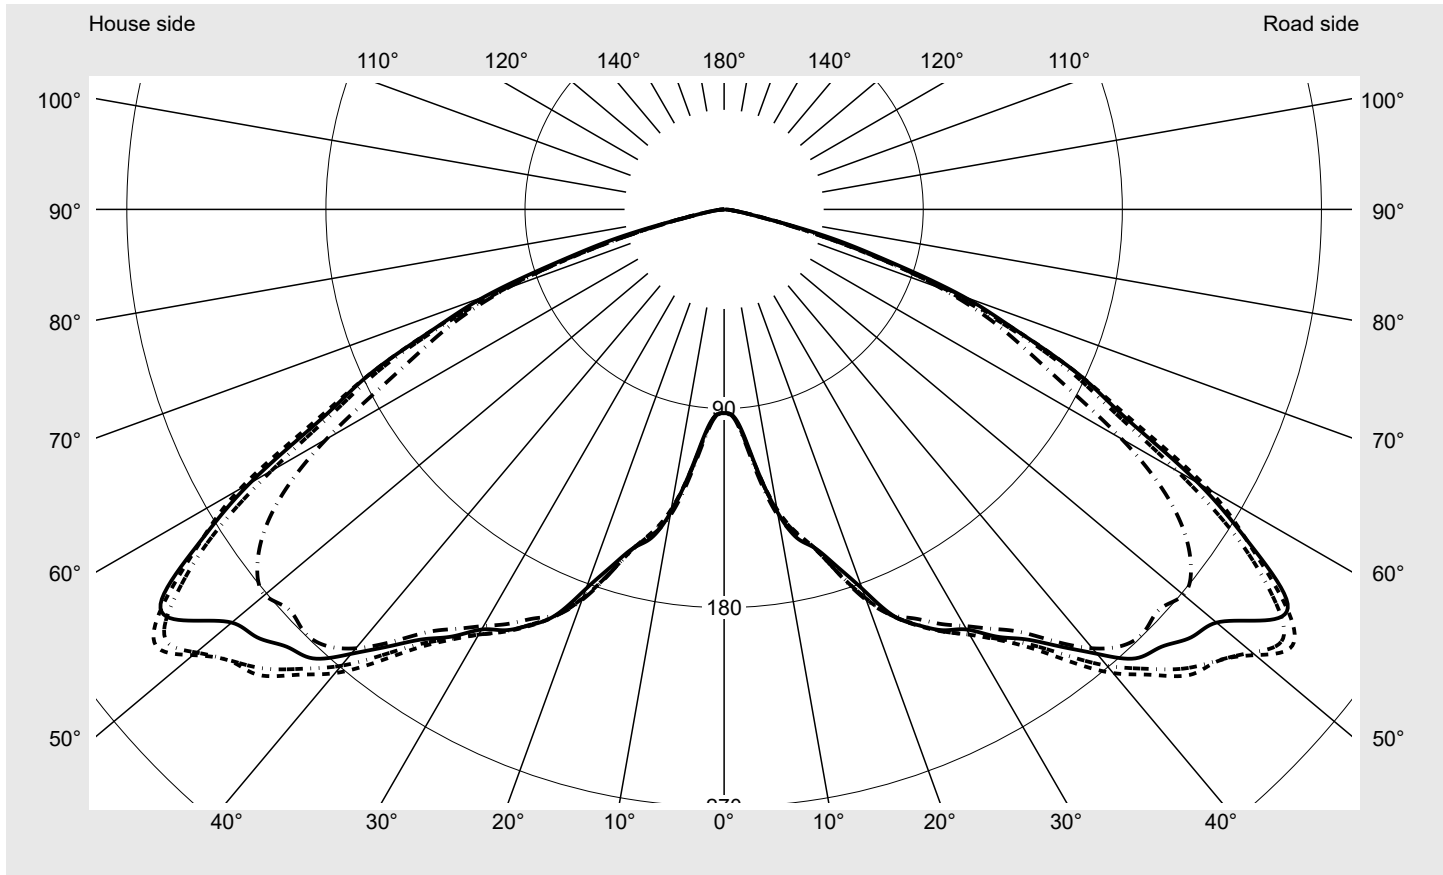

### Luminaire output ratios

Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%

### Luminous intensity class acc. to EN13201-2

Class:	G6
Imax 70°	119.6
Imax 80°	10.2
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0


### Measurement conditions

DIN EN 13032 and DIN 5032

**Photometric test report**

<b>Family</b> <b>DL® 20 LED</b>	<b>Order number: 5XA51283WS008P</b> <b>EAN: 4058352271988</b>	<b>LP number</b> <b>59489_19</b>
------------------------------------	--	-------------------------------------

**Envelope curve in cd/klm**      **KMK 52.5°**    **KMK 50°**    **KMK 47.5°**    **KMK 45°**      **siteco**

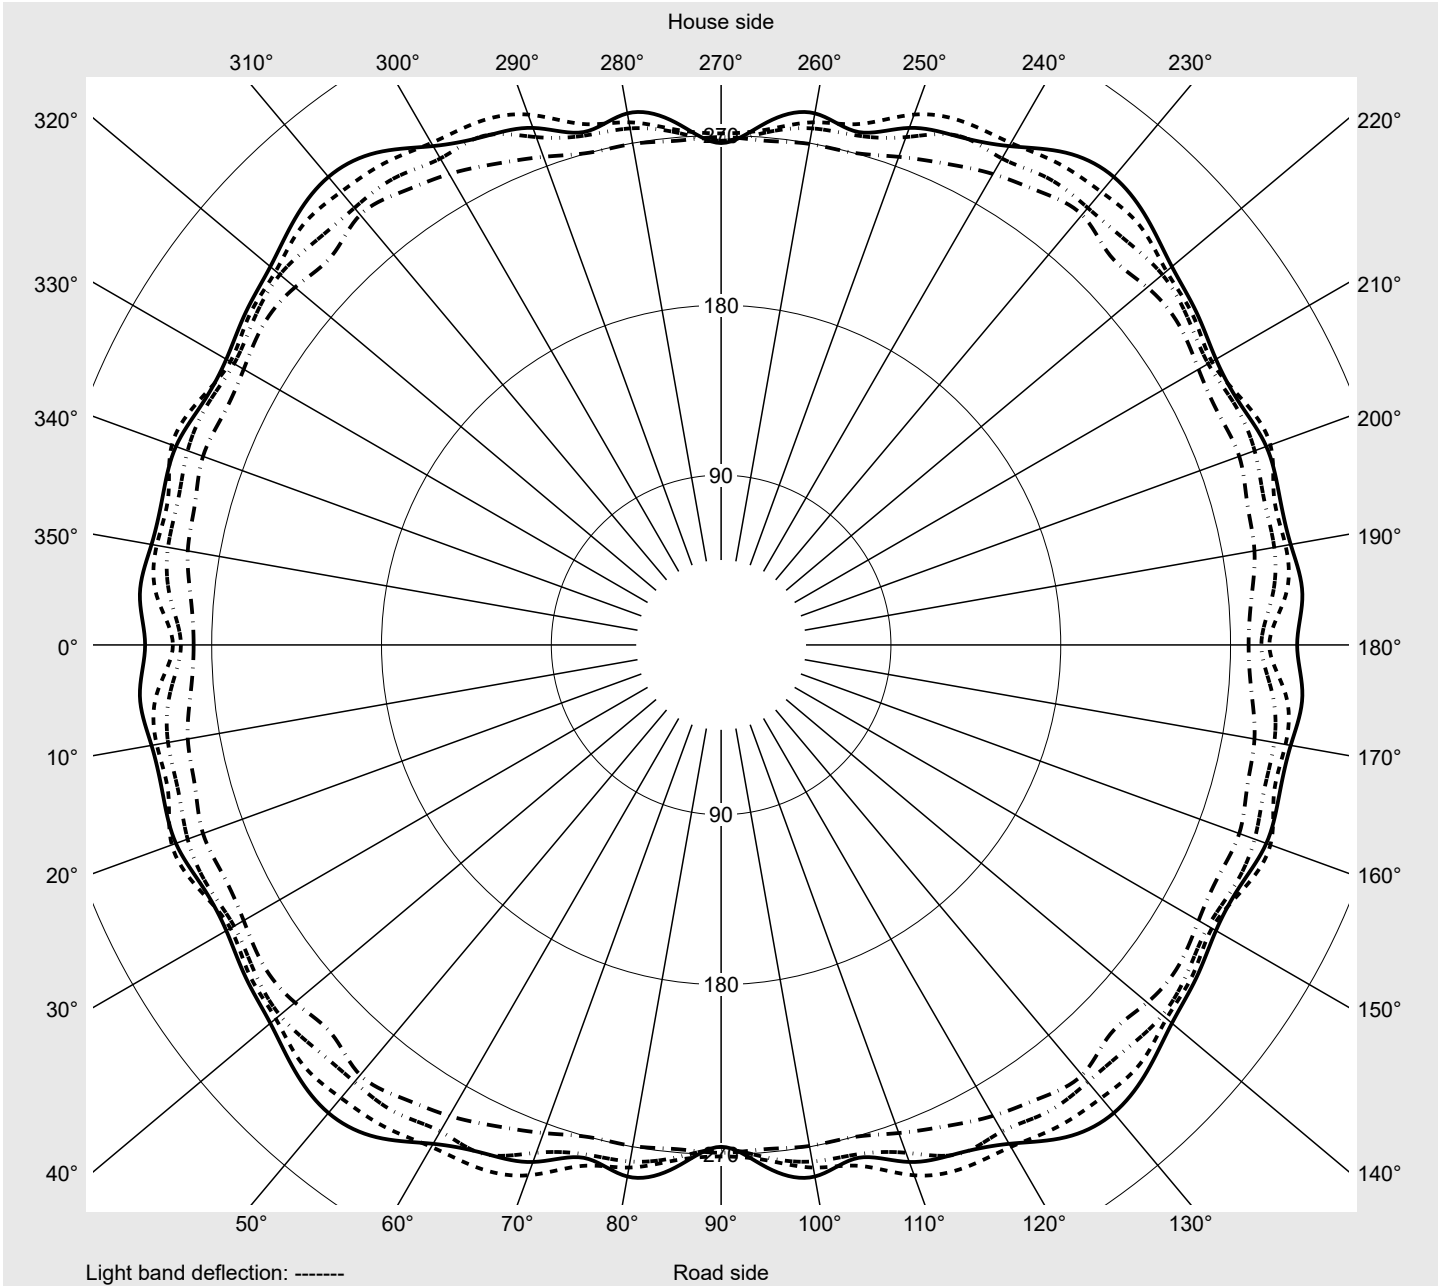

## Photometric test report

<b>Family</b> <b>DL® 20 LED</b>	<b>Order number: 5XA51283WS008P</b> <b>EAN: 4058352271988</b>	<b>LP number</b> <b>59489_19</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
<b>siteco</b>		

C-planes	0° 180°	5°	10°	15°	20°	25°	30°	35°	40°	45°
		175° 185° 355°	170° 190° 350°	165° 195° 345°	160° 200° 340°	155° 205° 335°	150° 210° 330°	145° 215° 325°	140° 220° 320°	135° 225° 315°
Luminous intensity in cd/klm										
γ										
0,0°	92.1	92.1	92.1	92.1	92.1	92.1	92.1	92.1	92.1	92.1
2,5°	93.4	93.2	93.1	93.3	93.3	93.3	93.3	93.3	93.4	93.5
5,0°	102.6	102.9	102.9	103.0	102.9	102.9	103.0	103.0	103.1	103.3
7,5°	120.6	120.2	120.1	120.1	119.8	119.6	119.7	119.6	119.8	120.3
10,0°	139.0	139.1	138.5	138.4	137.3	136.8	136.8	136.3	136.6	137.5
12,5°	152.1	151.2	150.5	150.5	149.0	148.4	148.7	147.7	147.9	149.4
15,0°	158.5	157.9	157.9	158.4	157.4	157.4	158.2	157.5	157.6	159.0
17,5°	169.1	168.6	169.4	170.4	170.6	171.4	172.2	172.4	172.1	172.5
20,0°	182.5	183.9	185.1	185.3	186.6	187.2	186.8	186.8	186.6	186.5
22,5°	198.4	198.7	199.5	198.7	200.2	200.0	198.4	199.1	198.5	197.4
25,0°	207.3	209.4	209.1	207.0	208.7	208.9	206.7	207.5	207.4	205.9
27,5°	214.5	216.3	216.8	214.4	215.4	215.5	214.3	214.7	214.1	213.5
30,0°	219.3	221.6	223.0	220.8	221.0	222.5	222.0	220.9	220.0	219.9
32,5°	228.9	230.3	232.4	230.1	228.5	229.7	230.3	229.4	230.0	229.4
35,0°	237.2	241.2	242.0	238.8	237.4	239.3	241.5	239.9	239.5	240.8
37,5°	248.9	251.0	250.2	248.6	251.3	252.2	253.8	251.9	252.2	254.2
40,0°	262.2	264.6	262.5	260.0	264.5	267.0	266.1	268.6	268.1	269.8
42,5°	275.2	277.3	275.3	277.1	278.3	279.3	279.4	282.4	282.6	279.4
45,0°	279.6	282.1	287.0	288.7	292.2	290.7	292.2	296.1	294.8	291.7
47,5°	286.3	293.2	297.7	297.9	300.9	300.6	298.1	302.0	305.3	303.3
50,0°	290.6	300.3	303.8	303.4	309.8	305.6	300.3	305.1	308.1	314.0
52,5°	305.3	309.2	306.5	306.3	307.5	303.2	302.8	307.5	311.9	319.4
55,0°	311.0	305.4	298.9	300.0	292.0	289.0	292.6	299.2	298.2	304.3
57,5°	282.2	276.7	270.3	271.8	266.1	264.4	268.1	272.4	272.2	276.3
60,0°	247.6	245.5	244.2	239.0	236.3	232.0	232.9	238.4	241.6	244.4
62,5°	205.4	209.1	210.1	207.7	204.4	198.0	200.9	206.1	205.1	205.5
65,0°	177.5	177.6	176.7	178.2	173.4	171.3	172.2	176.4	174.3	174.3
67,5°	143.2	143.6	143.1	145.0	143.3	140.0	143.1	149.0	147.3	144.4
70,0°	114.9	113.5	112.8	112.7	112.4	110.9	112.3	119.6	115.8	111.4
72,5°	78.2	80.5	81.1	78.8	75.5	76.3	77.9	81.3	79.6	74.4
75,0°	50.1	48.6	45.8	43.9	43.4	42.5	42.2	43.8	44.5	42.1
77,5°	21.0	22.0	20.5	20.2	21.3	21.4	20.6	22.0	22.3	21.2
80,0°	9.7	9.8	9.3	9.1	9.7	10.1	9.8	10.2	9.9	9.2
82,5°	4.6	4.9	4.8	4.7	4.8	4.9	4.7	4.9	4.9	4.8
85,0°	2.3	2.4	2.4	2.3	2.3	2.3	2.3	2.4	2.4	2.3
87,5°	1.2	1.2	1.2	1.2	1.2	1.2	1.1	1.2	1.1	1.1
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

## Photometric test report

<b>Family</b> <b>DL® 20 LED</b>	<b>Order number: 5XA51283WS008P</b> <b>EAN: 4058352271988</b>	<b>LP number</b> <b>59489_19</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
		<b>siteco</b>

C-planes $\gamma$	50°	55°	60°	65°	70°	75°	80°	85°	90°	Phi-zone	Total Phi-zone
	130° 230° 310°	125° 235° 305°	120° 240° 300°	115° 245° 295°	110° 250° 290°	105° 255° 285°	100° 260° 280°	95° 265° 275°			
Luminous intensity in cd/klm										Luminous flux in lm/klm	
0,0°	92.1	92.1	92.1	92.1	92.1	92.1	92.1	92.1	92.1	0.1	0.1
2,5°	93.6	93.6	93.8	93.7	93.8	93.9	94.0	94.0	94.0	1.1	1.3
5,0°	103.5	103.8	104.1	104.3	104.4	104.7	104.7	104.8	104.8	2.5	3.7
7,5°	120.8	121.4	122.0	122.4	122.6	123.0	123.1	123.2	123.3	4.3	8.1
10,0°	137.7	138.2	139.0	139.1	139.5	140.3	140.0	140.2	140.7	6.6	14.7
12,5°	149.2	149.7	150.7	150.0	150.0	150.8	150.0	149.8	150.7	8.9	23.5
15,0°	158.8	159.0	159.7	158.5	158.3	159.1	158.1	157.8	158.5	11.2	34.8
17,5°	172.6	172.6	172.5	172.3	172.4	172.6	172.5	172.7	172.9	14.2	48.9
20,0°	187.2	186.9	186.0	186.5	187.0	186.8	187.9	188.4	188.0	17.5	66.4
22,5°	198.9	198.8	197.2	198.1	198.3	197.6	199.7	199.8	198.5	20.8	87.3
25,0°	207.7	207.1	204.7	205.8	206.0	204.4	206.4	206.2	204.0	24.0	111.2
27,5°	215.2	215.1	211.4	213.0	213.8	212.2	213.4	213.2	211.2	27.1	138.3
30,0°	222.0	221.9	217.5	218.7	221.0	221.0	221.2	219.6	217.4	30.3	168.6
32,5°	230.7	230.2	225.0	226.1	228.5	226.7	226.4	226.4	224.8	33.7	202.3
35,0°	242.1	239.9	236.9	238.1	238.4	235.2	234.4	234.3	233.1	37.5	239.8
37,5°	257.9	254.0	251.8	253.1	250.1	245.3	243.6	245.6	246.2	41.9	281.6
40,0°	273.6	269.3	265.8	265.6	261.7	256.1	255.0	256.8	259.0	46.6	328.2
42,5°	285.3	281.6	279.0	274.3	269.2	263.3	265.7	264.5	267.2	51.1	379.3
45,0°	297.6	293.5	288.2	281.5	275.3	270.1	269.7	268.3	269.2	55.3	434.6
47,5°	302.4	302.0	297.7	297.7	286.4	279.5	278.0	272.6	267.2	59.4	494.0
50,0°	313.4	311.6	307.2	305.6	299.1	285.9	281.3	274.1	271.1	63.1	557.1
52,5°	323.8	318.5	305.3	297.3	291.6	281.4	286.1	278.0	266.0	65.8	622.9
55,0°	308.6	301.6	284.6	267.9	262.8	266.7	273.7	261.2	253.9	64.7	687.6
57,5°	281.4	273.7	260.4	243.6	239.6	241.8	248.4	242.0	234.7	60.7	748.3
60,0°	252.7	236.3	225.6	218.2	209.4	207.3	215.1	212.9	207.5	54.9	803.2
62,5°	210.3	199.3	188.5	191.6	187.9	180.1	183.3	184.8	175.8	48.1	851.3
65,0°	177.5	172.0	164.5	167.2	167.2	158.3	157.6	157.0	151.2	42.2	893.6
67,5°	143.0	139.2	137.6	142.5	139.9	135.1	129.6	129.7	130.3	35.6	929.2
70,0°	108.8	106.6	108.9	113.6	113.6	108.1	104.3	105.9	104.6	28.6	957.8
72,5°	72.6	73.7	76.1	79.3	78.8	76.0	73.7	73.5	74.9	20.1	977.9
75,0°	42.7	43.0	42.7	43.6	43.1	44.3	40.7	40.8	41.6	11.5	989.5
77,5°	21.9	21.5	21.5	22.1	20.4	19.9	19.5	19.9	19.4	5.6	995.1
80,0°	9.5	9.8	9.7	10.1	9.8	9.4	9.7	9.9	9.3	2.6	997.7
82,5°	4.9	5.0	4.9	5.3	5.0	4.8	5.1	5.2	4.9	1.3	999.0
85,0°	2.4	2.4	2.4	2.4	2.4	2.3	2.5	2.4	2.3	0.6	999.7
87,5°	1.2	1.1	1.2	1.2	1.2	1.2	1.2	1.1	1.2	0.3	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

## Photometric test report

<b>Family</b> DL® 20 LED	<b>Order number: 5XA51283WS008P</b> <b>EAN: 4058352271988</b>	<b>LP number</b> 59489_19
-----------------------------	--	------------------------------

<b>Dimming levels table</b>	environmental temperature: 25°C	<b>sITeco</b>
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Luminous flux [lm]	Power consumption [W] start of lifetime	Power consumption [W] end of lifetime	Power consumption [W] average
100	254	4250	34.3	35.1	34.7
95	241	4045	32.5	33.4	33.0
90	227	3823	30.6	31.5	31.0
85	214	3615	29.0	29.7	29.4
80	201	3406	27.2	27.9	27.6
75	188	3195	25.5	26.1	25.8
70	174	2967	23.7	24.3	24.0
65	162	2770	22.1	22.7	22.4
60	149	2556	20.5	21.0	20.8
55	136	2339	18.9	19.3	19.1
50	123	2121	17.2	17.6	17.4
45	111	1918	15.7	16.0	15.8
40	98	1698	14.1	14.4	14.2
35	86	1492	12.7	12.9	12.8
30	73	1269	11.1	11.4	11.2
25	61	1062	9.7	9.9	9.8
20	49	853	8.2	8.4	8.3
15	37	642	6.8	6.9	6.8
14	34	589	6.5	6.5	6.5