

Photometric test report

Family
DL® 20 LED

Order number: 5XA51283NS008
EAN: 4058352271858

LP number
59489_24



Version post-top mounting
Optic symmetric, wide distribution (PL1.2s)
Cover toughened safety glass
Lamps LED 4000 K | CRI ≥ 70
Controlgear ECG Plus
Rated values Net luminous flux = 3060 lm
Power consumption = 23.2 W
Luminous efficacy = 131.9 lm/W

serial
documentation
09.01.2024

siteco

Luminous intensity in cd/klm


C180-0

C230-50

C235-55

C270-90

Imax: 324 cd/klm

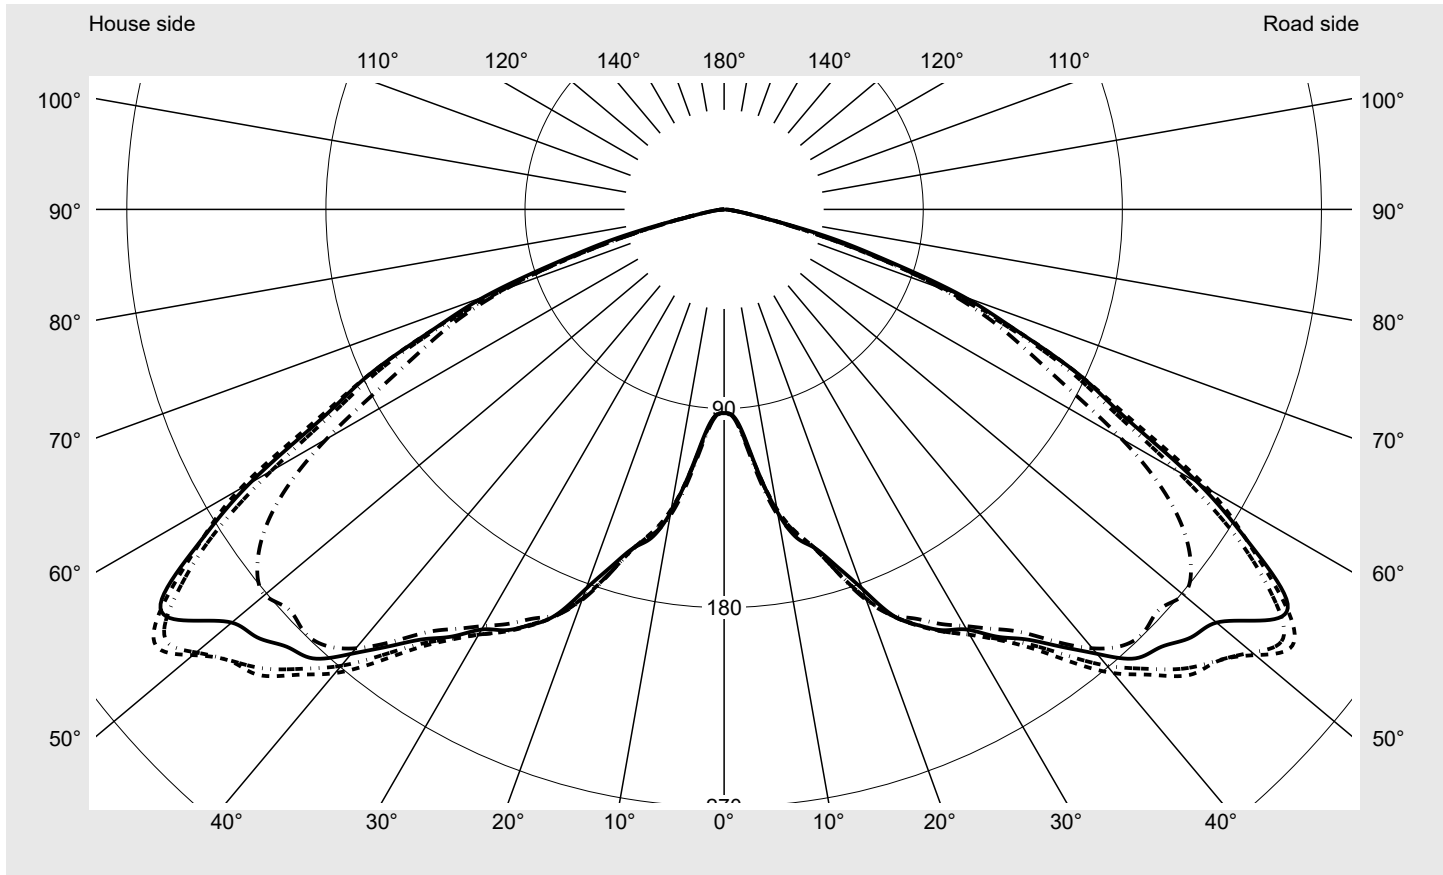

Luminaire output ratios

Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%

Luminous intensity class acc. to EN13201-2

Class:	G6
Imax 70°	119.6
Imax 80°	10.2
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0


Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family DL® 20 LED	Order number: 5XA51283NS008 EAN: 4058352271858	LP number 59489_24
------------------------------------	---	-------------------------------------

Envelope curve in cd/klm **KMK 52.5°** **KMK 50°** **KMK 47.5°** **KMK 45°** **siteco**

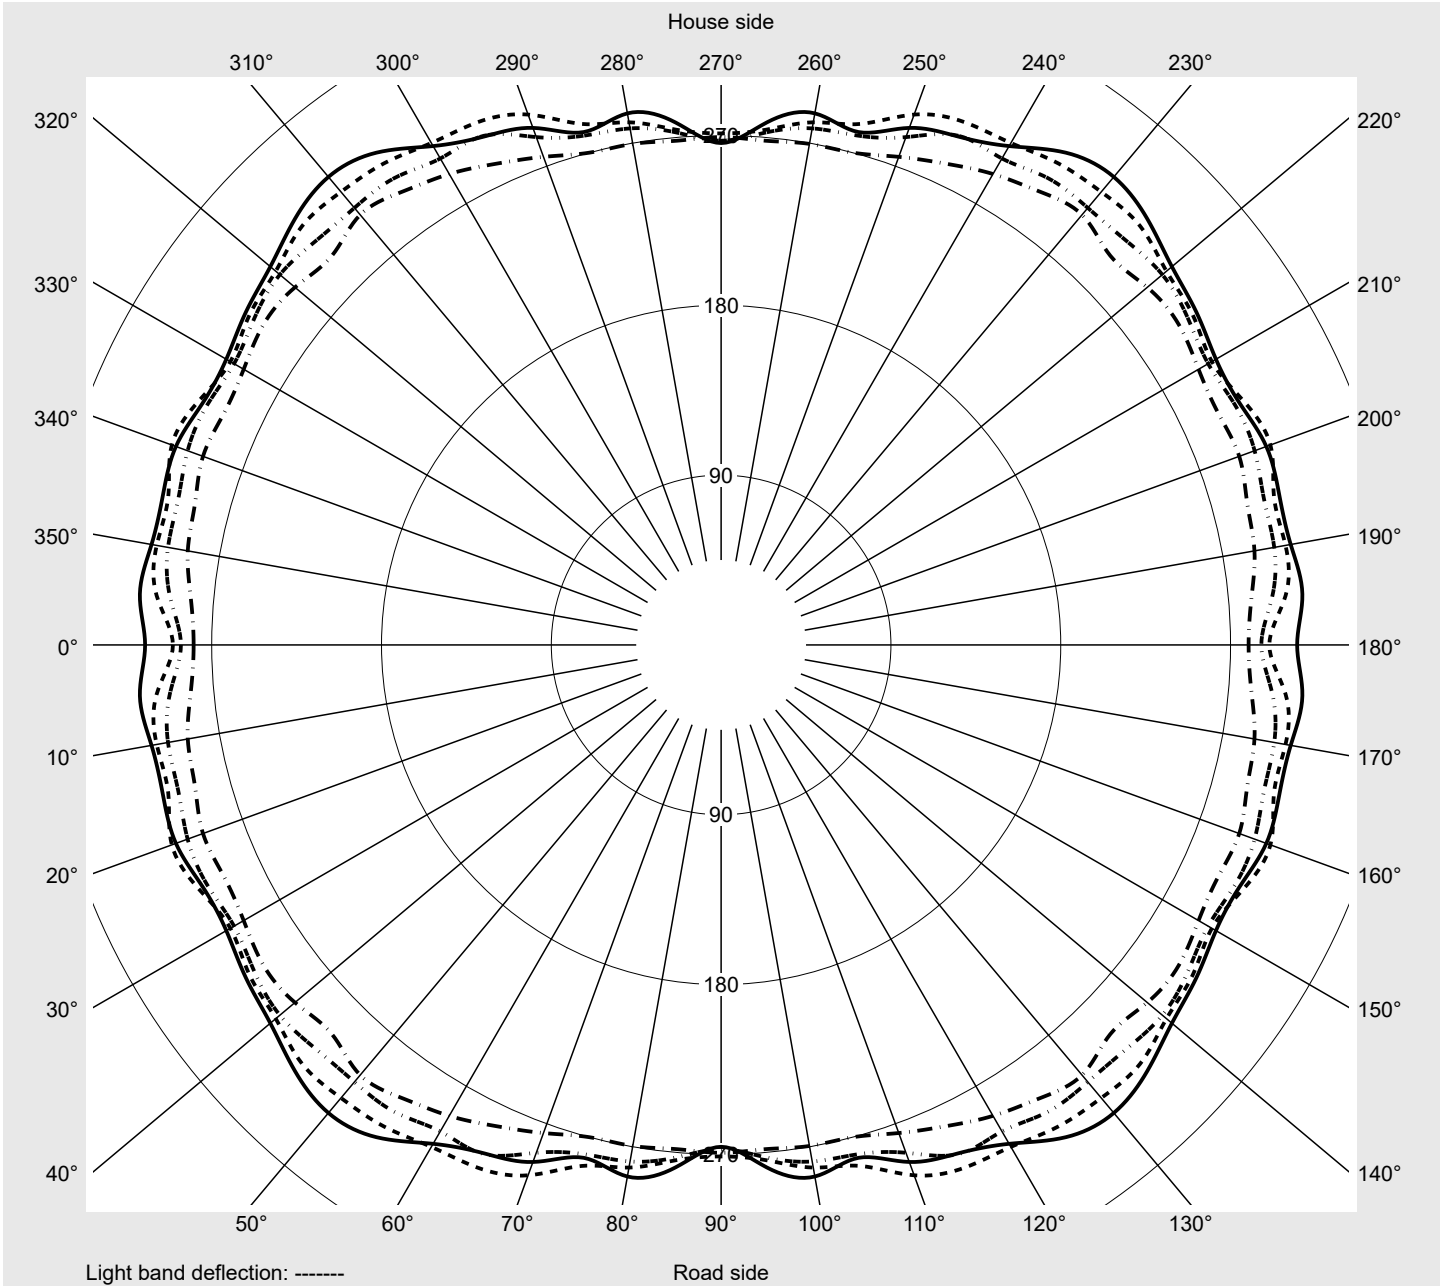

Photometric test report

Family DL® 20 LED	Order number: 5XA51283NS008 EAN: 4058352271858	LP number 59489_24
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	0° 180°	5°	10°	15°	20°	25°	30°	35°	40°	45°
		175° 185° 355°	170° 190° 350°	165° 195° 345°	160° 200° 340°	155° 205° 335°	150° 210° 330°	145° 215° 325°	140° 220° 320°	135° 225° 315°
Luminous intensity in cd/klm										
γ										
0,0°	92.1	92.1	92.1	92.1	92.1	92.1	92.1	92.1	92.1	92.1
2,5°	93.4	93.2	93.1	93.3	93.3	93.3	93.3	93.3	93.4	93.5
5,0°	102.6	102.9	102.9	103.0	102.9	102.9	103.0	103.0	103.1	103.3
7,5°	120.6	120.2	120.1	120.1	119.8	119.6	119.7	119.6	119.8	120.3
10,0°	139.0	139.1	138.5	138.4	137.3	136.8	136.8	136.3	136.6	137.5
12,5°	152.1	151.2	150.5	150.5	149.0	148.4	148.7	147.7	147.9	149.4
15,0°	158.5	157.9	157.9	158.4	157.4	157.4	158.2	157.5	157.6	159.0
17,5°	169.1	168.6	169.4	170.4	170.6	171.4	172.2	172.4	172.1	172.5
20,0°	182.5	183.9	185.1	185.3	186.6	187.2	186.8	186.8	186.6	186.5
22,5°	198.4	198.7	199.5	198.7	200.2	200.0	198.4	199.1	198.5	197.4
25,0°	207.3	209.4	209.1	207.0	208.7	208.9	206.7	207.5	207.4	205.9
27,5°	214.5	216.3	216.8	214.4	215.4	215.5	214.3	214.7	214.1	213.5
30,0°	219.3	221.6	223.0	220.8	221.0	222.5	222.0	220.9	220.0	219.9
32,5°	228.9	230.3	232.4	230.1	228.5	229.7	230.3	229.4	230.0	229.4
35,0°	237.2	241.2	242.0	238.8	237.4	239.3	241.5	239.9	239.5	240.8
37,5°	248.9	251.0	250.2	248.6	251.3	252.2	253.8	251.9	252.2	254.2
40,0°	262.2	264.6	262.5	260.0	264.5	267.0	266.1	268.6	268.1	269.8
42,5°	275.2	277.3	275.3	277.1	278.3	279.3	279.4	282.4	282.6	279.4
45,0°	279.6	282.1	287.0	288.7	292.2	290.7	292.2	296.1	294.8	291.7
47,5°	286.3	293.2	297.7	297.9	300.9	300.6	298.1	302.0	305.3	303.3
50,0°	290.6	300.3	303.8	303.4	309.8	305.6	300.3	305.1	308.1	314.0
52,5°	305.3	309.2	306.5	306.3	307.5	303.2	302.8	307.5	311.9	319.4
55,0°	311.0	305.4	298.9	300.0	292.0	289.0	292.6	299.2	298.2	304.3
57,5°	282.2	276.7	270.3	271.8	266.1	264.4	268.1	272.4	272.2	276.3
60,0°	247.6	245.5	244.2	239.0	236.3	232.0	232.9	238.4	241.6	244.4
62,5°	205.4	209.1	210.1	207.7	204.4	198.0	200.9	206.1	205.1	205.5
65,0°	177.5	177.6	176.7	178.2	173.4	171.3	172.2	176.4	174.3	174.3
67,5°	143.2	143.6	143.1	145.0	143.3	140.0	143.1	149.0	147.3	144.4
70,0°	114.9	113.5	112.8	112.7	112.4	110.9	112.3	119.6	115.8	111.4
72,5°	78.2	80.5	81.1	78.8	75.5	76.3	77.9	81.3	79.6	74.4
75,0°	50.1	48.6	45.8	43.9	43.4	42.5	42.2	43.8	44.5	42.1
77,5°	21.0	22.0	20.5	20.2	21.3	21.4	20.6	22.0	22.3	21.2
80,0°	9.7	9.8	9.3	9.1	9.7	10.1	9.8	10.2	9.9	9.2
82,5°	4.6	4.9	4.8	4.7	4.8	4.9	4.7	4.9	4.9	4.8
85,0°	2.3	2.4	2.4	2.3	2.3	2.3	2.3	2.4	2.4	2.3
87,5°	1.2	1.2	1.2	1.2	1.2	1.2	1.1	1.2	1.1	1.1
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family DL® 20 LED	Order number: 5XA51283NS008 EAN: 4058352271858	LP number 59489_24
Table of values for luminous intensities		Maximum luminous intensity
		sITeCO

C-planes γ	50°	55°	60°	65°	70°	75°	80°	85°	90°	Phi-zone	Total Phi-zone
	130° 230° 310°	125° 235° 305°	120° 240° 300°	115° 245° 295°	110° 250° 290°	105° 255° 285°	100° 260° 280°	95° 265° 275°			
Luminous intensity in cd/klm										Luminous flux in lm/klm	
0,0°	92.1	92.1	92.1	92.1	92.1	92.1	92.1	92.1	92.1	0.1	0.1
2,5°	93.6	93.6	93.8	93.7	93.8	93.9	94.0	94.0	94.0	1.1	1.3
5,0°	103.5	103.8	104.1	104.3	104.4	104.7	104.7	104.8	104.8	2.5	3.7
7,5°	120.8	121.4	122.0	122.4	122.6	123.0	123.1	123.2	123.3	4.3	8.1
10,0°	137.7	138.2	139.0	139.1	139.5	140.3	140.0	140.2	140.7	6.6	14.7
12,5°	149.2	149.7	150.7	150.0	150.0	150.8	150.0	149.8	150.7	8.9	23.5
15,0°	158.8	159.0	159.7	158.5	158.3	159.1	158.1	157.8	158.5	11.2	34.8
17,5°	172.6	172.6	172.5	172.3	172.4	172.6	172.5	172.7	172.9	14.2	48.9
20,0°	187.2	186.9	186.0	186.5	187.0	186.8	187.9	188.4	188.0	17.5	66.4
22,5°	198.9	198.8	197.2	198.1	198.3	197.6	199.7	199.8	198.5	20.8	87.3
25,0°	207.7	207.1	204.7	205.8	206.0	204.4	206.4	206.2	204.0	24.0	111.2
27,5°	215.2	215.1	211.4	213.0	213.8	212.2	213.4	213.2	211.2	27.1	138.3
30,0°	222.0	221.9	217.5	218.7	221.0	221.0	221.2	219.6	217.4	30.3	168.6
32,5°	230.7	230.2	225.0	226.1	228.5	226.7	226.4	226.4	224.8	33.7	202.3
35,0°	242.1	239.9	236.9	238.1	238.4	235.2	234.4	234.3	233.1	37.5	239.8
37,5°	257.9	254.0	251.8	253.1	250.1	245.3	243.6	245.6	246.2	41.9	281.6
40,0°	273.6	269.3	265.8	265.6	261.7	256.1	255.0	256.8	259.0	46.6	328.2
42,5°	285.3	281.6	279.0	274.3	269.2	263.3	265.7	264.5	267.2	51.1	379.3
45,0°	297.6	293.5	288.2	281.5	275.3	270.1	269.7	268.3	269.2	55.3	434.6
47,5°	302.4	302.0	297.7	297.7	286.4	279.5	278.0	272.6	267.2	59.4	494.0
50,0°	313.4	311.6	307.2	305.6	299.1	285.9	281.3	274.1	271.1	63.1	557.1
52,5°	323.8	318.5	305.3	297.3	291.6	281.4	286.1	278.0	266.0	65.8	622.9
55,0°	308.6	301.6	284.6	267.9	262.8	266.7	273.7	261.2	253.9	64.7	687.6
57,5°	281.4	273.7	260.4	243.6	239.6	241.8	248.4	242.0	234.7	60.7	748.3
60,0°	252.7	236.3	225.6	218.2	209.4	207.3	215.1	212.9	207.5	54.9	803.2
62,5°	210.3	199.3	188.5	191.6	187.9	180.1	183.3	184.8	175.8	48.1	851.3
65,0°	177.5	172.0	164.5	167.2	167.2	158.3	157.6	157.0	151.2	42.2	893.6
67,5°	143.0	139.2	137.6	142.5	139.9	135.1	129.6	129.7	130.3	35.6	929.2
70,0°	108.8	106.6	108.9	113.6	113.6	108.1	104.3	105.9	104.6	28.6	957.8
72,5°	72.6	73.7	76.1	79.3	78.8	76.0	73.7	73.5	74.9	20.1	977.9
75,0°	42.7	43.0	42.7	43.6	43.1	44.3	40.7	40.8	41.6	11.5	989.5
77,5°	21.9	21.5	21.5	22.1	20.4	19.9	19.5	19.9	19.4	5.6	995.1
80,0°	9.5	9.8	9.7	10.1	9.8	9.4	9.7	9.9	9.3	2.6	997.7
82,5°	4.9	5.0	4.9	5.3	5.0	4.8	5.1	5.2	4.9	1.3	999.0
85,0°	2.4	2.4	2.4	2.4	2.4	2.3	2.5	2.4	2.3	0.6	999.7
87,5°	1.2	1.1	1.2	1.2	1.2	1.2	1.2	1.1	1.2	0.3	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family DL® 20 LED	Order number: 5XA51283NS008 EAN: 4058352271858	LP number 59489_24
-----------------------------	---	------------------------------

Dimming levels table	environmental temperature: 25°C	sITeco
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Luminous flux [lm]	Power consumption [W] start of lifetime	Power consumption [W] end of lifetime	Power consumption [W] average
100	254	3060	23.2	23.7	23.4
95	241	2909	22.0	22.6	22.3
90	228	2758	20.9	21.4	21.2
85	215	2605	19.8	20.3	20.0
80	202	2452	18.7	19.1	18.9
75	189	2299	17.6	18.0	17.8
70	176	2144	16.5	16.9	16.7
65	163	1988	15.4	15.8	15.6
60	150	1833	14.3	14.7	14.5
55	138	1688	13.4	13.7	13.6
50	125	1531	12.4	12.6	12.5
45	112	1374	11.3	11.6	11.4
40	100	1227	10.4	10.6	10.5
35	87	1068	9.4	9.6	9.5
30	75	921	8.4	8.5	8.4
25	62	760	7.3	7.4	7.4
20	51	623	6.5	6.6	6.6