




Photometric test report

Family Licross® 21 Opal	Order number: 52TE1DCN485G EAN: 4058352056707	LP number 59520_105
	Version cover, opal, direct-/ indirect distribution, diffuse Lamps LED 4000 K CRI ≥ 80 Controlgear ECG-Multilumen CLOi Rated values Net luminous flux = 8780 lm Power consumption = 49.9 W Luminous efficacy = 176 lm/W	serial documentation 29.01.2024





Luminous intensity in cd/klm C180-0 C270-90 **Imax: 294 cd/klm**

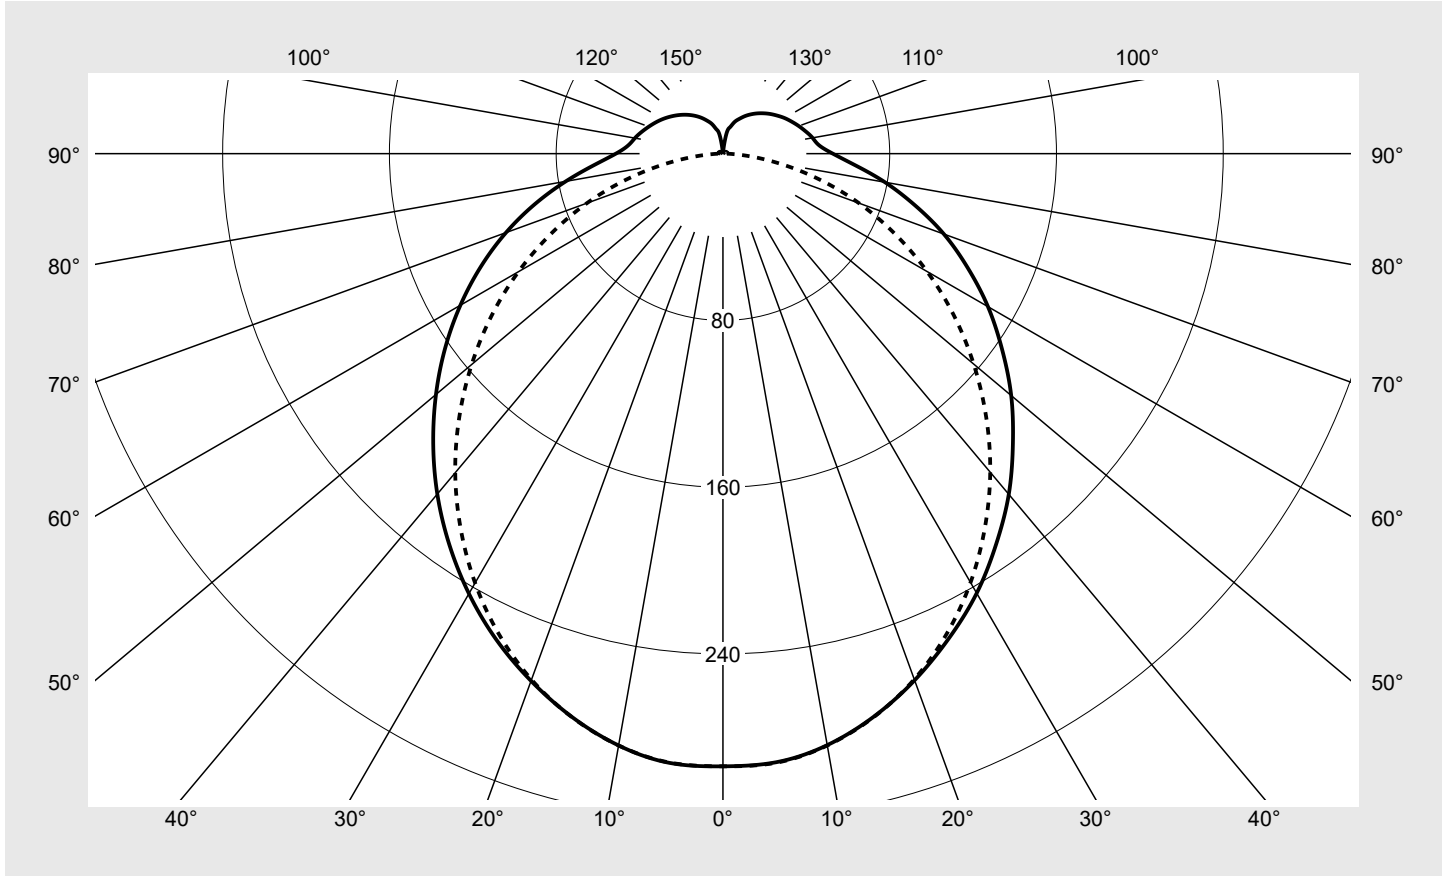

Classifications	
DIN 5040	B 3 1
CIE	N1=44 N2=73 N3=91 N4=87 N5=100

Luminaire light output ratios	
η_{LB}	100.0%
ϕ_u	87.4%
ϕ_o	12.6%

Measurement conditions
DIN EN 13032 and DIN 5032

Photometric test report

Family Licross® 21 Opal	Order number: 52TE1DCN485G EAN: 4058352056707	LP number 59520_105
--	--	--------------------------------------

Table of values for luminous intensities	Maximum luminous intensity	siteco
---	-----------------------------------	---------------

C-planes	0°	15°	30°	45°	60°	75°	90°	105°	120°	135°	150°	165°	180°
γ	Luminous intensity in cd/klm												
0°	293.9	293.9	293.9	293.9	293.9	293.9	293.9	293.9	293.9	293.9	293.9	293.9	293.9
5°	293.1	292.7	289.9	291.0	293.1	293.0	293.3	293.1	293.1	292.5	291.2	291.6	293.4
10°	288.1	287.8	285.0	286.0	288.1	287.9	288.3	288.0	288.0	287.5	286.2	286.7	288.3
15°	279.6	279.4	276.6	277.6	279.6	279.4	279.8	279.5	279.5	279.0	277.7	278.4	279.8
20°	268.8	268.4	265.5	266.2	268.1	267.8	268.3	268.1	268.0	267.5	266.6	267.8	269.2
25°	256.5	256.4	252.9	252.4	253.9	253.4	254.1	253.8	253.8	253.6	254.0	255.9	257.2
30°	243.5	242.9	239.1	237.4	237.4	236.9	237.6	237.4	237.5	238.5	240.0	242.5	243.7
35°	228.6	228.2	223.9	221.1	219.2	218.5	219.1	218.9	219.7	221.9	224.6	227.5	228.9
40°	213.3	212.5	208.1	204.0	200.4	198.8	199.5	199.5	201.1	204.3	208.6	211.7	213.2
45°	196.7	195.9	191.2	185.9	180.8	177.8	178.6	178.3	181.6	186.0	191.4	194.8	196.6
50°	180.5	179.0	174.4	167.8	161.5	156.5	157.0	156.9	161.7	167.6	173.9	177.7	179.7
55°	163.4	162.0	157.2	149.2	141.7	135.1	135.2	135.5	141.8	149.1	156.1	160.5	162.7
60°	146.8	144.8	139.8	131.0	122.1	114.1	113.1	114.2	121.9	130.6	138.3	143.3	145.4
65°	129.6	127.7	122.3	112.9	103.0	93.4	91.0	93.7	102.6	112.1	120.5	126.2	128.1
70°	112.8	110.6	104.4	95.0	83.9	73.2	69.4	73.2	83.4	93.6	102.3	109.1	110.8
75°	95.2	93.5	86.3	76.8	64.8	53.0	48.0	53.1	64.1	74.9	84.3	91.4	93.3
80°	78.9	76.8	69.4	59.0	47.0	34.5	28.0	34.2	45.8	57.3	67.7	74.1	76.6
85°	63.7	61.7	54.7	44.0	31.4	18.8	11.3	18.6	30.6	42.7	52.6	59.2	61.9
90°	52.7	50.3	47.2	33.6	21.8	9.7	1.7	9.7	21.3	32.8	42.6	49.1	51.4
95°	46.3	44.0	38.4	29.9	19.4	8.9	1.8	8.9	19.3	29.6	38.3	43.8	45.6
100°	43.6	41.6	36.5	28.4	19.0	9.0	2.1	8.7	18.6	27.9	35.8	41.3	42.9
105°	41.1	39.4	34.3	27.0	18.2	9.1	2.1	8.8	17.9	26.7	33.7	38.6	40.4
110°	38.7	36.7	32.3	25.7	17.6	9.2	2.0	8.7	17.0	25.1	31.7	36.0	37.9
115°	36.4	34.4	30.4	24.3	17.0	9.3	1.9	8.8	16.4	23.6	29.8	33.7	35.5
120°	34.1	32.2	28.7	23.1	16.5	9.4	1.8	8.8	15.7	22.3	27.9	31.4	33.2
125°	31.8	30.1	26.8	21.8	15.8	9.4	1.6	8.8	15.0	21.0	26.0	29.2	30.9
130°	29.6	27.9	25.1	20.7	15.3	9.5	1.4	8.7	14.3	19.7	24.1	27.1	28.6
135°	27.4	25.8	23.3	19.5	14.6	8.1	1.3	7.6	13.7	18.5	22.3	24.9	26.4
140°	25.2	23.7	21.6	18.3	13.6	7.0	1.3	6.4	12.7	17.1	20.5	22.8	24.2
145°	23.0	21.6	19.8	16.6	12.1	6.4	1.2	5.9	11.1	15.6	18.8	20.7	21.9
150°	20.7	19.6	18.1	14.3	11.0	6.2	1.3	6.0	9.5	13.3	16.9	18.6	19.6
155°	18.4	17.4	15.6	12.5	8.2	5.5	1.3	5.2	7.5	11.1	14.5	16.4	17.3
160°	16.1	15.3	12.6	10.0	7.9	5.1	1.4	4.6	6.8	7.9	11.7	14.3	14.9
165°	13.1	12.1	8.6	7.8	8.1	5.4	1.4	4.8	6.9	7.0	6.9	11.2	12.1
170°	9.8	7.7	7.3	8.0	6.5	2.9	1.4	2.2	5.4	6.7	6.3	6.6	8.9
175°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Licross® 21 Opal	Order number: 52TE1DCN485G EAN: 4058352056707	LP number 59520_105
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	195°	210°	225°	240°	255°	270°	285°	300°	315°	330°	345°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0°	293.9	293.9	293.9	293.9	293.9	293.9	293.9	293.9	293.9	293.9	293.9	1.8	1.8
5°	292.9	289.8	290.9	292.8	292.8	293.2	292.8	292.9	292.3	291.2	292.0	14.0	15.7
10°	288.0	285.0	285.8	287.9	287.8	288.3	287.9	288.0	287.3	286.3	287.0	27.3	43.1
15°	279.5	276.7	277.5	279.4	279.4	279.9	279.5	279.5	278.9	277.9	279.0	39.6	82.6
20°	268.9	265.7	266.2	268.0	267.9	268.5	268.2	268.1	267.5	266.6	267.7	50.2	132.8
25°	256.9	253.4	252.5	253.8	253.6	254.3	254.0	254.0	253.5	253.8	256.1	58.9	191.7
30°	243.4	239.6	237.7	237.4	237.1	237.8	237.6	237.8	238.3	239.7	242.3	65.6	257.3
35°	228.5	224.4	221.4	219.4	218.7	219.4	219.3	219.8	221.8	224.6	228.0	70.0	327.3
40°	212.7	208.2	204.2	200.7	198.9	199.8	199.8	201.1	204.3	208.6	211.9	72.3	399.6
45°	195.8	191.1	185.9	181.0	177.8	178.9	178.7	181.7	186.2	191.6	195.6	72.3	472.0
50°	178.6	174.0	167.6	161.4	156.5	157.3	157.3	162.0	168.0	174.3	178.3	70.5	542.5
55°	161.2	156.5	148.8	141.5	135.3	135.5	135.8	142.2	149.7	156.9	161.8	66.9	609.4
60°	143.7	138.7	130.1	121.6	114.2	113.3	114.6	122.5	131.3	139.3	144.4	61.7	671.1
65°	126.5	121.0	111.8	102.3	93.3	91.1	94.0	103.2	113.1	121.8	128.0	55.2	726.3
70°	109.1	102.8	93.5	83.0	72.9	69.4	73.6	84.1	94.6	103.5	110.4	47.6	773.9
75°	91.6	84.7	75.4	63.7	52.5	47.9	53.5	65.0	76.2	85.9	93.4	39.0	812.9
80°	74.9	67.7	57.5	45.8	33.9	27.9	34.5	46.6	58.5	69.1	75.6	30.2	843.1
85°	59.9	53.1	42.6	30.4	18.3	11.1	18.9	31.3	43.7	53.8	61.1	22.2	865.3
90°	49.1	42.6	32.8	21.3	9.6	1.7	9.7	21.6	33.2	43.3	50.0	16.9	882.1
95°	43.4	38.0	29.6	19.2	8.8	1.8	8.9	19.4	29.7	38.6	44.5	14.9	897.1
100°	41.0	35.9	27.9	18.7	8.8	2.1	8.9	18.7	28.1	36.1	41.8	14.0	911.1
105°	38.7	33.7	26.5	17.8	8.7	2.1	9.0	18.1	27.0	34.2	39.3	13.1	924.2
110°	35.9	31.6	25.0	17.1	8.8	2.0	9.1	17.4	25.5	32.1	36.6	12.0	936.2
115°	33.6	29.7	23.6	16.4	8.7	1.9	9.3	16.9	24.2	30.4	34.4	11.0	947.2
120°	31.4	27.9	22.4	15.7	8.8	1.8	9.3	16.2	22.9	28.6	32.2	9.9	957.1
125°	29.2	26.0	21.1	15.0	8.7	1.6	9.4	15.7	21.7	26.8	30.1	8.9	966.0
130°	27.0	24.2	19.8	14.4	8.7	1.4	9.4	15.1	20.5	24.9	27.8	7.8	973.7
135°	24.9	22.4	18.6	13.7	7.3	1.3	8.2	14.6	19.3	23.2	25.8	6.7	980.4
140°	22.7	20.6	17.3	12.7	6.4	1.3	7.0	13.5	18.0	21.5	23.6	5.6	986.0
145°	20.6	18.9	15.7	11.3	5.8	1.2	6.5	12.0	15.8	19.8	21.6	4.5	990.5
150°	18.5	17.0	13.4	10.2	6.1	1.3	6.3	10.3	14.2	17.9	19.5	3.5	994.0
155°	16.4	14.6	11.8	7.5	4.9	1.3	5.8	8.1	12.0	15.5	17.4	2.6	996.6
160°	14.2	11.8	9.1	7.1	4.6	1.4	5.2	7.3	8.7	12.7	15.3	1.8	998.3
165°	11.1	8.0	7.1	7.6	4.8	1.4	5.5	7.3	7.6	7.6	12.0	1.1	999.4
170°	6.9	7.3	7.0	5.8	2.1	1.4	3.1	6.1	7.5	6.2	7.2	0.6	1000.0
175°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Licross® 21 Opal	Order number: 52TE1DCN485G EAN: 4058352056707	LP number 59520_105
-----------------------------------	--	-------------------------------


UGR-Table		Standard room									
Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		View crosswise (C0)					View endwise (C90)				
x	y										
2H	2H	21.3	22.9	21.8	23.3	23.8	21.0	22.5	21.4	23.0	23.5
	3H	23.3	24.7	23.7	25.1	25.7	22.5	24.0	23.0	24.4	24.9
	4H	24.1	25.4	24.6	25.9	26.4	23.0	24.4	23.6	24.9	25.4
	6H	24.8	26.0	25.4	26.6	27.2	23.4	24.6	23.9	25.2	25.8
	8H	25.2	26.4	25.8	26.9	27.5	23.6	24.7	24.1	25.3	25.9
	12H	25.5	26.6	26.1	27.2	27.8	23.6	24.7	24.1	25.2	25.9
4H	2H	22.0	23.3	22.5	23.8	24.4	21.7	23.0	22.2	23.5	24.1
	3H	24.0	25.2	24.6	25.7	26.3	23.4	24.5	23.9	25.0	25.6
	4H	25.1	26.1	25.6	26.6	27.3	24.1	25.1	24.6	25.6	26.3
	6H	26.0	26.9	26.6	27.5	28.2	24.5	25.4	25.1	26.0	26.7
	8H	26.5	27.3	27.1	27.9	28.6	24.7	25.6	25.3	26.2	26.8
	12H	26.9	27.6	27.5	28.2	28.9	24.8	25.5	25.4	26.2	26.9
8H	4H	25.4	26.2	26.0	26.8	27.5	24.5	25.3	25.1	25.9	26.6
	6H	26.5	27.2	27.1	27.8	28.6	25.1	25.8	25.8	26.5	27.2
	8H	27.1	27.7	27.7	28.3	29.1	25.4	26.0	26.0	26.7	27.4
	12H	27.6	28.2	28.3	28.8	29.6	25.5	26.1	26.2	26.7	27.5
12H	4H	25.3	26.1	26.0	26.7	27.4	24.5	25.2	25.1	25.8	26.6
	6H	26.5	27.1	27.2	27.8	28.6	25.3	25.8	25.9	26.5	27.3
	8H	27.2	27.7	27.9	28.4	29.2	25.6	26.1	26.2	26.8	27.5

Luminance table		Max. for $\gamma \geq 65^\circ$										Photometric dimensions in mm:		L = 1500	H(C0) = 25	H(C180) = 25
												B = 76	H(C90) = 25	H(C270) = 25		
C-planes	γ	0°	30°	60°	90°	120°	150°	180°	210°	240°	270°	300°	330°			
		Luminance in cd/m ²														
45°		16123.1	16104.7	16708.0	19131.2	16775.3	16118.4	16109.9	16097.9	16723.0	19165.9	16782.8	16138.8			
50°		15538.0	15481.7	15947.6	18447.5	15971.7	15438.5	15468.3	15445.7	15939.6	18485.6	15995.7	15474.5			
55°		14929.8	14876.4	15155.6	17735.5	15164.3	14776.8	14863.2	14807.4	15138.3	17767.3	15207.6	14853.4			
60°		14406.2	14277.6	14358.5	16933.6	14339.4	14128.6	14271.1	14169.9	14301.3	16957.9	14406.1	14227.9			
65°		13844.0	13679.5	13563.1	16009.4	13509.7	13480.0	13688.1	13543.5	13467.1	16023.6	13595.1	13625.1			
70°		13340.3	13014.9	12672.6	14951.3	12587.0	12752.1	13100.8	12822.8	12525.9	14951.3	12697.1	12913.9			
75°		12717.1	12260.7	11570.0	13444.3	11435.7	11984.3	12468.2	12030.4	11372.0	13423.8	11594.6	12203.2			
80°		12214.5	11565.2	10347.4	11330.5	10092.2	11281.9	11850.8	11268.4	10081.7	11287.5	10265.3	11511.2			
85°		11818.4	11099.9	9106.9	8365.4	8881.1	10680.3	11486.0	10775.8	8808.3	8269.7	9083.4	10933.5			

Photometric test report

Family Licross® 21 Opal	Order number: 52TE1DCN485G EAN: 4058352056707	LP number 59520_105
--	--	--------------------------------------

Luminance values in cd/m² γ 65° γ 70° γ 75° γ 80° γ 85° **siteco**

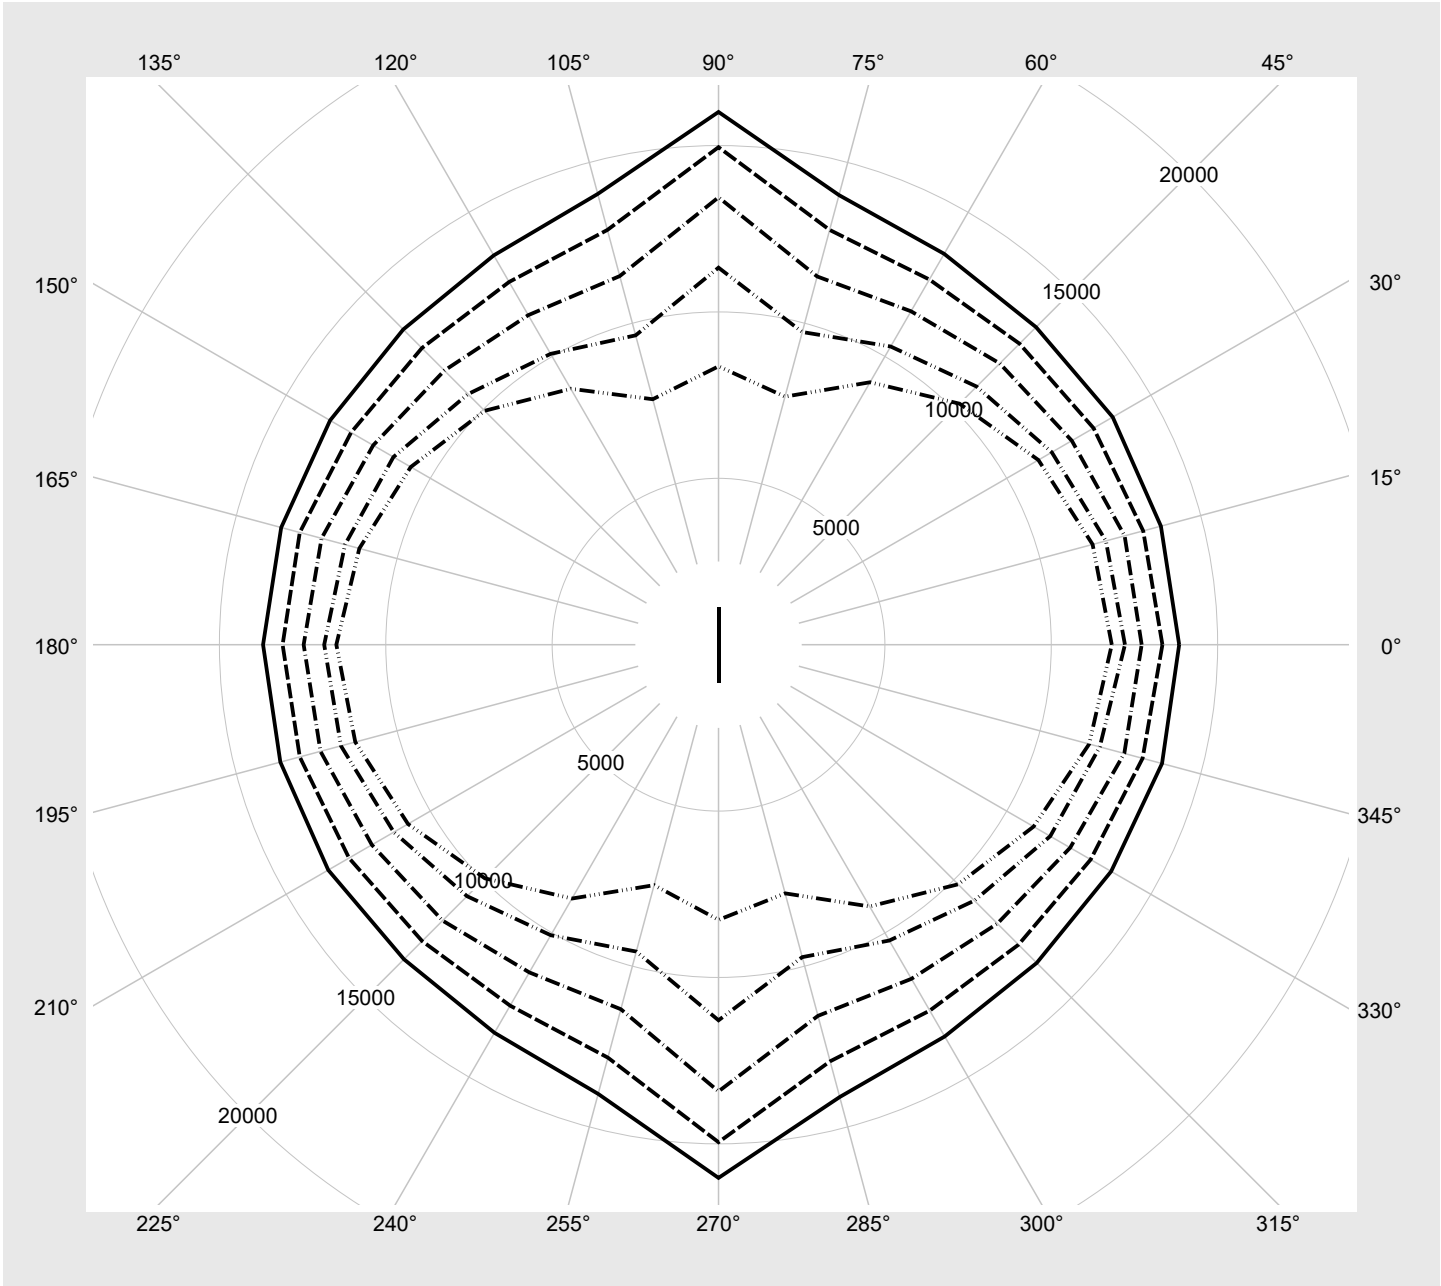

Photometric test report

Family Licross® 21 Opal	Order number: 52TE1DCN485G EAN: 4058352056707	LP number 59520_105
-----------------------------------	--	--------------------------------------

Multilumen Table	environmental temperature: 25°C	sITeco
-------------------------	---------------------------------	---------------

DIP-Step	Switch Setting			Luminous flux [lm]	Power consumption [W]	Power consumption	Power consumption
	1	2	3			[W] end of lifetime	[W] average
1	A	C	E	8780	49.9	60.5	55.2
2	A	C	F	8360	47.3	56.9	52.1
3	A	D	E	7866	44.4	53.4	48.9
4	A	D	F	7362	41.4	49.5	45.4
5	B	C	E	6858	38.4	45.6	42.0
6	B	C	F	6343	35.3	42.2	38.8
7	B	D	E	5902	32.8	39.2	36.0
8	B	D	F	5388	29.9	35.3	32.6