




# Photometric test report

<b>Family</b> <b>Licross® 21 Opal</b>	<b>Order number: 52TE1DVN445G</b> <b>EAN: 4058352052037</b>	<b>LP number</b> <b>59520_95</b>
	<b>Version</b> cover, opal, direct-/ indirect distribution, diffuse <b>Lamps</b> LED 4000 K   CRI ≥ 80 <b>Controlgear</b> ECG-DALI CLO <b>Rated values</b> Net luminous flux = 4500 lm Power consumption = 25.8 W Luminous efficacy = 174.4 lm/W	<b>serial documentation</b> <b>29.01.2024</b>





**Luminous intensity in cd/klm** C180-0 C270-90 **Imax: 294 cd/klm**

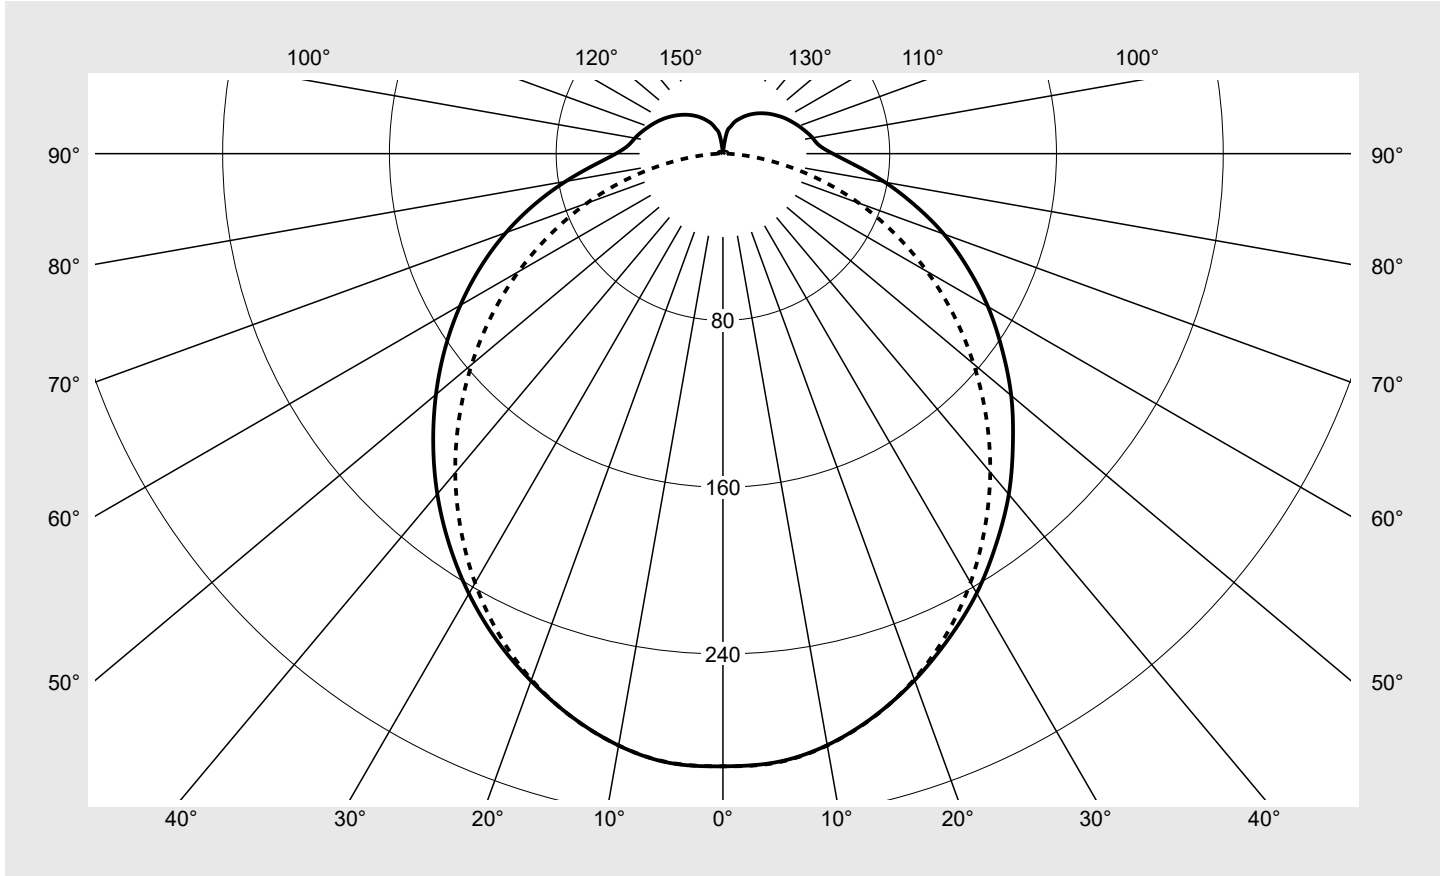

Classifications	
DIN 5040	B 3 1
CIE	N1=44 N2=73 N3=91 N4=87 N5=100

Luminaire light output ratios	
$\eta_{LB}$	100.0%
$\phi_u$	87.4%
$\phi_o$	12.6%

**Measurement conditions**  
DIN EN 13032 and DIN 5032

## Photometric test report

<b>Family</b> <b>Licross® 21 Opal</b>	<b>Order number: 52TE1DVN445G</b> <b>EAN: 4058352052037</b>	<b>LP number</b> <b>59520_95</b>
--	--	-------------------------------------

<b>Table of values for luminous intensities</b>	<b>Maximum luminous intensity</b>	<b>siteco</b>
---	-----------------------------------	---------------

C-planes	0°	15°	30°	45°	60°	75°	90°	105°	120°	135°	150°	165°	180°
$\gamma$	Luminous intensity in cd/klm												
0°	293.9	293.9	293.9	293.9	293.9	293.9	293.9	293.9	293.9	293.9	293.9	293.9	293.9
5°	293.1	292.7	289.9	291.0	293.1	293.0	293.3	293.1	293.1	292.5	291.2	291.6	293.4
10°	288.1	287.8	285.0	286.0	288.1	287.9	288.3	288.0	288.0	287.5	286.2	286.7	288.3
15°	279.6	279.4	276.6	277.6	279.6	279.4	279.8	279.5	279.5	279.0	277.7	278.4	279.8
20°	268.8	268.4	265.5	266.2	268.1	267.8	268.3	268.1	268.0	267.5	266.6	267.8	269.2
25°	256.5	256.4	252.9	252.4	253.9	253.4	254.1	253.8	253.8	253.6	254.0	255.9	257.2
30°	243.5	242.9	239.1	237.4	237.4	236.9	237.6	237.4	237.5	238.5	240.0	242.5	243.7
35°	228.6	228.2	223.9	221.1	219.2	218.5	219.1	218.9	219.7	221.9	224.6	227.5	228.9
40°	213.3	212.5	208.1	204.0	200.4	198.8	199.5	199.5	201.1	204.3	208.6	211.7	213.2
45°	196.7	195.9	191.2	185.9	180.8	177.8	178.6	178.3	181.6	186.0	191.4	194.8	196.6
50°	180.5	179.0	174.4	167.8	161.5	156.5	157.0	156.9	161.7	167.6	173.9	177.7	179.7
55°	163.4	162.0	157.2	149.2	141.7	135.1	135.2	135.5	141.8	149.1	156.1	160.5	162.7
60°	146.8	144.8	139.8	131.0	122.1	114.1	113.1	114.2	121.9	130.6	138.3	143.3	145.4
65°	129.6	127.7	122.3	112.9	103.0	93.4	91.0	93.7	102.6	112.1	120.5	126.2	128.1
70°	112.8	110.6	104.4	95.0	83.9	73.2	69.4	73.2	83.4	93.6	102.3	109.1	110.8
75°	95.2	93.5	86.3	76.8	64.8	53.0	48.0	53.1	64.1	74.9	84.3	91.4	93.3
80°	78.9	76.8	69.4	59.0	47.0	34.5	28.0	34.2	45.8	57.3	67.7	74.1	76.6
85°	63.7	61.7	54.7	44.0	31.4	18.8	11.3	18.6	30.6	42.7	52.6	59.2	61.9
90°	52.7	50.3	47.2	33.6	21.8	9.7	1.7	9.7	21.3	32.8	42.6	49.1	51.4
95°	46.3	44.0	38.4	29.9	19.4	8.9	1.8	8.9	19.3	29.6	38.3	43.8	45.6
100°	43.6	41.6	36.5	28.4	19.0	9.0	2.1	8.7	18.6	27.9	35.8	41.3	42.9
105°	41.1	39.4	34.3	27.0	18.2	9.1	2.1	8.8	17.9	26.7	33.7	38.6	40.4
110°	38.7	36.7	32.3	25.7	17.6	9.2	2.0	8.7	17.0	25.1	31.7	36.0	37.9
115°	36.4	34.4	30.4	24.3	17.0	9.3	1.9	8.8	16.4	23.6	29.8	33.7	35.5
120°	34.1	32.2	28.7	23.1	16.5	9.4	1.8	8.8	15.7	22.3	27.9	31.4	33.2
125°	31.8	30.1	26.8	21.8	15.8	9.4	1.6	8.8	15.0	21.0	26.0	29.2	30.9
130°	29.6	27.9	25.1	20.7	15.3	9.5	1.4	8.7	14.3	19.7	24.1	27.1	28.6
135°	27.4	25.8	23.3	19.5	14.6	8.1	1.3	7.6	13.7	18.5	22.3	24.9	26.4
140°	25.2	23.7	21.6	18.3	13.6	7.0	1.3	6.4	12.7	17.1	20.5	22.8	24.2
145°	23.0	21.6	19.8	16.6	12.1	6.4	1.2	5.9	11.1	15.6	18.8	20.7	21.9
150°	20.7	19.6	18.1	14.3	11.0	6.2	1.3	6.0	9.5	13.3	16.9	18.6	19.6
155°	18.4	17.4	15.6	12.5	8.2	5.5	1.3	5.2	7.5	11.1	14.5	16.4	17.3
160°	16.1	15.3	12.6	10.0	7.9	5.1	1.4	4.6	6.8	7.9	11.7	14.3	14.9
165°	13.1	12.1	8.6	7.8	8.1	5.4	1.4	4.8	6.9	7.0	6.9	11.2	12.1
170°	9.8	7.7	7.3	8.0	6.5	2.9	1.4	2.2	5.4	6.7	6.3	6.6	8.9
175°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

## Photometric test report

<b>Family</b> <b>Licross® 21 Opal</b>	<b>Order number: 52TE1DVN445G</b> <b>EAN: 4058352052037</b>	<b>LP number</b> <b>59520_95</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
		<b>siteco</b>

C-planes	195°	210°	225°	240°	255°	270°	285°	300°	315°	330°	345°	Phi-zone	Total Phi-zone
$\gamma$	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0°	293.9	293.9	293.9	293.9	293.9	293.9	293.9	293.9	293.9	293.9	293.9	1.8	1.8
5°	292.9	289.8	290.9	292.8	292.8	293.2	292.8	292.9	292.3	291.2	292.0	14.0	15.7
10°	288.0	285.0	285.8	287.9	287.8	288.3	287.9	288.0	287.3	286.3	287.0	27.3	43.1
15°	279.5	276.7	277.5	279.4	279.4	279.9	279.5	279.5	278.9	277.9	279.0	39.6	82.6
20°	268.9	265.7	266.2	268.0	267.9	268.5	268.2	268.1	267.5	266.6	267.7	50.2	132.8
25°	256.9	253.4	252.5	253.8	253.6	254.3	254.0	254.0	253.5	253.8	256.1	58.9	191.7
30°	243.4	239.6	237.7	237.4	237.1	237.8	237.6	237.8	238.3	239.7	242.3	65.6	257.3
35°	228.5	224.4	221.4	219.4	218.7	219.4	219.3	219.8	221.8	224.6	228.0	70.0	327.3
40°	212.7	208.2	204.2	200.7	198.9	199.8	199.8	201.1	204.3	208.6	211.9	72.3	399.6
45°	195.8	191.1	185.9	181.0	177.8	178.9	178.7	181.7	186.2	191.6	195.6	72.3	472.0
50°	178.6	174.0	167.6	161.4	156.5	157.3	157.3	162.0	168.0	174.3	178.3	70.5	542.5
55°	161.2	156.5	148.8	141.5	135.3	135.5	135.8	142.2	149.7	156.9	161.8	66.9	609.4
60°	143.7	138.7	130.1	121.6	114.2	113.3	114.6	122.5	131.3	139.3	144.4	61.7	671.1
65°	126.5	121.0	111.8	102.3	93.3	91.1	94.0	103.2	113.1	121.8	128.0	55.2	726.3
70°	109.1	102.8	93.5	83.0	72.9	69.4	73.6	84.1	94.6	103.5	110.4	47.6	773.9
75°	91.6	84.7	75.4	63.7	52.5	47.9	53.5	65.0	76.2	85.9	93.4	39.0	812.9
80°	74.9	67.7	57.5	45.8	33.9	27.9	34.5	46.6	58.5	69.1	75.6	30.2	843.1
85°	59.9	53.1	42.6	30.4	18.3	11.1	18.9	31.3	43.7	53.8	61.1	22.2	865.3
90°	49.1	42.6	32.8	21.3	9.6	1.7	9.7	21.6	33.2	43.3	50.0	16.9	882.1
95°	43.4	38.0	29.6	19.2	8.8	1.8	8.9	19.4	29.7	38.6	44.5	14.9	897.1
100°	41.0	35.9	27.9	18.7	8.8	2.1	8.9	18.7	28.1	36.1	41.8	14.0	911.1
105°	38.7	33.7	26.5	17.8	8.7	2.1	9.0	18.1	27.0	34.2	39.3	13.1	924.2
110°	35.9	31.6	25.0	17.1	8.8	2.0	9.1	17.4	25.5	32.1	36.6	12.0	936.2
115°	33.6	29.7	23.6	16.4	8.7	1.9	9.3	16.9	24.2	30.4	34.4	11.0	947.2
120°	31.4	27.9	22.4	15.7	8.8	1.8	9.3	16.2	22.9	28.6	32.2	9.9	957.1
125°	29.2	26.0	21.1	15.0	8.7	1.6	9.4	15.7	21.7	26.8	30.1	8.9	966.0
130°	27.0	24.2	19.8	14.4	8.7	1.4	9.4	15.1	20.5	24.9	27.8	7.8	973.7
135°	24.9	22.4	18.6	13.7	7.3	1.3	8.2	14.6	19.3	23.2	25.8	6.7	980.4
140°	22.7	20.6	17.3	12.7	6.4	1.3	7.0	13.5	18.0	21.5	23.6	5.6	986.0
145°	20.6	18.9	15.7	11.3	5.8	1.2	6.5	12.0	15.8	19.8	21.6	4.5	990.5
150°	18.5	17.0	13.4	10.2	6.1	1.3	6.3	10.3	14.2	17.9	19.5	3.5	994.0
155°	16.4	14.6	11.8	7.5	4.9	1.3	5.8	8.1	12.0	15.5	17.4	2.6	996.6
160°	14.2	11.8	9.1	7.1	4.6	1.4	5.2	7.3	8.7	12.7	15.3	1.8	998.3
165°	11.1	8.0	7.1	7.6	4.8	1.4	5.5	7.3	7.6	7.6	12.0	1.1	999.4
170°	6.9	7.3	7.0	5.8	2.1	1.4	3.1	6.1	7.5	6.2	7.2	0.6	1000.0
175°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

## Photometric test report

<b>Family</b> Licross® 21 Opal	<b>Order number: 52TE1DVN445G</b> <b>EAN: 4058352052037</b>	<b>LP number</b> 59520_95
-----------------------------------	--	------------------------------

siteco


UGR-Table		Standard room									
Room dimensions		View crosswise (C0)					View endwise (C90)				
x	y										
2H	2H	19.0	20.6	19.5	21.0	21.5	18.6	20.2	19.1	20.7	21.2
	3H	20.9	22.4	21.4	22.8	23.3	20.2	21.7	20.7	22.1	22.6
	4H	21.7	23.0	22.2	23.5	24.1	20.7	22.0	21.2	22.6	23.1
	6H	22.5	23.7	23.0	24.2	24.8	21.1	22.3	21.6	22.8	23.4
	8H	22.9	24.0	23.5	24.6	25.2	21.2	22.4	21.8	22.9	23.5
	12H	23.2	24.3	23.8	24.8	25.5	21.3	22.3	21.8	22.9	23.5
4H	2H	19.7	21.0	20.2	21.5	22.1	19.3	20.7	19.9	21.2	21.7
	3H	21.7	22.8	22.3	23.4	24.0	21.0	22.2	21.6	22.7	23.3
	4H	22.7	23.8	23.3	24.3	25.0	21.7	22.8	22.3	23.3	24.0
	6H	23.7	24.5	24.3	25.1	25.8	22.2	23.1	22.8	23.7	24.4
	8H	24.1	25.0	24.8	25.6	26.3	22.4	23.2	23.0	23.8	24.5
	12H	24.5	25.3	25.2	25.9	26.6	22.5	23.2	23.1	23.8	24.6
8H	4H	23.0	23.9	23.6	24.5	25.2	22.1	22.9	22.8	23.6	24.3
	6H	24.2	24.9	24.8	25.5	26.2	22.8	23.5	23.5	24.1	24.9
	8H	24.8	25.4	25.4	26.0	26.8	23.1	23.7	23.7	24.3	25.1
	12H	25.3	25.8	26.0	26.5	27.3	23.2	23.7	23.9	24.4	25.2
12H	4H	23.0	23.8	23.6	24.4	25.1	22.2	22.9	22.8	23.5	24.3
	6H	24.2	24.8	24.9	25.5	26.2	22.9	23.5	23.6	24.2	24.9
	8H	24.9	25.4	25.5	26.1	26.8	23.2	23.8	23.9	24.4	25.2

Luminance table		Max. for $\gamma \geq 65^\circ$										Photometric dimensions in mm:		L = 1500	H(C0) = 25	H(C180) = 25
												B = 76	H(C90) = 25	H(C270) = 25		
C-planes	$\gamma$	0°	30°	60°	90°	120°	150°	180°	210°	240°	270°	300°	330°			
		Luminance in cd/m <sup>2</sup>														
45°		8263.6	8254.1	8563.3	9805.3	8597.8	8261.1	8256.8	8250.6	8571.0	9823.1	8601.7	8271.6			
50°		7963.7	7934.8	8173.6	9454.9	8186.0	7912.7	7927.9	7916.4	8169.5	9474.4	8198.3	7931.1			
55°		7652.0	7624.6	7767.7	9089.9	7772.1	7573.5	7617.8	7589.2	7758.8	9106.3	7794.3	7612.8			
60°		7383.6	7317.7	7359.1	8679.0	7349.4	7241.3	7314.3	7262.5	7329.8	8691.4	7383.5	7292.2			
65°		7095.4	7011.1	6951.5	8205.3	6924.1	6908.9	7015.5	6941.4	6902.3	8212.6	6967.9	6983.3			
70°		6837.3	6670.5	6495.1	7662.9	6451.2	6535.8	6714.5	6572.1	6419.9	7662.9	6507.6	6618.7			
75°		6517.9	6284.0	5930.0	6890.6	5861.1	6142.3	6390.3	6165.9	5828.5	6880.1	5942.6	6254.5			
80°		6260.3	5927.5	5303.3	5807.2	5172.6	5782.3	6073.9	5775.4	5167.1	5785.2	5261.2	5899.8			
85°		6057.2	5689.0	4667.5	4287.5	4551.8	5474.0	5886.9	5522.9	4514.5	4238.4	4655.5	5603.8			

**Photometric test report**

<b>Family</b> <b>Licross® 21 Opal</b>	<b>Order number: 52TE1DVN445G</b> <b>EAN: 4058352052037</b>	<b>LP number</b> <b>59520_95</b>
--	--	-------------------------------------

**Luminance values in cd/m<sup>2</sup>**     γ 65°    γ 70°    γ 75°    γ 80°    γ 85°     **siteco**

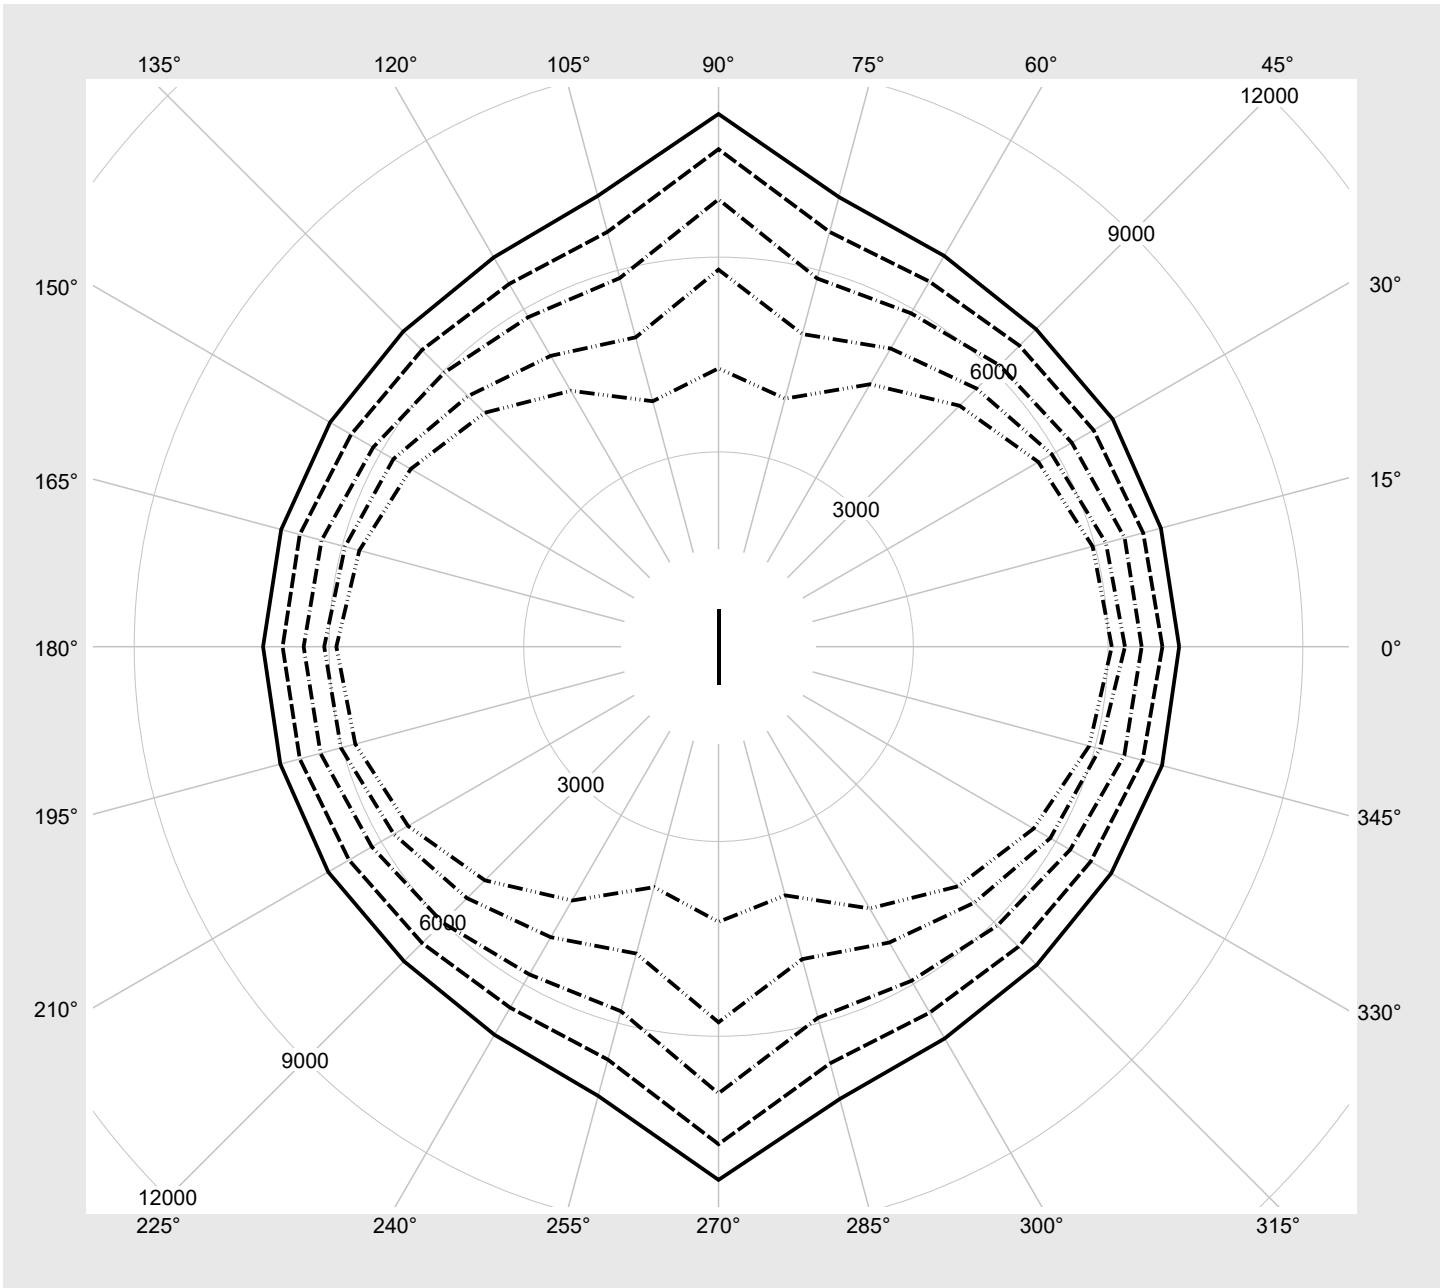

## Photometric test report

<b>Family</b> Licross® 21 Opal	<b>Order number: 52TE1DVN445G</b> <b>EAN: 4058352052037</b>	<b>LP number</b> <b>59520_95</b>
-----------------------------------	--	-------------------------------------

<b>Dimming levels table</b>	environmental temperature: 25°C	<b>siteco</b>
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W]
				start of lifetime	end of lifetime	average
100	254	254	4500	25.8	29.9	27.8
95	241	252	4275	24.6	28.5	26.6
90	228	250	4053	23.4	27.1	25.2
85	215	248	3825	22.2	25.7	24.0
80	202	246	3600	20.9	24.3	22.6
75	189	243	3374	19.7	22.9	21.3
70	176	241	3145	18.4	21.4	19.9
65	163	238	2918	17.2	20.0	18.6
60	151	235	2704	16.0	18.6	17.3
55	138	232	2475	14.7	17.1	15.9
50	125	228	2242	13.4	15.6	14.5
45	113	224	2030	12.1	14.2	13.2
40	100	220	1796	11.4	12.6	12.0
35	88	215	1582	10.4	11.6	11.0
30	75	209	1349	9.2	10.4	9.8
25	63	203	1131	8.0	9.1	8.6
20	50	194	897	6.7	7.6	7.2
18	44	190	789	6.2	6.9	6.6