




Photometric test report

Family Licross® 11 Recessed	Order number: 51TL1DMN46XG EAN: 4058352051931	LP number 59520_256
	Version cover, opal, direct-/ indirect distribution, diffuse Lamps LED 4000 K CRI ≥ 80 Controlgear ECG Multilumen Rated values Net luminous flux = 6320 lm Power consumption = 34.3 W Luminous efficacy = 184.3 lm/W	serial documentation 19.02.2024
		

Luminous intensity in cd/klm C180-0 C270-90 **Imax: 294 cd/klm**

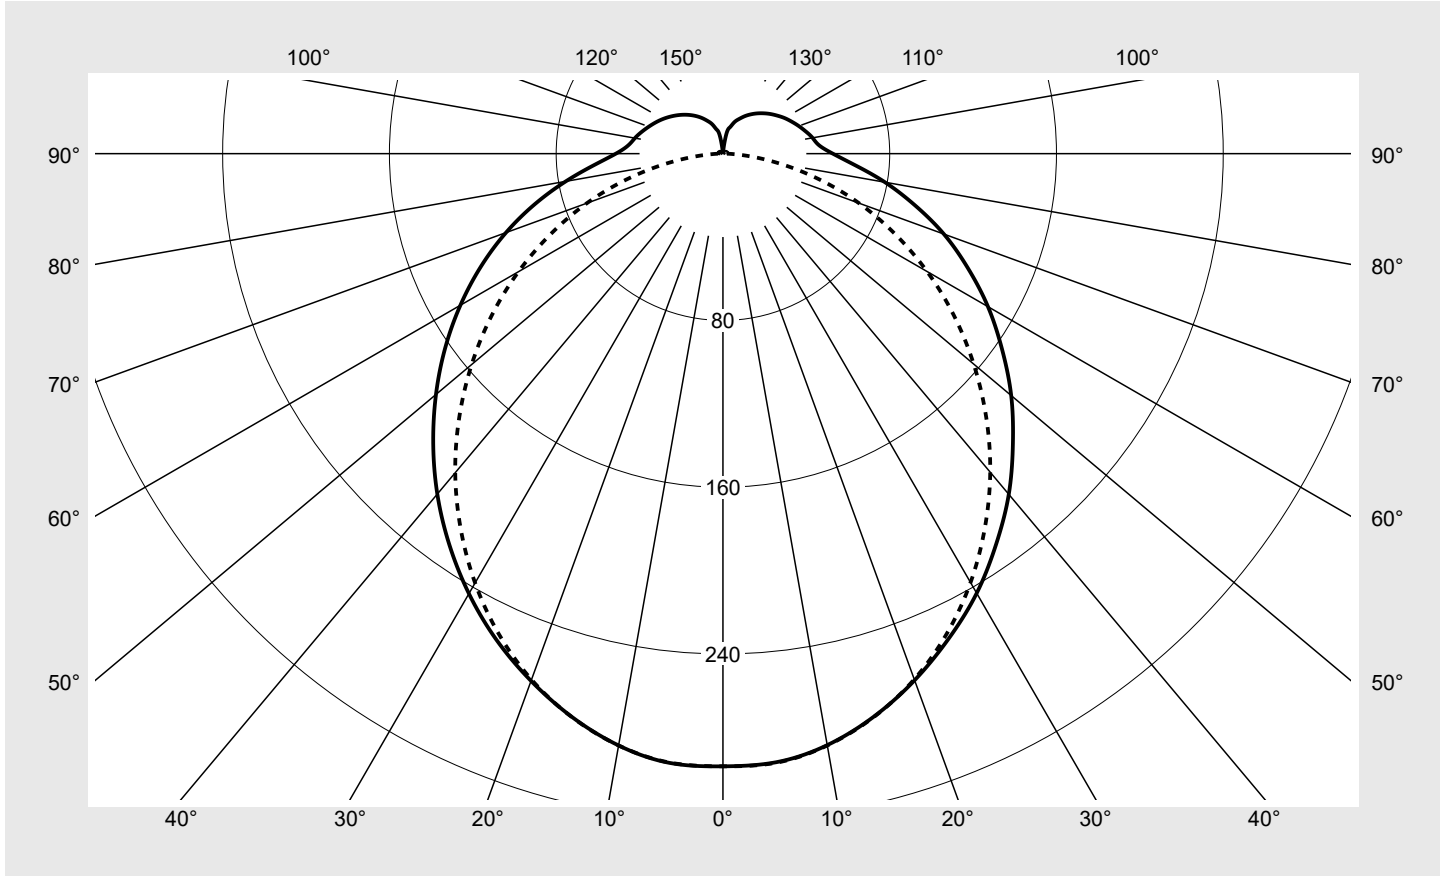

Classifications	
DIN 5040	B 3 1
CIE	N1=44 N2=73 N3=91 N4=87 N5=100

Luminaire light output ratios	
η_{LB}	100.0%
ϕ_u	87.4%
ϕ_o	12.6%

Measurement conditions
DIN EN 13032 and DIN 5032

Photometric test report

Family Licross® 11 Recessed	Order number: 51TL1DMN46XG EAN: 4058352051931	LP number 59520_256
--	--	--------------------------------------

Table of values for luminous intensities	Maximum luminous intensity	siteco
---	-----------------------------------	---------------

C-planes	0°	15°	30°	45°	60°	75°	90°	105°	120°	135°	150°	165°	180°
γ	Luminous intensity in cd/klm												
0°	293.9	293.9	293.9	293.9	293.9	293.9	293.9	293.9	293.9	293.9	293.9	293.9	293.9
5°	293.1	292.7	289.9	291.0	293.1	293.0	293.3	293.1	293.1	292.5	291.2	291.6	293.4
10°	288.1	287.8	285.0	286.0	288.1	287.9	288.3	288.0	288.0	287.5	286.2	286.7	288.3
15°	279.6	279.4	276.6	277.6	279.6	279.4	279.8	279.5	279.5	279.0	277.7	278.4	279.8
20°	268.8	268.4	265.5	266.2	268.1	267.8	268.3	268.1	268.0	267.5	266.6	267.8	269.2
25°	256.5	256.4	252.9	252.4	253.9	253.4	254.1	253.8	253.8	253.6	254.0	255.9	257.2
30°	243.5	242.9	239.1	237.4	237.4	236.9	237.6	237.4	237.5	238.5	240.0	242.5	243.7
35°	228.6	228.2	223.9	221.1	219.2	218.5	219.1	218.9	219.7	221.9	224.6	227.5	228.9
40°	213.3	212.5	208.1	204.0	200.4	198.8	199.5	199.5	201.1	204.3	208.6	211.7	213.2
45°	196.7	195.9	191.2	185.9	180.8	177.8	178.6	178.3	181.6	186.0	191.4	194.8	196.6
50°	180.5	179.0	174.4	167.8	161.5	156.5	157.0	156.9	161.7	167.6	173.9	177.7	179.7
55°	163.4	162.0	157.2	149.2	141.7	135.1	135.2	135.5	141.8	149.1	156.1	160.5	162.7
60°	146.8	144.8	139.8	131.0	122.1	114.1	113.1	114.2	121.9	130.6	138.3	143.3	145.4
65°	129.6	127.7	122.3	112.9	103.0	93.4	91.0	93.7	102.6	112.1	120.5	126.2	128.1
70°	112.8	110.6	104.4	95.0	83.9	73.2	69.4	73.2	83.4	93.6	102.3	109.1	110.8
75°	95.2	93.5	86.3	76.8	64.8	53.0	48.0	53.1	64.1	74.9	84.3	91.4	93.3
80°	78.9	76.8	69.4	59.0	47.0	34.5	28.0	34.2	45.8	57.3	67.7	74.1	76.6
85°	63.7	61.7	54.7	44.0	31.4	18.8	11.3	18.6	30.6	42.7	52.6	59.2	61.9
90°	52.7	50.3	47.2	33.6	21.8	9.7	1.7	9.7	21.3	32.8	42.6	49.1	51.4
95°	46.3	44.0	38.4	29.9	19.4	8.9	1.8	8.9	19.3	29.6	38.3	43.8	45.6
100°	43.6	41.6	36.5	28.4	19.0	9.0	2.1	8.7	18.6	27.9	35.8	41.3	42.9
105°	41.1	39.4	34.3	27.0	18.2	9.1	2.1	8.8	17.9	26.7	33.7	38.6	40.4
110°	38.7	36.7	32.3	25.7	17.6	9.2	2.0	8.7	17.0	25.1	31.7	36.0	37.9
115°	36.4	34.4	30.4	24.3	17.0	9.3	1.9	8.8	16.4	23.6	29.8	33.7	35.5
120°	34.1	32.2	28.7	23.1	16.5	9.4	1.8	8.8	15.7	22.3	27.9	31.4	33.2
125°	31.8	30.1	26.8	21.8	15.8	9.4	1.6	8.8	15.0	21.0	26.0	29.2	30.9
130°	29.6	27.9	25.1	20.7	15.3	9.5	1.4	8.7	14.3	19.7	24.1	27.1	28.6
135°	27.4	25.8	23.3	19.5	14.6	8.1	1.3	7.6	13.7	18.5	22.3	24.9	26.4
140°	25.2	23.7	21.6	18.3	13.6	7.0	1.3	6.4	12.7	17.1	20.5	22.8	24.2
145°	23.0	21.6	19.8	16.6	12.1	6.4	1.2	5.9	11.1	15.6	18.8	20.7	21.9
150°	20.7	19.6	18.1	14.3	11.0	6.2	1.3	6.0	9.5	13.3	16.9	18.6	19.6
155°	18.4	17.4	15.6	12.5	8.2	5.5	1.3	5.2	7.5	11.1	14.5	16.4	17.3
160°	16.1	15.3	12.6	10.0	7.9	5.1	1.4	4.6	6.8	7.9	11.7	14.3	14.9
165°	13.1	12.1	8.6	7.8	8.1	5.4	1.4	4.8	6.9	7.0	6.9	11.2	12.1
170°	9.8	7.7	7.3	8.0	6.5	2.9	1.4	2.2	5.4	6.7	6.3	6.6	8.9
175°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Licross® 11 Recessed	Order number: 51TL1DMN46XG EAN: 4058352051931	LP number 59520_256
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	195°	210°	225°	240°	255°	270°	285°	300°	315°	330°	345°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0°	293.9	293.9	293.9	293.9	293.9	293.9	293.9	293.9	293.9	293.9	293.9	1.8	1.8
5°	292.9	289.8	290.9	292.8	292.8	293.2	292.8	292.9	292.3	291.2	292.0	14.0	15.7
10°	288.0	285.0	285.8	287.9	287.8	288.3	287.9	288.0	287.3	286.3	287.0	27.3	43.1
15°	279.5	276.7	277.5	279.4	279.4	279.9	279.5	279.5	278.9	277.9	279.0	39.6	82.6
20°	268.9	265.7	266.2	268.0	267.9	268.5	268.2	268.1	267.5	266.6	267.7	50.2	132.8
25°	256.9	253.4	252.5	253.8	253.6	254.3	254.0	254.0	253.5	253.8	256.1	58.9	191.7
30°	243.4	239.6	237.7	237.4	237.1	237.8	237.6	237.8	238.3	239.7	242.3	65.6	257.3
35°	228.5	224.4	221.4	219.4	218.7	219.4	219.3	219.8	221.8	224.6	228.0	70.0	327.3
40°	212.7	208.2	204.2	200.7	198.9	199.8	199.8	201.1	204.3	208.6	211.9	72.3	399.6
45°	195.8	191.1	185.9	181.0	177.8	178.9	178.7	181.7	186.2	191.6	195.6	72.3	472.0
50°	178.6	174.0	167.6	161.4	156.5	157.3	157.3	162.0	168.0	174.3	178.3	70.5	542.5
55°	161.2	156.5	148.8	141.5	135.3	135.5	135.8	142.2	149.7	156.9	161.8	66.9	609.4
60°	143.7	138.7	130.1	121.6	114.2	113.3	114.6	122.5	131.3	139.3	144.4	61.7	671.1
65°	126.5	121.0	111.8	102.3	93.3	91.1	94.0	103.2	113.1	121.8	128.0	55.2	726.3
70°	109.1	102.8	93.5	83.0	72.9	69.4	73.6	84.1	94.6	103.5	110.4	47.6	773.9
75°	91.6	84.7	75.4	63.7	52.5	47.9	53.5	65.0	76.2	85.9	93.4	39.0	812.9
80°	74.9	67.7	57.5	45.8	33.9	27.9	34.5	46.6	58.5	69.1	75.6	30.2	843.1
85°	59.9	53.1	42.6	30.4	18.3	11.1	18.9	31.3	43.7	53.8	61.1	22.2	865.3
90°	49.1	42.6	32.8	21.3	9.6	1.7	9.7	21.6	33.2	43.3	50.0	16.9	882.1
95°	43.4	38.0	29.6	19.2	8.8	1.8	8.9	19.4	29.7	38.6	44.5	14.9	897.1
100°	41.0	35.9	27.9	18.7	8.8	2.1	8.9	18.7	28.1	36.1	41.8	14.0	911.1
105°	38.7	33.7	26.5	17.8	8.7	2.1	9.0	18.1	27.0	34.2	39.3	13.1	924.2
110°	35.9	31.6	25.0	17.1	8.8	2.0	9.1	17.4	25.5	32.1	36.6	12.0	936.2
115°	33.6	29.7	23.6	16.4	8.7	1.9	9.3	16.9	24.2	30.4	34.4	11.0	947.2
120°	31.4	27.9	22.4	15.7	8.8	1.8	9.3	16.2	22.9	28.6	32.2	9.9	957.1
125°	29.2	26.0	21.1	15.0	8.7	1.6	9.4	15.7	21.7	26.8	30.1	8.9	966.0
130°	27.0	24.2	19.8	14.4	8.7	1.4	9.4	15.1	20.5	24.9	27.8	7.8	973.7
135°	24.9	22.4	18.6	13.7	7.3	1.3	8.2	14.6	19.3	23.2	25.8	6.7	980.4
140°	22.7	20.6	17.3	12.7	6.4	1.3	7.0	13.5	18.0	21.5	23.6	5.6	986.0
145°	20.6	18.9	15.7	11.3	5.8	1.2	6.5	12.0	15.8	19.8	21.6	4.5	990.5
150°	18.5	17.0	13.4	10.2	6.1	1.3	6.3	10.3	14.2	17.9	19.5	3.5	994.0
155°	16.4	14.6	11.8	7.5	4.9	1.3	5.8	8.1	12.0	15.5	17.4	2.6	996.6
160°	14.2	11.8	9.1	7.1	4.6	1.4	5.2	7.3	8.7	12.7	15.3	1.8	998.3
165°	11.1	8.0	7.1	7.6	4.8	1.4	5.5	7.3	7.6	7.6	12.0	1.1	999.4
170°	6.9	7.3	7.0	5.8	2.1	1.4	3.1	6.1	7.5	6.2	7.2	0.6	1000.0
175°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Licross® 11 Recessed	Order number: 51TL1DMN46XG EAN: 4058352051931	LP number 59520_256
---------------------------------------	--	-------------------------------

UGR-Table		Standard room									
Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		View crosswise (C0)					View endwise (C90)				
x	y										
2H	2H	20.2	21.7	20.6	22.2	22.7	19.8	21.4	20.3	21.8	22.3
	3H	22.1	23.5	22.6	24.0	24.5	21.4	22.8	21.9	23.3	23.8
	4H	22.9	24.2	23.4	24.7	25.3	21.9	23.2	22.4	23.7	24.3
	6H	23.7	24.9	24.2	25.4	26.0	22.3	23.5	22.8	24.0	24.6
	8H	24.1	25.2	24.6	25.8	26.4	22.4	23.6	23.0	24.1	24.7
	12H	24.4	25.4	25.0	26.0	26.7	22.4	23.5	23.0	24.1	24.7
4H	2H	20.8	22.2	21.4	22.7	23.2	20.5	21.8	21.1	22.3	22.9
	3H	22.9	24.0	23.4	24.6	25.2	22.2	23.3	22.8	23.9	24.5
	4H	23.9	24.9	24.5	25.5	26.1	22.9	23.9	23.5	24.5	25.1
	6H	24.8	25.7	25.4	26.3	27.0	23.4	24.3	24.0	24.9	25.6
	8H	25.3	26.1	25.9	26.7	27.4	23.6	24.4	24.2	25.0	25.7
	12H	25.7	26.4	26.4	27.1	27.8	23.6	24.4	24.3	25.0	25.7
8H	4H	24.2	25.0	24.8	25.7	26.3	23.3	24.1	23.9	24.7	25.4
	6H	25.4	26.1	26.0	26.7	27.4	24.0	24.7	24.6	25.3	26.0
	8H	25.9	26.6	26.6	27.2	27.9	24.3	24.9	24.9	25.5	26.3
	12H	26.5	27.0	27.2	27.7	28.5	24.4	24.9	25.1	25.6	26.4
12H	4H	24.2	24.9	24.8	25.6	26.3	23.4	24.1	24.0	24.7	25.4
	6H	25.4	26.0	26.1	26.7	27.4	24.1	24.7	24.8	25.4	26.1
	8H	26.0	26.6	26.7	27.2	28.0	24.4	24.9	25.1	25.6	26.4

Luminance table		Max. for $\gamma \geq 65^\circ$										Photometric dimensions in mm:		L = 1500	H(C0) = 25	H(C180) = 25
												B = 76	H(C90) = 25	H(C270) = 25		
C-planes		0°	30°	60°	90°	120°	150°	180°	210°	240°	270°	300°	330°			
	γ	Luminance in cd/m ²														
45°		11605.7	11592.5	12026.7	13771.0	12075.2	11602.3	11596.2	11587.5	12037.5	13796.0	12080.6	11617.0			
50°		11184.5	11144.0	11479.4	13278.9	11496.7	11112.9	11134.4	11118.1	11473.6	13306.3	11514.0	11138.8			
55°		10746.8	10708.3	10909.3	12766.3	10915.5	10636.6	10698.8	10658.7	10896.8	12789.2	10946.7	10691.8			
60°		10369.8	10277.3	10335.5	12189.1	10321.8	10170.0	10272.6	10199.8	10294.3	12206.6	10369.8	10241.5			
65°		9965.2	9846.8	9762.9	11523.8	9724.5	9703.2	9852.9	9748.8	9693.8	11534.1	9786.0	9807.6			
70°		9602.6	9368.4	9122.0	10762.2	9060.3	9179.2	9430.2	9230.1	9016.3	10762.2	9139.6	9295.6			
75°		9154.0	8825.5	8328.3	9677.4	8231.6	8626.5	8974.9	8659.7	8185.7	9662.7	8346.0	8784.0			
80°		8792.2	8324.8	7448.2	8155.9	7264.6	8120.9	8530.4	8111.2	7257.0	8125.0	7389.1	8286.0			
85°		8507.1	7989.9	6555.3	6021.6	6392.8	7687.9	8267.9	7756.6	6340.3	5952.7	6538.4	7870.2			

Photometric test report


Family
Licross® 11 Recessed

Order number: 51TL1DMN46XG
EAN: 4058352051931

LP number
59520_256

Luminance values in cd/m²

γ 65°
 γ 70°
 γ 75°
 γ 80°
 γ 85°

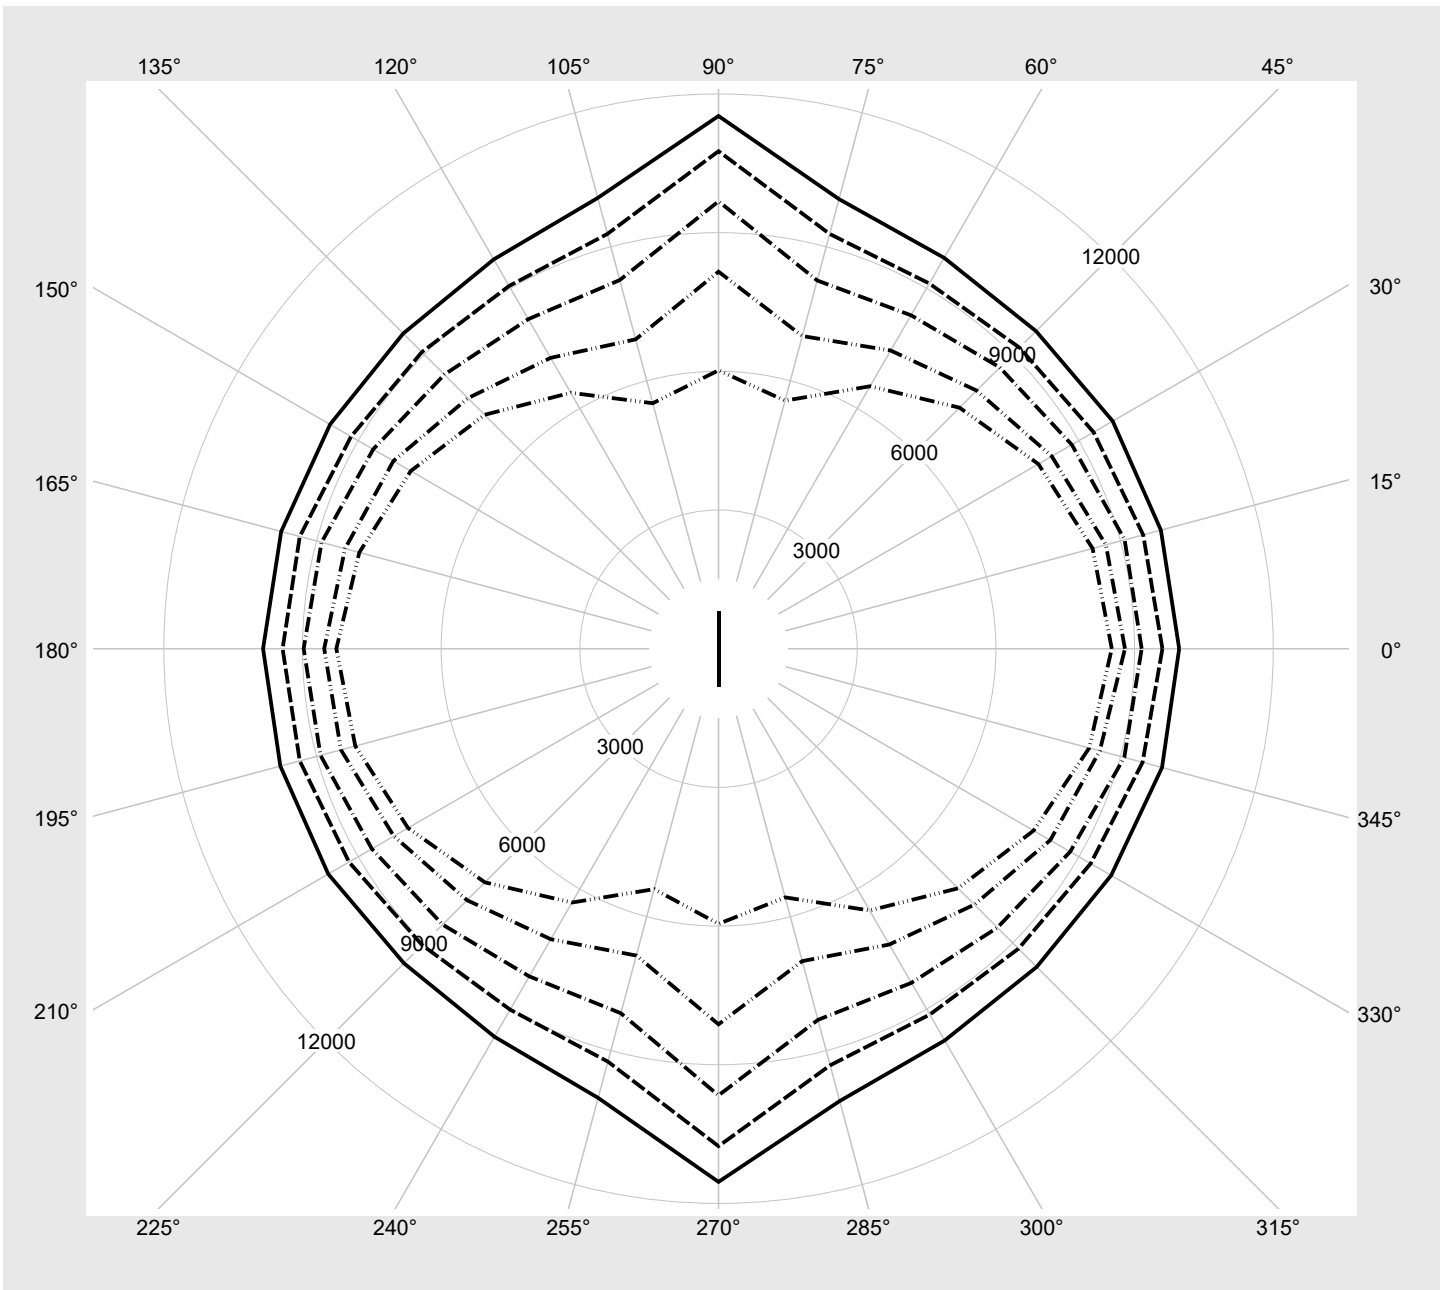

Photometric test report

Family Licross® 11 Recessed	Order number: 51TL1DMN46XG EAN: 4058352051931	LP number 59520_256
---------------------------------------	--	--------------------------------------

Multilumen Table	environmental temperature: 25°C	sITeco
-------------------------	---------------------------------	---------------

DIP-Step	Switch Setting			Luminous flux [lm]	Power consumption [W]
	1	2	3		
1	A	C	E	6320	34.3
2	A	C	F	6011	32.6
3	A	D	E	5713	30.9
4	A	D	F	5403	29.2
5	B	C	E	5094	27.4
6	B	C	F	4785	25.8
7	B	D	E	4476	24.1
8	B	D	F	4071	21.9