




Photometric test report

Family Streetlight 31 midi toolless	Order number: 5XH7U31T08NA EAN: 4069025100061	LP number 59537_219
	Version post-top or side-entry mounting, Smart Interface up/down Optic asymmetric, extremely wide distribution (P0.8a G) Cover toughened safety glass Lamps LED 3000 K CRI ≥ 70 Controlgear ECG SITECO - Smart Interface Rated values Net luminous flux = 22950 lm Power consumption = 149.5 W Luminous efficacy = 153.5 lm/W	serial documentation 10.04.2024





Luminous intensity in cd/klm C180-0 C205-25 C210-30 C270-90 **Imax: 856 cd/klm**

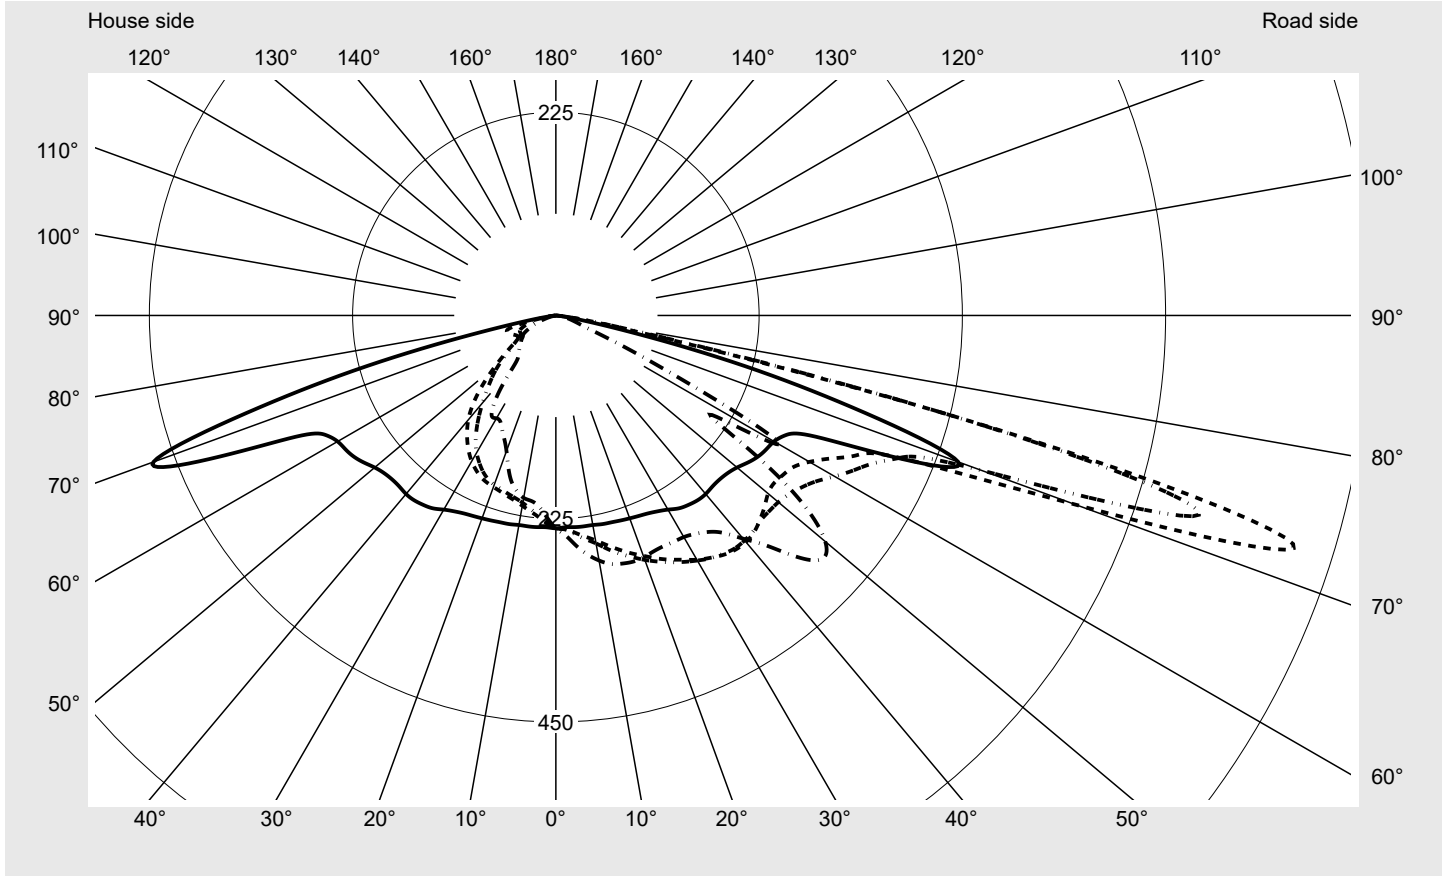


Luminaire output ratios	
Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%
Measurement conditions	
DIN EN 13032 and DIN 5032	

Luminous intensity class acc. to EN13201-2	
Class:	G3
Imax 70°	618.8
Imax 80°	68.3
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0

Photometric test report

Family Streetlight 31 midi toolless	Order number: 5XH7U31T08NA EAN: 4069025100061	LP number 59537_219
---	--	-------------------------------

Envelope curve in cd/klm **KMK 72.5°** **KMK 70°** **KMK 67.5°** **KMK 65°** **siteco**

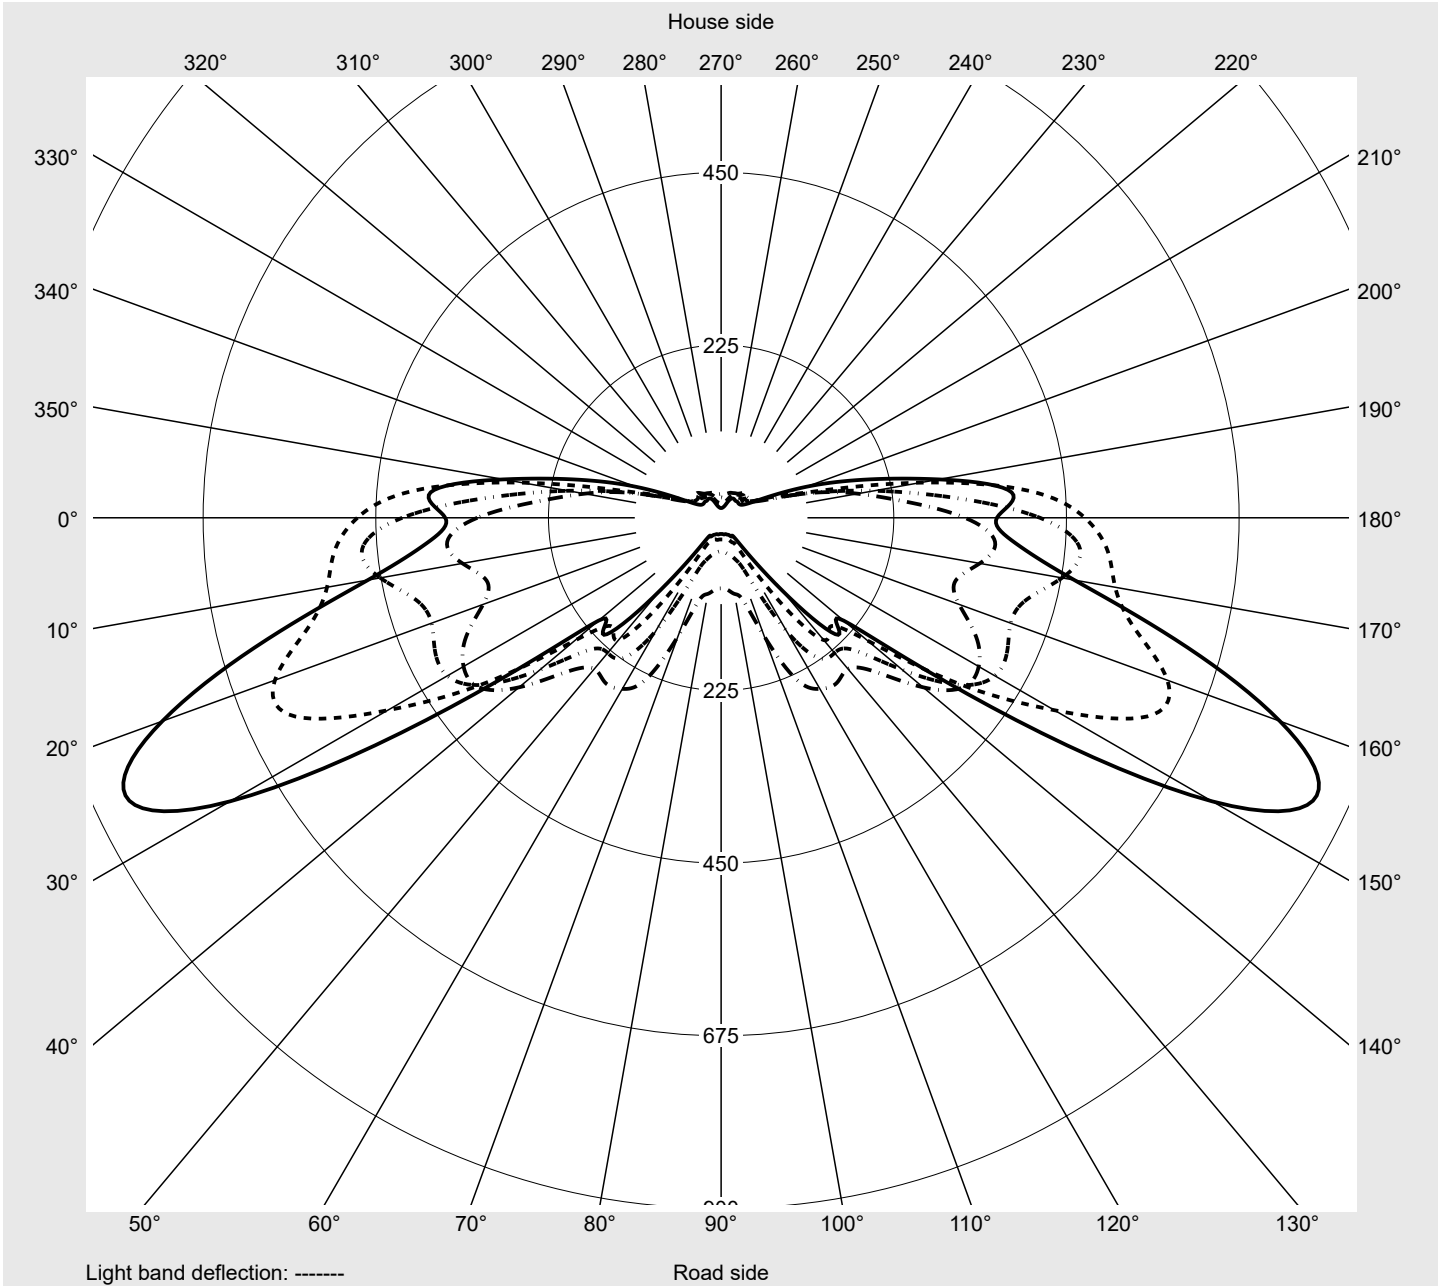

Photometric test report

Family Streetlight 31 midi toolless	Order number: 5XH7U31T08NA EAN: 4069025100061	LP number 59537_219
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	235.6	235.6	235.6	235.6	235.6	235.6	235.6	235.6	235.6	235.6	235.6	235.6	235.6
2,5°	234.7	235.2	235.9	236.3	236.6	236.6	237.1	238.2	239.1	239.6	240.2	240.8	241.4
5,0°	235.2	235.6	236.3	237.6	239.5	241.3	243.0	244.7	246.6	248.1	249.5	251.0	252.0
7,5°	235.5	236.3	238.0	240.8	243.9	246.8	249.7	252.2	254.9	256.9	258.9	260.6	262.1
10,0°	235.5	236.9	240.3	244.4	248.7	252.8	256.3	259.5	262.8	265.6	267.6	269.4	270.9
12,5°	236.6	239.6	244.5	249.8	255.3	260.4	264.8	268.6	271.6	274.3	276.7	278.4	279.6
15,0°	237.1	242.1	248.6	255.9	262.4	268.1	272.9	276.0	279.3	281.8	283.4	284.4	285.0
17,5°	238.0	245.1	253.5	262.0	269.7	275.9	280.4	284.2	286.5	288.0	288.8	288.8	288.4
20,0°	239.0	248.9	259.1	268.7	277.4	283.1	288.0	290.8	292.2	293.0	292.9	292.1	290.8
22,5°	240.2	252.1	264.0	275.5	284.7	291.0	294.8	297.0	297.3	297.0	295.8	293.9	291.9
25,0°	241.7	256.4	269.7	282.6	291.9	298.2	301.4	303.0	302.4	300.4	297.9	295.3	292.3
27,5°	244.4	261.7	277.2	290.5	299.8	304.8	307.5	308.4	306.8	303.6	299.8	296.2	293.4
30,0°	248.2	267.9	285.5	299.1	307.5	312.2	313.2	312.7	310.3	306.3	302.1	298.3	295.0
32,5°	253.2	275.1	294.8	308.3	315.3	318.1	318.6	316.5	312.9	309.0	305.2	301.4	299.1
35,0°	256.0	280.7	302.4	316.0	321.9	323.5	322.2	319.1	315.4	312.5	309.8	307.8	305.7
37,5°	257.8	284.8	307.2	321.0	325.8	326.7	325.1	321.5	317.8	316.2	316.4	317.1	315.6
40,0°	258.0	287.5	310.2	322.7	326.9	327.3	325.0	322.7	322.1	322.8	327.0	330.8	329.2
42,5°	256.7	287.7	310.0	321.3	324.3	325.0	323.6	324.2	327.6	332.7	340.5	346.4	346.9
45,0°	256.6	288.1	308.0	315.7	318.1	319.6	320.7	326.4	335.0	346.1	357.7	365.7	371.4
47,5°	258.2	288.9	305.8	309.5	309.7	313.4	320.5	332.2	346.1	362.6	377.2	387.9	396.1
50,0°	261.8	290.2	302.3	301.0	300.0	306.7	321.5	340.0	358.4	378.5	396.1	408.8	416.2
52,5°	267.6	293.4	300.8	295.4	293.1	304.6	325.3	350.3	370.6	391.3	406.9	415.8	411.4
55,0°	272.8	296.9	299.8	291.5	291.2	307.3	331.9	362.0	382.3	398.0	404.3	399.0	374.0
57,5°	276.0	299.2	298.8	289.2	292.4	312.1	341.7	374.1	390.1	391.8	379.5	349.4	309.6
60,0°	279.0	303.6	299.5	289.6	297.1	324.2	356.3	384.7	389.5	368.9	333.7	295.4	269.7
62,5°	286.9	315.3	307.8	295.1	308.6	343.0	371.4	388.3	374.0	327.5	286.9	271.6	282.6
65,0°	317.6	358.3	342.3	316.4	330.0	366.6	387.6	385.2	343.7	283.6	257.0	262.7	257.4
67,5°	415.5	469.6	451.1	412.1	401.5	411.4	411.9	379.6	308.1	243.4	229.9	223.3	170.3
70,0°	474.0	505.9	521.5	558.0	618.8	612.6	501.5	376.0	249.0	200.9	208.1	134.9	52.2
72,5°	359.4	385.8	467.5	612.6	774.9	856.4	739.2	430.1	208.5	215.7	123.1	38.5	28.0
75,0°	217.0	235.1	244.0	284.5	439.0	598.5	574.8	446.3	365.7	173.9	47.3	23.6	20.9
77,5°	84.6	127.6	114.0	114.9	138.6	182.9	201.9	296.7	316.9	127.3	20.5	18.5	15.7
80,0°	25.9	36.3	41.1	42.9	45.7	50.6	56.5	68.3	62.6	24.9	14.8	12.0	10.8
82,5°	6.9	8.1	10.0	11.8	13.7	15.5	15.0	11.3	10.2	7.8	6.8	7.0	6.3
85,0°	2.5	2.4	2.2	2.1	2.3	2.4	2.6	2.2	2.1	2.1	2.8	2.6	3.0
87,5°	1.3	1.2	1.1	1.1	1.0	1.0	0.9	0.9	0.9	0.8	0.8	0.7	0.7
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 31 midi toolless	Order number: 5XH7U31T08NA EAN: 4069025100061	LP number 59537_219
---	--	--------------------------------------



Table of values for luminous intensities	Maximum luminous intensity
---	-----------------------------------

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	235.6	235.6	235.6	235.6	235.6	235.6	235.6	235.6	235.6	235.6	235.6	235.6	235.6
2,5°	242.1	242.7	242.9	243.3	243.6	243.6	233.9	232.6	232.1	231.5	230.4	229.4	228.4
5,0°	253.1	253.8	254.4	255.1	255.4	255.6	232.8	230.9	228.4	226.2	223.7	221.9	220.0
7,5°	263.4	264.5	265.3	266.1	266.5	266.8	232.3	228.5	224.9	221.8	218.5	216.0	213.6
10,0°	272.2	273.3	274.4	274.8	275.3	275.4	231.7	226.3	221.9	217.7	213.9	210.7	208.5
12,5°	280.0	280.4	281.1	281.0	281.6	281.7	231.8	225.0	219.1	214.2	210.0	207.1	205.4
15,0°	284.9	284.8	284.7	284.5	284.6	284.3	231.7	223.6	216.8	211.0	206.9	204.3	202.7
17,5°	287.8	286.8	286.2	285.8	285.7	285.6	231.9	222.1	214.2	208.2	204.3	201.6	199.7
20,0°	289.1	287.5	286.1	285.1	284.6	284.7	232.2	220.9	211.9	205.8	202.1	199.5	195.9
22,5°	289.6	286.9	284.9	283.4	282.6	282.7	231.3	219.0	209.4	203.8	200.0	196.1	190.4
25,0°	289.7	287.1	284.7	282.7	281.6	281.8	230.9	217.2	207.0	201.2	197.0	190.8	184.6
27,5°	290.7	288.1	285.3	283.5	282.2	282.4	231.0	215.8	204.8	198.3	192.1	183.6	175.8
30,0°	292.7	290.3	287.4	284.9	283.3	283.3	231.9	215.2	203.1	195.6	186.4	175.5	165.7
32,5°	296.9	294.2	290.9	288.1	286.8	286.7	233.9	215.1	201.6	192.3	179.1	165.3	151.3
35,0°	303.7	300.3	297.0	294.1	292.8	292.6	234.2	214.0	199.0	187.8	170.8	152.9	133.6
37,5°	312.8	310.0	307.3	304.8	303.4	303.2	232.9	211.7	195.9	181.7	161.4	139.5	117.8
40,0°	327.4	326.6	326.1	323.7	322.3	322.6	230.5	207.6	190.1	173.9	150.8	126.1	104.7
42,5°	348.4	350.5	351.2	347.7	345.8	345.6	225.6	199.9	180.2	161.5	137.5	113.5	93.3
45,0°	376.2	379.7	381.2	379.7	377.9	378.1	221.9	191.8	167.6	144.8	121.9	102.0	82.5
47,5°	401.7	405.0	405.0	402.3	399.3	399.3	220.2	184.5	154.2	125.7	104.8	91.2	73.0
50,0°	414.0	405.7	397.5	391.6	388.9	389.3	222.4	181.7	144.5	107.3	87.9	79.1	65.2
52,5°	392.1	370.1	354.6	348.1	346.3	348.2	226.1	181.6	137.5	92.3	73.1	67.3	60.3
55,0°	337.6	304.9	283.0	272.8	269.0	270.9	229.7	182.1	133.7	80.5	60.8	58.1	58.1
57,5°	271.5	242.0	225.0	215.8	207.8	205.0	230.4	179.6	129.0	73.2	51.8	51.4	55.3
60,0°	264.0	271.2	273.1	272.9	277.8	285.6	230.7	177.3	127.7	71.4	48.1	45.8	51.3
62,5°	283.7	274.7	259.6	225.0	192.5	183.4	228.9	175.1	126.4	72.1	48.4	43.7	47.7
65,0°	232.6	164.2	111.7	100.7	94.0	92.0	241.4	180.8	126.6	74.4	50.7	43.6	43.9
67,5°	86.7	59.5	51.2	47.7	44.6	43.8	302.9	202.7	126.9	77.2	53.7	43.0	39.8
70,0°	35.6	31.0	29.1	29.3	28.4	28.3	402.8	263.5	138.3	85.7	56.7	39.7	35.3
72,5°	25.1	23.4	22.0	22.1	21.3	21.1	380.0	288.0	191.6	118.1	56.9	34.6	30.1
75,0°	19.2	17.9	16.9	16.8	16.3	16.0	178.4	166.7	153.9	124.4	50.5	28.1	24.5
77,5°	13.8	13.2	12.3	11.9	11.7	11.6	58.4	60.7	56.1	51.7	29.3	20.7	18.3
80,0°	9.4	9.1	8.0	7.4	7.2	7.1	17.6	17.5	18.3	20.2	13.8	11.8	11.5
82,5°	5.4	5.0	4.4	4.2	4.0	3.9	5.6	5.5	5.2	6.9	6.1	6.0	5.6
85,0°	2.4	2.2	1.8	1.7	1.6	1.5	2.6	2.6	2.7	2.7	2.7	2.6	2.4
87,5°	0.7	0.7	0.7	0.7	0.7	0.7	1.4	1.4	1.5	1.5	1.6	1.5	1.4
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 31 midi toolless	Order number: 5XH7U31T08NA EAN: 4069025100061	LP number 59537_219
Table of values for luminous intensities		Maximum luminous intensity



C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0,0°	235.6	235.6	235.6	235.6	235.6	235.6	235.6	235.6	235.6	235.6	235.6	0.4	0.4
2,5°	227.4	226.8	226.2	225.5	225.0	224.7	224.4	224.1	224.0	223.9	223.9	2.8	3.1
5,0°	218.1	217.3	216.1	214.8	213.9	213.4	213.2	212.8	212.6	212.6	212.5	5.6	8.7
7,5°	211.6	210.3	209.1	208.2	207.6	207.5	207.3	207.2	207.2	207.3	207.2	8.4	17.1
10,0°	207.0	206.1	205.5	205.1	204.9	204.7	204.6	204.9	205.0	205.1	205.0	11.2	28.3
12,5°	204.1	203.5	203.0	202.4	201.7	200.9	200.0	199.6	199.3	199.3	199.1	14.1	42.5
15,0°	201.6	200.3	198.8	196.6	194.9	193.4	192.0	190.9	190.4	190.3	190.1	16.9	59.4
17,5°	197.6	194.5	191.9	189.0	186.6	184.3	181.5	179.0	177.3	175.8	175.4	19.6	79.0
20,0°	191.3	187.9	184.5	181.4	176.1	171.1	166.9	163.7	161.5	160.3	159.8	22.1	101.1
22,5°	185.4	180.9	176.0	169.2	162.6	157.4	153.6	151.3	149.9	149.1	148.8	24.5	125.6
25,0°	178.6	171.8	163.2	156.0	150.1	146.1	143.5	142.0	141.0	140.4	140.3	26.8	152.4
27,5°	168.5	157.6	148.3	141.8	137.3	134.4	133.2	132.8	132.7	132.6	132.8	29.0	181.4
30,0°	153.4	141.7	133.3	127.7	125.4	125.3	126.7	128.6	130.2	131.1	131.4	31.2	212.6
32,5°	135.3	124.0	116.0	113.0	114.6	119.0	124.7	129.0	131.2	131.8	132.0	33.4	246.0
35,0°	117.2	104.7	97.8	98.8	106.1	114.2	119.2	121.3	120.9	119.8	119.3	35.4	281.4
37,5°	100.8	87.9	83.5	88.3	95.8	100.2	101.2	100.7	99.3	97.6	96.9	37.0	318.4
40,0°	86.5	75.2	74.8	79.6	81.5	81.7	80.8	77.9	74.4	72.0	71.1	38.7	357.1
42,5°	75.9	69.2	71.0	71.3	71.3	70.4	67.5	65.1	63.3	62.1	61.6	40.7	397.8
45,0°	68.4	67.4	67.8	67.4	67.1	64.5	62.3	60.7	59.5	58.6	58.2	43.2	441.0
47,5°	64.9	65.9	65.1	65.4	62.7	59.6	58.0	56.9	55.9	55.1	54.7	45.5	486.5
50,0°	63.3	63.8	63.9	61.7	57.5	55.3	54.2	53.1	52.2	51.6	51.4	47.0	533.6
52,5°	63.3	61.9	60.9	57.4	53.5	51.9	50.9	50.0	49.2	48.7	48.7	47.3	580.8
55,0°	61.7	58.2	57.1	52.8	49.6	48.4	47.5	46.8	46.3	46.2	46.3	45.9	626.7
57,5°	55.9	54.2	53.1	48.0	45.6	44.6	44.2	43.6	43.3	43.2	43.3	43.9	670.6
60,0°	50.9	51.2	49.0	43.8	42.0	41.0	41.0	41.3	41.4	41.3	41.4	45.6	716.2
62,5°	47.0	48.1	45.1	40.5	38.9	37.8	37.7	37.0	36.3	36.2	36.6	44.9	761.1
65,0°	43.3	45.0	42.0	38.3	36.9	35.6	34.7	32.8	31.3	30.9	31.2	42.1	803.2
67,5°	39.5	41.3	38.8	36.8	35.8	34.1	30.8	27.7	26.5	26.2	26.5	42.5	845.7
70,0°	35.4	36.0	34.3	34.0	33.6	31.2	25.9	21.9	20.1	19.3	19.1	46.5	892.2
72,5°	29.4	29.7	29.0	29.6	29.0	25.6	19.2	15.4	13.8	12.9	12.7	48.7	940.9
75,0°	23.6	23.4	23.0	23.9	24.0	20.0	13.7	10.2	9.1	8.2	8.1	34.4	975.3
77,5°	17.7	16.7	16.1	17.0	17.6	14.4	8.7	6.1	4.9	4.0	3.8	16.7	992.0
80,0°	11.2	10.2	9.2	9.6	10.6	8.1	5.1	3.3	2.2	1.4	1.2	5.4	997.4
82,5°	5.5	5.0	4.3	4.0	4.7	3.8	2.6	1.8	1.2	0.8	0.7	1.7	999.2
85,0°	2.3	2.1	1.8	1.6	1.5	1.2	1.0	0.8	0.7	0.6	0.5	0.6	999.7
87,5°	1.3	1.2	1.1	1.0	0.8	0.8	0.7	0.6	0.5	0.5	0.5	0.3	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Streetlight 31 midi toolless	Order number: 5XH7U31T08NA EAN: 4069025100061	LP number 59537_219
---	--	--------------------------------------

Dimming levels table	environmental temperature: 25°C	siteco
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W]
				start of lifetime	end of lifetime	average
100	254	254	22950	149.5	163.6	156.6
95	239	252	21825	140.1	152.8	146.4
90	224	249	20668	130.8	142.5	136.6
85	209	247	19478	121.6	132.5	127.0
80	195	244	18341	113.1	123.1	118.1
75	181	242	17176	104.7	113.9	109.3
70	168	239	16080	97.0	105.4	101.2
65	154	236	14876	88.7	96.4	92.6
60	141	232	13740	81.1	88.1	84.6
55	128	229	12582	73.6	79.8	76.7
50	116	225	11496	66.6	72.3	69.4
45	103	221	10299	59.2	64.2	61.7
40	91	216	9175	52.2	56.7	54.4
35	79	211	8037	45.4	49.3	47.3
30	67	205	6882	38.5	41.7	40.1
25	55	198	5708	31.8	34.4	33.1
20	44	190	4621	25.8	27.8	26.8
15	32	178	3421	19.4	20.8	20.1
10	21	163	2307	13.4	14.4	13.9
10	20	161	2205	12.9	13.8	13.4

Dimming levels table	environmental temperature: 5°C
-----------------------------	--------------------------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W]
				start of lifetime	end of lifetime	average
100	254	254	23640	151.3	165.6	158.4
95	239	252	22447	141.9	154.7	148.3
90	225	250	21310	133.1	145.0	139.0
85	210	247	20064	123.8	134.8	129.3
80	196	245	18875	115.3	125.4	120.4
75	183	242	17754	107.4	116.7	112.0
70	169	239	16525	98.9	107.5	103.2
65	156	236	15370	91.2	99.0	95.1
60	143	233	14194	83.5	90.6	87.0
55	130	229	13003	75.8	82.3	79.0
50	117	226	11794	68.2	73.9	71.1
45	105	222	10663	61.2	66.3	63.8
40	92	217	9419	53.6	58.1	55.8
35	80	212	8255	46.6	50.6	48.6
30	68	206	7077	39.7	43.0	41.4
25	56	199	5884	32.9	35.6	34.2
20	44	190	4679	26.2	28.3	27.2
15	33	179	3563	20.2	21.7	21.0
10	21	163	2332	13.6	14.6	14.1
9	20	161	2230	13.1	14.0	13.6

Photometric test report

Family Streetlight 31 midi toolless	Order number: 5XH7U31T08NA EAN: 4069025100061	LP number 59537_219
---	--	-------------------------------

Dimming levels table	environmental temperature: 15°C	siteco
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W]
				start of lifetime	end of lifetime	average
100	254	254	23320	150.4	164.6	157.5
95	239	252	22159	141.0	153.7	147.4
90	224	249	20969	131.6	143.4	137.5
85	210	247	19831	123.0	133.9	128.4
80	196	245	18667	114.5	124.6	119.6
75	182	242	17480	106.0	115.3	110.6
70	169	239	16360	98.2	106.7	102.4
65	155	236	15135	89.9	97.7	93.8
60	142	233	13978	82.3	89.3	85.8
55	129	229	12803	74.7	81.0	77.8
50	117	226	11700	67.7	73.4	70.6
45	104	221	10489	60.1	65.2	62.6
40	92	217	9352	53.2	57.7	55.4
35	80	212	8200	46.2	50.2	48.2
30	68	206	7034	39.4	42.6	41.0
25	56	199	5850	32.7	35.3	34.0
20	44	190	4654	26.0	28.0	27.0
15	33	179	3545	20.0	21.5	20.8
10	21	163	2321	13.5	14.5	14.0
10	20	161	2219	13.0	13.9	13.4

Photometric test report

Family Streetlight 31 midi toolless	Order number: 5XH7U31T08NA EAN: 4069025100061	LP number 59537_219
---	--	--------------------------------------

Luminousfluxs table	siteco
----------------------------	---------------

Temperature °C	Luminous flux lm	Power consumption W
25.0	22950.0	149.5
5.0	23640.0	151.3
15.0	23320.0	150.4