


Photometric test report

Family Streetlight 31 maxi toolless	Order number: 5XH8V31T08TA EAN: 4069025105097	LP number 59540_464
	Version post-top or side-entry mounting, Smart Interface up/down Optic asymmetric, extremely wide distribution (P0.5a G) Cover toughened safety glass Lamps LED 3000 K CRI ≥ 70 Controlgear ECG SITECO - Smart Interface Rated values Net luminous flux = 33060 lm Power consumption = 228.8 W Luminous efficacy = 144.5 lm/W	serial documentation 27.05.2024



Luminous intensity in cd/klm C180-0 C200-20 C205-25 C270-90 **Imax: 308 cd/klm**

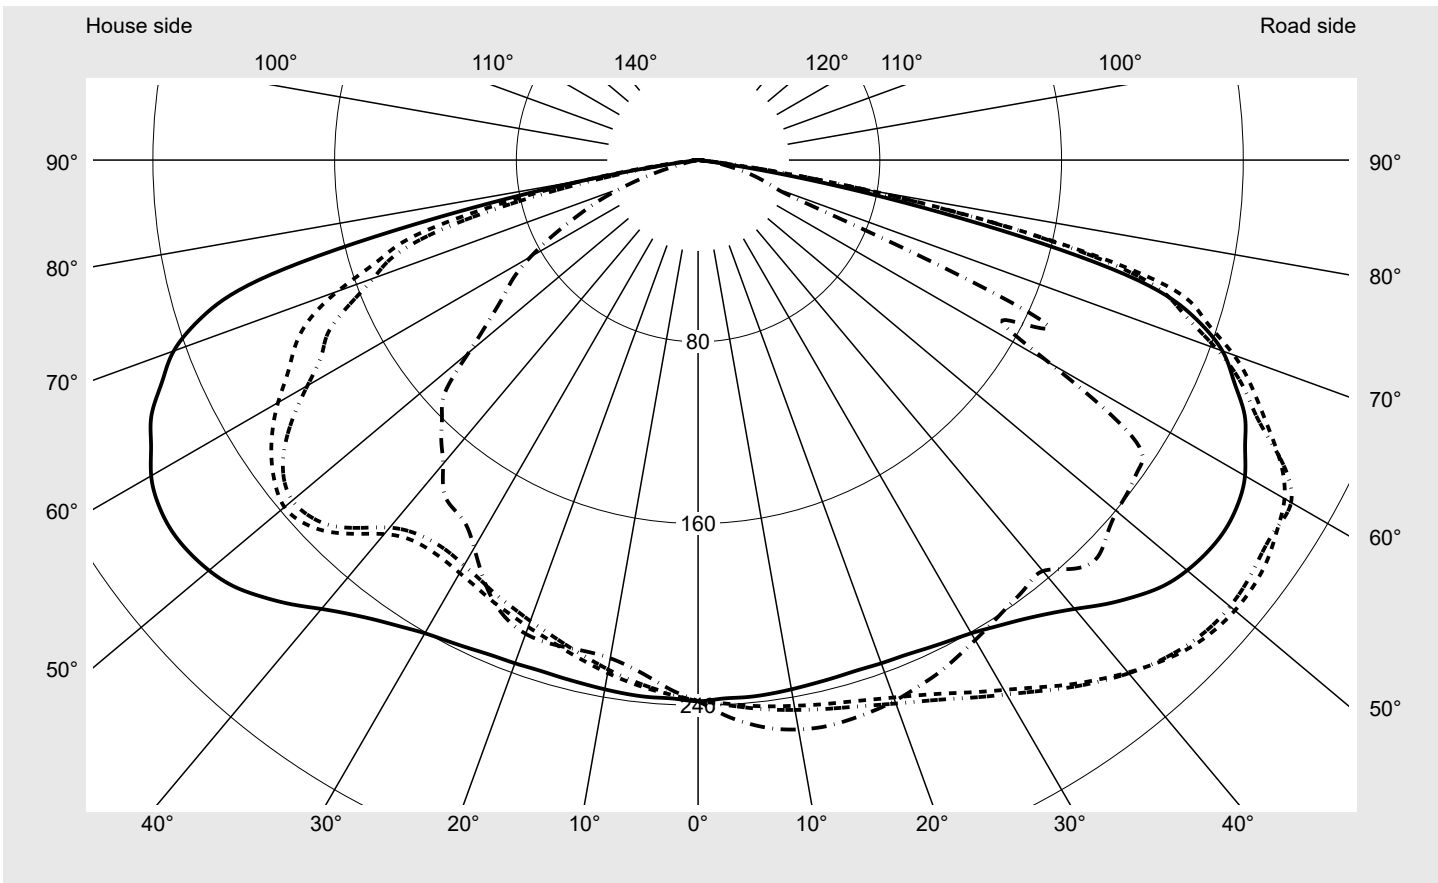

Luminaire output ratios	
Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%


Luminous intensity class acc. to EN13201-2	
Class:	G6
Imax 70°	256.5
Imax 80°	74.5
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0

Measurement conditions
DIN EN 13032 and DIN 5032

Photometric test report

Family Streetlight 31 maxi toolless	Order number: 5XH8V31T08TA EAN: 4069025105097	LP number 59540_464
-----------------------------------------------	----------------------------------------------------------------	-------------------------------

Envelope curve in cd/klm **KMK 50°** **KMK 47.5°** **KMK 45°** **KMK 42.5°** **siteco**

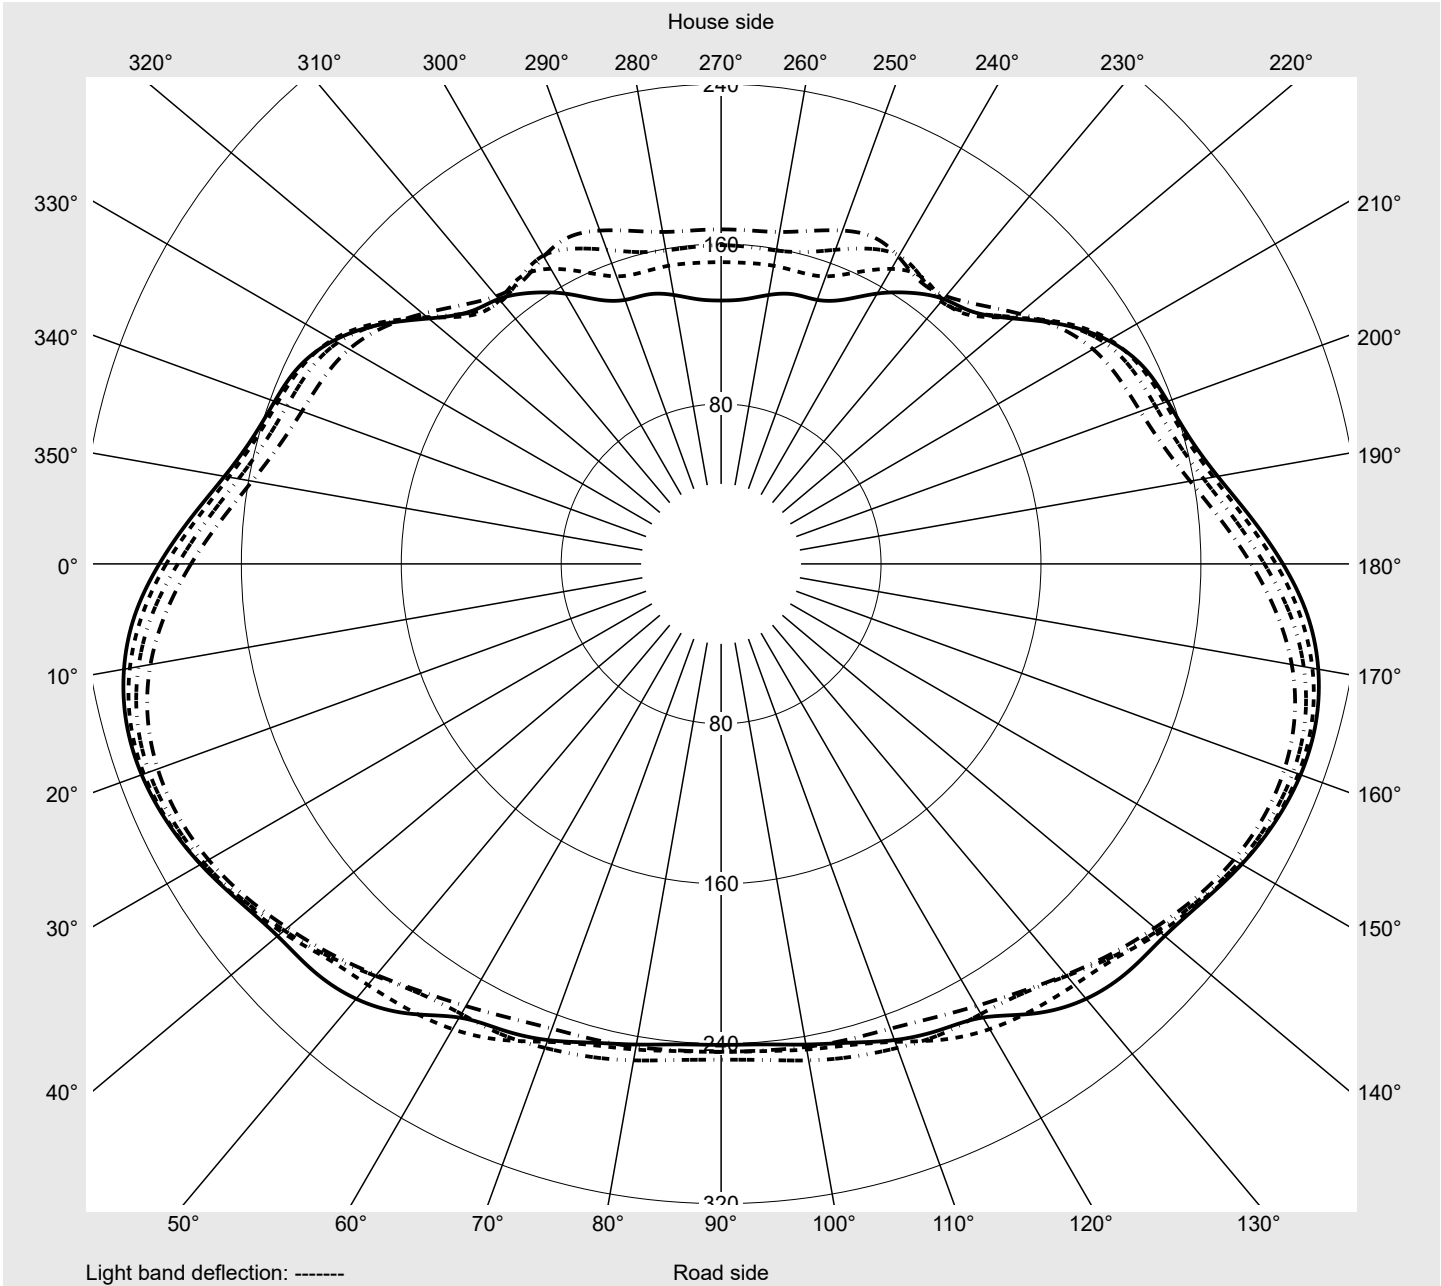

Photometric test report

Family Streetlight 31 maxi toolless	Order number: 5XH8V31T08TA EAN: 4069025105097	LP number 59540_464
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	238.2	238.2	238.2	238.2	238.2	238.2	238.2	238.2	238.2	238.2	238.2	238.2	238.2
2,5°	237.3	237.5	238.1	238.8	239.3	239.9	240.2	240.7	241.5	241.7	242.0	242.5	242.9
5,0°	237.4	238.0	238.8	239.9	241.0	241.9	242.7	243.5	244.6	245.2	245.8	246.5	247.1
7,5°	237.1	238.2	239.5	241.0	242.5	244.0	245.1	246.2	247.5	248.4	249.3	250.0	250.6
10,0°	236.6	238.2	239.9	241.9	243.9	245.8	247.4	248.6	250.0	251.1	252.0	252.6	253.2
12,5°	236.0	238.3	240.4	243.0	245.5	247.6	249.4	250.9	252.2	253.3	254.1	254.7	255.0
15,0°	235.6	238.5	241.1	244.2	247.1	249.5	251.5	253.1	254.1	255.1	255.8	256.2	256.2
17,5°	235.3	239.0	242.1	245.7	249.2	251.8	253.9	255.5	256.4	257.0	257.4	257.2	256.9
20,0°	235.7	240.1	243.9	248.0	251.8	254.6	256.7	258.1	258.5	258.7	258.6	258.0	257.4
22,5°	236.2	241.5	246.0	250.8	255.0	257.8	259.6	260.5	260.4	260.0	259.4	258.4	257.3
25,0°	237.3	243.5	248.9	254.5	259.0	261.8	262.9	262.9	262.2	261.3	260.2	258.6	257.0
27,5°	238.7	246.0	252.9	259.4	264.0	266.6	267.1	266.4	264.7	262.7	260.7	258.6	256.6
30,0°	240.5	249.4	257.8	264.7	269.3	271.6	271.4	269.9	267.6	264.6	261.5	258.8	256.5
32,5°	243.5	253.9	263.5	270.7	275.3	277.3	276.5	274.3	270.9	266.8	262.8	259.6	256.7
35,0°	247.2	259.5	270.1	277.6	282.1	283.6	282.1	279.0	274.6	269.3	264.8	260.4	256.5
37,5°	251.9	265.3	276.5	284.1	288.4	289.4	287.5	283.6	277.9	271.9	266.1	260.9	256.4
40,0°	257.9	272.0	283.3	290.8	294.5	294.9	292.3	287.5	280.9	274.1	267.3	261.3	255.9
42,5°	265.2	278.8	289.9	297.0	299.9	299.5	296.1	290.4	283.2	275.9	268.4	261.2	255.4
45,0°	271.8	285.6	295.9	302.4	304.5	303.0	298.9	292.4	285.3	277.6	269.0	262.5	260.0
47,5°	277.6	290.6	300.3	305.9	307.3	305.1	300.6	293.5	286.7	279.0	274.9	272.2	268.7
50,0°	281.0	294.4	303.3	308.0	308.5	305.7	300.6	294.3	289.6	288.2	284.0	274.4	262.0
52,5°	282.9	296.1	304.6	308.3	308.1	304.7	299.6	297.0	297.9	293.2	280.2	268.9	260.6
55,0°	283.4	296.4	304.5	307.4	306.1	302.7	301.1	302.7	299.0	287.3	277.3	263.0	250.2
57,5°	281.8	294.2	302.3	304.6	302.4	301.8	305.3	302.8	291.1	282.3	265.6	251.7	240.8
60,0°	278.0	289.6	297.4	299.9	298.1	301.4	306.7	298.1	285.4	267.5	252.7	240.4	231.1
62,5°	271.5	282.8	289.9	292.5	289.2	290.5	292.2	289.3	274.8	251.5	238.4	226.6	217.3
65,0°	265.5	275.5	281.2	283.0	276.6	272.6	272.7	269.1	253.6	232.0	217.9	208.5	203.1
67,5°	255.5	265.6	270.2	271.0	264.5	259.5	258.9	247.4	230.6	208.1	193.8	187.1	185.3
70,0°	245.6	253.4	256.5	255.8	251.0	242.8	232.3	218.1	200.6	183.2	168.1	164.4	158.1
72,5°	228.5	234.6	236.2	235.1	233.9	223.7	206.6	186.8	169.6	156.3	143.4	138.9	120.8
75,0°	194.7	195.1	199.0	209.9	213.2	203.6	180.2	156.3	139.6	128.8	118.9	109.7	86.9
77,5°	118.9	121.4	127.9	140.9	149.5	148.0	139.4	124.1	109.0	97.7	88.2	79.3	61.2
80,0°	48.4	49.8	59.9	70.1	74.5	72.8	73.8	68.2	62.2	64.4	61.2	53.2	40.3
82,5°	5.9	5.6	6.9	11.1	15.0	19.9	24.6	26.8	29.1	29.4	28.1	28.6	21.9
85,0°	2.4	2.3	2.3	2.3	2.2	2.2	2.1	2.8	5.0	6.4	7.9	7.6	6.5
87,5°	1.3	1.3	1.3	1.2	1.2	1.1	1.1	1.1	1.0	1.0	0.9	0.9	0.9
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 31 maxi toolless	Order number: 5XH8V31T08TA EAN: 4069025105097	LP number 59540_464
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	238.2	238.2	238.2	238.2	238.2	238.2	238.2	238.2	238.2	238.2	238.2	238.2	238.2
2,5°	243.1	243.3	243.5	243.7	244.0	244.1	237.0	236.3	236.1	236.0	235.7	235.4	235.1
5,0°	247.5	247.7	248.2	248.5	248.7	248.9	236.4	235.2	234.6	234.0	233.2	232.7	232.1
7,5°	251.1	251.3	251.7	252.1	252.3	252.4	235.6	234.0	232.8	231.8	230.6	229.8	228.8
10,0°	253.6	253.7	254.0	254.3	254.5	254.5	234.4	232.3	230.7	229.3	227.7	226.4	225.4
12,5°	255.2	255.1	255.2	255.4	255.5	255.5	233.2	230.5	228.3	226.5	224.5	223.1	222.0
15,0°	256.0	255.7	255.5	255.5	255.3	255.2	232.0	228.8	226.1	223.7	221.5	220.0	218.8
17,5°	256.4	255.7	255.2	254.9	254.6	254.5	231.1	227.2	224.0	221.0	218.5	216.8	215.8
20,0°	256.4	255.4	254.5	253.9	253.5	253.3	230.6	226.1	222.2	218.7	215.9	214.1	213.2
22,5°	256.1	254.8	253.4	252.3	251.7	251.4	230.4	225.2	220.5	216.3	213.3	211.4	210.7
25,0°	255.5	253.9	252.2	250.6	249.8	249.4	230.5	224.3	218.9	214.2	210.9	208.9	208.1
27,5°	254.6	252.6	250.7	248.6	247.2	246.8	230.6	223.7	217.2	211.8	208.1	206.1	205.4
30,0°	254.1	251.5	248.9	246.5	244.5	244.0	231.7	223.3	215.8	209.9	206.0	203.9	203.6
32,5°	253.8	250.5	247.2	244.2	242.0	241.4	233.2	223.4	215.0	208.6	204.5	202.8	202.8
35,0°	253.1	249.3	245.3	242.1	239.8	239.0	235.9	224.7	215.1	208.4	204.6	203.2	203.1
37,5°	252.2	248.0	243.9	240.6	237.9	237.1	239.1	226.9	216.7	210.0	206.5	204.9	203.8
40,0°	251.1	246.5	242.5	239.3	236.9	236.2	244.5	231.5	221.4	214.9	211.2	208.5	204.5
42,5°	250.6	247.4	246.2	245.4	244.3	244.1	251.0	238.3	228.9	223.2	219.6	214.8	206.2
45,0°	259.7	257.6	255.2	252.2	249.1	248.0	257.8	245.1	236.2	231.1	227.7	221.4	208.7
47,5°	262.6	254.5	249.2	246.7	244.6	244.1	262.9	250.1	241.1	236.1	232.0	224.4	210.0
50,0°	257.5	253.5	248.0	244.1	241.3	240.6	266.1	252.3	242.8	237.7	233.1	223.6	208.6
52,5°	251.2	244.9	242.1	240.7	239.3	238.9	266.9	251.8	241.0	234.6	229.9	219.4	203.8
55,0°	243.2	238.5	237.3	237.6	236.9	236.9	267.2	250.9	238.0	229.3	222.4	210.0	194.8
57,5°	234.8	231.1	231.4	231.5	228.4	226.6	265.9	248.8	234.0	222.2	211.5	194.5	178.5
60,0°	224.0	222.1	219.2	203.5	185.6	178.7	262.4	244.0	227.9	213.5	198.5	177.2	155.0
62,5°	211.1	203.0	179.8	157.1	151.1	152.4	255.7	235.9	219.2	203.8	187.0	161.9	138.0
65,0°	192.2	167.0	147.6	160.8	169.6	166.4	248.1	226.8	210.5	196.1	179.7	152.0	125.4
67,5°	160.4	132.9	139.7	112.6	79.6	70.0	238.5	217.0	201.7	186.0	166.0	137.5	102.2
70,0°	124.2	113.5	80.1	43.1	37.5	36.7	228.2	207.7	189.6	168.8	152.1	121.0	79.1
72,5°	94.2	70.4	34.4	31.3	30.3	30.0	213.8	196.5	166.3	147.8	140.2	97.8	60.8
75,0°	68.8	33.0	24.9	24.6	23.8	23.5	185.0	166.1	133.3	129.6	114.8	74.9	40.4
77,5°	42.1	18.9	17.8	17.5	16.7	16.4	125.5	104.8	84.8	89.9	72.8	40.0	22.4
80,0°	20.7	11.7	11.4	10.9	10.4	10.2	49.6	44.0	43.6	48.4	32.4	14.5	12.4
82,5°	9.2	6.5	6.2	6.1	5.7	5.6	6.8	6.4	10.9	13.5	8.3	5.6	5.7
85,0°	2.9	2.5	2.5	2.4	2.3	2.2	2.4	2.4	2.4	2.4	2.3	2.2	2.1
87,5°	0.9	0.8	0.9	0.8	0.8	0.8	1.3	1.3	1.3	1.3	1.3	1.3	1.2
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 31 maxi toolless	Order number: 5XH8V31T08TA EAN: 4069025105097	LP number 59540_464
Table of values for luminous intensities		Maximum luminous intensity
		sITeco

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0,0°	238.2	238.2	238.2	238.2	238.2	238.2	238.2	238.2	238.2	238.2	238.2	0.4	0.4
2,5°	234.8	234.7	234.6	234.3	234.3	234.4	234.5	234.3	234.3	234.2	234.2	2.8	3.2
5,0°	231.3	231.0	230.6	230.1	229.9	229.8	229.7	229.6	229.4	229.4	229.4	5.7	8.9
7,5°	227.9	227.2	226.7	226.2	225.8	225.7	225.5	225.3	225.2	225.3	225.3	8.5	17.4
10,0°	224.2	223.7	223.2	222.7	222.5	222.5	222.4	222.4	222.5	222.6	222.7	11.3	28.7
12,5°	220.9	220.4	220.2	220.2	220.3	220.5	220.8	221.1	221.4	221.7	221.9	14.1	42.8
15,0°	218.0	217.8	218.1	218.5	219.1	219.7	220.3	220.9	221.6	222.0	222.2	16.8	59.6
17,5°	215.5	215.7	216.3	217.2	218.2	219.2	220.1	221.0	221.9	222.4	222.6	19.5	79.1
20,0°	213.3	213.9	214.9	216.1	217.4	218.4	219.3	220.3	221.1	221.7	221.9	22.2	101.2
22,5°	211.0	211.7	213.0	214.3	215.5	216.4	217.1	217.7	218.3	218.9	219.1	24.7	125.9
25,0°	208.4	209.5	210.8	212.0	212.8	213.1	213.1	213.0	213.1	213.4	213.7	27.2	153.2
27,5°	206.1	207.2	208.3	208.7	208.3	207.6	206.7	206.2	205.8	205.7	205.9	29.6	182.8
30,0°	204.5	205.4	205.3	204.4	202.8	200.8	199.0	197.7	197.2	196.9	197.1	31.9	214.7
32,5°	203.4	203.2	201.5	198.8	195.6	192.4	190.2	189.2	189.2	189.8	190.2	34.2	248.8
35,0°	202.5	199.9	195.9	191.3	186.9	183.7	183.2	184.2	185.8	187.0	187.5	36.4	285.3
37,5°	200.6	195.5	189.2	183.4	179.5	178.6	181.2	183.8	184.5	184.1	183.9	38.8	324.0
40,0°	198.0	189.6	181.5	176.2	175.6	179.2	182.3	180.9	177.6	175.3	174.7	41.1	365.1
42,5°	194.7	183.2	174.9	172.9	177.5	180.3	177.4	172.5	168.6	167.4	167.3	43.5	408.6
45,0°	192.0	177.6	171.3	174.8	178.0	174.0	167.2	161.5	159.2	159.1	159.4	45.9	454.5
47,5°	191.5	176.0	172.4	175.1	170.4	161.0	153.1	151.1	151.4	151.1	150.9	47.9	502.4
50,0°	191.0	178.3	173.0	165.5	156.1	145.9	140.5	139.6	136.6	132.9	131.7	49.3	551.6
52,5°	188.5	178.4	165.3	151.1	137.1	128.7	128.3	125.6	119.8	116.5	116.0	50.0	601.7
55,0°	180.5	166.4	147.4	130.9	119.3	117.7	116.1	110.0	105.8	104.4	104.7	50.3	651.9
57,5°	160.7	141.9	126.3	112.6	107.9	108.0	101.5	97.5	96.5	95.8	96.2	49.8	701.7
60,0°	137.1	120.9	107.9	100.7	100.2	95.4	88.5	86.8	86.3	85.0	85.1	48.3	750.0
62,5°	120.2	105.6	96.5	93.8	89.2	80.7	76.1	75.2	74.5	72.5	72.3	46.0	796.0
65,0°	103.2	92.1	87.2	82.7	74.1	66.9	63.7	62.8	63.5	59.8	59.3	43.9	839.8
67,5°	79.9	73.1	69.4	64.1	58.1	54.4	51.9	51.9	53.0	49.0	48.0	39.6	879.5
70,0°	59.9	55.4	52.2	49.6	47.6	45.3	41.9	41.0	41.2	36.5	35.7	34.9	914.4
72,5°	44.5	42.2	40.2	39.5	38.4	35.2	31.1	29.9	28.7	24.4	23.5	30.4	944.8
75,0°	32.9	31.4	31.0	30.7	29.2	25.4	20.6	18.2	15.7	12.8	12.1	25.2	969.9
77,5°	22.0	21.6	20.9	19.9	17.6	14.7	11.7	9.7	7.7	5.2	5.0	17.3	987.2
80,0°	11.8	11.1	10.5	9.8	8.8	7.5	6.0	4.8	3.6	2.0	1.8	8.9	996.1
82,5°	5.5	5.1	4.9	4.6	4.3	3.7	3.0	2.4	1.8	1.1	1.0	2.9	999.0
85,0°	2.0	1.9	1.9	1.8	1.6	1.4	1.2	1.1	0.9	0.8	0.7	0.7	999.7
87,5°	1.1	1.1	1.0	0.9	0.8	0.8	0.7	0.6	0.6	0.6	0.6	0.3	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Streetlight 31 maxi toolless	Order number: 5XH8V31T08TA EAN: 4069025105097	LP number 59540_464
-----------------------------------------------	----------------------------------------------------------------	--------------------------------------

Dimming levels table	environmental temperature: 25°C	siteco
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W] start of lifetime	Power consumption [W] end of lifetime	Power consumption [W] average
100	254	254	33060	228.8	248.7	238.8
95	238	252	31371	213.0	232.5	222.8
90	223	249	29725	198.8	217.1	208.0
85	210	247	28157	187.3	203.5	195.4
80	195	244	26409	173.1	188.5	180.8
75	182	242	24843	161.1	175.0	168.0
70	168	239	23145	148.2	161.1	154.6
65	155	236	21511	136.6	148.1	142.4
60	142	233	19870	124.9	135.5	130.2
55	129	229	18178	113.6	123.1	118.4
50	116	225	16472	102.4	110.7	106.6
45	104	221	14863	92.2	99.6	95.9
40	92	217	13228	82.1	88.6	85.4
35	80	212	11579	72.0	77.7	74.8
30	68	206	9885	62.2	66.8	64.5
25	57	199	8321	53.2	57.0	55.1
20	45	191	6594	43.2	46.3	44.8
15	34	180	4990	34.0	36.4	35.2
10	23	166	3370	24.5	26.1	25.3
9	21	163	3072	22.7	24.3	23.5

Dimming levels table	environmental temperature: 5°C
-----------------------------	--------------------------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W] start of lifetime	Power consumption [W] end of lifetime	Power consumption [W] average
100	254	254	33980	231.1	251.2	241.2
95	239	252	32307	216.2	235.7	226.0
90	224	249	30563	202.0	220.0	211.0
85	211	247	28945	190.3	207.0	198.6
80	197	245	27239	176.8	192.4	184.6
75	183	242	25483	163.8	178.0	170.9
70	170	239	23843	151.8	164.9	158.4
65	156	236	22023	139.0	150.8	144.9
60	143	233	20329	127.3	138.0	132.6
55	131	230	18728	116.7	126.3	121.5
50	118	226	16974	105.4	113.9	109.6
45	106	222	15326	95.0	102.6	98.8
40	94	218	13657	84.8	91.5	88.2
35	81	212	11847	73.7	79.5	76.6
30	70	207	10259	64.7	69.5	67.1
25	58	200	8528	54.7	58.7	56.7
20	46	191	6785	44.6	47.8	46.2
15	35	181	5164	35.3	37.8	36.6
10	23	166	3384	24.8	26.5	25.6
9	21	163	3085	23.0	24.6	23.8

Photometric test report

Family Streetlight 31 maxi toolless	Order number: 5XH8V31T08TA EAN: 4069025105097	LP number 59540_464
-----------------------------------------------	----------------------------------------------------------------	--------------------------------------

Dimming levels table	environmental temperature: 15°C	siteco
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W] start of lifetime	Power consumption [W] end of lifetime	Power consumption [W] average
100	254	254	33560	229.9	249.9	239.9
95	239	252	31932	215.1	234.5	224.8
90	224	249	30234	200.9	218.8	209.8
85	210	247	28523	188.3	204.5	196.4
80	196	245	26856	174.9	190.5	182.7
75	182	242	25132	161.9	176.0	169.0
70	169	239	23522	149.9	163.0	156.4
65	156	236	21856	138.2	149.9	144.0
60	143	233	20188	126.6	137.2	131.9
55	130	229	18477	115.1	124.7	119.9
50	117	226	16745	103.9	112.3	108.1
45	105	222	15115	93.5	101.0	97.2
40	93	217	13460	83.4	90.0	86.7
35	81	212	11804	73.2	79.0	76.1
30	69	206	10085	63.4	68.2	65.8
25	57	199	8365	53.5	57.4	55.4
20	46	191	6773	44.4	47.5	46.0
15	34	180	5010	34.2	36.6	35.4
10	23	166	3382	24.6	26.3	25.5
9	21	163	3083	22.8	24.4	23.6

Photometric test report

Family Streetlight 31 maxi toolless	Order number: 5XH8V31T08TA EAN: 4069025105097	LP number 59540_464
-----------------------------------------------	----------------------------------------------------------------	--------------------------------------

Luminousfluxs table **siteco**

Temperature °C	Luminous flux lm	Power consumption W
25.0	33060.0	228.8
5.0	33980.0	231.1
15.0	33560.0	229.9