
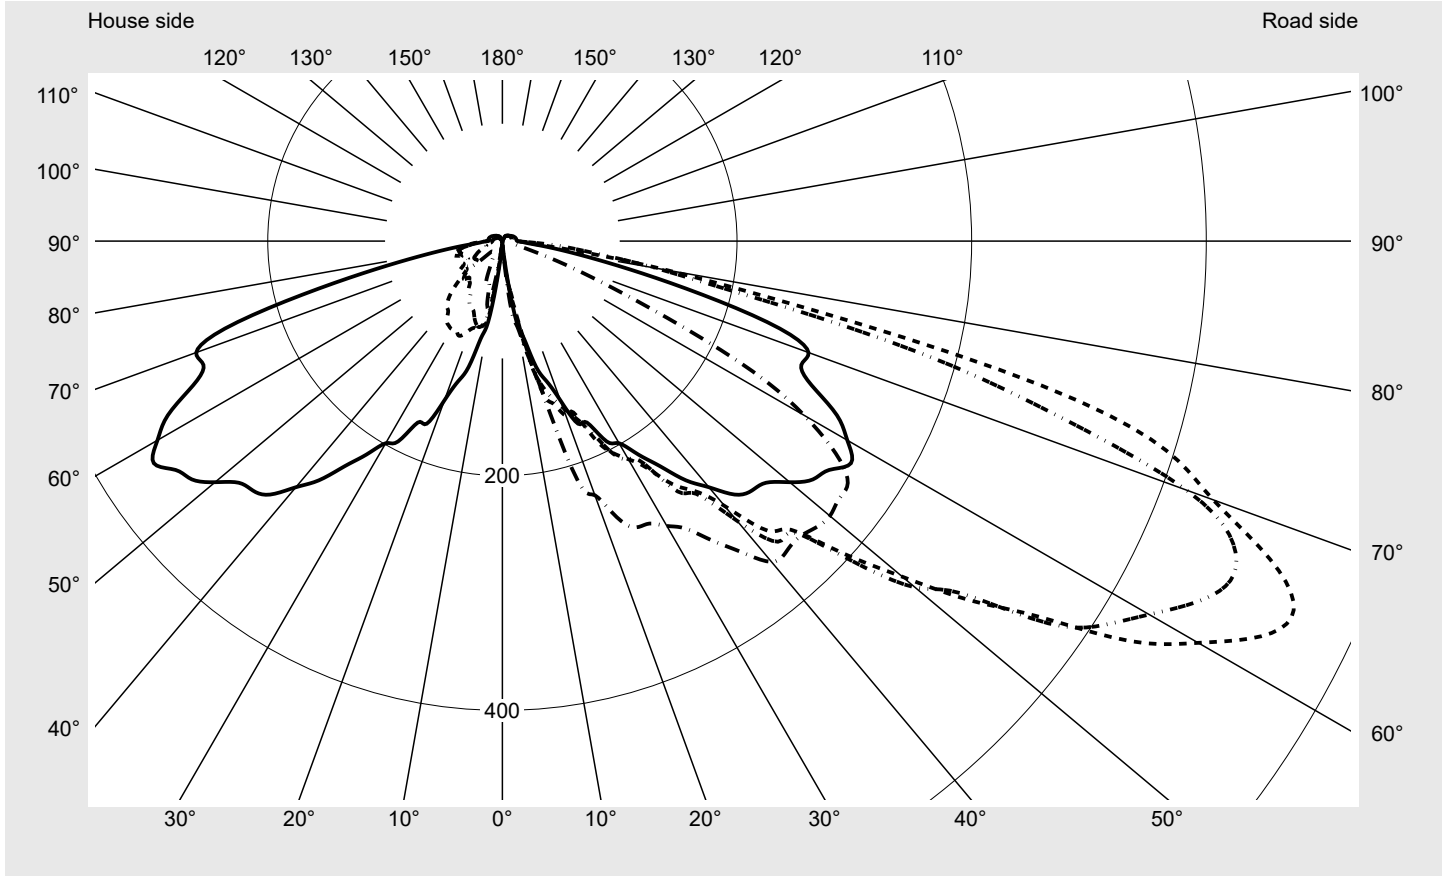


Photometric test report

Family DL 11 iQ 	Order number: 5XA5575EF14HP00022 EAN: 4058352768839	LP number 59404_203
	Version post-top- or mounting to wall arm Optic asymmetric, wide distribution (ST1.2a) Cover cover transparent, PMMA Lamps LED 3000 K CRI ≥ 70 Controlgear ECG SITECO iQ Rated values Net luminous flux = 4840 lm Power consumption = 33.6 W Luminous efficacy = 144 lm/W	serial documentation 17.07.2024

Luminous intensity in cd/klm C180-0 C205-25 C210-30 C270-90 **Imax: 744 cd/klm**




Luminaire output ratios	
Eta	100.0%
Eta 0° - 90°	95.4%
Eta 90° - 180°	4.6%
Measurement conditions	
DIN EN 13032 and DIN 5032	

Luminous intensity class acc. to EN13201-2	
Class:	G1
Imax 70°	653.9
Imax 80°	166.6
Imax 90°	13.3
Imax >90°	12.2
Imax >95°	12.0

Photometric test report

Family DL 11 iQ	Order number: 5XA5575EF14HP00022 EAN: 4058352768839	LP number 59404_203
---------------------------	--	-------------------------------

Envelope curve in cd/klm **KMK 65°** **KMK 62,5°** **KMK 60°** **KMK 57,5°** **siteco**

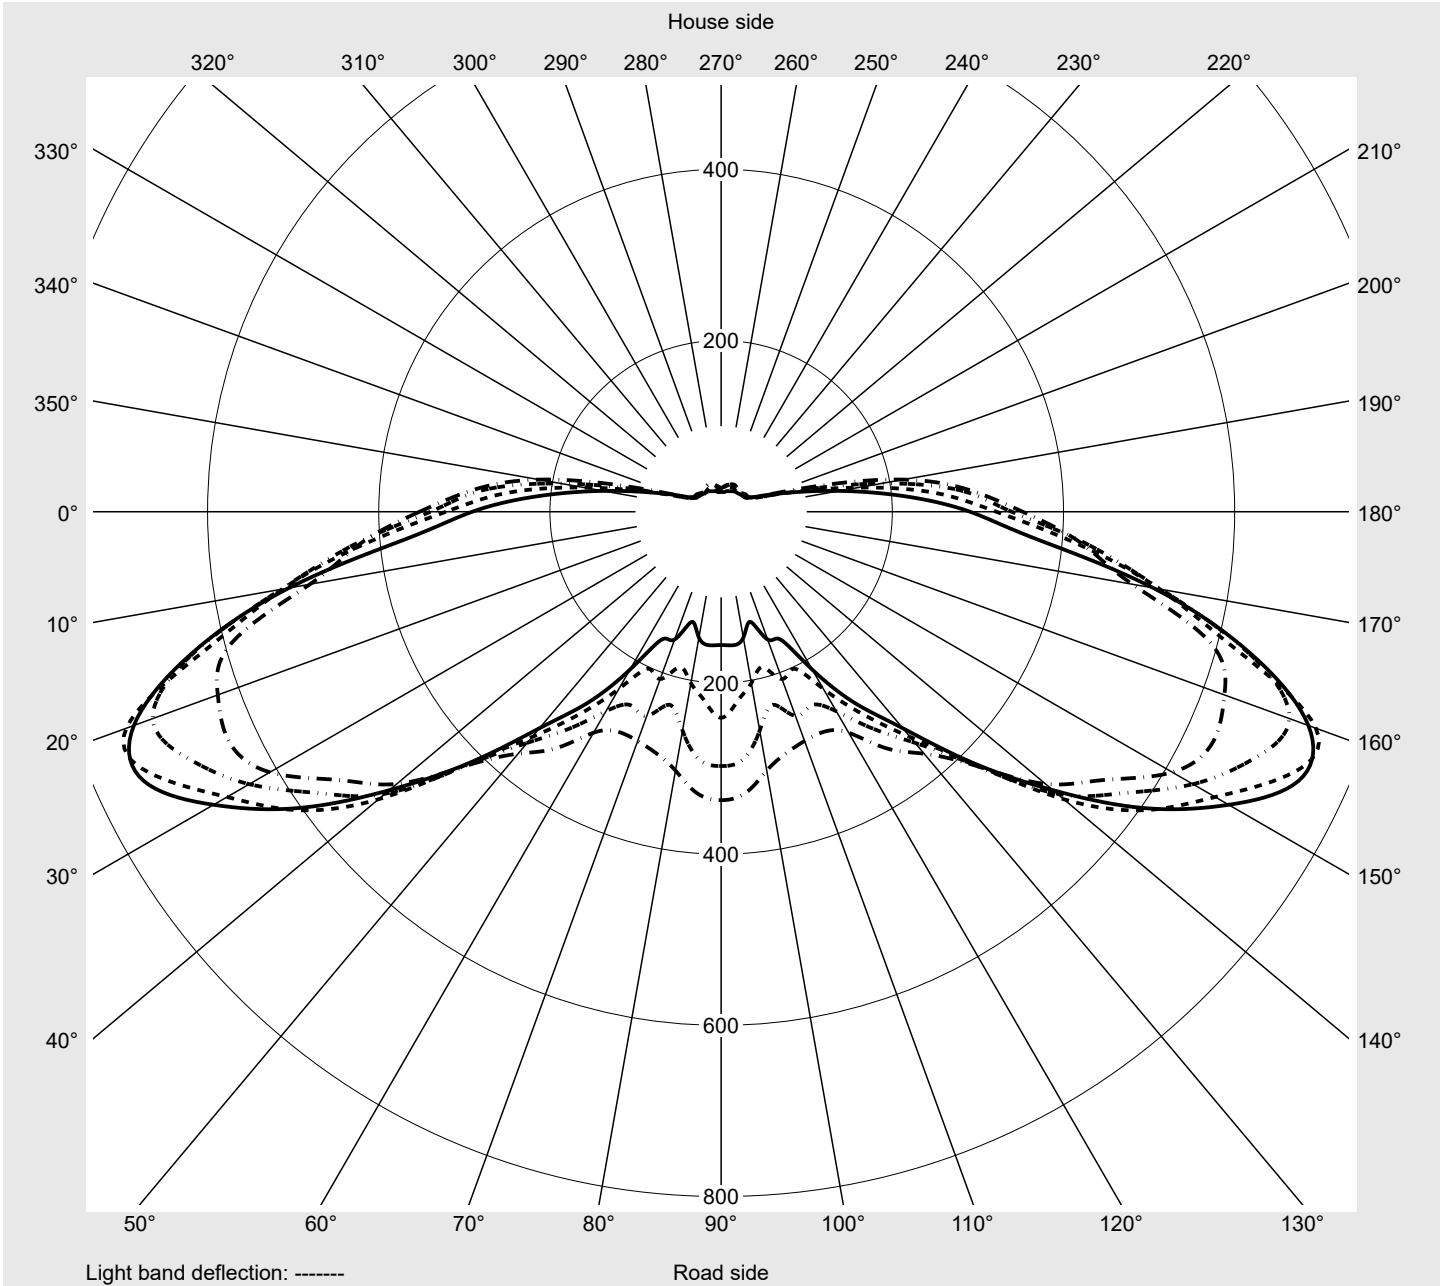

Photometric test report

Family DL 11 iQ	Order number: 5XA5575EF14HP00022 EAN: 4058352768839	LP number 59404_203
Table of values for luminous intensities		Maximum luminous intensity



C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	4.1	4.1	4.1	4.1	4.1	4.1	4.1	4.1	4.1	4.1	4.1	4.1	4.1
2,5°	4.1	4.1	4.2	4.4	4.5	4.6	4.7	4.8	4.9	5.1	5.2	5.3	5.4
5,0°	7.1	7.9	8.7	9.4	10.5	12.4	14.2	15.5	16.6	17.2	17.6	17.7	17.7
7,5°	30.1	32.0	35.4	37.5	36.8	36.6	36.1	35.2	34.6	34.5	35.5	37.8	41.1
10,0°	70.1	66.6	62.8	62.5	60.6	56.4	51.9	50.0	51.2	54.9	60.7	67.9	71.2
12,5°	85.0	89.9	87.9	86.5	86.3	90.3	99.7	107.8	110.9	106.6	100.0	96.4	94.2
15,0°	111.0	115.7	123.9	132.8	135.3	135.0	125.7	124.6	120.2	123.6	122.9	123.2	125.9
17,5°	125.2	133.8	146.2	149.9	143.5	145.5	139.9	154.3	143.6	142.8	140.7	140.4	145.7
20,0°	144.4	146.2	153.6	152.6	161.2	158.2	151.1	146.7	150.2	152.3	152.9	161.5	170.3
22,5°	168.5	170.6	171.1	165.8	162.4	158.1	163.3	161.8	162.1	160.6	160.2	166.1	176.5
25,0°	170.7	176.5	179.1	186.6	187.3	185.5	179.6	171.8	180.5	182.5	179.1	174.5	195.8
27,5°	192.5	196.0	194.3	193.6	196.9	203.5	204.2	195.8	194.7	197.2	198.2	188.7	212.5
30,0°	199.0	211.2	214.4	214.8	211.5	214.7	214.6	216.6	218.9	221.3	218.6	208.8	232.5
32,5°	215.8	215.2	219.1	212.6	225.3	229.2	225.1	219.4	232.6	240.9	232.0	228.8	250.4
35,0°	234.2	240.3	237.4	226.7	240.9	253.0	260.5	249.9	253.9	273.5	265.8	249.2	271.9
37,5°	257.1	255.6	257.0	258.2	264.4	268.3	271.6	266.5	277.4	284.7	283.5	271.9	292.4
40,0°	273.9	269.0	272.8	266.2	281.2	294.8	311.3	287.2	284.3	310.0	299.4	289.1	313.1
42,5°	293.0	293.2	293.0	290.3	302.3	334.8	347.6	335.4	327.2	338.4	323.4	310.9	328.7
45,0°	300.7	293.7	312.6	312.6	330.1	348.0	351.2	351.9	350.2	373.8	364.8	330.5	342.9
47,5°	304.9	305.5	327.8	333.5	357.0	394.0	402.7	398.0	388.5	386.2	374.9	342.4	353.3
50,0°	319.7	332.4	365.4	387.4	396.2	445.1	459.2	440.8	409.7	398.8	379.6	346.9	346.3
52,5°	333.7	373.9	412.9	472.1	471.1	503.2	493.4	465.1	427.8	417.0	390.2	359.2	339.8
55,0°	340.1	401.4	433.4	524.3	546.6	558.1	568.0	499.5	466.3	422.9	382.1	355.5	318.1
57,5°	352.3	422.6	487.8	592.0	625.8	634.6	608.7	546.3	494.7	419.1	369.0	337.6	298.1
60,0°	339.5	428.3	522.2	638.3	706.5	684.9	636.6	573.2	512.6	418.3	352.5	309.4	269.1
62,5°	321.5	414.8	520.2	623.7	739.4	729.4	666.6	607.6	522.6	415.3	343.5	288.8	239.0
65,0°	290.8	370.7	512.6	640.6	730.2	744.3	684.7	603.6	506.0	414.2	330.2	273.1	212.9
67,5°	275.8	326.1	476.1	602.2	721.4	708.1	674.3	581.8	487.7	389.2	317.3	252.4	183.9
70,0°	277.7	345.3	463.7	594.3	653.9	644.8	620.5	528.4	432.2	355.1	287.7	225.7	160.5
72,5°	248.0	355.4	412.8	559.9	615.1	593.3	498.1	449.3	362.2	288.1	231.7	181.7	136.7
75,0°	176.5	283.3	367.2	480.9	500.3	476.0	369.4	326.4	242.7	188.6	182.0	159.8	126.6
77,5°	110.9	173.9	246.2	322.1	334.3	269.5	213.8	181.0	152.7	129.7	140.9	130.8	113.8
80,0°	66.7	95.3	130.6	161.6	166.6	142.0	133.1	129.0	102.4	78.8	67.1	57.9	55.4
82,5°	39.8	49.4	58.2	69.9	79.4	61.2	80.1	91.0	70.4	44.8	25.7	22.2	15.7
85,0°	22.8	23.8	22.3	23.5	21.5	26.4	50.3	58.2	44.5	22.5	15.3	13.3	11.0
87,5°	17.2	15.9	15.2	15.3	15.5	17.7	23.6	24.1	17.2	12.4	11.3	10.3	9.6
90,0°	13.3	12.8	12.5	12.0	11.7	11.7	11.1	10.7	10.2	9.9	9.5	9.3	9.0
92,5°	12.2	12.1	11.9	11.7	11.3	11.0	10.6	10.2	9.9	9.6	9.3	9.0	8.8
95,0°	12.0	11.9	11.8	11.5	11.2	10.9	10.4	10.1	9.8	9.5	9.2	9.0	8.8
97,5°	12.0	11.8	11.7	11.3	11.1	10.7	10.4	10.1	9.7	9.5	9.1	9.0	8.8
100,0°	11.8	11.7	11.5	11.2	10.9	10.6	10.2	9.8	9.5	9.3	9.0	8.8	8.6
102,5°	11.7	11.5	11.3	11.1	10.7	10.4	10.1	9.7	9.5	9.2	9.0	8.8	8.6
105,0°	11.4	11.3	11.1	10.8	10.5	10.2	9.8	9.5	9.3	9.0	8.8	8.6	8.4
107,5°	11.1	10.9	10.7	10.5	10.1	9.9	9.5	9.3	9.0	8.9	8.6	8.4	8.4
110,0°	10.6	10.6	10.4	10.2	9.9	9.5	9.3	9.1	8.9	8.7	8.5	8.4	8.3
112,5°	10.3	10.2	10.1	9.9	9.5	9.3	9.1	8.9	8.7	8.5	8.4	8.3	8.1

Photometric test report

Family DL 11 iQ	Order number: 5XA5575EF14HP00022 EAN: 4058352768839	LP number 59404_203
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	4.1	4.1	4.1	4.1	4.1	4.1	4.1	4.1	4.1	4.1	4.1	4.1	4.1
2,5°	5.6	5.7	5.7	5.8	5.8	5.9	4.0	4.0	4.0	4.1	4.0	4.1	4.1
5,0°	17.6	17.1	17.0	16.9	16.2	16.2	6.3	5.9	5.5	5.1	4.9	4.9	4.9
7,5°	46.4	49.7	52.4	57.3	59.1	60.1	26.1	22.0	18.7	16.7	14.4	12.9	12.3
10,0°	75.3	75.2	74.3	74.7	73.0	74.5	72.6	76.8	77.4	71.4	61.9	53.7	47.6
12,5°	93.7	95.9	96.4	97.4	97.9	99.0	79.6	76.8	75.8	74.1	73.2	71.4	66.0
15,0°	131.7	135.6	137.3	139.4	136.9	137.8	106.9	93.1	88.3	79.2	78.1	75.9	68.2
17,5°	151.7	164.0	178.5	196.9	209.2	214.8	117.1	104.0	96.2	84.3	77.7	74.1	67.6
20,0°	186.4	196.9	212.9	224.9	228.3	230.5	136.8	123.8	111.1	92.6	80.3	69.6	58.0
22,5°	189.8	206.1	221.9	233.7	246.2	254.7	159.9	145.8	123.8	105.1	85.9	64.4	48.2
25,0°	209.6	221.1	237.4	262.0	269.4	269.2	164.2	146.4	127.6	104.6	88.7	62.7	43.9
27,5°	225.8	233.9	260.9	272.5	273.5	271.4	178.9	164.3	128.3	103.4	85.4	60.6	39.3
30,0°	246.9	251.4	275.5	284.2	279.6	280.4	181.9	166.5	137.9	116.3	86.5	55.4	34.6
32,5°	266.9	272.2	290.5	295.2	290.9	290.5	205.8	190.1	150.1	118.6	85.2	50.1	33.9
35,0°	285.5	290.8	308.2	313.6	310.2	311.5	213.7	196.0	155.6	119.3	82.8	50.1	33.2
37,5°	308.9	325.9	332.7	331.8	331.7	333.9	241.5	220.2	173.4	133.5	75.9	45.4	35.1
40,0°	327.5	348.2	342.0	342.6	344.9	356.9	262.0	225.1	166.3	124.6	73.5	44.0	37.6
42,5°	344.0	358.8	345.0	346.9	353.4	358.6	266.9	221.9	163.8	114.9	68.7	42.1	38.8
45,0°	353.9	358.1	344.5	353.9	357.7	357.2	287.1	233.8	167.5	107.7	61.2	45.9	43.0
47,5°	361.6	354.6	348.3	360.0	365.1	361.8	287.6	230.4	157.0	95.1	51.0	43.7	39.9
50,0°	358.8	346.2	345.1	356.9	364.7	364.5	291.9	230.5	148.8	83.9	42.0	39.4	35.4
52,5°	343.5	334.5	343.5	348.4	360.3	361.4	293.1	231.6	139.5	75.1	38.8	35.8	32.7
55,0°	314.0	315.8	328.5	338.9	351.6	359.4	301.5	242.5	137.6	73.4	43.8	37.1	33.1
57,5°	283.8	285.0	292.3	307.1	329.7	337.0	291.1	216.4	115.5	58.3	40.1	35.9	35.1
60,0°	249.5	253.8	233.4	259.6	290.8	297.1	282.1	189.8	98.6	51.3	38.2	34.1	34.1
62,5°	202.3	208.0	188.0	203.3	221.8	240.7	251.6	162.7	90.5	53.9	39.3	32.9	31.5
65,0°	164.9	158.9	133.3	149.3	156.6	155.7	212.5	140.1	87.8	57.3	39.3	33.6	31.6
67,5°	136.9	108.9	82.7	92.6	93.0	91.0	195.3	129.5	84.9	55.8	38.8	34.2	32.4
70,0°	115.2	81.2	45.7	41.6	45.4	50.0	189.3	128.1	81.5	49.4	37.3	33.9	32.9
72,5°	93.6	53.5	26.9	19.5	19.2	21.1	166.4	126.4	79.9	49.6	41.5	35.7	34.1
75,0°	75.2	25.6	17.1	13.3	12.7	12.5	125.1	94.2	70.8	46.3	43.7	37.7	33.8
77,5°	43.3	16.6	13.3	11.2	10.8	10.8	76.4	63.0	59.6	42.8	39.5	37.1	33.6
80,0°	17.9	12.5	11.0	10.3	10.1	10.0	57.2	54.4	48.1	38.9	35.6	35.9	32.0
82,5°	11.7	10.2	9.6	9.5	9.5	9.3	36.4	36.1	34.9	31.6	31.2	29.1	24.3
85,0°	10.0	9.2	9.0	9.0	9.0	9.0	22.4	24.2	26.5	28.0	26.8	24.4	20.9
87,5°	9.2	8.9	8.8	8.6	8.6	8.6	17.8	18.7	19.5	19.3	18.7	18.2	17.5
90,0°	8.8	8.6	8.5	8.4	8.3	8.3	13.1	12.9	12.7	12.5	12.4	12.2	12.0
92,5°	8.6	8.4	8.4	8.2	8.2	8.1	12.2	12.2	12.1	12.0	11.8	11.7	11.6
95,0°	8.6	8.4	8.3	8.2	8.1	8.1	12.1	12.1	11.9	11.8	11.7	11.5	11.3
97,5°	8.6	8.4	8.3	8.2	8.1	8.1	11.9	11.9	11.9	11.7	11.5	11.5	11.3
100,0°	8.5	8.4	8.3	8.3	8.1	8.1	11.9	11.9	11.7	11.7	11.5	11.3	11.1
102,5°	8.4	8.3	8.3	8.1	8.1	8.1	11.7	11.7	11.6	11.4	11.2	11.1	11.0
105,0°	8.4	8.2	8.1	8.1	8.1	8.1	11.4	11.4	11.4	11.2	11.1	10.8	10.6
107,5°	8.3	8.1	8.1	8.1	8.0	8.1	11.1	11.1	11.0	10.9	10.6	10.5	10.2
110,0°	8.1	8.1	8.1	8.0	7.9	7.9	10.6	10.6	10.6	10.4	10.2	10.1	9.9
112,5°	8.1	8.0	7.9	7.9	7.9	7.9	10.3	10.3	10.1	10.1	9.9	9.6	9.4

Photometric test report

Family DL 11 iQ	Order number: 5XA5575EF14HP00022 EAN: 4058352768839	LP number 59404_203
Table of values for luminous intensities		Maximum luminous intensity
		sITeco

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0,0°	4.1	4.1	4.1	4.1	4.1	4.1	4.1	4.1	4.1	4.1	4.1	0.0	0.0
2,5°	4.2	4.2	4.4	4.6	4.9	5.0	4.8	4.7	4.7	4.7	4.7	0.1	0.1
5,0°	4.9	4.9	5.0	5.1	5.1	5.2	5.0	5.2	5.2	5.2	5.2	0.2	0.3
7,5°	11.8	12.0	11.7	11.5	11.1	10.8	10.5	9.6	9.0	8.6	8.4	1.0	1.3
10,0°	44.0	41.8	39.4	37.7	35.9	34.5	32.7	31.8	32.3	32.3	31.6	2.7	4.0
12,5°	56.8	48.2	42.6	37.7	36.7	38.5	41.2	44.1	50.7	55.4	56.6	4.6	8.5
15,0°	63.3	64.1	65.6	64.0	51.7	41.0	39.0	41.8	45.1	46.4	46.6	6.9	15.4
17,5°	61.1	58.0	56.1	57.0	54.1	45.1	39.2	42.6	41.2	38.3	37.8	9.1	24.6
20,0°	48.6	46.7	46.7	45.7	44.2	38.6	32.9	38.6	39.6	39.7	39.5	11.1	35.7
22,5°	39.9	38.3	37.4	36.0	34.5	31.5	25.9	30.3	33.1	34.2	35.3	13.0	48.7
25,0°	37.3	33.5	32.2	30.9	29.5	27.0	24.7	24.2	26.1	26.1	25.8	15.2	64.0
27,5°	34.6	31.2	29.6	28.4	26.3	23.9	22.4	19.8	21.3	20.5	19.8	17.6	81.5
30,0°	31.8	29.6	28.0	26.9	24.7	22.0	20.4	17.9	18.3	17.2	16.0	20.2	101.7
32,5°	31.6	29.7	27.5	25.5	22.9	20.2	18.6	17.0	16.4	15.5	14.2	22.8	124.5
35,0°	31.3	29.0	26.3	24.3	21.8	19.3	17.7	16.3	15.5	14.4	13.3	26.2	150.7
37,5°	31.5	28.1	25.4	23.1	21.1	18.8	17.1	15.9	15.0	14.0	12.8	29.9	180.6
40,0°	34.4	29.8	25.5	22.8	21.2	18.8	17.2	15.7	14.9	13.9	12.5	33.2	213.8
42,5°	35.7	30.2	25.8	23.5	21.1	19.7	17.7	16.0	15.0	13.8	12.5	37.0	250.8
45,0°	36.2	29.9	26.4	25.3	23.8	22.4	21.5	18.4	16.0	14.2	12.5	40.4	291.1
47,5°	34.9	29.4	28.3	29.3	28.8	27.2	25.4	23.6	23.1	19.2	17.7	43.9	335.1
50,0°	31.2	28.5	29.0	30.3	31.7	30.8	30.2	29.9	29.3	29.6	32.9	47.7	382.7
52,5°	30.1	27.5	27.7	29.6	31.8	32.1	31.9	34.8	36.4	31.2	28.4	51.6	434.3
55,0°	30.4	28.5	28.3	31.3	35.0	36.1	32.5	31.4	30.8	28.5	27.4	55.1	489.5
57,5°	33.3	31.6	31.0	32.1	33.5	34.5	33.6	32.6	31.2	29.1	28.0	57.7	547.2
60,0°	32.6	30.8	30.9	32.5	34.5	35.0	34.1	32.3	30.1	28.6	27.7	58.6	605.8
62,5°	30.5	28.4	29.1	29.7	30.7	31.2	30.3	29.6	27.4	25.9	25.3	57.7	663.5
65,0°	30.5	29.6	28.9	28.5	27.5	26.4	25.5	24.9	23.5	23.0	23.1	55.5	719.0
67,5°	32.1	30.7	29.5	28.0	24.2	22.3	21.9	21.8	20.6	20.1	20.3	52.0	771.0
70,0°	33.4	30.7	29.1	26.5	21.2	19.2	18.7	18.8	18.1	17.7	17.2	48.2	819.2
72,5°	33.3	31.0	29.6	24.0	18.7	16.4	16.7	16.6	16.0	15.2	14.7	42.9	862.1
75,0°	32.4	29.8	27.3	21.0	18.2	14.6	15.9	16.3	15.8	14.8	14.4	34.5	896.7
77,5°	29.9	28.2	24.3	19.8	18.2	14.3	15.4	16.7	16.6	15.9	15.2	23.6	920.3
80,0°	26.6	23.9	19.8	16.6	15.1	13.3	13.8	15.1	15.5	14.9	14.4	14.5	934.8
82,5°	22.5	19.5	17.2	15.1	14.0	12.8	12.4	12.7	12.2	11.0	10.3	8.6	943.4
85,0°	17.3	15.7	15.1	13.9	12.9	11.4	11.3	11.1	10.6	9.8	9.3	5.4	948.8
87,5°	15.2	13.6	13.7	14.0	12.2	11.0	10.8	10.6	10.1	9.3	8.8	3.9	952.7
90,0°	11.8	11.7	11.6	11.6	11.1	10.6	10.5	10.3	9.8	9.0	8.4	3.0	955.7
92,5°	11.4	11.2	11.1	10.9	10.7	10.6	10.4	10.2	9.7	8.8	8.3	2.9	958.5
95,0°	11.2	11.1	11.0	10.8	10.7	10.5	10.3	10.2	9.6	8.7	8.3	2.8	961.4
97,5°	11.1	11.0	10.9	10.7	10.6	10.4	10.2	10.1	9.5	8.5	8.1	2.8	964.2
100,0°	11.0	10.9	10.8	10.6	10.4	10.3	10.1	9.9	9.4	8.4	7.8	2.7	966.9
102,5°	10.8	10.6	10.5	10.3	10.1	10.0	9.7	9.5	9.0	8.0	7.6	2.7	969.6
105,0°	10.5	10.3	10.1	9.9	9.7	9.5	9.2	9.0	8.5	7.7	7.1	2.6	972.1
107,5°	10.1	9.9	9.6	9.4	9.2	9.0	8.7	8.5	8.0	7.2	6.8	2.5	974.6
110,0°	9.6	9.4	9.2	9.0	8.7	8.4	8.2	8.0	7.6	6.8	6.4	2.3	976.9
112,5°	9.2	9.0	8.7	8.5	8.3	7.9	7.7	7.5	7.1	6.4	6.1	2.2	979.2

Photometric test report

Family DL 11 iQ	Order number: 5XA5575EF14HP00022 EAN: 4058352768839	LP number 59404_203
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
115,0°	9.9	9.8	9.7	9.5	9.3	9.0	8.8	8.6	8.5	8.4	8.3	8.1	8.1
117,5°	9.3	9.3	9.2	9.0	8.9	8.7	8.5	8.4	8.3	8.2	8.1	7.9	7.9
120,0°	8.9	8.9	8.7	8.6	8.4	8.4	8.3	8.1	8.1	7.9	7.9	7.9	7.8
122,5°	8.4	8.4	8.3	8.2	8.1	8.0	7.9	7.9	7.8	7.8	7.8	7.6	7.6
125,0°	7.9	7.9	7.9	7.9	7.8	7.7	7.6	7.6	7.6	7.6	7.6	7.4	7.4
127,5°	7.5	7.5	7.5	7.5	7.4	7.4	7.4	7.3	7.3	7.3	7.3	7.3	7.3
130,0°	7.2	7.2	7.2	7.2	7.2	7.1	7.1	7.1	7.1	7.1	7.1	7.1	7.1
132,5°	6.8	6.8	6.8	6.8	6.8	6.8	6.8	6.8	6.9	6.9	6.9	6.9	6.9
135,0°	6.3	6.4	6.5	6.5	6.5	6.5	6.5	6.6	6.6	6.6	6.6	6.6	6.6
137,5°	6.0	6.1	6.2	6.2	6.2	6.2	6.2	6.2	6.3	6.4	6.4	6.4	6.4
140,0°	5.7	5.7	5.7	5.8	5.8	5.9	5.9	6.0	6.1	6.1	6.1	6.1	6.1
142,5°	5.3	5.5	5.5	5.5	5.6	5.7	5.7	5.7	5.7	5.8	5.9	5.9	5.9
145,0°	5.1	5.2	5.2	5.3	5.3	5.3	5.5	5.5	5.6	5.6	5.6	5.6	5.6
147,5°	4.7	4.8	4.8	5.0	5.0	5.0	5.2	5.2	5.2	5.3	5.3	5.3	5.4
150,0°	4.2	4.3	4.4	4.5	4.5	4.6	4.6	4.7	4.7	4.8	4.8	4.9	4.9
152,5°	3.5	3.6	3.7	3.8	3.8	4.0	4.0	4.0	4.1	4.1	4.1	4.2	4.2
155,0°	2.9	2.9	2.9	3.0	3.0	3.1	3.2	3.3	3.3	3.3	3.3	3.4	3.4
157,5°	2.1	2.2	2.2	2.2	2.3	2.3	2.3	2.3	2.4	2.4	2.4	2.4	2.4
160,0°	1.6	1.6	1.6	1.6	1.6	1.6	1.6	1.6	1.6	1.6	1.6	1.7	1.7
162,5°	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4
165,0°	1.3	1.3	1.3	1.3	1.2	1.3	1.3	1.2	1.2	1.2	1.2	1.2	1.3
167,5°	1.2	1.2	1.3	1.3	1.3	1.4	1.2	1.2	1.2	1.2	1.2	1.3	1.3
170,0°	1.2	1.1	1.1	1.1	1.1	1.1	1.2	1.1	1.2	1.2	1.2	1.2	1.1
172,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
175,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
177,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family DL 11 iQ	Order number: 5XA5575EF14HP00022 EAN: 4058352768839	LP number 59404_203
---------------------------	--	-------------------------------



Table of values for luminous intensities	Maximum luminous intensity
---	-----------------------------------

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
115,0°	8.0	7.9	7.9	7.9	7.8	7.9	10.0	9.8	9.8	9.7	9.5	9.2	9.0
117,5°	7.9	7.8	7.8	7.8	7.8	7.8	9.3	9.3	9.3	9.2	9.0	8.9	8.7
120,0°	7.8	7.8	7.8	7.7	7.7	7.8	8.9	8.8	8.7	8.6	8.4	8.3	8.1
122,5°	7.6	7.6	7.6	7.6	7.6	7.6	8.4	8.3	8.2	8.1	7.9	7.8	7.6
125,0°	7.4	7.4	7.4	7.4	7.4	7.4	7.9	7.9	7.9	7.6	7.5	7.3	7.2
127,5°	7.3	7.3	7.3	7.3	7.3	7.3	7.5	7.5	7.3	7.3	7.1	6.9	6.8
130,0°	7.1	7.1	7.1	7.1	7.1	7.1	7.2	7.0	7.0	6.8	6.7	6.6	6.4
132,5°	6.9	6.9	6.9	6.9	6.9	6.9	6.7	6.7	6.5	6.4	6.2	6.2	6.0
135,0°	6.7	6.6	6.6	6.6	6.6	6.6	6.3	6.2	6.1	6.0	5.8	5.7	5.6
137,5°	6.4	6.4	6.4	6.4	6.4	6.4	6.0	5.8	5.7	5.7	5.5	5.3	5.2
140,0°	6.2	6.2	6.2	6.2	6.2	6.2	5.6	5.5	5.3	5.3	5.2	5.0	5.0
142,5°	5.9	5.9	5.9	5.9	5.9	5.9	5.3	5.2	5.2	5.0	4.8	4.8	4.6
145,0°	5.7	5.7	5.7	5.7	5.7	5.7	5.0	4.8	4.8	4.6	4.6	4.5	4.5
147,5°	5.4	5.4	5.4	5.4	5.4	5.4	4.6	4.5	4.5	4.3	4.3	4.1	4.1
150,0°	4.9	4.9	5.0	5.0	5.1	5.1	4.1	4.0	4.0	3.8	3.8	3.6	3.6
152,5°	4.2	4.2	4.2	4.3	4.3	4.4	3.5	3.4	3.3	3.2	3.1	3.1	3.0
155,0°	3.5	3.5	3.5	3.5	3.5	3.5	2.8	2.7	2.6	2.6	2.5	2.4	2.4
157,5°	2.4	2.4	2.5	2.5	2.4	2.5	2.1	2.0	2.0	1.9	1.9	1.9	1.9
160,0°	1.7	1.7	1.7	1.7	1.7	1.7	1.6	1.6	1.6	1.6	1.5	1.5	1.5
162,5°	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4
165,0°	1.3	1.4	1.4	1.4	1.4	1.4	1.4	1.3	1.4	1.4	1.4	1.4	1.4
167,5°	1.3	1.4	1.3	1.3	1.2	1.2	1.2	1.2	1.2	1.3	1.2	1.3	1.3
170,0°	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2
172,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
175,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
177,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family DL 11 iQ	Order number: 5XA5575EF14HP00022 EAN: 4058352768839	LP number 59404_203
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
115,0°	8.9	8.6	8.4	8.1	7.9	7.6	7.3	7.2	6.8	6.2	5.7	2.1	981.3
117,5°	8.4	8.2	8.0	7.7	7.4	7.2	7.0	6.8	6.4	5.8	5.6	2.0	983.3
120,0°	8.0	7.8	7.6	7.4	7.1	6.8	6.7	6.4	6.1	5.6	5.2	1.9	985.1
122,5°	7.4	7.3	7.1	6.9	6.6	6.5	6.2	6.0	5.7	5.3	4.9	1.7	986.8
125,0°	6.9	6.8	6.6	6.4	6.2	6.0	5.8	5.6	5.3	5.1	4.7	1.6	988.4
127,5°	6.6	6.4	6.2	6.0	5.8	5.7	5.4	5.2	5.0	4.8	4.6	1.5	989.9
130,0°	6.2	6.0	5.9	5.7	5.5	5.3	5.1	5.0	4.8	4.6	4.4	1.4	991.3
132,5°	5.8	5.7	5.5	5.3	5.2	5.0	4.8	4.6	4.5	4.3	4.1	1.3	992.6
135,0°	5.4	5.3	5.2	5.0	4.8	4.6	4.5	4.3	4.2	4.1	3.9	1.1	993.7
137,5°	5.1	5.0	4.8	4.6	4.5	4.4	4.2	4.1	3.9	3.9	3.7	1.0	994.8
140,0°	4.8	4.6	4.6	4.4	4.2	4.1	4.0	3.9	3.7	3.7	3.5	0.9	995.7
142,5°	4.6	4.5	4.3	4.2	4.1	4.1	3.9	3.7	3.6	3.6	3.5	0.9	996.5
145,0°	4.3	4.2	4.1	4.1	4.0	3.9	3.7	3.5	3.5	3.5	3.5	0.8	997.3
147,5°	4.0	3.9	3.8	3.7	3.6	3.5	3.4	3.3	3.3	3.2	3.2	0.7	998.0
150,0°	3.5	3.4	3.3	3.3	3.1	3.0	2.9	2.9	2.8	2.8	2.7	0.6	998.5
152,5°	3.0	2.8	2.8	2.8	2.6	2.5	2.4	2.4	2.4	2.3	2.4	0.4	999.0
155,0°	2.4	2.3	2.3	2.2	2.1	2.1	2.0	2.0	1.9	1.9	1.9	0.3	999.3
157,5°	1.9	1.8	1.8	1.8	1.8	1.7	1.7	1.7	1.7	1.5	1.7	0.2	999.5
160,0°	1.5	1.5	1.5	1.5	1.5	1.5	1.4	1.4	1.4	1.4	1.4	0.1	999.7
162,5°	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	0.1	999.8
165,0°	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.2	1.4	0.1	999.9
167,5°	1.4	1.4	1.4	1.5	1.4	1.4	1.4	1.3	1.4	1.2	1.4	0.1	999.9
170,0°	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	0.1	1000.0
172,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
175,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
177,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family DL 11 iQ	Order number: 5XA5575EF14HP00022 EAN: 4058352768839	LP number 59404_203
--------------------	--	------------------------

Dimming levels table	environmental temperature: 25°C	siteco
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W]
				start of lifetime	end of lifetime	average
100	254	254	4840	33.6	35.9	34.8
95	241	252	4592	31.3	33.5	32.4
90	229	250	4364	29.4	31.4	30.4
85	216	248	4116	27.3	29.2	28.2
80	203	246	3868	25.4	27.1	26.2
75	190	243	3620	23.5	25.1	24.3
70	178	241	3392	21.9	23.3	22.6
65	165	238	3144	20.1	21.4	20.8
60	152	235	2896	18.4	19.5	19.0
55	140	232	2668	16.8	17.9	17.4
50	127	229	2420	15.2	16.2	15.7
45	114	225	2172	13.7	14.5	14.1
40	102	221	1944	12.2	13.0	12.6
35	89	216	1696	10.7	11.3	11.0
30	76	210	1448	9.2	9.7	9.4
25	63	203	1200	7.8	8.2	8.0
20	51	195	972	6.6	6.9	6.8
15	38	184	724	5.2	5.5	5.4
11	28	173	534	4.1	4.4	4.2