




Photometric test report

Family Round 21 M	Order number: 51MR36GM8421W EAN: 4058352881743	LP number 59513_7
	Version Suspended luminaire, cover, opal, PMMA, symmetric extremely wide distribution, direct-/indirect distribution, aluminium housing, white	serial documentation 31.07.2024
	Lamps LED 4000 K CRI ≥ 80	
Controlgear ECG Multilumen		
Rated values Net luminous flux = 8960 lm Power consumption = 62.3 W Luminous efficacy = 143.8 lm/W		

Luminous intensity in cd/klm C180-0 C270-90 **Imax: 320 cd/klm**

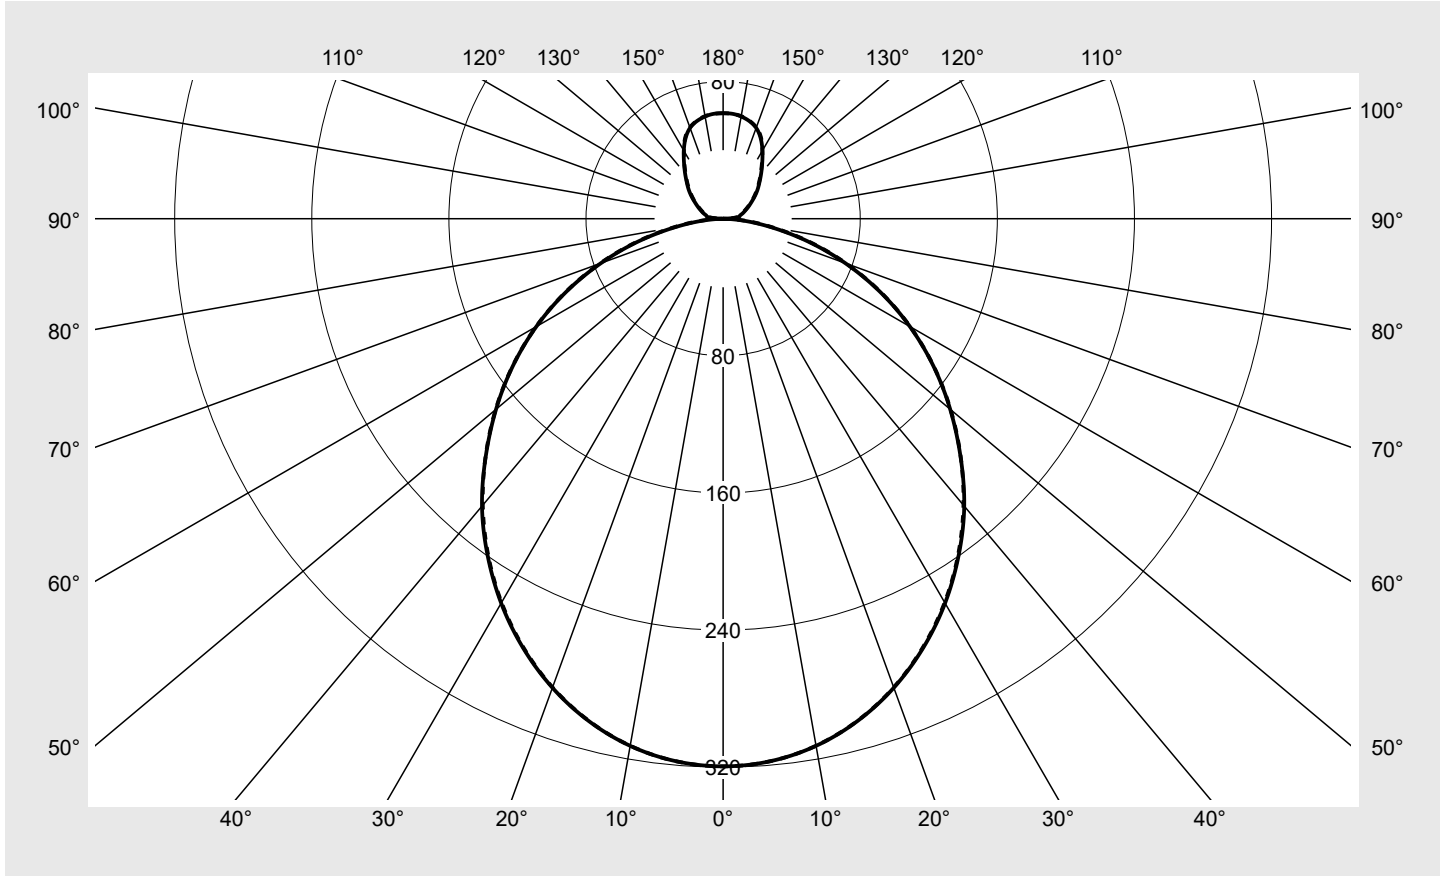

Classifications	
DIN 5040	B 4 3
CIE	N1=49 N2=80 N3=96 N4=85 N5=100

Luminaire light output ratios	
η_{LB}	100.0%
ϕ_u	85.0%
ϕ_o	15.0%

Measurement conditions
 DIN EN 13032 and DIN 5032

Photometric test report

Family Round 21 M	Order number: 51MR36GM8421W EAN: 4058352881743	LP number 59513_7
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes γ	0° 180°	15°	30°	45°	60°	75°	90° 270°	Phi-zone	Total Phi-zone
		165° 195° 345°	150° 210° 330°	135° 225° 315°	120° 240° 300°	105° 255° 285°			
Luminous intensity in cd/klm							Luminous flux in lm/klm		
0°	319.5	319.5	319.5	319.5	319.5	319.5	319.5	1.9	1.9
5°	317.7	317.8	317.8	317.7	317.7	317.7	317.7	15.2	17.1
10°	312.3	312.3	312.3	312.2	312.2	312.2	312.2	29.7	46.8
15°	303.3	303.5	303.4	303.3	303.3	303.3	303.2	43.0	89.8
20°	291.2	291.3	291.2	291.2	291.0	291.0	291.0	54.6	144.4
25°	276.2	276.6	276.2	276.3	275.9	276.0	275.9	64.0	208.4
30°	259.0	259.3	259.0	258.9	258.6	258.6	258.5	70.9	279.4
35°	239.6	240.1	239.7	239.7	239.3	239.3	239.1	75.3	354.7
40°	218.9	219.3	218.8	219.0	218.3	218.8	218.1	77.1	431.8
45°	195.8	197.7	196.8	197.2	196.3	196.9	196.0	76.3	508.0
50°	172.9	174.9	174.1	174.4	173.6	174.1	173.3	73.1	581.1
55°	149.7	151.6	150.7	151.3	150.2	150.8	150.0	67.7	648.8
60°	125.8	127.7	126.8	127.4	126.3	126.7	126.1	60.2	709.0
65°	101.1	103.0	102.1	102.9	101.7	102.5	101.5	50.8	759.8
70°	75.9	78.1	77.0	77.8	76.7	77.7	76.5	39.8	799.6
75°	51.2	53.2	52.4	53.1	52.2	53.0	52.1	27.8	827.4
80°	28.4	30.2	29.8	30.3	29.8	30.0	29.7	16.1	843.5
85°	10.5	12.5	12.3	12.9	12.5	12.4	12.2	6.7	850.3
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	850.3
95°	7.6	7.9	7.6	7.8	7.5	7.5	7.0	4.2	854.4
100°	9.9	10.0	10.0	10.0	9.8	9.8	9.4	5.3	859.7
105°	11.7	11.8	11.8	11.8	11.7	11.7	11.2	6.2	865.9
110°	13.7	13.9	13.9	13.9	13.9	13.7	13.2	7.1	873.1
115°	16.1	16.4	16.4	16.4	16.2	16.1	15.7	8.1	881.1
120°	18.9	19.1	19.2	19.4	19.0	18.9	18.6	9.0	890.2
125°	22.3	22.4	22.3	22.6	22.2	22.1	21.9	10.0	900.2
130°	26.1	26.1	26.0	26.2	25.8	25.9	25.5	10.9	911.1
135°	30.0	30.1	30.1	30.1	30.0	30.0	29.5	11.6	922.7
140°	34.5	34.5	34.7	34.6	34.7	34.6	34.1	12.2	934.9
145°	39.8	39.6	39.8	39.8	39.7	39.7	39.5	12.5	947.4
150°	45.9	45.3	45.7	45.5	46.0	45.9	45.8	12.5	959.9
155°	51.8	51.9	51.7	52.5	52.1	52.4	52.3	12.1	972.0
160°	56.4	56.5	56.5	56.6	56.5	56.5	56.6	10.6	982.6
165°	59.0	59.0	59.0	59.0	59.1	59.1	59.2	8.4	990.9
170°	60.6	60.5	60.6	60.6	60.7	60.7	60.8	5.8	996.7
175°	61.5	61.3	61.3	61.4	61.4	61.4	61.4	2.9	999.6
180°	61.5	61.5	61.5	61.5	61.5	61.5	61.5	0.4	1000.0

Photometric test report

Family Round 21 M	Order number: 51MR36GM8421W EAN: 4058352881743	LP number 59513_7
----------------------	---	----------------------

UGR-Table	Standard room	siteco								
-----------	---------------	--------	--	--	--	--	--	--	--	--

Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	View crosswise (C0)					View endwise (C90)					
x	y										
2H	2H	19.0	20.4	19.5	20.9	21.5	18.9	20.3	19.5	20.9	21.5
	3H	20.4	21.7	21.0	22.2	22.9	20.4	21.6	21.0	22.2	22.9
	4H	21.0	22.2	21.6	22.8	23.5	21.0	22.2	21.6	22.8	23.4
	6H	21.4	22.5	22.0	23.1	23.8	21.4	22.5	22.0	23.1	23.8
	8H	21.5	22.5	22.1	23.1	23.8	21.5	22.5	22.2	23.2	23.9
	12H	21.6	22.5	22.2	23.2	23.9	21.6	22.6	22.3	23.2	23.9
4H	2H	19.6	20.8	20.2	21.4	22.1	19.6	20.8	20.2	21.4	22.0
	3H	21.3	22.3	21.9	22.9	23.6	21.3	22.3	21.9	22.9	23.6
	4H	22.0	22.9	22.6	23.5	24.2	22.0	22.9	22.6	23.5	24.2
	6H	22.5	23.3	23.2	23.9	24.7	22.5	23.3	23.2	23.9	24.7
	8H	22.6	23.3	23.3	24.0	24.7	22.6	23.3	23.3	24.0	24.8
	12H	22.7	23.4	23.4	24.0	24.8	22.8	23.4	23.4	24.1	24.9
8H	4H	22.2	22.9	22.9	23.6	24.4	22.2	22.9	22.9	23.6	24.4
	6H	22.8	23.4	23.5	24.1	24.9	22.8	23.4	23.5	24.1	24.9
	8H	23.0	23.6	23.7	24.3	25.1	23.0	23.6	23.7	24.3	25.1
	12H	23.2	23.7	23.9	24.4	25.2	23.3	23.7	24.0	24.4	25.2
12H	4H	22.3	22.9	23.0	23.6	24.4	22.3	22.9	23.0	23.6	24.4
	6H	22.9	23.4	23.6	24.1	24.9	22.9	23.4	23.6	24.1	24.9
	8H	23.2	23.6	23.9	24.3	25.1	23.2	23.6	23.9	24.3	25.2

Luminance table	Max. for $\gamma \geq 65^\circ$	Photometric dimensions in mm: D = 590						
-----------------	---------------------------------	---------------------------------------	--	--	--	--	--	--


C-planes	γ	0° 180°	15°	30°	45°	60°	75°	90° 270°
			165° 195° 345°	150° 210° 330°	135° 225° 315°	120° 240° 300°	105° 255° 285°	
Luminance in cd/m ²								
45°		9076.4	9162.0	9121.9	9140.1	9096.9	9127.3	9083.5
50°		8817.3	8918.2	8874.8	8892.6	8848.5	8878.3	8833.6
55°		8556.1	8664.1	8611.7	8643.7	8584.2	8614.0	8568.1
60°		8247.9	8370.2	8308.5	8350.5	8277.0	8301.6	8262.4
65°		7841.0	7990.4	7915.8	7981.1	7885.5	7947.4	7870.4
70°		7272.8	7486.4	7376.1	7456.4	7345.4	7443.1	7331.3
75°		6484.7	6735.9	6634.0	6720.6	6611.3	6712.7	6601.3
80°		5358.3	5704.6	5626.1	5712.1	5618.9	5666.3	5596.4
85°		3955.0	4688.3	4623.2	4859.8	4682.7	4665.0	4596.2

Photometric test report

Family Round 21 M	Order number: 51MR36GM8421W EAN: 4058352881743	LP number 59513_7
-----------------------------	---	-----------------------------



Luminance values in cd/m² γ 65° γ 70° γ 75° γ 80° γ 85°

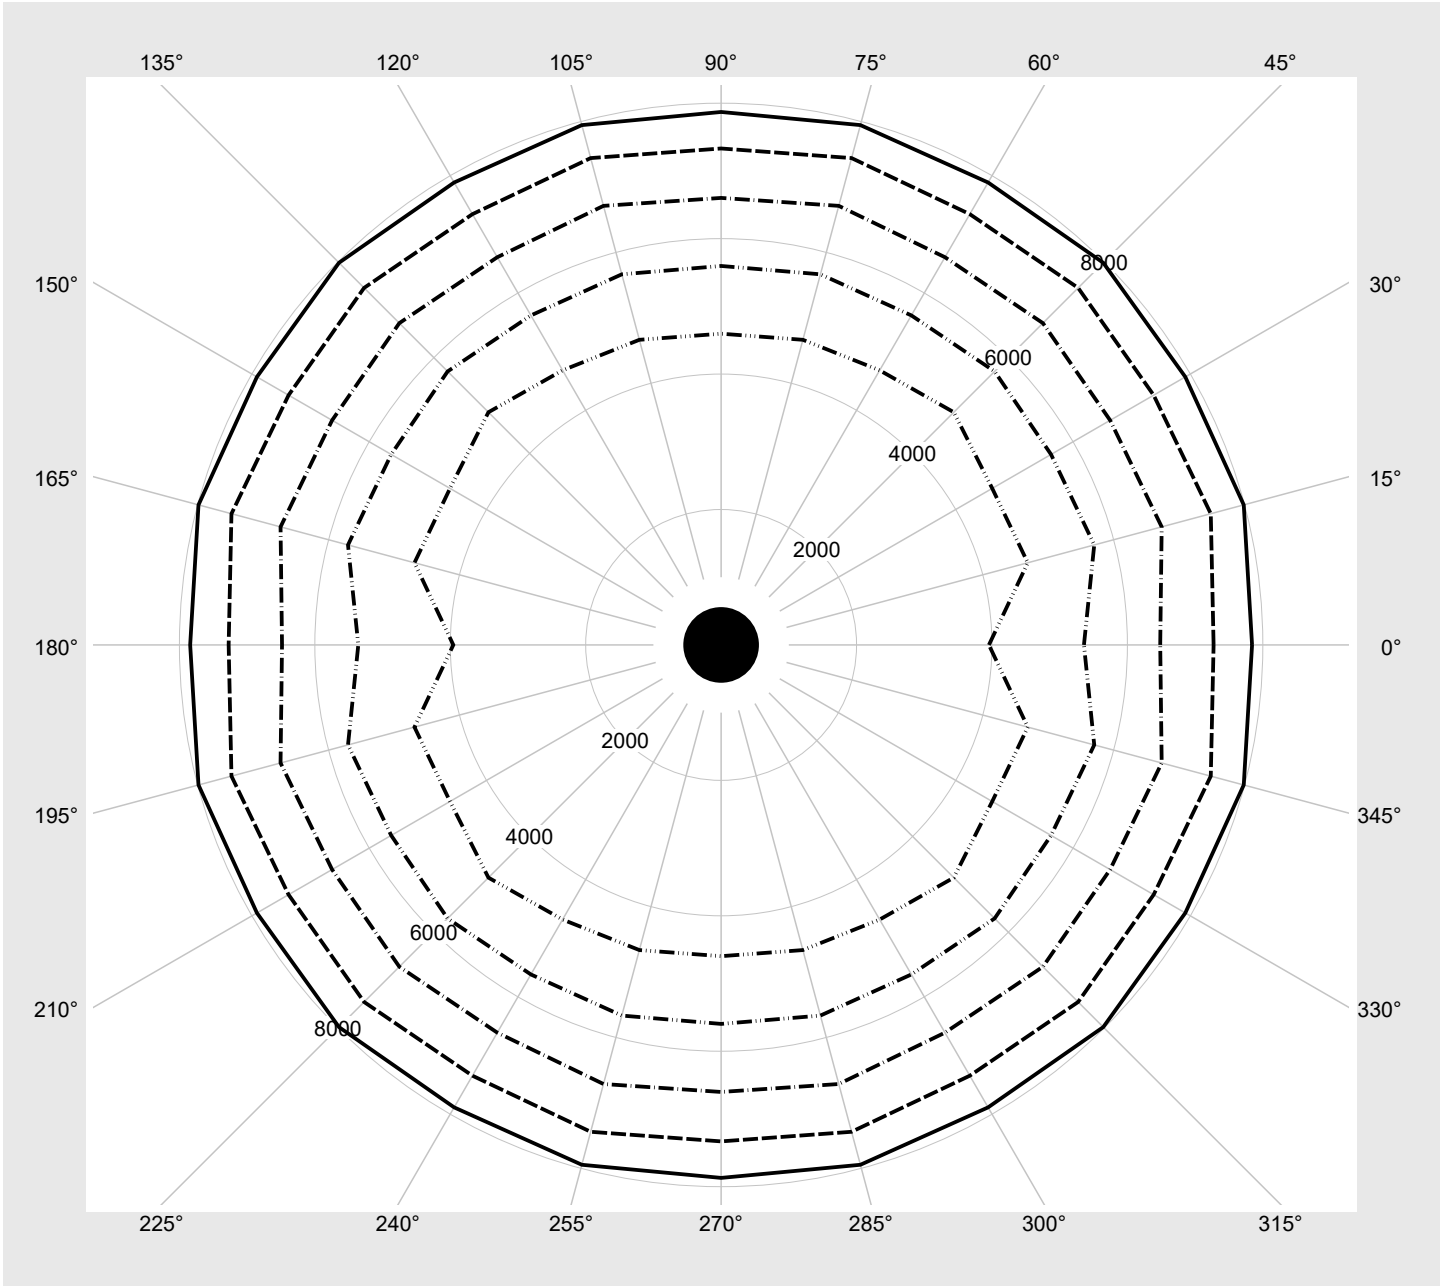

Photometric test report

Family Round 21 M	Order number: 51MR36GM8421W EAN: 4058352881743	LP number 59513_7
-----------------------------	---	-----------------------------

Multilumen Table	environmental temperature: 25°C	siteco
-------------------------	---------------------------------	---------------

DIP-Step	Switch Setting				Luminous flux [lm]	Power consumption [W]
	1	2	3	4		
15	ON	ON	ON	ON	8960	62.3
14	ON	ON	ON	OFF	8650	60.0
13	ON	ON	OFF	ON	8340	57.7
12	ON	ON	OFF	OFF	8020	55.4
11	ON	OFF	ON	ON	7710	53.1
10	ON	OFF	ON	OFF	7440	51.0
9	ON	OFF	OFF	ON	7120	48.7
8	ON	OFF	OFF	OFF	6800	46.4
7	OFF	ON	ON	ON	6480	44.1
6	OFF	ON	ON	OFF	6160	41.8
5	OFF	ON	OFF	ON	5840	39.5
4	OFF	ON	OFF	OFF	5550	37.4
3	OFF	OFF	ON	ON	5230	35.2
2	OFF	OFF	ON	OFF	4910	32.9
1	OFF	OFF	OFF	ON	4580	30.6
0	OFF	OFF	OFF	OFF	4260	28.5