
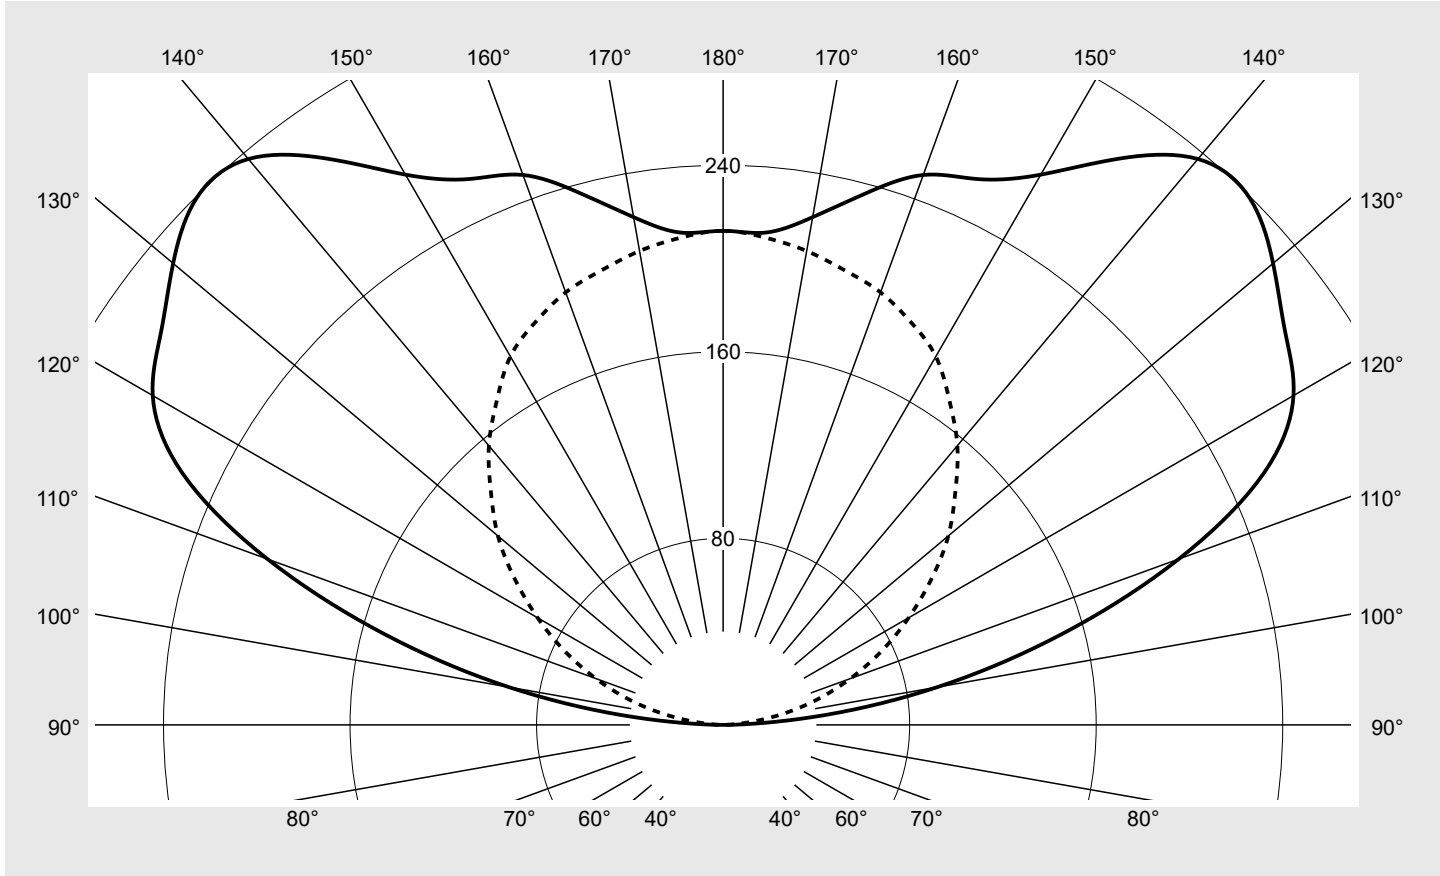


# Photometric test report

<b>Family</b> <b>Scriptus®</b>	<b>Order number: 5MZ323D04WA</b> <b>EAN: 4058352124918</b>	<b>LP number</b> <b>57367_21</b>
	<b>Version</b> asymmetrical design, MLA-optic, direct/indirect wide distribution, UGR≤19 <b>Lamps</b> 1 x LED 4000K / CRI ≥ 80 (unbekannt LED 4000K / CRI = 80) <b>Controlgear</b> ECG-DALI <b>Setting</b> individual position: only indirect light <b>Rated values</b> Net luminous flux = 4840 lm Power consumption = 40.2 W Luminous efficacy = 120.4 lm/W	<b>serial documentation</b> <b>25.01.2017</b>



**Luminous intensity in cd/klm** C180-0 C270-90 **Imax: 319 cd/klm**



Classifications	
DIN 5040	E 1 2
CIE	N1=n. def. N2=n. def. N3=n. def. N4=0 N5=100

Luminaire light output ratios	
$\eta_{LB}$	100.0%
$\phi_u$	0.0%
$\phi_o$	100.0%

Measurement conditions
DIN EN 13032 and DIN 5032

## Photometric test report

Family <b>Scriptus®</b>	Order number: <b>5MZ323D04WA</b> EAN: <b>4058352124918</b>	LP number <b>57367_21</b>
Table of values for luminous intensities		Maximum luminous intensity
		<b>sITeco</b>

C-planes $\gamma$	0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°	Phi-zone	Total Phi-zone
0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
10°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
15°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
20°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
25°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
30°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
35°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
40°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
45°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
50°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
55°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
60°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
65°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
70°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
75°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
95°	38.5	39.8	41.7	38.1	24.0	15.3	8.9	16.6	16.6
100°	93.3	95.8	96.6	83.9	54.7	34.0	24.5	38.1	54.7
105°	150.3	153.2	156.0	130.9	81.7	50.4	41.4	59.0	113.7
110°	208.0	210.7	208.4	167.5	101.6	66.9	58.0	76.2	189.9
115°	256.1	253.2	243.2	188.0	115.0	83.8	75.0	86.8	276.8
120°	282.5	279.2	262.6	197.0	126.2	100.1	91.9	91.2	367.9
125°	294.2	290.2	274.3	200.9	138.3	115.9	109.1	91.4	459.3
130°	307.9	304.5	276.8	200.9	151.1	131.0	126.1	89.7	549.0
135°	319.4	311.0	271.8	201.6	166.3	144.1	140.8	85.6	634.6
140°	316.8	303.2	257.6	205.3	181.4	156.8	156.3	78.7	713.3
145°	296.5	282.6	245.5	212.3	193.1	168.5	169.4	69.9	783.3
150°	272.5	262.3	240.6	222.8	199.8	178.0	182.4	60.8	844.1
155°	258.3	253.4	242.9	225.6	203.5	187.8	190.6	51.6	895.7
160°	251.0	247.5	237.5	222.6	206.5	195.4	197.4	41.7	937.4
165°	236.0	234.0	226.4	216.8	208.5	202.4	201.8	30.9	968.3
170°	221.1	220.0	217.3	213.6	209.1	207.2	206.4	20.3	988.6
175°	212.0	212.9	211.6	211.9	211.4	211.1	209.7	10.1	998.7
180°	211.9	211.9	211.9	211.9	211.9	211.9	211.9	1.3	1000.0

### Photometric test report

Family <b>Scriptus®</b>	Order number: <b>5MZ323D04WA</b> EAN: <b>4058352124918</b>	LP number <b>57367_21</b>
UGR-Table <b>Standard room</b>		<b>siteco</b>

The UGR formula for this luminaire type cannot be used, see LiTG Publication 20:  
 "The UGR - Process for Evaluation of Direct Glare of Artificial Lighting in Indoor Rooms"


<b>Luminance table</b>	<b>Max. for <math>\gamma \geq 65^\circ</math></b>	Photometric dimensions in mm:	L = 1750 B = 42
------------------------	---	-------------------------------	--------------------

C-planes	$\gamma$	0°	15°	30°	45°	60°	75°	90°
		180°	165°	150°	135°	120°	105°	270°
		195°	210°	225°	240°	255°	285°	300°
		345°	330°	315°	300°	285°	270°	255°
		Luminance in cd/m <sup>2</sup>						
45°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
50°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
55°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
60°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
65°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
70°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
75°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

**Photometric test report**

<b>Family</b> <b>Scriptus®</b>	<b>Order number: 5MZ323D04WA</b> <b>EAN: 4058352124918</b>	<b>LP number</b> <b>57367_21</b>
-----------------------------------	---	-------------------------------------

**Luminance values in cd/m<sup>2</sup>**     γ 65°   γ 70°   γ 75°   γ 80°   γ 85°     **siteco**

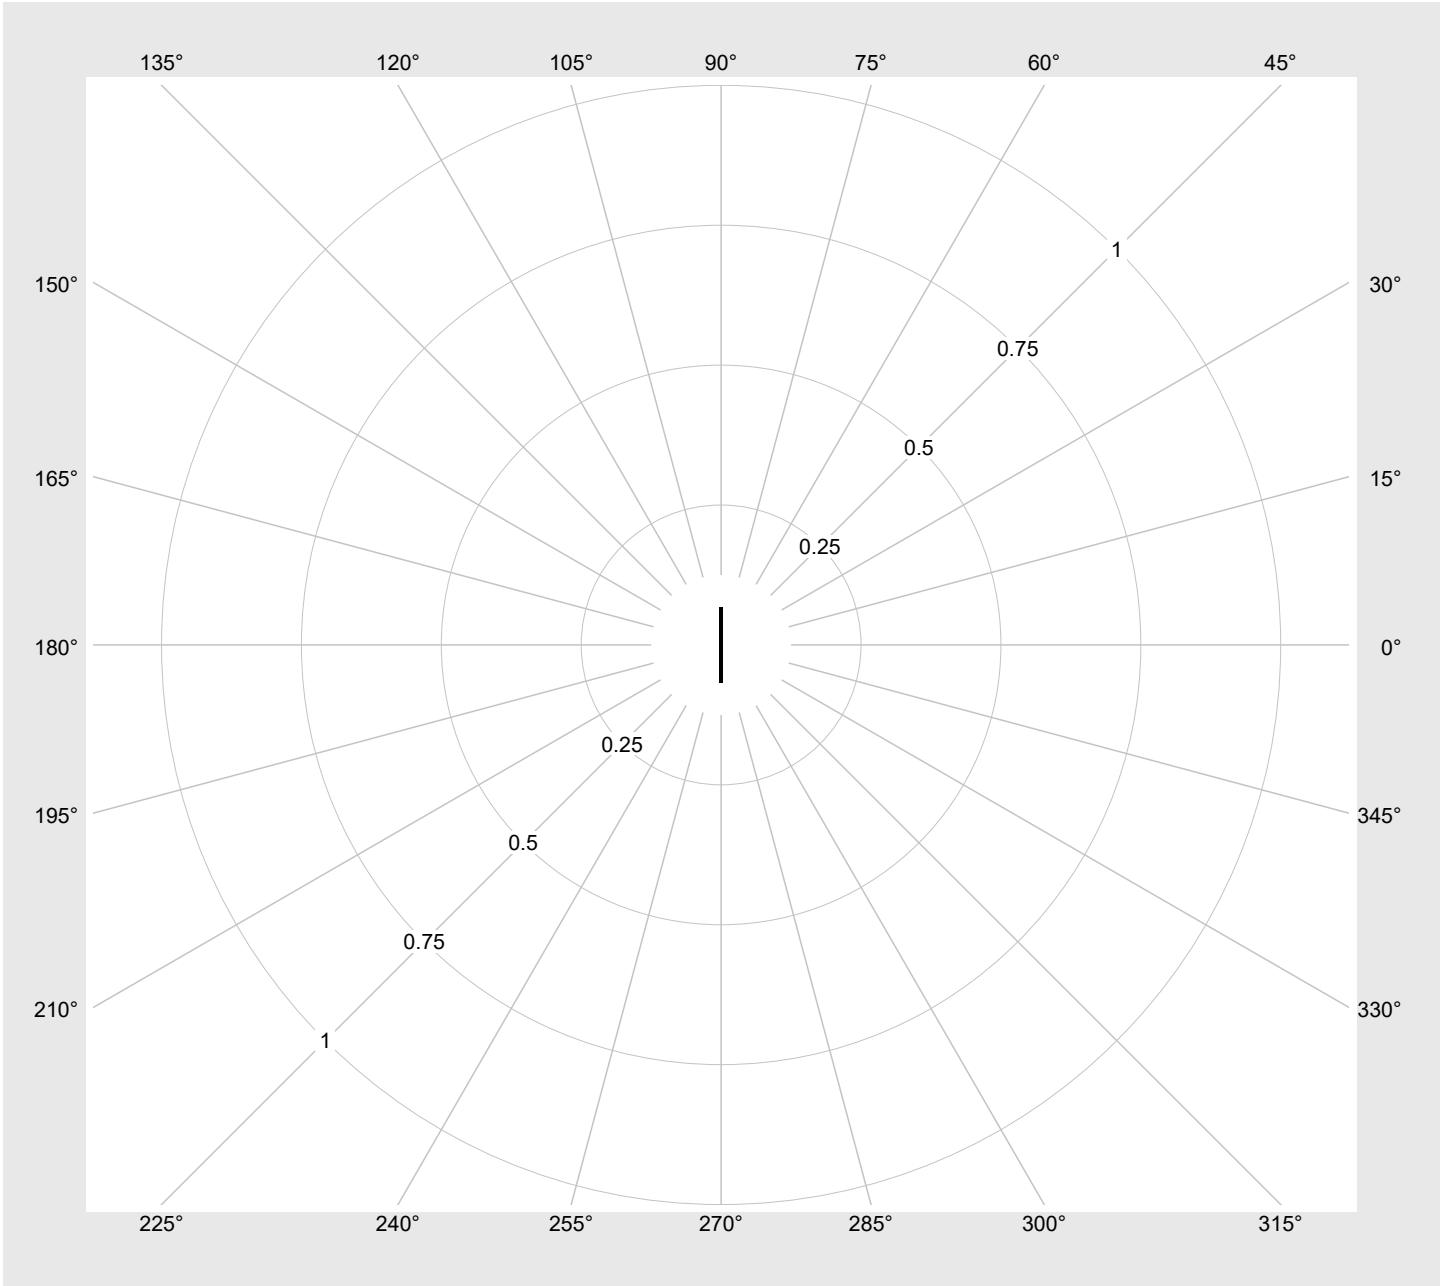

## Photometric test report

Family <b>Scriptus®</b>	Order number: <b>5MZ323D04WA</b> EAN: <b>4058352124918</b>	LP number <b>57367_21</b>
----------------------------	---	------------------------------

<b>Dimming levels table</b>	environmental temperature: 25°C	<b>sITeco</b>
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	254	254	4840	40.2
95	240	252	4598	38.0
90	226	250	4356	35.8
85	212	247	4114	33.7
80	199	245	3872	31.5
75	186	242	3630	29.6
70	173	240	3388	27.5
65	161	237	3146	25.5
60	148	234	2904	23.5
55	135	230	2662	21.6
50	122	227	2420	19.7
45	109	223	2178	17.8
40	97	218	1936	16.0
35	84	213	1694	14.2
30	72	208	1452	12.4
25	60	201	1210	10.7
20	48	192	968	9.0
15	36	182	726	7.3
10	24	167	484	5.7
5	12	143	241	3.9