


Photometric test report

Family LARGE BELL LED	Order number: 5XA1563K1B108 EAN: 4058352168035	LP number 57651_8
--	---	------------------------------------

Envelope curve in cd/klm **KMK 65°** **KMK 62,5°** **KMK 60°** **KMK 57,5°** **siteco**

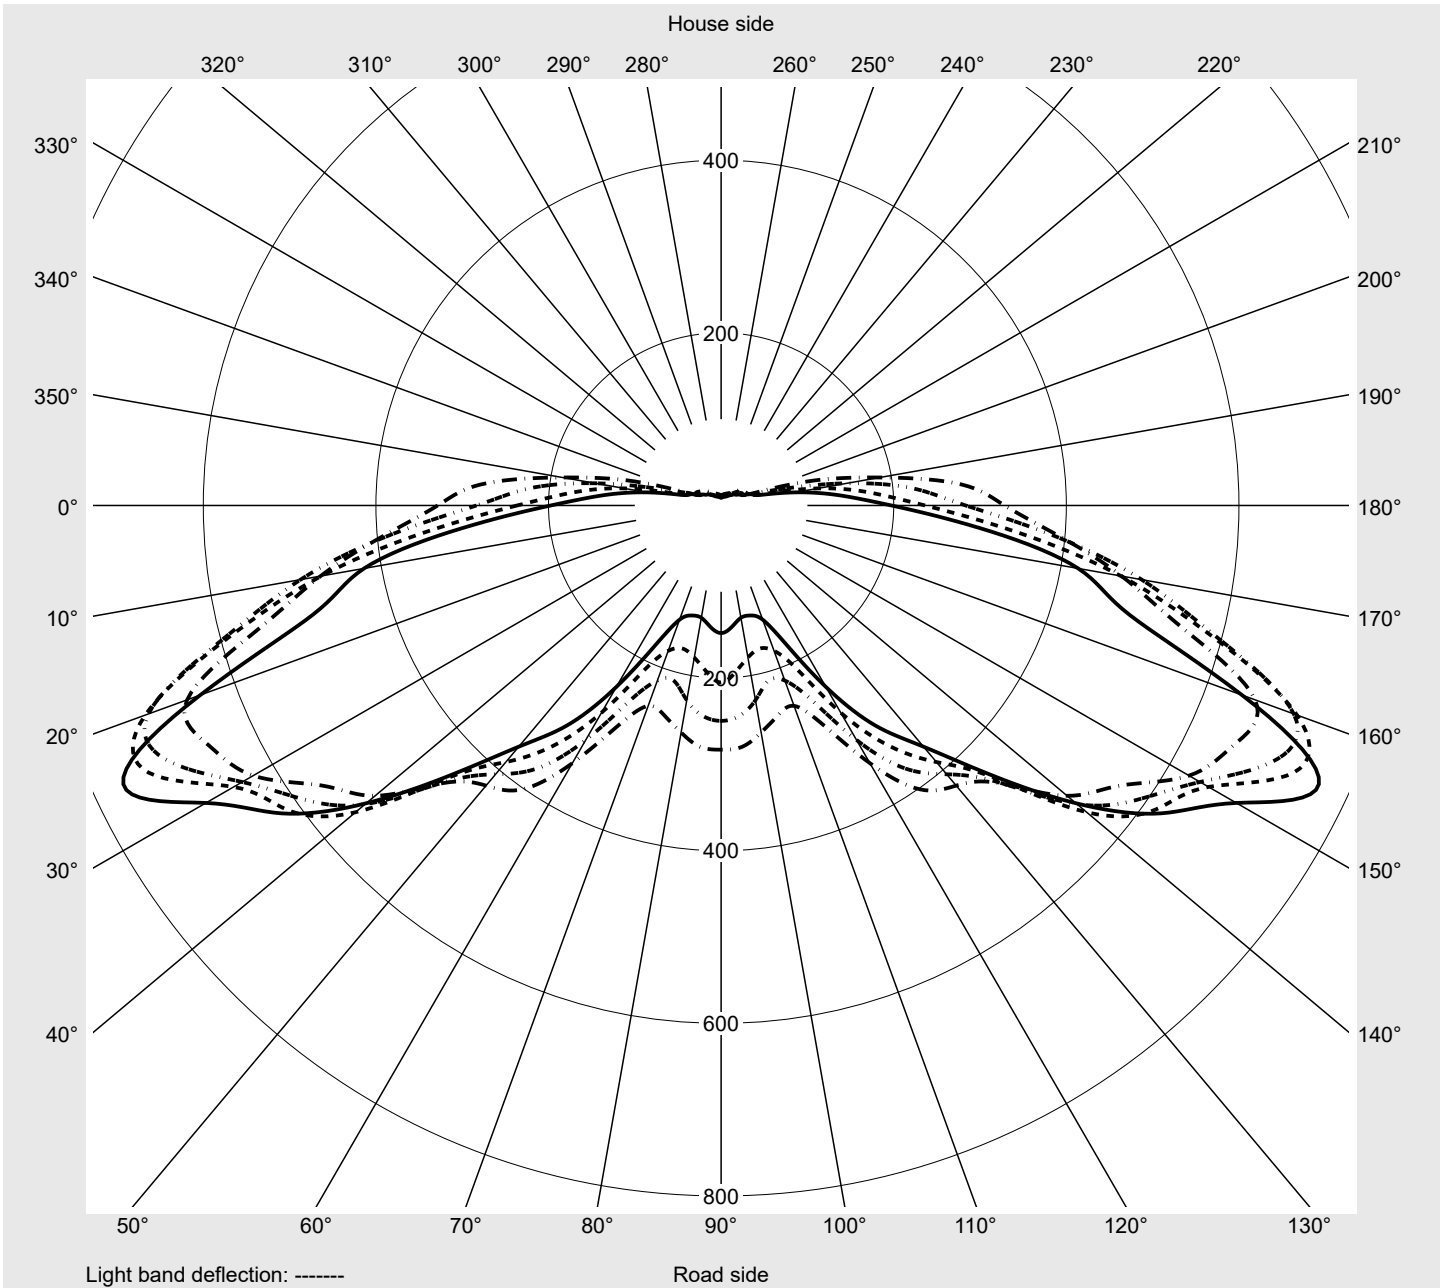

Photometric test report

Family LARGE BELL LED	Order number: 5XA1563K1B108 EAN: 4058352168035	LP number 57651_8
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	179.0	179.0	179.0	179.0	179.0	179.0	179.0	179.0	179.0	179.0	179.0	179.0	179.0
2,5°	177.8	178.3	179.1	179.7	180.2	180.9	181.5	182.3	182.7	183.0	183.3	184.0	184.5
5,0°	177.0	177.6	178.6	180.2	181.9	183.3	184.5	186.1	187.7	189.7	191.3	192.5	193.3
7,5°	184.0	184.6	186.1	187.1	188.6	188.1	188.9	191.3	193.3	195.9	199.4	202.0	204.4
10,0°	192.3	196.6	197.9	199.7	202.6	202.1	203.8	204.4	204.9	206.6	209.0	212.9	217.8
12,5°	189.7	196.9	200.8	206.2	211.5	212.9	216.9	217.7	219.8	219.8	220.8	222.6	226.8
15,0°	177.9	185.0	189.2	195.8	206.4	211.8	217.5	223.2	227.6	227.3	230.4	232.4	235.7
17,5°	171.2	178.3	183.0	190.7	194.9	200.3	205.1	213.1	223.4	230.8	237.8	237.8	241.4
20,0°	181.5	192.5	202.1	208.4	209.8	210.0	208.5	209.0	213.1	226.2	236.2	245.1	243.5
22,5°	183.3	200.2	213.4	222.7	227.6	230.9	223.4	221.3	217.7	219.6	230.9	247.9	258.1
25,0°	182.7	194.1	196.7	204.9	216.2	227.6	242.0	245.0	235.3	231.1	232.7	251.2	266.9
27,5°	195.9	203.6	213.4	213.4	217.5	224.5	240.9	255.9	268.0	257.1	255.9	261.3	280.6
30,0°	213.1	226.3	242.5	243.8	244.2	238.6	243.0	252.8	274.7	287.8	286.8	280.6	292.4
32,5°	216.9	230.1	236.0	246.1	258.2	270.5	269.2	270.5	280.3	305.0	323.2	311.2	308.6
35,0°	236.8	238.1	252.0	252.8	256.6	277.7	296.5	307.1	306.8	316.3	339.7	345.6	333.1
37,5°	259.4	267.1	283.9	286.7	282.4	287.7	302.4	324.3	344.4	343.8	351.3	368.6	358.0
40,0°	269.0	271.6	285.4	299.0	316.3	329.5	329.5	337.2	358.3	376.6	366.7	380.2	380.7
42,5°	279.2	280.5	298.1	305.8	320.4	344.7	370.3	376.1	374.2	400.8	398.5	390.9	391.7
45,0°	296.0	297.2	327.6	338.5	348.2	356.5	377.0	410.2	418.8	412.8	420.6	403.8	394.5
47,5°	302.2	319.6	372.7	384.2	395.1	392.7	411.5	433.7	447.6	438.3	432.7	418.8	393.2
50,0°	303.0	344.4	426.0	428.0	458.4	430.1	474.3	476.7	455.6	439.3	440.7	423.6	385.3
52,5°	311.2	343.6	434.2	455.5	515.5	502.2	522.7	521.7	472.0	438.8	445.3	421.8	382.8
55,0°	316.9	352.8	433.2	498.3	581.2	573.2	578.8	553.1	505.0	452.0	437.8	415.6	368.9
57,5°	328.4	390.5	471.3	555.9	658.4	656.0	626.0	565.5	523.3	454.8	423.7	401.5	344.7
60,0°	283.4	382.8	494.9	597.2	706.2	703.7	640.7	592.8	538.4	453.2	406.6	372.1	313.7
62,5°	236.3	340.3	470.2	590.9	710.1	732.2	652.2	614.4	552.9	445.5	388.1	340.3	277.2
65,0°	197.4	301.1	420.1	490.1	642.2	764.2	689.3	621.9	536.7	441.1	364.9	311.1	242.7
67,5°	195.8	300.6	403.3	449.1	592.5	752.8	681.5	578.4	533.1	411.1	334.8	288.0	207.5
70,0°	220.6	327.2	417.0	472.3	538.0	681.0	641.7	543.3	463.8	372.1	302.1	252.5	174.2
72,5°	222.1	322.5	384.0	449.2	518.1	593.0	574.2	466.1	361.8	299.9	241.7	198.0	138.0
75,0°	165.7	266.7	327.9	383.5	441.2	473.0	460.9	331.7	242.4	204.6	192.7	175.6	123.1
77,5°	126.1	182.8	212.8	249.7	276.4	262.0	247.6	173.7	146.0	134.3	142.8	142.8	102.7
80,0°	63.5	77.5	97.1	120.9	122.0	115.6	135.6	111.2	97.0	68.7	55.8	64.4	42.4
82,5°	37.1	40.9	47.3	62.5	55.6	46.3	67.2	77.8	61.8	37.8	24.0	15.5	10.1
85,0°	11.9	14.1	14.7	17.3	15.7	17.5	30.4	37.8	21.1	15.9	7.5	6.5	5.4
87,5°	6.4	6.7	6.4	6.7	7.0	9.0	11.6	10.8	8.7	5.9	4.6	4.3	3.4
90,0°	2.9	3.1	3.1	3.3	3.3	3.8	3.3	3.3	2.8	2.5	2.5	2.3	2.0
92,5°	2.5	2.5	2.5	2.5	2.5	2.5	2.3	2.3	2.3	2.0	2.0	2.0	1.6
95,0°	2.3	2.3	2.3	2.3	2.3	2.3	2.1	2.0	2.0	2.0	1.6	1.6	1.5
97,5°	2.1	2.3	2.1	2.1	2.1	2.0	2.0	2.0	1.6	1.6	1.6	1.6	1.3
100,0°	2.0	2.0	2.0	2.0	2.0	2.0	1.8	1.6	1.6	1.6	1.5	1.5	1.3
102,5°	1.8	2.0	1.8	1.8	1.6	1.6	1.6	1.6	1.5	1.3	1.3	1.3	1.1
105,0°	1.6	1.6	1.6	1.6	1.6	1.4	1.3	1.3	1.3	1.0	1.0	1.0	1.0
107,5°	1.5	1.4	1.4	1.3	1.3	1.2	1.1	1.0	1.0	0.9	0.9	0.8	0.8
110,0°	1.4	1.3	1.3	1.2	1.1	1.0	1.0	0.9	0.8	0.8	0.7	0.7	0.7
112,5°	1.3	1.2	1.2	1.1	1.0	0.9	0.9	0.8	0.7	0.7	0.6	0.6	0.6

Photometric test report

Family LARGE BELL LED	Order number: 5XA1563K1B108 EAN: 4058352168035	LP number 57651_8
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	179.0	179.0	179.0	179.0	179.0	179.0	179.0	179.0	179.0	179.0	179.0	179.0	179.0
2,5°	185.1	186.1	186.8	187.1	187.7	188.1	177.0	176.8	176.6	177.1	177.6	177.6	177.8
5,0°	194.8	196.4	198.0	199.0	200.0	200.5	175.6	174.7	174.2	173.8	173.8	173.4	173.7
7,5°	206.7	210.1	212.8	214.4	214.9	214.9	181.4	181.0	179.1	177.0	176.0	172.5	170.6
10,0°	221.3	225.8	229.0	230.9	232.1	232.6	192.7	187.3	185.9	181.2	177.1	173.4	168.8
12,5°	233.0	240.4	247.3	250.2	252.3	251.5	187.6	181.9	179.7	172.9	173.0	166.6	160.1
15,0°	242.2	251.7	259.5	266.7	270.2	273.1	170.7	165.3	162.1	158.5	155.7	152.6	145.1
17,5°	247.1	258.4	269.5	276.4	282.8	285.2	170.6	164.8	154.2	145.1	138.8	137.0	130.0
20,0°	253.3	262.0	274.3	282.3	289.0	291.4	172.2	164.8	159.6	142.3	131.2	123.3	117.4
22,5°	261.7	267.6	275.4	285.4	290.3	290.8	168.0	160.1	152.4	144.4	129.9	114.5	104.7
25,0°	274.3	277.2	281.3	287.2	291.8	293.1	170.6	152.7	139.0	138.0	124.3	108.4	89.6
27,5°	289.5	288.6	288.6	293.6	294.7	294.7	182.3	159.0	139.0	130.0	118.2	99.8	79.8
30,0°	306.6	303.0	298.6	300.6	300.6	298.6	193.3	174.5	145.1	127.2	116.1	93.7	67.2
32,5°	322.0	318.2	309.3	307.1	306.8	310.1	198.2	171.6	150.6	133.3	112.7	84.9	57.7
35,0°	334.1	332.3	318.2	313.5	315.1	317.9	220.6	184.0	150.6	134.4	106.5	71.8	48.7
37,5°	345.6	341.0	322.2	320.5	323.0	326.4	235.3	201.2	159.3	133.6	103.0	59.9	45.5
40,0°	355.2	343.8	325.1	326.3	330.2	333.0	243.8	204.1	156.2	135.1	86.0	51.2	42.4
42,5°	367.0	343.4	326.6	330.2	334.1	335.9	264.1	201.6	137.4	122.8	63.9	42.4	42.4
45,0°	375.7	339.5	328.4	331.5	337.2	335.9	288.3	223.6	159.8	122.5	56.6	46.8	43.7
47,5°	367.6	333.8	327.2	330.2	335.6	337.2	296.7	227.6	170.7	99.4	50.5	44.0	41.5
50,0°	354.7	322.0	319.7	324.8	331.8	333.3	294.0	231.9	171.2	84.4	42.8	41.0	37.9
52,5°	335.6	302.7	304.5	314.2	322.7	324.1	299.4	226.3	165.5	67.9	40.4	38.3	33.9
55,0°	310.1	277.5	281.6	294.0	305.8	309.1	300.6	215.9	151.1	51.2	36.1	35.2	31.6
57,5°	280.8	247.1	252.3	267.1	280.6	282.9	279.5	186.8	112.0	45.9	32.8	31.5	28.7
60,0°	249.1	215.9	210.5	229.1	244.7	249.6	224.4	148.2	74.6	42.8	29.1	28.1	25.7
62,5°	210.3	179.2	171.7	178.9	193.5	205.1	172.5	114.0	51.5	37.3	28.3	25.5	23.2
65,0°	176.6	140.8	132.0	132.1	141.3	147.8	136.7	87.5	47.4	37.8	29.3	25.5	21.6
67,5°	141.0	102.0	90.1	90.3	94.5	94.5	132.5	74.7	53.2	43.3	29.1	26.0	20.9
70,0°	116.3	77.0	55.3	54.1	56.3	57.6	143.9	80.0	56.3	41.5	26.5	23.7	18.8
72,5°	90.4	57.6	34.3	30.4	30.1	32.1	134.3	76.7	54.9	34.8	26.2	22.4	17.3
75,0°	70.3	37.6	24.4	20.0	18.5	18.3	79.6	55.6	47.4	31.2	27.0	21.4	17.0
77,5°	49.7	21.8	16.5	13.9	12.4	12.1	62.5	42.2	37.1	30.7	25.3	20.6	16.5
80,0°	19.3	12.3	10.8	9.8	8.8	8.2	41.2	34.0	30.9	26.8	21.3	19.0	15.7
82,5°	9.8	6.5	6.4	6.2	5.9	5.9	26.7	23.7	22.1	18.2	17.0	15.5	13.1
85,0°	4.6	4.1	4.1	3.9	3.9	3.9	12.3	13.6	15.4	14.6	13.4	11.9	10.0
87,5°	2.9	2.6	2.6	2.6	2.6	2.6	6.9	7.2	8.7	8.8	8.3	7.5	7.0
90,0°	1.8	1.6	1.6	1.6	1.6	1.6	3.1	3.1	2.9	2.9	2.8	2.8	2.6
92,5°	1.6	1.3	1.3	1.3	1.3	1.3	2.5	2.3	2.5	2.5	2.5	2.5	2.5
95,0°	1.3	1.3	1.3	1.0	1.0	1.0	2.3	2.3	2.3	2.3	2.3	2.1	2.5
97,5°	1.3	1.1	1.0	1.0	1.0	1.0	2.1	2.1	2.1	2.1	2.1	2.1	2.1
100,0°	1.1	1.0	1.0	1.0	1.0	1.0	2.0	2.1	2.0	2.1	2.1	2.1	2.1
102,5°	1.0	1.0	0.8	1.0	0.8	0.7	2.0	1.8	2.0	1.8	1.8	1.8	1.8
105,0°	0.9	0.8	0.7	0.7	0.7	0.7	1.6	1.6	1.6	1.6	1.6	1.6	1.7
107,5°	0.7	0.7	0.6	0.6	0.6	0.6	1.5	1.5	1.5	1.5	1.5	1.5	1.5
110,0°	0.6	0.6	0.6	0.5	0.5	0.5	1.4	1.4	1.4	1.4	1.4	1.4	1.5
112,5°	0.6	0.5	0.5	0.5	0.5	0.5	1.3	1.3	1.4	1.4	1.4	1.4	1.4

Photometric test report

Family LARGE BELL LED	Order number: 5XA1563K1B108 EAN: 4058352168035	LP number 57651_8
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0,0°	179.0	179.0	179.0	179.0	179.0	179.0	179.0	179.0	179.0	179.0	179.0	0.3	0.3
2,5°	177.8	177.6	177.8	177.3	176.8	176.6	176.5	176.5	176.1	176.1	176.3	2.2	2.4
5,0°	173.7	173.5	173.4	172.9	172.9	172.9	173.0	173.4	173.4	173.5	173.7	4.3	6.8
7,5°	167.5	166.0	165.2	165.8	165.5	165.7	166.0	166.5	166.8	168.4	168.4	6.6	13.4
10,0°	162.6	157.3	154.2	152.6	152.1	152.9	154.1	155.5	156.7	156.2	156.3	9.0	22.4
12,5°	153.2	143.8	138.5	135.4	135.2	136.2	137.9	138.0	138.5	138.8	139.0	11.2	33.6
15,0°	139.5	125.9	119.2	116.4	116.9	117.7	117.9	118.1	118.4	118.4	118.7	12.9	46.5
17,5°	119.2	108.9	100.1	97.8	97.6	97.6	97.0	97.1	97.6	97.5	97.8	14.4	60.9
20,0°	103.7	91.7	84.4	82.6	81.9	81.1	80.1	79.6	80.0	79.6	79.2	16.1	77.0
22,5°	88.0	74.9	69.5	68.7	67.9	66.9	66.1	65.6	64.9	64.6	64.4	17.9	94.9
25,0°	75.2	61.8	59.7	58.9	57.4	56.3	55.4	54.3	54.0	53.5	53.3	19.4	114.2
27,5°	61.2	53.5	52.3	50.9	49.7	48.1	46.8	45.6	45.0	44.8	44.8	21.5	135.7
30,0°	52.7	48.9	47.6	46.3	44.6	42.7	40.6	39.1	38.3	37.8	37.3	24.2	160.0
32,5°	47.4	46.4	44.8	43.2	40.6	38.4	36.6	34.8	33.2	32.5	32.4	26.9	186.8
35,0°	46.0	44.3	42.8	40.2	37.8	35.7	34.2	32.1	30.1	29.3	29.1	29.9	216.7
37,5°	45.6	43.8	41.5	38.9	36.6	34.5	32.1	30.4	28.8	28.0	27.8	33.3	250.0
40,0°	45.3	42.5	39.9	37.5	35.2	32.9	30.6	29.3	27.5	26.2	25.5	36.3	286.3
42,5°	42.4	38.1	38.3	35.5	32.9	29.9	28.3	26.8	25.5	24.7	23.9	39.1	325.5
45,0°	34.7	32.1	35.7	32.7	29.6	26.8	25.7	24.4	23.2	22.4	22.2	42.7	368.1
47,5°	36.0	30.9	30.6	28.5	26.2	23.9	22.4	21.3	20.8	20.3	20.3	46.1	414.2
50,0°	34.5	32.1	25.7	24.0	22.7	20.8	19.6	18.8	18.0	17.5	17.7	49.3	463.5
52,5°	32.9	28.8	25.3	21.8	20.1	18.6	17.8	17.0	16.0	15.4	15.0	52.0	515.5
55,0°	30.3	25.5	22.6	20.0	18.2	17.0	16.2	15.2	14.4	13.7	13.4	54.3	569.8
57,5°	27.0	23.1	20.6	18.0	16.4	15.3	14.5	13.8	13.0	12.4	12.2	56.3	626.1
60,0°	24.7	20.6	18.2	16.4	14.9	13.7	13.1	12.6	11.6	11.3	11.1	56.0	682.2
62,5°	21.8	18.8	16.5	14.9	13.4	12.6	11.8	11.3	10.6	10.0	9.8	53.9	736.1
65,0°	20.0	17.2	15.4	13.4	12.1	11.3	10.6	10.1	9.6	9.2	8.8	50.6	786.7
67,5°	19.0	16.5	14.4	12.6	11.1	10.0	9.3	9.0	8.5	8.2	7.9	47.8	834.5
70,0°	17.8	15.5	13.4	11.6	10.0	9.0	8.2	7.7	7.4	7.2	7.2	45.0	879.6
72,5°	15.5	13.7	12.1	10.6	9.0	7.7	7.0	6.5	6.2	5.9	5.9	39.9	919.5
75,0°	14.2	12.3	10.6	9.2	7.9	6.7	6.1	5.6	5.2	4.9	4.9	31.9	951.3
77,5°	13.6	11.1	9.2	7.9	6.5	5.9	5.2	4.6	4.3	4.3	4.3	21.0	972.4
80,0°	12.8	10.1	8.3	6.9	5.6	4.7	4.3	3.8	3.6	3.6	3.3	11.2	983.6
82,5°	11.1	8.7	7.0	5.9	4.7	3.9	3.4	2.9	2.9	2.9	2.9	6.1	989.7
85,0°	8.3	6.5	5.6	4.4	3.6	3.1	2.6	2.5	2.3	2.3	2.3	2.8	992.5
87,5°	6.1	4.6	3.9	3.3	2.8	2.5	2.1	2.0	2.0	2.0	2.0	1.5	994.0
90,0°	2.6	2.3	2.1	2.1	1.8	1.6	1.6	1.5	1.3	1.3	1.3	0.7	994.6
92,5°	2.5	2.1	2.1	1.8	1.8	1.6	1.6	1.6	1.3	1.3	1.3	0.5	995.2
95,0°	2.3	2.3	2.1	2.1	1.8	1.6	1.6	1.6	1.6	1.3	1.3	0.5	995.7
97,5°	2.1	2.1	2.1	2.0	1.8	1.6	1.6	1.6	1.5	1.3	1.3	0.5	996.2
100,0°	2.1	2.0	2.0	1.8	1.8	1.8	1.6	1.6	1.5	1.5	1.3	0.5	996.7
102,5°	1.8	1.8	1.8	1.8	1.6	1.6	1.6	1.5	1.3	1.3	1.3	0.4	997.1
105,0°	1.6	1.6	1.6	1.6	1.5	1.5	1.4	1.3	1.3	1.2	1.2	0.4	997.4
107,5°	1.5	1.5	1.5	1.5	1.4	1.3	1.3	1.2	1.2	1.1	1.1	0.3	997.7
110,0°	1.5	1.4	1.4	1.4	1.3	1.3	1.2	1.1	1.1	1.1	1.0	0.3	998.0
112,5°	1.4	1.4	1.4	1.3	1.3	1.2	1.2	1.1	1.0	1.0	1.0	0.3	998.3

Photometric test report

Family LARGE BELL LED	Order number: 5XA1563K1B108 EAN: 4058352168035	LP number 57651_8
---------------------------------	---	-----------------------------

Table of values for luminous intensities	Maximum luminous intensity	siteco
---	-----------------------------------	---------------

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
115,0°	1.3	1.2	1.1	1.1	1.0	0.9	0.8	0.7	0.7	0.6	0.6	0.6	0.5
117,5°	1.2	1.2	1.1	1.0	0.9	0.8	0.7	0.7	0.6	0.6	0.5	0.5	0.5
120,0°	1.2	1.1	1.0	0.9	0.9	0.8	0.7	0.6	0.6	0.5	0.5	0.4	0.4
122,5°	1.1	1.0	1.0	0.9	0.8	0.7	0.6	0.6	0.5	0.5	0.4	0.4	0.4
125,0°	1.1	1.0	0.9	0.8	0.8	0.7	0.6	0.5	0.5	0.4	0.4	0.4	0.3
127,5°	1.0	0.9	0.9	0.8	0.7	0.6	0.6	0.5	0.4	0.4	0.4	0.3	0.3
130,0°	0.9	0.9	0.8	0.7	0.7	0.6	0.5	0.5	0.4	0.4	0.3	0.3	0.3
140,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family LARGE BELL LED	Order number: 5XA1563K1B108 EAN: 4058352168035	LP number 57651_8
		siteco

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
115,0°	0.5	0.5	0.5	0.5	0.5	0.5	1.3	1.3	1.4	1.4	1.4	1.4	1.4
117,5°	0.5	0.4	0.4	0.4	0.4	0.4	1.3	1.3	1.3	1.3	1.4	1.4	1.4
120,0°	0.4	0.4	0.4	0.4	0.4	0.4	1.2	1.2	1.3	1.3	1.3	1.3	1.4
122,5°	0.4	0.3	0.3	0.3	0.3	0.3	1.2	1.2	1.2	1.3	1.3	1.3	1.3
125,0°	0.3	0.3	0.3	0.3	0.3	0.3	1.1	1.2	1.2	1.2	1.3	1.3	1.3
127,5°	0.3	0.3	0.3	0.3	0.3	0.3	1.1	1.1	1.1	1.2	1.2	1.2	1.3
130,0°	0.3	0.3	0.2	0.2	0.2	0.2	1.0	1.0	1.1	1.1	1.2	1.2	1.2
140,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
115,0°	1.4	1.4	1.4	1.3	1.3	1.2	1.2	1.1	1.1	1.0	1.0	0.2	998.5
117,5°	1.4	1.4	1.3	1.3	1.3	1.2	1.2	1.1	1.1	1.0	1.0	0.2	998.8
120,0°	1.4	1.4	1.3	1.3	1.3	1.2	1.1	1.1	1.0	1.0	1.0	0.2	999.0
122,5°	1.3	1.3	1.3	1.3	1.2	1.2	1.1	1.1	1.0	1.0	1.0	0.2	999.2
125,0°	1.3	1.3	1.3	1.3	1.2	1.2	1.1	1.1	1.0	1.0	1.0	0.2	999.4
127,5°	1.3	1.3	1.3	1.2	1.2	1.2	1.1	1.1	1.0	1.0	1.0	0.2	999.5
130,0°	1.2	1.2	1.2	1.2	1.2	1.1	1.1	1.1	1.0	1.0	1.0	0.4	1000.0
140,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
160,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
170,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family LARGE BELL LED	Order number: 5XA1563K1B108 EAN: 4058352168035	LP number 57651_8
--	---	------------------------------------

Dimming levels table	environmental temperature: 25°C	sITeco
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Luminous flux [lm]	Power consumption [W] start of lifetime	Power consumption [W] end of lifetime	Power consumption [W] average
100	254	3320	23.4	24.3	23.8
95	241	3150	22.1	22.9	22.5
90	229	2993	20.9	21.6	21.2
85	216	2823	19.6	20.3	20.0
80	203	2653	18.3	18.9	18.6
75	190	2483	17.1	17.6	17.4
70	178	2327	16.0	16.6	16.3
65	165	2157	14.8	15.3	15.0
60	152	1987	13.6	14.1	13.8
55	140	1830	12.7	13.0	12.8
50	127	1660	11.6	11.9	11.8
45	114	1490	10.5	10.9	10.7
40	102	1333	9.6	9.9	9.8
35	89	1163	8.5	8.7	8.6
30	76	993	7.5	7.7	7.6
25	63	823	6.5	6.6	6.6
20	51	667	5.5	5.7	5.6
16	40	523	4.7	4.8	4.8