


Photometric test report

| | | |
|--|---|------------------------------------|
| Family SMALL BELL LED | Order number: 5XA1573E1B108 EAN: 4058352167977 | LP number 57649_9 |
|--|---|------------------------------------|

Envelope curve in cd/klm **KMK 67.5°** **KMK 65°** **KMK 62.5°** **KMK 60°** **siteco**

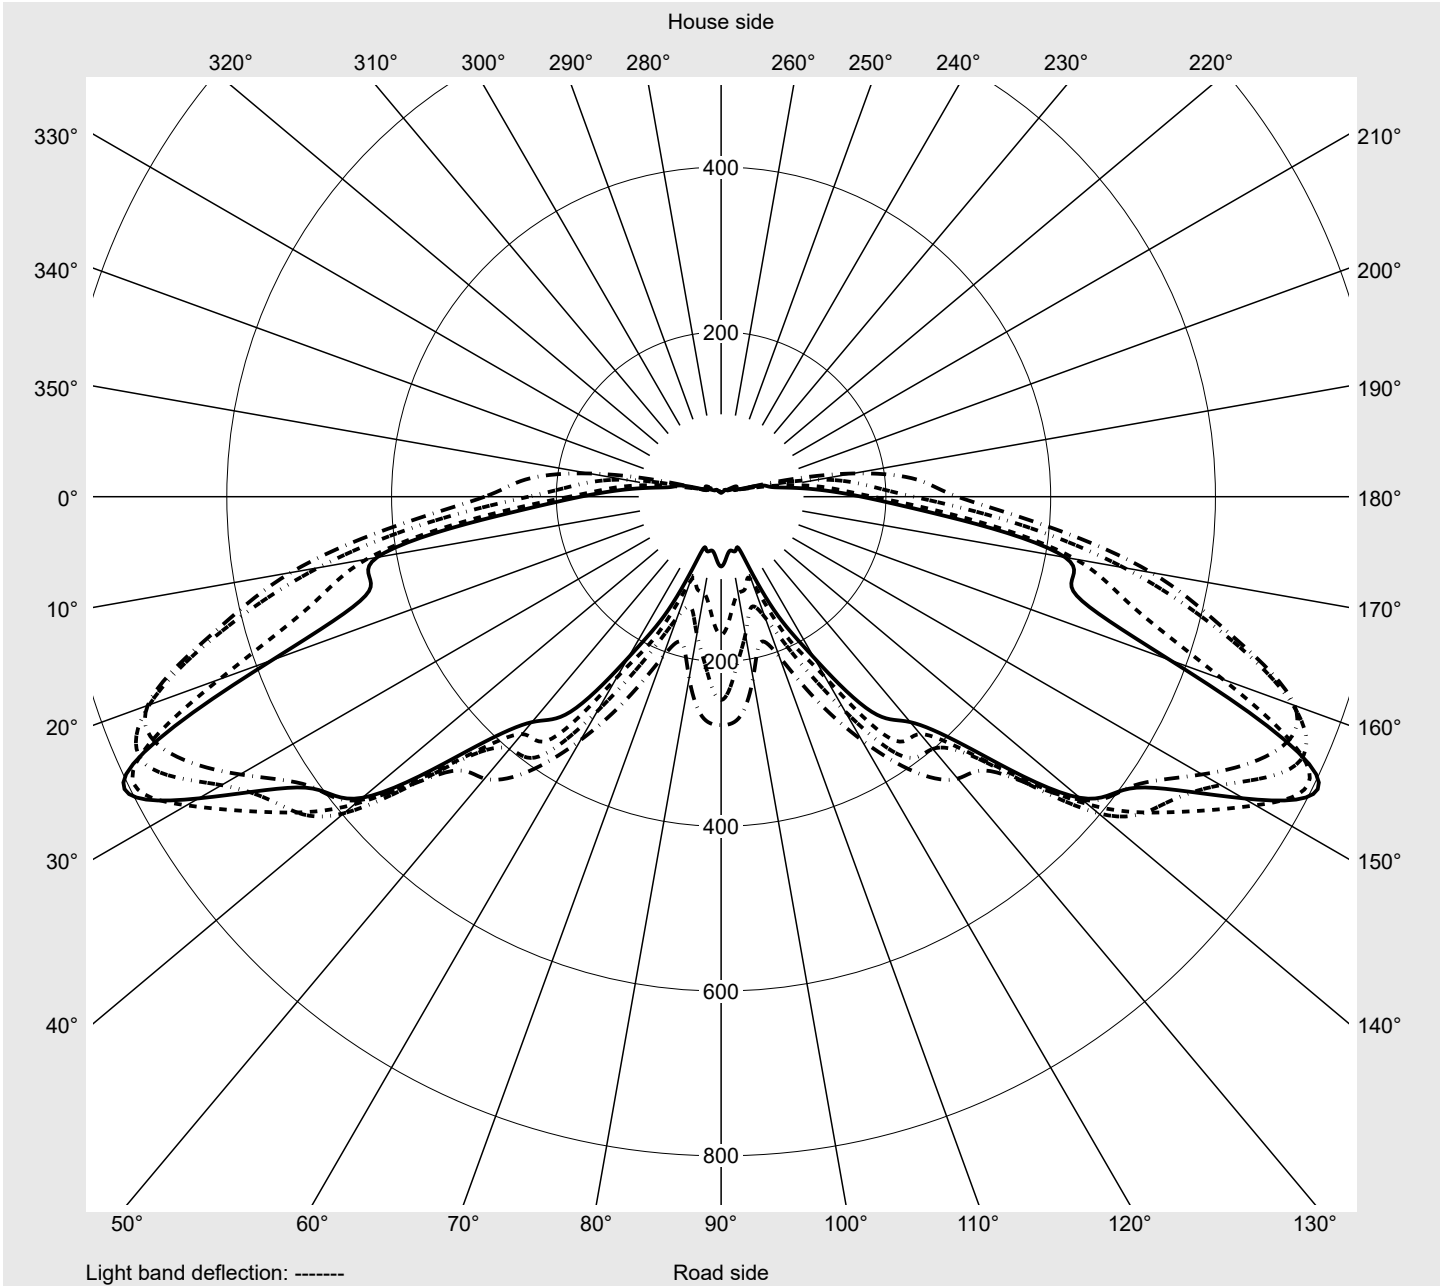

Photometric test report

| | | |
|---|---|------------------------------------|
| Family SMALL BELL LED | Order number: 5XA1573E1B108 EAN: 4058352167977 | LP number 57649_9 |
| Table of values for luminous intensities | | Maximum luminous intensity |
| | | siteco |

| C-planes | 0° 180° | 5° 175° | 10° 170° | 15° 165° | 20° 160° | 25° 155° | 30° 150° | 35° 145° | 40° 140° | 45° 135° | 50° 130° | 55° 125° | 60° 120° |
|----------|------------------------------|------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|
| γ | Luminous intensity in cd/klm | | | | | | | | | | | | |
| 0,0° | 167.9 | 167.9 | 167.9 | 167.9 | 167.9 | 167.9 | 167.9 | 167.9 | 167.9 | 167.9 | 167.9 | 167.9 | 167.9 |
| 2,5° | 164.9 | 164.8 | 164.5 | 165.1 | 163.4 | 160.9 | 160.7 | 162.9 | 162.3 | 161.6 | 161.5 | 161.0 | 162.7 |
| 5,0° | 163.0 | 163.3 | 161.2 | 163.0 | 165.2 | 164.4 | 162.6 | 165.6 | 167.4 | 167.7 | 172.1 | 173.6 | 175.3 |
| 7,5° | 175.6 | 179.4 | 180.6 | 176.7 | 176.1 | 176.0 | 175.2 | 173.5 | 176.8 | 178.4 | 181.0 | 185.1 | 192.7 |
| 10,0° | 194.9 | 195.9 | 196.9 | 197.5 | 197.8 | 192.0 | 192.6 | 191.2 | 195.0 | 196.5 | 199.7 | 207.7 | 210.9 |
| 12,5° | 188.3 | 195.5 | 204.1 | 210.1 | 216.4 | 222.0 | 223.9 | 226.4 | 223.1 | 217.8 | 220.0 | 224.4 | 228.6 |
| 15,0° | 164.9 | 174.6 | 179.5 | 197.5 | 208.4 | 224.1 | 244.8 | 244.0 | 235.7 | 229.5 | 232.1 | 237.8 | 239.8 |
| 17,5° | 162.3 | 160.5 | 165.9 | 180.1 | 192.6 | 210.3 | 217.2 | 223.2 | 227.4 | 230.9 | 225.2 | 228.4 | 236.0 |
| 20,0° | 167.6 | 178.8 | 188.5 | 194.8 | 201.2 | 204.2 | 201.5 | 198.7 | 201.4 | 209.1 | 223.0 | 230.8 | 232.7 |
| 22,5° | 170.4 | 198.7 | 209.0 | 210.6 | 210.9 | 209.7 | 207.6 | 203.7 | 205.7 | 203.4 | 207.6 | 222.9 | 240.9 |
| 25,0° | 171.5 | 186.6 | 196.0 | 196.7 | 201.6 | 209.7 | 222.8 | 225.7 | 217.2 | 206.0 | 206.3 | 228.3 | 256.7 |
| 27,5° | 186.7 | 191.1 | 204.8 | 202.5 | 202.4 | 208.5 | 227.9 | 245.4 | 251.4 | 238.7 | 229.7 | 246.4 | 273.6 |
| 30,0° | 199.6 | 214.1 | 226.3 | 229.8 | 228.6 | 225.4 | 231.6 | 253.8 | 266.8 | 274.8 | 272.1 | 275.3 | 288.9 |
| 32,5° | 214.3 | 219.5 | 229.9 | 235.6 | 248.6 | 254.0 | 261.8 | 270.1 | 280.7 | 295.0 | 319.4 | 313.3 | 305.8 |
| 35,0° | 234.7 | 240.3 | 245.8 | 247.3 | 254.6 | 265.0 | 290.0 | 307.5 | 307.9 | 313.6 | 339.5 | 354.3 | 335.2 |
| 37,5° | 254.5 | 276.3 | 277.7 | 281.6 | 287.1 | 288.6 | 295.2 | 333.0 | 338.3 | 337.4 | 347.6 | 383.0 | 366.3 |
| 40,0° | 273.4 | 280.0 | 283.5 | 296.8 | 325.7 | 332.3 | 335.1 | 337.8 | 368.3 | 389.1 | 371.0 | 391.5 | 388.0 |
| 42,5° | 294.2 | 289.7 | 294.5 | 307.7 | 337.9 | 349.9 | 380.8 | 383.4 | 387.4 | 420.2 | 411.7 | 411.6 | 407.3 |
| 45,0° | 309.8 | 301.5 | 332.6 | 349.0 | 370.5 | 354.1 | 386.7 | 421.6 | 434.2 | 435.4 | 437.7 | 436.4 | 432.9 |
| 47,5° | 317.6 | 328.3 | 380.7 | 410.0 | 414.2 | 382.1 | 416.9 | 450.9 | 465.5 | 458.6 | 442.0 | 455.0 | 433.6 |
| 50,0° | 313.2 | 338.0 | 439.5 | 440.4 | 477.4 | 439.0 | 492.8 | 503.7 | 467.6 | 447.2 | 441.8 | 451.3 | 426.2 |
| 52,5° | 321.4 | 342.6 | 441.6 | 470.9 | 533.3 | 507.3 | 554.9 | 554.1 | 472.4 | 434.6 | 450.6 | 453.3 | 421.6 |
| 55,0° | 332.2 | 356.9 | 442.9 | 516.4 | 601.9 | 577.2 | 615.6 | 590.7 | 526.2 | 468.4 | 469.6 | 451.0 | 402.2 |
| 57,5° | 329.6 | 390.9 | 488.2 | 597.9 | 690.8 | 668.2 | 649.6 | 582.9 | 561.9 | 494.5 | 470.7 | 444.7 | 392.8 |
| 60,0° | 287.0 | 392.6 | 530.4 | 637.8 | 740.6 | 737.3 | 674.2 | 611.3 | 572.9 | 473.4 | 446.7 | 406.8 | 340.9 |
| 62,5° | 233.7 | 355.2 | 496.6 | 625.9 | 738.5 | 769.9 | 700.2 | 652.6 | 597.8 | 457.2 | 399.6 | 384.8 | 300.7 |
| 65,0° | 184.2 | 298.2 | 437.0 | 517.9 | 648.2 | 787.6 | 749.1 | 667.6 | 580.6 | 453.1 | 376.1 | 358.5 | 253.7 |
| 67,5° | 170.5 | 275.3 | 424.1 | 442.5 | 580.0 | 796.9 | 732.3 | 615.7 | 568.5 | 437.4 | 357.1 | 318.6 | 225.8 |
| 70,0° | 197.3 | 309.6 | 444.3 | 463.4 | 541.2 | 719.4 | 674.9 | 560.3 | 501.1 | 382.0 | 320.0 | 277.1 | 183.9 |
| 72,5° | 210.9 | 347.6 | 434.5 | 472.2 | 530.9 | 612.9 | 603.1 | 473.5 | 383.8 | 294.0 | 251.7 | 215.8 | 145.0 |
| 75,0° | 146.6 | 297.8 | 357.5 | 393.3 | 487.2 | 506.2 | 499.9 | 337.1 | 254.5 | 207.3 | 189.0 | 180.2 | 115.8 |
| 77,5° | 119.0 | 205.3 | 238.0 | 263.6 | 322.0 | 314.8 | 279.1 | 185.5 | 157.4 | 130.1 | 149.5 | 147.2 | 97.4 |
| 80,0° | 61.6 | 88.3 | 107.7 | 140.7 | 137.2 | 154.2 | 147.4 | 115.0 | 104.5 | 67.1 | 64.3 | 64.5 | 42.9 |
| 82,5° | 33.8 | 44.0 | 52.4 | 65.5 | 55.2 | 51.2 | 75.0 | 82.7 | 67.4 | 35.2 | 24.2 | 14.9 | 9.5 |
| 85,0° | 10.1 | 14.5 | 15.0 | 18.2 | 14.0 | 20.0 | 33.0 | 37.1 | 20.9 | 14.0 | 7.4 | 5.8 | 4.3 |
| 87,5° | 5.0 | 4.8 | 4.8 | 4.5 | 5.6 | 7.7 | 10.6 | 11.4 | 8.7 | 5.5 | 3.8 | 3.3 | 2.8 |
| 90,0° | 2.2 | 2.5 | 2.3 | 2.2 | 2.6 | 3.4 | 2.6 | 2.8 | 2.1 | 2.0 | 1.9 | 1.8 | 1.7 |
| 92,5° | 1.7 | 1.7 | 1.5 | 1.5 | 1.5 | 1.5 | 1.9 | 1.7 | 1.8 | 1.8 | 1.8 | 1.4 | 1.3 |
| 95,0° | 1.5 | 1.5 | 1.5 | 1.5 | 1.5 | 1.5 | 1.5 | 1.5 | 1.5 | 1.5 | 1.5 | 1.6 | 1.0 |
| 97,5° | 1.5 | 1.5 | 1.5 | 1.5 | 1.5 | 1.5 | 1.5 | 1.5 | 1.9 | 2.6 | 5.4 | 5.7 | 1.2 |
| 100,0° | 1.5 | 1.5 | 1.5 | 1.5 | 1.5 | 1.5 | 1.5 | 1.5 | 2.0 | 3.4 | 4.4 | 5.4 | 0.9 |
| 102,5° | 1.5 | 1.5 | 1.4 | 1.3 | 1.5 | 1.3 | 1.1 | 1.0 | 1.0 | 1.0 | 1.3 | 3.4 | 3.3 |
| 105,0° | 1.3 | 1.3 | 1.0 | 1.1 | 1.0 | 1.0 | 1.0 | 1.0 | 1.0 | 1.0 | 1.0 | 1.2 | 3.8 |
| 107,5° | 1.0 | 1.0 | 1.0 | 1.0 | 1.0 | 1.0 | 1.0 | 1.1 | 0.4 | 0.6 | 0.5 | 0.5 | 0.5 |
| 110,0° | 1.0 | 1.0 | 1.0 | 1.0 | 0.9 | 0.8 | 0.6 | 0.5 | 0.5 | 0.5 | 0.5 | 0.5 | 0.5 |
| 112,5° | 1.0 | 1.0 | 1.0 | 0.7 | 0.6 | 0.5 | 0.5 | 0.5 | 0.5 | 0.5 | 0.5 | 0.5 | 0.5 |

Photometric test report

| | | |
|---|---|------------------------------------|
| Family SMALL BELL LED | Order number: 5XA1573E1B108 EAN: 4058352167977 | LP number 57649_9 |
| Table of values for luminous intensities | | Maximum luminous intensity |
| | | siteco |

| C-planes | 65° 115° | 70° 110° | 75° 105° | 80° 100° | 85° 95° | 90° | 185° 355° | 190° 350° | 195° 345° | 200° 340° | 205° 335° | 210° 330° | 215° 325° |
|----------|------------------------------|-------------|-------------|-------------|------------|-------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|
| γ | Luminous intensity in cd/klm | | | | | | | | | | | | |
| 0,0° | 167.9 | 167.9 | 167.9 | 167.9 | 167.9 | 167.9 | 167.9 | 167.9 | 167.9 | 167.9 | 167.9 | 167.9 | 167.9 |
| 2,5° | 160.3 | 160.7 | 159.2 | 165.5 | 163.7 | 161.6 | 166.2 | 163.9 | 164.5 | 166.1 | 167.3 | 168.1 | 167.5 |
| 5,0° | 175.4 | 180.0 | 183.0 | 183.2 | 183.4 | 181.2 | 162.3 | 160.4 | 161.6 | 162.3 | 164.0 | 164.5 | 165.9 |
| 7,5° | 192.9 | 192.0 | 193.5 | 196.1 | 199.9 | 201.4 | 172.2 | 168.6 | 169.6 | 167.9 | 169.6 | 166.8 | 159.3 |
| 10,0° | 215.8 | 215.0 | 220.4 | 224.5 | 226.8 | 226.8 | 189.6 | 186.7 | 180.8 | 178.3 | 177.3 | 169.6 | 161.9 |
| 12,5° | 233.5 | 241.6 | 246.2 | 249.9 | 255.2 | 262.5 | 181.7 | 174.0 | 165.6 | 162.6 | 156.4 | 149.6 | 145.1 |
| 15,0° | 249.4 | 260.1 | 270.9 | 283.6 | 283.2 | 293.2 | 155.9 | 150.1 | 142.2 | 135.8 | 128.4 | 122.6 | 120.7 |
| 17,5° | 248.9 | 264.6 | 287.0 | 307.0 | 320.4 | 324.6 | 161.6 | 151.5 | 138.9 | 123.6 | 114.0 | 104.3 | 100.5 |
| 20,0° | 241.5 | 263.3 | 283.8 | 304.2 | 323.8 | 328.5 | 163.9 | 156.8 | 145.5 | 119.3 | 105.0 | 94.5 | 88.5 |
| 22,5° | 255.8 | 269.1 | 279.6 | 295.5 | 307.3 | 313.9 | 155.8 | 143.6 | 128.2 | 116.2 | 100.1 | 87.6 | 78.7 |
| 25,0° | 262.9 | 272.2 | 284.5 | 293.9 | 295.4 | 298.1 | 147.4 | 127.3 | 122.5 | 112.9 | 99.3 | 81.3 | 64.8 |
| 27,5° | 287.6 | 289.2 | 294.4 | 293.3 | 296.4 | 292.3 | 167.1 | 141.5 | 121.2 | 112.5 | 98.4 | 78.0 | 54.5 |
| 30,0° | 310.8 | 306.4 | 305.1 | 302.1 | 305.2 | 304.4 | 182.5 | 158.1 | 129.0 | 114.8 | 99.4 | 71.9 | 46.6 |
| 32,5° | 322.6 | 321.3 | 305.5 | 311.8 | 308.4 | 302.8 | 192.8 | 164.4 | 140.7 | 118.2 | 100.0 | 64.4 | 36.5 |
| 35,0° | 341.9 | 334.0 | 315.6 | 307.6 | 323.7 | 314.3 | 218.8 | 177.6 | 147.3 | 125.0 | 95.2 | 50.8 | 30.2 |
| 37,5° | 350.4 | 341.9 | 319.9 | 312.6 | 317.6 | 320.6 | 243.5 | 200.7 | 158.1 | 133.7 | 87.7 | 41.1 | 33.0 |
| 40,0° | 376.6 | 356.1 | 324.9 | 316.3 | 328.7 | 336.3 | 258.1 | 208.6 | 167.9 | 132.3 | 74.3 | 37.2 | 35.8 |
| 42,5° | 389.9 | 349.3 | 322.2 | 327.8 | 331.1 | 338.1 | 282.9 | 219.8 | 173.5 | 131.1 | 61.6 | 40.1 | 40.0 |
| 45,0° | 408.1 | 345.0 | 323.4 | 340.0 | 332.2 | 326.6 | 307.0 | 236.1 | 174.2 | 119.7 | 50.9 | 44.5 | 43.8 |
| 47,5° | 410.0 | 331.8 | 328.3 | 335.3 | 344.1 | 333.8 | 316.8 | 244.4 | 178.8 | 102.5 | 42.6 | 44.9 | 44.8 |
| 50,0° | 387.0 | 325.7 | 320.6 | 323.1 | 338.7 | 327.6 | 313.4 | 236.8 | 173.7 | 75.6 | 35.3 | 40.4 | 37.6 |
| 52,5° | 357.7 | 312.5 | 314.7 | 321.1 | 330.4 | 319.6 | 310.9 | 236.4 | 167.9 | 54.8 | 30.2 | 34.1 | 31.0 |
| 55,0° | 315.3 | 282.0 | 280.7 | 305.0 | 320.1 | 321.0 | 315.1 | 231.6 | 149.3 | 36.1 | 26.1 | 26.7 | 27.1 |
| 57,5° | 278.7 | 230.7 | 241.1 | 269.0 | 297.1 | 296.6 | 295.7 | 197.0 | 111.7 | 29.3 | 22.5 | 24.4 | 24.4 |
| 60,0° | 270.9 | 206.5 | 183.5 | 223.4 | 267.4 | 277.2 | 238.5 | 162.4 | 71.5 | 27.8 | 19.2 | 21.5 | 22.0 |
| 62,5° | 216.3 | 155.9 | 139.7 | 169.6 | 208.8 | 246.7 | 172.5 | 118.5 | 50.6 | 28.0 | 18.9 | 18.8 | 19.5 |
| 65,0° | 185.7 | 109.0 | 114.4 | 119.0 | 141.1 | 167.6 | 128.4 | 80.0 | 43.3 | 27.1 | 19.6 | 19.1 | 17.2 |
| 67,5° | 151.7 | 73.4 | 67.9 | 66.3 | 73.9 | 84.7 | 108.9 | 65.9 | 52.7 | 30.6 | 21.6 | 18.7 | 14.9 |
| 70,0° | 117.5 | 58.4 | 43.6 | 25.6 | 32.1 | 31.1 | 121.9 | 69.9 | 60.8 | 33.5 | 20.4 | 16.0 | 13.3 |
| 72,5° | 76.8 | 53.7 | 19.1 | 9.9 | 11.6 | 10.4 | 112.6 | 70.1 | 61.6 | 31.7 | 21.2 | 14.5 | 13.0 |
| 75,0° | 55.1 | 27.1 | 11.9 | 7.4 | 7.2 | 6.7 | 66.7 | 56.7 | 48.5 | 30.9 | 26.9 | 18.5 | 14.3 |
| 77,5° | 39.7 | 9.4 | 6.8 | 5.9 | 5.9 | 5.2 | 53.9 | 41.7 | 35.7 | 31.4 | 26.3 | 21.9 | 15.5 |
| 80,0° | 16.1 | 6.4 | 5.4 | 5.0 | 4.9 | 4.6 | 37.5 | 33.4 | 35.0 | 27.4 | 19.6 | 18.1 | 14.4 |
| 82,5° | 6.7 | 4.3 | 3.9 | 3.8 | 3.6 | 4.1 | 26.1 | 25.1 | 25.9 | 17.5 | 15.2 | 13.4 | 11.6 |
| 85,0° | 3.3 | 2.8 | 2.8 | 2.8 | 2.9 | 3.0 | 10.3 | 11.5 | 14.5 | 13.1 | 11.1 | 11.2 | 7.2 |
| 87,5° | 2.2 | 1.8 | 1.8 | 1.8 | 1.8 | 2.1 | 4.7 | 5.8 | 6.5 | 9.2 | 8.0 | 6.9 | 5.3 |
| 90,0° | 1.3 | 1.1 | 1.0 | 1.0 | 1.0 | 1.0 | 2.5 | 2.5 | 2.3 | 2.2 | 2.3 | 2.3 | 2.0 |
| 92,5° | 1.1 | 1.0 | 0.7 | 0.8 | 0.8 | 0.5 | 1.6 | 1.9 | 1.8 | 1.8 | 1.8 | 1.8 | 1.8 |
| 95,0° | 1.0 | 0.8 | 0.5 | 0.5 | 0.5 | 0.5 | 1.5 | 1.5 | 1.7 | 1.8 | 1.9 | 1.8 | 1.7 |
| 97,5° | 1.1 | 0.5 | 0.5 | 0.5 | 0.5 | 0.5 | 1.5 | 1.5 | 1.5 | 1.7 | 1.8 | 1.8 | 1.8 |
| 100,0° | 0.8 | 0.5 | 0.5 | 0.5 | 0.5 | 0.5 | 1.5 | 1.5 | 1.5 | 1.5 | 1.5 | 1.5 | 1.5 |
| 102,5° | 0.8 | 0.5 | 0.5 | 0.5 | 0.5 | 0.5 | 1.5 | 1.5 | 1.5 | 1.5 | 1.5 | 1.5 | 1.5 |
| 105,0° | 0.6 | 0.5 | 0.5 | 0.5 | 0.5 | 0.5 | 1.2 | 1.5 | 1.5 | 1.5 | 1.5 | 1.5 | 1.5 |
| 107,5° | 0.5 | 0.5 | 0.5 | 0.5 | 0.5 | 0.5 | 1.3 | 1.3 | 1.3 | 1.4 | 1.5 | 1.5 | 1.5 |
| 110,0° | 0.5 | 0.5 | 0.5 | 0.5 | 0.3 | 0.5 | 1.0 | 1.0 | 1.0 | 1.0 | 1.0 | 1.2 | 1.4 |
| 112,5° | 0.6 | 0.5 | 0.4 | 0.3 | 0.0 | 0.2 | 1.0 | 1.0 | 1.0 | 1.3 | 1.0 | 1.1 | 1.1 |

Photometric test report

| | | |
|---|---|------------------------------------|
| Family SMALL BELL LED | Order number: 5XA1573E1B108 EAN: 4058352167977 | LP number 57649_9 |
| Table of values for luminous intensities | | Maximum luminous intensity |
| | | siteco |

| C-planes | 220° 320° | 225° 315° | 230° 310° | 235° 305° | 240° 300° | 245° 295° | 250° 290° | 255° 285° | 260° 280° | 265° 275° | 270° | Phi-zone | Total Phi-zone |
|----------|------------------------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|-------|-------------------------|-------------------|
| γ | Luminous intensity in cd/klm | | | | | | | | | | | Luminous flux in lm/klm | |
| 0,0° | 167.9 | 167.9 | 167.9 | 167.9 | 167.9 | 167.9 | 167.9 | 167.9 | 167.9 | 167.9 | 167.9 | 0.3 | 0.3 |
| 2,5° | 168.3 | 169.1 | 171.3 | 173.3 | 170.0 | 173.1 | 173.8 | 174.1 | 171.8 | 172.1 | 168.5 | 2.0 | 2.2 |
| 5,0° | 167.1 | 168.5 | 173.3 | 177.1 | 177.0 | 176.6 | 173.2 | 175.3 | 171.5 | 173.0 | 168.2 | 4.1 | 6.3 |
| 7,5° | 156.2 | 157.6 | 160.5 | 162.0 | 166.5 | 169.9 | 173.9 | 176.1 | 177.5 | 177.9 | 176.7 | 6.3 | 12.6 |
| 10,0° | 153.8 | 148.3 | 151.2 | 150.0 | 149.6 | 155.0 | 157.0 | 162.5 | 165.3 | 166.2 | 159.9 | 8.8 | 21.4 |
| 12,5° | 137.1 | 134.7 | 134.0 | 133.7 | 136.0 | 138.5 | 143.1 | 141.8 | 138.0 | 134.7 | 131.6 | 11.1 | 32.5 |
| 15,0° | 118.3 | 111.3 | 110.1 | 103.1 | 105.4 | 108.8 | 116.8 | 123.0 | 121.9 | 115.0 | 113.2 | 12.7 | 45.2 |
| 17,5° | 93.6 | 85.8 | 83.1 | 77.1 | 77.2 | 76.2 | 81.9 | 86.4 | 85.4 | 84.7 | 86.3 | 13.8 | 59.0 |
| 20,0° | 82.2 | 69.6 | 65.5 | 58.3 | 58.7 | 57.4 | 55.7 | 54.7 | 52.9 | 56.5 | 58.4 | 14.9 | 73.9 |
| 22,5° | 63.1 | 54.1 | 52.1 | 48.3 | 47.9 | 44.8 | 45.0 | 39.6 | 36.9 | 36.4 | 40.7 | 16.2 | 90.1 |
| 25,0° | 48.0 | 40.7 | 37.7 | 39.8 | 38.1 | 36.2 | 35.2 | 29.9 | 26.4 | 26.2 | 26.6 | 17.4 | 107.5 |
| 27,5° | 36.7 | 30.9 | 32.3 | 32.8 | 31.7 | 29.4 | 27.0 | 23.0 | 20.8 | 20.2 | 19.6 | 19.6 | 127.2 |
| 30,0° | 30.0 | 28.9 | 28.1 | 27.8 | 26.1 | 23.5 | 22.3 | 19.4 | 17.9 | 17.3 | 16.8 | 22.5 | 149.7 |
| 32,5° | 28.3 | 27.8 | 26.7 | 24.1 | 22.2 | 18.4 | 17.7 | 16.3 | 15.6 | 15.1 | 14.8 | 25.4 | 175.1 |
| 35,0° | 29.1 | 27.9 | 24.6 | 22.6 | 20.3 | 17.1 | 15.7 | 14.6 | 13.9 | 12.8 | 12.8 | 28.7 | 203.8 |
| 37,5° | 30.4 | 26.2 | 22.9 | 21.4 | 19.3 | 16.6 | 14.4 | 13.5 | 12.5 | 11.7 | 11.2 | 32.3 | 236.1 |
| 40,0° | 32.2 | 24.0 | 21.8 | 19.8 | 17.2 | 14.9 | 13.3 | 12.3 | 11.5 | 10.7 | 10.4 | 35.9 | 272.0 |
| 42,5° | 33.8 | 23.9 | 21.3 | 18.0 | 15.9 | 13.6 | 12.6 | 11.7 | 10.8 | 10.2 | 10.2 | 39.6 | 311.6 |
| 45,0° | 34.1 | 25.0 | 19.1 | 16.1 | 14.5 | 12.8 | 11.6 | 10.9 | 10.3 | 9.9 | 10.3 | 43.4 | 355.0 |
| 47,5° | 33.1 | 22.1 | 16.5 | 14.9 | 13.3 | 12.4 | 11.5 | 10.6 | 9.7 | 9.7 | 10.1 | 47.2 | 402.1 |
| 50,0° | 27.7 | 20.3 | 14.9 | 13.4 | 12.6 | 12.1 | 11.3 | 9.7 | 8.9 | 8.8 | 9.2 | 50.1 | 452.3 |
| 52,5° | 24.1 | 18.2 | 13.8 | 12.4 | 11.8 | 11.4 | 10.4 | 9.2 | 8.4 | 7.7 | 7.8 | 52.9 | 505.1 |
| 55,0° | 21.4 | 16.6 | 13.1 | 11.9 | 11.0 | 10.3 | 9.8 | 8.7 | 7.9 | 7.2 | 7.1 | 55.8 | 561.0 |
| 57,5° | 18.3 | 14.6 | 11.9 | 10.9 | 10.1 | 9.4 | 8.9 | 7.8 | 7.1 | 6.9 | 7.2 | 58.1 | 619.0 |
| 60,0° | 17.1 | 13.3 | 10.6 | 10.2 | 9.6 | 8.9 | 7.7 | 7.3 | 6.6 | 6.6 | 6.1 | 58.1 | 677.1 |
| 62,5° | 15.5 | 11.9 | 10.3 | 10.2 | 9.0 | 8.3 | 7.7 | 6.6 | 6.2 | 5.7 | 6.2 | 55.7 | 732.8 |
| 65,0° | 13.4 | 11.1 | 10.6 | 9.9 | 9.0 | 7.7 | 7.3 | 6.2 | 5.6 | 5.6 | 5.6 | 51.7 | 784.5 |
| 67,5° | 12.2 | 10.9 | 10.4 | 10.2 | 8.9 | 7.4 | 6.3 | 6.0 | 5.1 | 5.3 | 5.1 | 48.0 | 832.5 |
| 70,0° | 12.0 | 10.7 | 10.2 | 9.7 | 8.7 | 7.1 | 5.9 | 5.0 | 4.6 | 5.0 | 4.7 | 45.0 | 877.4 |
| 72,5° | 11.6 | 10.1 | 9.6 | 8.9 | 7.9 | 6.6 | 5.4 | 4.8 | 4.6 | 4.6 | 4.2 | 40.3 | 917.8 |
| 75,0° | 11.6 | 10.0 | 8.8 | 8.0 | 6.9 | 6.1 | 4.9 | 4.3 | 4.1 | 4.0 | 4.2 | 32.5 | 950.3 |
| 77,5° | 10.6 | 9.7 | 8.1 | 7.1 | 6.1 | 5.1 | 4.3 | 4.0 | 3.6 | 3.6 | 3.6 | 22.1 | 972.3 |
| 80,0° | 10.1 | 8.0 | 6.8 | 6.2 | 5.2 | 4.1 | 3.6 | 3.5 | 3.1 | 3.1 | 3.1 | 11.8 | 984.2 |
| 82,5° | 8.4 | 6.4 | 5.8 | 5.0 | 4.3 | 3.1 | 3.0 | 2.8 | 2.7 | 2.9 | 2.8 | 6.2 | 990.3 |
| 85,0° | 5.4 | 4.5 | 4.1 | 3.6 | 3.1 | 2.6 | 2.4 | 2.3 | 2.6 | 2.5 | 2.5 | 2.6 | 992.9 |
| 87,5° | 3.7 | 3.2 | 2.8 | 2.5 | 2.1 | 1.9 | 1.8 | 2.0 | 2.1 | 2.2 | 2.2 | 1.2 | 994.2 |
| 90,0° | 2.0 | 2.0 | 1.7 | 1.8 | 1.5 | 1.4 | 1.4 | 1.5 | 1.5 | 2.1 | 1.8 | 0.5 | 994.7 |
| 92,5° | 1.8 | 1.8 | 1.8 | 1.8 | 1.6 | 1.4 | 1.3 | 1.5 | 2.1 | 2.0 | 1.6 | 0.4 | 995.1 |
| 95,0° | 2.1 | 2.2 | 3.3 | 4.6 | 3.5 | 1.8 | 1.5 | 1.7 | 2.1 | 2.1 | 1.5 | 0.5 | 995.6 |
| 97,5° | 2.3 | 2.9 | 4.2 | 5.1 | 4.6 | 2.6 | 2.0 | 1.5 | 1.8 | 1.6 | 1.5 | 0.6 | 996.1 |
| 100,0° | 1.8 | 1.9 | 2.7 | 4.4 | 4.1 | 2.7 | 1.5 | 1.5 | 1.5 | 1.5 | 1.5 | 0.5 | 996.6 |
| 102,5° | 1.5 | 3.0 | 5.9 | 5.9 | 3.5 | 1.6 | 1.5 | 1.5 | 1.5 | 1.5 | 1.5 | 0.5 | 997.1 |
| 105,0° | 1.8 | 3.1 | 5.3 | 5.7 | 3.4 | 2.0 | 1.5 | 1.5 | 1.5 | 1.5 | 1.5 | 0.4 | 997.5 |
| 107,5° | 1.6 | 2.8 | 4.4 | 5.3 | 3.5 | 1.6 | 1.4 | 1.2 | 1.1 | 1.0 | 1.0 | 0.3 | 997.9 |
| 110,0° | 1.5 | 2.0 | 3.1 | 3.3 | 2.5 | 1.2 | 1.0 | 1.0 | 1.0 | 1.0 | 1.0 | 0.3 | 998.1 |
| 112,5° | 1.6 | 1.2 | 1.6 | 1.3 | 1.2 | 1.0 | 1.0 | 1.0 | 1.0 | 1.0 | 1.0 | 0.2 | 998.4 |

Photometric test report

| | | |
|---|---|------------------------------------|
| Family SMALL BELL LED | Order number: 5XA1573E1B108 EAN: 4058352167977 | LP number 57649_9 |
| Table of values for luminous intensities | | Maximum luminous intensity |
| | | siteco |

| C-planes | 0° 180° | 5° 175° | 10° 170° | 15° 165° | 20° 160° | 25° 155° | 30° 150° | 35° 145° | 40° 140° | 45° 135° | 50° 130° | 55° 125° | 60° 120° |
|----------|------------------------------|------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|
| γ | Luminous intensity in cd/klm | | | | | | | | | | | | |
| 115,0° | 1.0 | 1.0 | 1.0 | 1.0 | 0.8 | 0.5 | 0.5 | 0.5 | 0.5 | 0.5 | 0.5 | 0.5 | 0.5 |
| 117,5° | 1.0 | 1.0 | 1.0 | 0.8 | 0.5 | 0.5 | 0.5 | 0.5 | 0.5 | 0.5 | 0.5 | 0.6 | 0.2 |
| 120,0° | 1.0 | 1.0 | 1.0 | 1.0 | 0.5 | 0.5 | 0.5 | 0.5 | 0.5 | 0.5 | 0.5 | 0.3 | 0.3 |
| 122,5° | 1.0 | 1.0 | 1.1 | 0.9 | 0.5 | 0.5 | 0.5 | 0.5 | 0.5 | 0.5 | 0.5 | 0.4 | 0.4 |
| 125,0° | 1.0 | 0.9 | 1.1 | 0.8 | 0.5 | 0.5 | 0.5 | 0.5 | 0.5 | 0.5 | 0.5 | 0.3 | 0.4 |
| 127,5° | 1.0 | 1.0 | 1.0 | 0.8 | 0.5 | 0.5 | 0.5 | 0.5 | 0.5 | 0.5 | 0.5 | 0.3 | 0.5 |
| 130,0° | 1.0 | 1.0 | 0.9 | 0.6 | 0.5 | 0.5 | 0.5 | 0.5 | 0.5 | 0.5 | 0.5 | 0.5 | 0.3 |
| 132,5° | 1.0 | 1.0 | 0.9 | 1.0 | 0.5 | 0.5 | 0.5 | 0.5 | 0.5 | 0.5 | 0.5 | 0.5 | 0.5 |
| 135,0° | 1.0 | 1.0 | 0.9 | 0.6 | 0.6 | 0.5 | 0.5 | 0.5 | 0.5 | 0.5 | 0.5 | 0.5 | 0.5 |
| 137,5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 140,0° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 142,5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 145,0° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 147,5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 150,0° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 152,5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 155,0° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 157,5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 160,0° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 162,5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 165,0° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 167,5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 170,0° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 172,5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 175,0° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 177,5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 180,0° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Photometric test report

| | | |
|--|---|------------------------------------|
| Family SMALL BELL LED | Order number: 5XA1573E1B108 EAN: 4058352167977 | LP number 57649_9 |
|--|---|------------------------------------|

| | | |
|---|-----------------------------------|---------------|
| Table of values for luminous intensities | Maximum luminous intensity | siteco |
|---|-----------------------------------|---------------|

| C-planes | 65° 115° | 70° 110° | 75° 105° | 80° 100° | 85° 95° | 90° | 185° 355° | 190° 350° | 195° 345° | 200° 340° | 205° 335° | 210° 330° | 215° 325° |
|----------|------------------------------|-------------|-------------|-------------|------------|-----|--------------|--------------|--------------|--------------|--------------|--------------|--------------|
| γ | Luminous intensity in cd/klm | | | | | | | | | | | | |
| 115,0° | 0.5 | 0.5 | 0.3 | 0.2 | 0.0 | 0.0 | 1.0 | 1.2 | 1.0 | 1.0 | 1.2 | 1.2 | 1.5 |
| 117,5° | 0.4 | 0.1 | 0.3 | 0.2 | 0.1 | 0.0 | 1.0 | 1.0 | 1.0 | 1.1 | 1.3 | 1.3 | 1.4 |
| 120,0° | 0.3 | 0.2 | 0.0 | 0.3 | 0.1 | 0.0 | 1.0 | 1.0 | 1.0 | 1.0 | 1.4 | 1.2 | 1.4 |
| 122,5° | 0.5 | 0.4 | 0.3 | 0.2 | 0.2 | 0.0 | 1.0 | 1.0 | 1.0 | 1.2 | 1.4 | 1.5 | 1.4 |
| 125,0° | 0.1 | 0.0 | 0.2 | 0.1 | 0.2 | 0.0 | 1.0 | 1.0 | 1.0 | 1.1 | 1.0 | 1.5 | 1.3 |
| 127,5° | 0.5 | 0.1 | 0.4 | 0.3 | 0.1 | 0.0 | 1.0 | 1.0 | 1.0 | 1.0 | 1.0 | 1.3 | 1.5 |
| 130,0° | 0.4 | 0.2 | 0.2 | 0.5 | 0.2 | 0.2 | 1.0 | 1.0 | 1.0 | 1.0 | 1.0 | 1.2 | 1.0 |
| 132,5° | 0.5 | 0.3 | 0.3 | 0.3 | 0.2 | 0.3 | 1.0 | 1.0 | 1.0 | 1.0 | 1.0 | 1.0 | 1.2 |
| 135,0° | 0.5 | 0.5 | 0.5 | 0.5 | 0.5 | 0.5 | 1.0 | 1.0 | 1.0 | 1.0 | 1.0 | 1.0 | 1.0 |
| 137,5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 140,0° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 142,5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 145,0° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 147,5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 150,0° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 152,5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 155,0° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 157,5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 160,0° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 162,5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 165,0° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 167,5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 170,0° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 172,5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 175,0° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 177,5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 180,0° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Photometric test report

| | | |
|---|---|------------------------------------|
| Family SMALL BELL LED | Order number: 5XA1573E1B108 EAN: 4058352167977 | LP number 57649_9 |
| Table of values for luminous intensities | | Maximum luminous intensity |
| | | siteco |

| C-planes | 220° 320° | 225° 315° | 230° 310° | 235° 305° | 240° 300° | 245° 295° | 250° 290° | 255° 285° | 260° 280° | 265° 275° | 270° | Phi-zone | Total Phi-zone |
|----------|------------------------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|------|-------------------------|-------------------|
| γ | Luminous intensity in cd/klm | | | | | | | | | | | Luminous flux in lm/klm | |
| 115,0° | 1.6 | 1.4 | 1.5 | 1.2 | 1.1 | 1.0 | 1.0 | 1.0 | 1.0 | 1.0 | 1.0 | 0.2 | 998.6 |
| 117,5° | 1.5 | 1.5 | 1.0 | 1.1 | 1.0 | 1.1 | 1.0 | 1.0 | 1.0 | 1.0 | 1.0 | 0.2 | 998.8 |
| 120,0° | 1.4 | 1.5 | 1.2 | 1.1 | 1.2 | 1.0 | 1.0 | 1.0 | 1.0 | 1.0 | 1.0 | 0.2 | 999.0 |
| 122,5° | 1.5 | 1.2 | 1.3 | 1.3 | 1.3 | 1.0 | 1.0 | 1.0 | 1.0 | 1.0 | 1.0 | 0.2 | 999.2 |
| 125,0° | 1.6 | 1.3 | 1.5 | 1.4 | 1.0 | 1.0 | 1.0 | 1.0 | 1.0 | 1.0 | 1.0 | 0.2 | 999.3 |
| 127,5° | 1.5 | 1.5 | 1.6 | 1.4 | 1.3 | 1.2 | 1.0 | 1.0 | 1.0 | 1.0 | 1.0 | 0.2 | 999.5 |
| 130,0° | 1.3 | 1.2 | 1.3 | 1.2 | 1.2 | 1.0 | 1.0 | 1.0 | 1.0 | 1.0 | 1.0 | 0.2 | 999.7 |
| 132,5° | 1.3 | 1.4 | 1.5 | 1.3 | 1.4 | 1.1 | 1.2 | 1.0 | 1.0 | 1.0 | 1.0 | 0.2 | 999.9 |
| 135,0° | 1.2 | 1.5 | 1.2 | 1.6 | 1.4 | 1.0 | 1.0 | 1.0 | 1.0 | 1.0 | 1.0 | 0.2 | 1000.0 |
| 137,5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 1000.0 |
| 140,0° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 1000.0 |
| 142,5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 1000.0 |
| 145,0° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 1000.0 |
| 147,5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 1000.0 |
| 150,0° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 1000.0 |
| 152,5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 1000.0 |
| 155,0° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 1000.0 |
| 157,5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 1000.0 |
| 160,0° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 1000.0 |
| 162,5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 1000.0 |
| 165,0° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 1000.0 |
| 167,5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 1000.0 |
| 170,0° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 1000.0 |
| 172,5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 1000.0 |
| 175,0° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 1000.0 |
| 177,5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 1000.0 |
| 180,0° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 1000.0 |

Photometric test report

| | | |
|--|---|------------------------------------|
| Family SMALL BELL LED | Order number: 5XA1573E1B108 EAN: 4058352167977 | LP number 57649_9 |
|--|---|------------------------------------|

| | | |
|-----------------------------|---------------------------------|---------------|
| Dimming levels table | environmental temperature: 25°C | sITeco |
|-----------------------------|---------------------------------|---------------|

| Luminous flux % | Dimming level linear | Luminous flux [lm] | Power consumption [W] start of lifetime | Power consumption [W] end of lifetime | Power consumption [W] average |
|-----------------|----------------------|--------------------|---|---------------------------------------|-------------------------------|
| 100 | 254 | 1640 | 13.2 | 13.6 | 13.4 |
| 95 | 241 | 1556 | 12.6 | 12.9 | 12.8 |
| 90 | 229 | 1479 | 12.0 | 12.3 | 12.2 |
| 85 | 216 | 1395 | 11.3 | 11.6 | 11.4 |
| 80 | 203 | 1311 | 10.7 | 10.9 | 10.8 |
| 75 | 190 | 1227 | 10.1 | 10.3 | 10.2 |
| 70 | 178 | 1149 | 9.5 | 9.7 | 9.6 |
| 65 | 165 | 1065 | 8.9 | 9.1 | 9.0 |
| 60 | 152 | 981 | 8.3 | 8.5 | 8.4 |
| 55 | 140 | 904 | 7.8 | 7.9 | 7.8 |
| 50 | 127 | 820 | 7.2 | 7.3 | 7.2 |
| 45 | 114 | 736 | 6.6 | 6.8 | 6.7 |
| 40 | 102 | 659 | 6.1 | 6.2 | 6.2 |
| 35 | 89 | 575 | 5.6 | 5.6 | 5.6 |
| 30 | 76 | 491 | 5.0 | 5.1 | 5.0 |
| 25 | 63 | 407 | 4.3 | 4.4 | 4.4 |
| 20 | 51 | 329 | 3.5 | 3.6 | 3.6 |
| 15 | 39 | 252 | 2.8 | 2.9 | 2.8 |