

Photometric test report

Family
LANTERN CLASSIC LED

Order number: **5XA5245NF14HP**
EAN: **4058352834695**

LP number
58717_21



Version post-top- or mounting to wall arm
Optic asymmetric, extremely wide distribution (P1.0a)
Cover cover transparent, PMMA
Lamps LED 2700 K | CRI ≥ 70
Controlgear ECG SITECO iQ
Rated values Net luminous flux = 3780 lm
Power consumption = 33.6 W
Luminous efficacy = 112.5 lm/W

serial
documentation
04.11.2022

siteco

Luminous intensity in cd/klm


C180-0

C185-5

C190-10

C270-90

Imax: 822 cd/klm

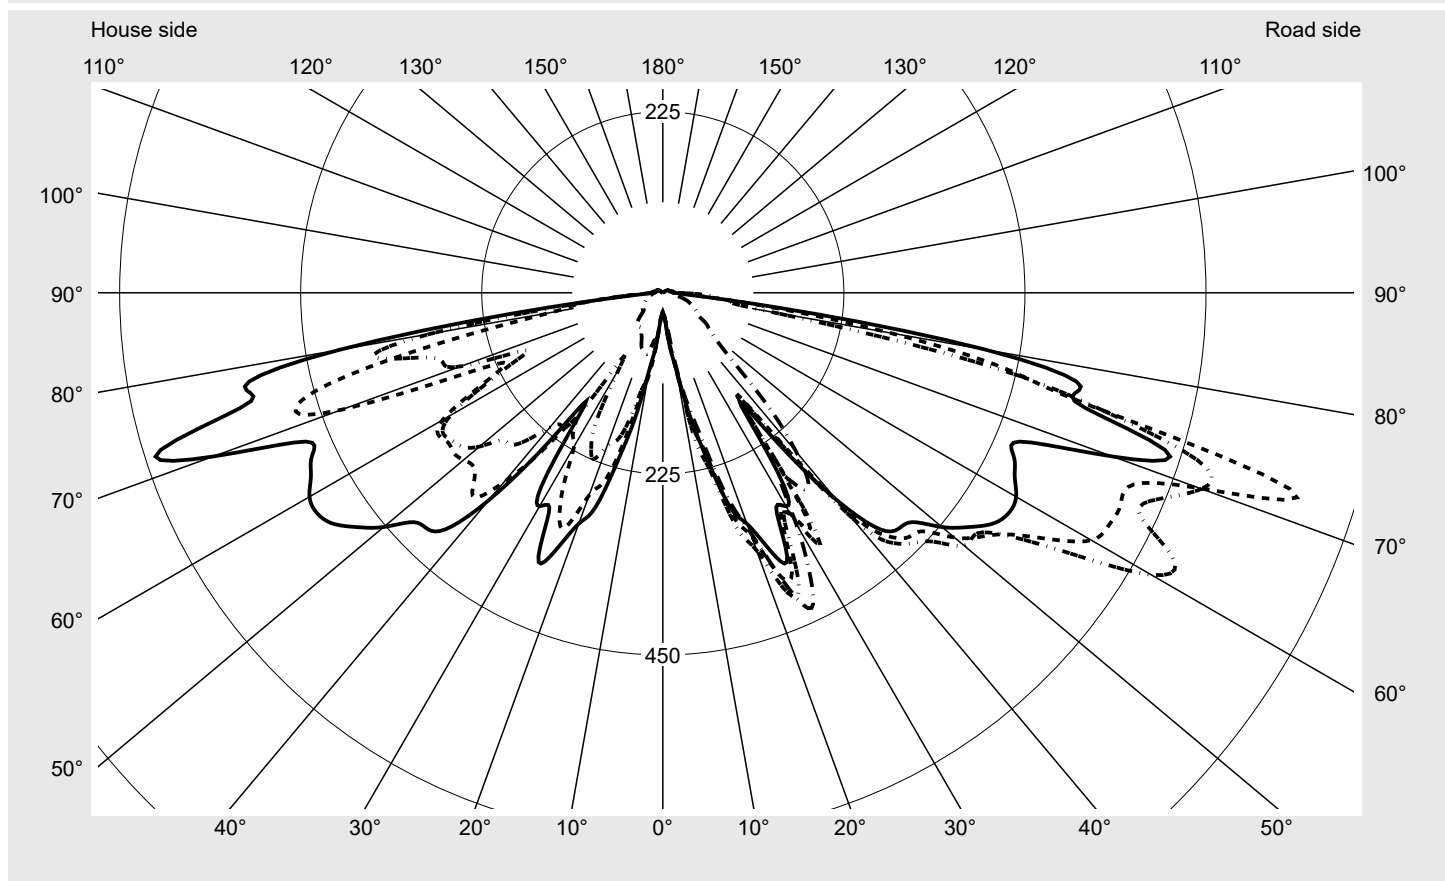

Luminaire output ratios

Eta	100.0%
Eta 0° - 90°	96.4%
Eta 90° - 180°	3.6%

Luminous intensity class acc. to EN13201-2

Class:	---
Imax 70°	741.1
Imax 80°	408.1
Imax 90°	15.6
Imax >90°	14.8
Imax >95°	13.2


Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family LANTERN CLASSIC LED	Order number: 5XA5245NF14HP EAN: 4058352834695	LP number 58717_21
---------------------------------------------	-----------------------------------------------------------------	-------------------------------------

Envelope curve in cd/klm **KMK 72.5°** **KMK 70°** **KMK 67.5°** **KMK 65°** **siteco**

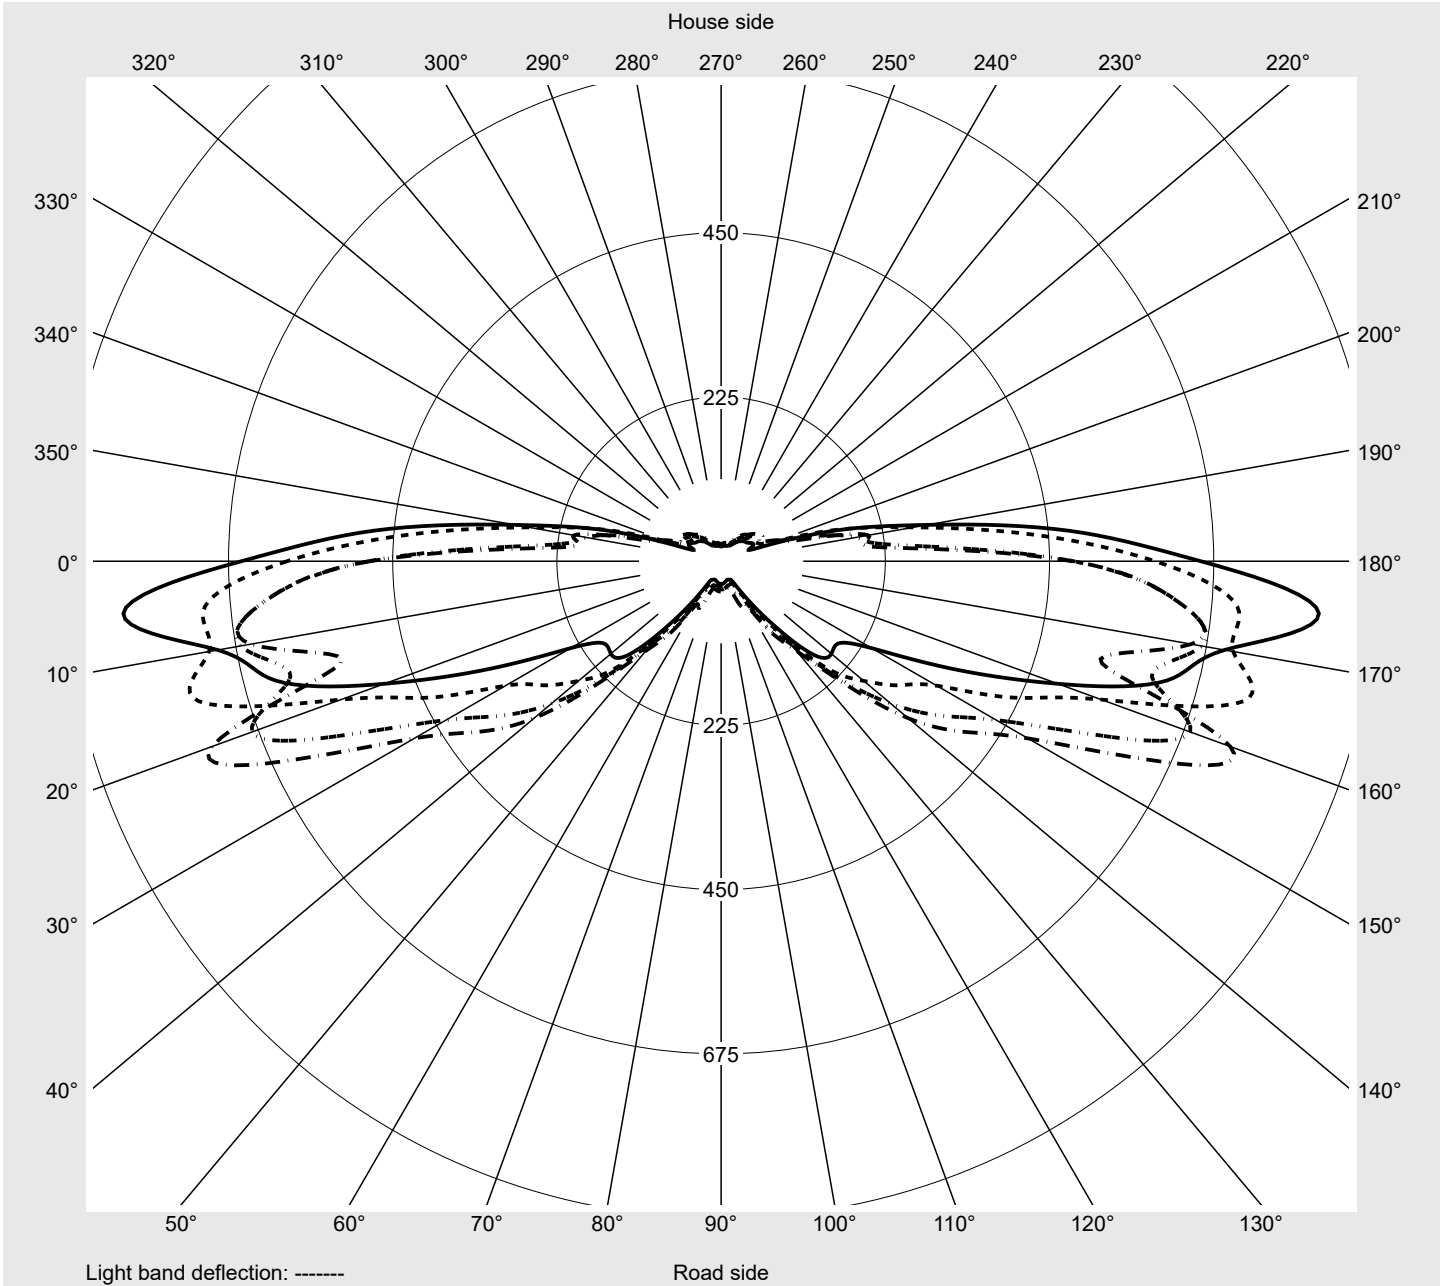

Photometric test report

Family LANTERN CLASSIC LED	Order number: 5XA5245NF14HP EAN: 4058352834695	LP number 58717_21
Table of values for luminous intensities		Maximum luminous intensity
siteco		

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	24.1	24.1	24.1	24.1	24.1	24.1	24.1	24.1	24.1	24.1	24.1	24.1	24.1
2,5°	30.7	30.5	31.6	30.7	31.6	30.5	31.2	30.5	31.2	30.5	31.4	30.8	31.8
5,0°	34.6	34.2	33.4	34.0	32.6	33.4	32.0	33.4	33.2	34.2	34.8	34.4	34.0
7,5°	69.0	62.7	71.8	56.2	63.1	53.4	61.5	56.2	63.7	57.9	60.7	52.8	56.0
10,0°	98.1	102.0	98.3	111.1	106.8	109.4	103.6	92.3	92.1	89.0	91.8	91.2	97.1
12,5°	159.4	170.7	188.8	172.6	169.5	136.8	143.0	154.6	164.7	163.5	166.7	134.3	133.5
15,0°	216.3	207.0	229.8	216.3	220.3	223.2	225.6	224.8	231.9	213.0	228.6	234.3	213.6
17,5°	280.4	290.1	306.7	304.3	293.6	268.1	278.2	261.2	278.2	282.2	303.5	285.3	270.7
20,0°	305.3	321.9	340.5	334.4	331.6	301.6	338.3	344.1	361.3	327.3	346.6	327.3	334.8
22,5°	344.7	380.6	402.0	395.1	360.3	319.5	358.9	361.1	364.2	356.9	373.5	356.1	351.2
25,0°	366.2	379.1	399.8	392.7	373.5	329.0	358.7	366.0	356.9	356.5	361.9	344.7	328.2
27,5°	305.9	320.3	333.8	346.4	351.6	308.3	349.8	347.2	345.5	346.8	341.9	322.9	295.4
30,0°	306.3	317.2	320.9	328.4	335.0	293.1	352.0	353.0	362.5	340.1	323.9	291.5	265.8
32,5°	270.3	335.8	358.5	340.1	308.1	245.8	277.2	291.7	296.4	285.9	289.1	280.4	268.1
35,0°	166.5	180.5	179.7	248.8	265.2	184.1	252.1	245.0	259.4	262.2	268.3	266.0	253.3
37,5°	238.5	193.4	208.4	188.6	227.8	251.3	313.2	319.4	296.4	266.6	228.8	216.3	209.6
40,0°	336.2	344.9	363.1	318.8	303.3	271.9	268.7	287.7	283.8	284.0	229.2	185.3	168.5
42,5°	398.1	408.7	421.4	398.4	371.4	280.8	282.2	251.3	233.7	227.8	219.9	192.2	168.5
45,0°	414.5	430.1	440.0	424.5	368.0	319.0	343.7	301.0	261.6	218.7	193.2	181.1	165.5
47,5°	421.8	438.6	458.0	448.9	328.2	369.0	389.5	335.2	289.9	231.0	180.7	164.9	137.8
50,0°	452.8	473.2	488.8	486.0	327.3	410.5	408.7	349.8	294.6	217.5	164.3	182.3	139.6
52,5°	478.3	497.9	491.6	481.7	366.4	453.8	429.3	367.6	303.5	217.3	160.2	151.9	115.1
55,0°	500.3	523.4	528.0	459.5	404.6	485.3	437.6	373.9	308.7	219.9	160.8	153.6	102.0
57,5°	509.6	569.7	605.1	454.0	452.8	502.9	429.3	379.7	313.4	214.5	163.7	140.2	91.0
60,0°	507.0	615.0	701.0	479.9	558.2	549.7	437.4	389.5	324.1	220.1	169.1	128.3	82.3
62,5°	493.0	625.1	715.2	519.7	687.7	628.0	480.1	404.6	332.2	231.0	167.7	123.2	77.9
65,0°	481.3	627.2	654.1	540.0	742.5	642.5	485.5	407.7	334.6	234.1	160.0	117.5	69.4
67,5°	483.3	627.8	668.8	611.0	684.0	561.2	435.2	369.2	303.7	224.0	147.1	109.5	53.2
70,0°	594.8	709.9	712.5	741.1	554.3	442.3	341.1	296.4	255.1	210.4	136.0	82.5	43.5
72,5°	657.3	822.2	700.4	632.0	491.0	348.2	238.3	196.4	197.1	183.1	121.0	66.4	33.6
75,0°	535.3	568.3	568.1	593.2	323.3	230.6	152.5	141.4	132.1	131.3	85.2	57.7	25.3
77,5°	531.5	436.8	402.8	388.0	234.1	167.5	126.9	122.0	94.7	70.6	42.9	30.8	19.6
80,0°	408.1	286.7	136.4	194.0	139.2	110.7	88.8	85.8	55.4	45.7	32.0	23.7	17.4
82,5°	157.6	131.7	86.6	120.8	100.3	75.3	70.0	57.7	28.3	22.3	19.4	18.2	15.4
85,0°	40.7	47.3	67.6	109.2	79.3	56.4	47.7	34.6	21.8	17.8	15.0	14.8	13.6
87,5°	21.0	31.2	49.6	65.5	45.3	33.6	24.1	22.5	16.2	15.0	14.0	13.4	12.3
90,0°	13.6	14.4	14.8	15.6	15.2	15.2	14.8	14.4	14.0	13.8	13.4	12.9	12.1
92,5°	13.4	14.0	14.4	14.8	14.6	14.6	14.2	14.0	13.4	13.4	13.1	12.9	12.3
95,0°	12.7	13.1	13.4	14.0	13.8	13.8	13.8	13.4	13.1	12.9	12.7	12.7	12.3
97,5°	11.9	12.3	12.5	12.9	12.9	13.2	13.1	13.1	12.7	12.5	12.3	11.9	11.9
100,0°	10.7	10.9	11.3	11.7	11.7	12.1	12.3	12.1	11.7	11.7	11.3	11.5	11.1
102,5°	9.7	10.1	10.3	10.7	10.9	11.3	11.3	11.3	10.9	10.9	10.9	10.7	10.5
105,0°	9.3	9.3	9.5	9.9	10.1	10.5	10.5	10.5	10.5	10.5	10.1	10.3	10.1
107,5°	8.5	8.7	9.1	9.3	9.7	10.1	10.1	10.1	9.7	9.7	9.7	9.7	9.9
110,0°	8.1	8.3	8.5	8.9	9.3	9.7	9.7	9.7	9.3	9.3	9.3	9.5	9.7
112,5°	8.1	7.9	8.5	8.5	8.9	9.3	9.3	9.3	9.1	9.1	9.3	9.3	9.3

Photometric test report

Family LANTERN CLASSIC LED	Order number: 5XA5245NF14HP EAN: 4058352834695	LP number 58717_21
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	24.1	24.1	24.1	24.1	24.1	24.1	24.1	24.1	24.1	24.1	24.1	24.1	24.1
2,5°	31.0	32.0	31.2	33.4	32.4	34.4	31.0	30.7	30.8	29.9	30.7	29.3	29.9
5,0°	36.0	37.2	37.6	36.6	36.8	35.2	35.8	35.8	38.2	36.8	39.9	37.8	40.1
7,5°	49.2	50.2	44.1	44.7	38.0	41.9	72.2	65.1	66.2	62.5	63.9	57.3	66.4
10,0°	82.3	82.7	77.7	84.8	80.1	89.4	108.2	106.0	90.8	92.5	95.5	88.8	97.7
12,5°	114.5	106.6	100.5	116.5	126.6	140.8	138.8	125.2	131.3	116.7	126.0	108.4	111.9
15,0°	185.3	157.6	142.4	173.8	176.8	189.8	201.7	167.3	171.6	155.6	138.4	138.8	133.1
17,5°	254.7	229.4	210.6	242.4	247.8	266.2	248.4	193.2	204.9	186.5	181.1	166.3	145.7
20,0°	321.5	265.4	240.1	259.4	283.8	315.2	267.9	202.3	216.7	197.3	176.6	162.3	154.2
22,5°	349.6	298.2	287.3	316.2	353.6	383.2	315.0	223.6	238.9	201.1	177.4	169.1	138.8
25,0°	339.7	317.0	324.5	351.2	416.6	433.1	303.7	210.4	247.2	211.8	153.1	135.1	113.1
27,5°	308.3	293.4	322.9	332.0	391.5	396.7	265.2	177.8	197.7	160.6	125.4	110.5	104.8
30,0°	267.7	263.2	292.5	276.6	335.2	331.0	220.5	107.2	147.7	130.9	123.4	128.3	137.2
32,5°	263.4	244.2	264.6	225.6	268.1	268.9	208.0	106.6	185.1	176.6	177.8	157.6	120.0
35,0°	246.0	211.0	248.4	238.9	284.9	294.2	192.6	193.8	212.6	183.7	167.5	139.6	83.1
37,5°	216.7	200.7	253.5	246.4	294.8	297.0	250.1	207.6	177.6	153.1	126.8	95.3	63.9
40,0°	193.2	188.8	244.4	223.4	263.8	257.5	306.7	218.3	198.7	178.0	128.9	88.8	72.8
42,5°	158.2	147.1	196.0	184.3	213.4	202.1	345.1	247.2	235.1	197.7	121.2	84.2	80.1
45,0°	157.8	139.4	159.4	140.4	144.9	135.7	331.8	267.1	254.5	193.4	98.7	82.1	82.1
47,5°	134.7	125.6	128.9	100.8	104.6	97.7	319.4	271.3	269.1	174.6	86.4	81.5	80.5
50,0°	116.5	109.5	110.5	86.2	87.0	81.1	322.9	297.2	269.5	143.0	83.1	80.3	77.3
52,5°	121.6	105.4	104.4	81.7	76.7	71.6	327.3	314.0	252.1	116.3	85.6	79.3	74.0
55,0°	106.2	87.4	81.3	67.8	69.4	64.5	325.3	319.9	221.5	99.1	84.8	76.1	70.4
57,5°	97.5	70.6	67.6	56.9	54.6	51.0	330.0	324.1	184.5	88.2	80.5	71.6	69.2
60,0°	85.6	58.1	55.4	48.8	49.2	48.2	316.0	304.3	149.7	83.1	75.5	70.6	68.6
62,5°	76.9	52.6	44.3	44.1	45.5	45.1	264.2	252.9	118.8	77.1	70.8	70.2	68.0
65,0°	70.8	48.2	39.2	39.9	41.3	41.5	219.3	204.7	113.9	84.0	64.3	65.8	63.1
67,5°	47.7	37.0	34.6	36.6	38.4	38.8	249.7	187.9	132.9	79.7	57.5	59.7	56.4
70,0°	33.8	32.2	31.2	32.8	35.0	34.8	424.7	267.3	168.1	80.5	57.3	52.6	49.6
72,5°	28.1	26.7	27.5	29.3	30.8	30.8	478.7	286.7	162.9	53.2	46.5	49.2	44.1
75,0°	21.8	22.9	24.9	25.3	26.3	25.3	418.4	310.6	151.1	47.1	41.7	42.3	40.7
77,5°	19.2	20.0	21.8	21.0	20.8	19.8	269.3	368.2	173.8	38.8	38.6	38.4	37.2
80,0°	17.2	17.4	18.4	17.6	17.6	17.0	141.8	293.2	201.7	39.5	34.6	35.4	33.4
82,5°	15.6	15.8	16.2	15.6	15.8	15.8	106.6	122.2	90.8	29.9	29.9	31.8	29.9
85,0°	14.2	14.0	14.2	14.0	14.4	14.6	54.4	52.4	45.9	35.4	26.7	28.9	27.3
87,5°	12.9	12.7	13.4	13.1	13.4	13.1	18.0	19.0	18.6	22.5	24.3	26.5	25.1
90,0°	12.1	12.3	12.7	12.7	12.9	13.1	14.0	13.8	13.4	13.2	12.9	12.9	12.5
92,5°	12.3	12.3	12.7	12.7	12.9	13.1	13.4	13.6	13.2	13.1	12.9	12.9	12.5
95,0°	12.3	12.3	12.5	12.7	12.7	13.1	12.9	12.9	12.5	12.5	12.5	12.5	12.3
97,5°	11.9	11.9	11.9	12.1	12.7	12.7	11.9	12.1	11.7	11.7	11.7	12.1	11.7
100,0°	11.3	11.3	11.7	11.5	12.1	12.3	10.7	10.9	10.5	10.5	10.5	10.9	10.7
102,5°	10.9	10.9	11.1	11.1	11.1	11.5	9.9	9.9	9.7	9.9	9.9	10.1	9.7
105,0°	10.1	10.1	10.5	10.3	10.7	10.7	9.1	9.1	9.1	8.9	9.1	9.3	9.3
107,5°	9.7	9.9	9.9	9.9	9.9	10.3	8.3	8.5	8.3	8.3	8.3	8.5	8.5
110,0°	9.3	9.5	9.7	9.5	9.7	9.9	7.9	8.1	7.9	7.9	7.9	8.1	7.7
112,5°	9.1	9.3	9.5	9.3	9.5	9.9	7.5	7.7	7.3	7.3	7.5	7.5	7.3

Photometric test report

Family LANTERN CLASSIC LED	Order number: 5XA5245NF14HP EAN: 4058352834695	LP number 58717_21
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0,0°	24.1	24.1	24.1	24.1	24.1	24.1	24.1	24.1	24.1	24.1	24.1	0.0	0.0
2,5°	28.5	29.1	27.9	28.3	27.3	27.9	26.9	27.5	26.9	27.3	26.5	0.4	0.4
5,0°	37.6	39.7	36.6	38.4	37.0	39.7	37.6	39.7	36.2	38.0	35.6	0.9	1.3
7,5°	62.5	64.7	55.2	59.7	56.0	55.8	53.6	54.6	55.4	57.9	58.9	2.1	3.3
10,0°	77.3	77.7	77.9	77.9	64.9	55.6	55.4	65.5	64.7	64.5	59.7	4.1	7.5
12,5°	105.0	100.1	107.0	104.8	83.2	65.5	55.8	63.3	67.8	71.6	72.0	7.3	14.7
15,0°	120.8	109.2	126.2	117.7	109.9	85.8	78.3	67.6	74.9	78.1	78.7	11.7	26.4
17,5°	121.6	111.1	131.1	121.6	111.1	88.0	76.7	66.6	70.4	74.4	75.1	16.8	43.3
20,0°	120.6	102.8	121.0	104.6	95.3	77.7	74.7	61.9	61.7	73.6	74.4	21.2	64.5
22,5°	108.0	97.3	95.9	89.0	81.9	73.6	71.0	57.5	56.2	68.6	69.6	25.7	90.2
25,0°	105.6	93.7	83.2	74.5	71.2	66.2	67.4	58.9	54.4	62.1	62.1	28.4	118.6
27,5°	96.3	81.3	78.1	66.6	61.5	60.9	61.7	56.4	49.8	56.6	57.3	28.1	146.7
30,0°	107.6	74.7	68.8	62.9	59.5	60.1	59.7	53.8	44.7	50.8	51.4	28.4	175.1
32,5°	95.5	76.9	73.8	69.8	66.0	60.7	56.4	52.6	43.3	51.4	50.6	28.8	204.0
35,0°	72.0	71.6	72.0	70.2	66.6	60.3	55.2	54.0	45.5	52.0	51.4	27.2	231.1
37,5°	57.1	57.3	63.3	63.9	65.1	59.1	55.4	53.6	46.9	50.8	51.8	28.7	259.8
40,0°	63.3	57.9	52.2	50.0	53.2	50.8	52.0	51.2	46.1	48.6	50.6	32.5	292.3
42,5°	75.9	71.0	59.5	53.2	47.5	39.7	41.7	42.7	41.9	42.1	44.3	34.5	326.8
45,0°	79.3	75.3	69.8	61.5	50.4	38.8	38.4	36.8	35.2	35.2	37.2	36.2	363.0
47,5°	78.7	75.1	70.2	62.9	52.8	40.5	39.9	36.2	33.2	32.4	32.0	37.4	400.3
50,0°	77.3	74.5	70.4	63.3	52.6	39.2	37.6	34.4	33.0	32.4	32.0	39.4	439.7
52,5°	73.6	71.8	67.8	60.3	51.4	38.8	36.4	33.0	31.8	31.0	31.6	41.1	480.8
55,0°	69.2	67.0	64.1	56.8	48.2	37.8	35.8	31.6	29.9	29.3	29.7	42.3	523.1
57,5°	65.8	62.9	60.3	53.0	44.5	35.4	33.4	30.1	28.9	28.5	28.1	43.7	566.8
60,0°	63.1	59.1	56.8	49.0	40.7	32.8	30.8	28.7	27.9	27.1	26.9	46.0	612.8
62,5°	61.1	55.2	52.2	44.9	37.6	31.2	29.1	27.5	26.9	25.9	25.7	47.9	660.8
65,0°	58.3	51.6	47.5	40.3	34.0	29.5	27.1	25.7	25.7	24.3	24.1	47.9	708.7
67,5°	53.4	47.1	42.5	36.2	30.5	27.5	25.5	24.3	24.3	23.1	22.9	46.9	755.6
70,0°	48.4	43.1	38.8	32.4	27.3	25.3	23.7	22.7	23.1	21.9	21.8	48.1	803.7
72,5°	41.9	38.8	34.8	29.3	24.9	23.5	22.3	21.6	21.8	20.6	20.2	45.4	849.1
75,0°	38.4	35.0	31.4	27.1	22.5	21.8	20.8	20.2	20.2	19.0	18.2	36.7	885.9
77,5°	34.8	31.6	28.9	25.3	21.2	20.2	19.4	19.2	18.6	17.2	16.6	29.7	915.5
80,0°	31.6	28.7	26.1	23.1	19.4	18.4	17.8	17.2	16.6	15.2	14.6	20.4	935.9
82,5°	27.7	24.3	21.9	19.8	17.0	16.4	16.4	15.4	14.8	13.8	13.4	12.3	948.2
85,0°	24.3	20.4	18.6	16.8	14.8	15.2	15.0	14.2	13.6	12.9	12.3	8.2	956.4
87,5°	20.8	17.2	15.6	14.4	12.7	12.7	13.1	12.9	12.7	11.9	11.5	5.6	962.1
90,0°	12.3	12.1	11.5	10.9	9.9	10.3	10.7	10.9	10.7	10.7	9.9	3.5	965.6
92,5°	12.5	12.1	11.7	11.3	10.3	10.7	10.7	11.1	11.1	10.9	10.3	3.5	969.1
95,0°	12.1	11.7	11.3	10.9	10.1	10.5	10.5	10.5	10.7	10.7	9.9	3.4	972.4
97,5°	11.3	10.9	10.9	10.3	9.7	9.9	10.3	10.1	10.1	10.1	9.9	3.2	975.6
100,0°	10.5	10.3	10.1	9.5	9.3	9.1	9.3	9.3	9.3	9.3	9.1	2.9	978.5
102,5°	9.7	9.3	9.3	8.7	8.5	8.5	8.5	8.5	8.5	8.3	8.3	2.7	981.2
105,0°	8.9	8.7	8.7	7.9	7.9	7.7	7.7	7.7	7.7	7.5	7.1	2.5	983.7
107,5°	8.1	7.7	7.9	7.1	7.1	6.9	6.9	6.7	6.7	6.7	6.7	2.3	985.9
110,0°	7.5	7.1	7.1	6.7	6.7	6.5	6.3	6.1	6.3	6.1	6.3	2.1	988.1
112,5°	6.9	6.5	6.7	6.5	6.3	6.3	6.3	5.9	6.1	5.9	5.9	2.0	990.1

Photometric test report

Family LANTERN CLASSIC LED	Order number: 5XA5245NF14HP EAN: 4058352834695	LP number 58717_21
---------------------------------------------	-----------------------------------------------------------------	-------------------------------------

Table of values for luminous intensities	Maximum luminous intensity	siteco
-------------------------------------------------	-----------------------------------	---------------

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
115,0°	7.7	7.7	8.1	8.3	8.5	8.9	8.9	8.9	8.7	8.9	8.9	9.3	9.1
117,5°	7.1	7.3	7.5	7.7	8.1	8.3	8.5	8.3	8.3	8.5	8.7	8.7	8.7
120,0°	6.7	6.9	7.3	7.5	7.7	8.1	8.3	8.1	7.9	8.3	8.7	8.7	8.7
122,5°	5.3	5.9	5.7	6.3	6.3	6.7	6.7	6.7	6.7	7.3	7.3	7.7	7.3
125,0°	3.8	4.0	4.0	4.4	4.4	4.7	4.4	4.7	4.7	5.1	5.1	5.5	5.3
127,5°	2.4	2.4	2.6	2.6	2.8	2.8	2.8	3.0	3.2	3.4	3.6	4.0	4.0
130,0°	2.2	2.0	2.2	2.2	2.4	2.4	2.4	2.6	2.6	3.0	3.2	3.2	3.4
132,5°	1.6	1.6	1.8	1.8	1.8	2.0	2.0	2.2	2.2	2.6	2.6	2.8	2.8
135,0°	1.0	1.2	1.2	1.4	1.4	1.6	1.6	1.8	1.8	2.0	2.2	2.2	2.2
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
165,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family LANTERN CLASSIC LED	Order number: 5XA5245NF14HP EAN: 4058352834695	LP number 58717_21
		siteco

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
115,0°	9.3	9.1	9.1	8.9	9.1	9.5	7.5	7.3	6.9	6.9	6.7	6.9	6.9
117,5°	8.9	8.9	8.7	8.5	8.7	9.1	6.7	6.7	6.5	6.3	6.3	6.5	6.1
120,0°	8.7	8.5	8.5	8.1	8.3	8.7	6.7	6.3	6.3	5.9	5.9	6.3	6.1
122,5°	7.7	7.1	7.1	6.9	7.1	7.1	4.9	5.3	4.9	4.9	4.7	4.9	4.7
125,0°	5.3	4.9	4.9	4.5	4.7	4.4	3.2	3.4	3.2	3.4	3.0	3.4	3.0
127,5°	3.8	3.4	3.2	3.0	2.8	2.8	1.8	2.4	2.2	2.2	2.0	2.0	2.0
130,0°	3.4	3.0	2.8	2.6	2.4	2.4	2.0	1.8	1.8	1.8	1.6	1.6	1.6
132,5°	2.6	2.4	2.4	1.8	1.8	1.6	1.4	1.6	1.2	1.4	1.2	1.4	1.2
135,0°	2.0	1.8	1.6	1.4	1.4	1.2	0.8	0.8	0.8	0.8	0.8	0.8	0.8
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
165,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
115,0°	6.5	6.1	6.3	6.1	6.1	5.9	6.1	5.9	5.7	5.5	5.5	1.9	992.0
117,5°	6.1	5.7	5.9	5.7	5.7	5.9	5.7	5.5	5.3	5.1	5.1	1.7	993.7
120,0°	5.7	5.3	5.5	5.7	5.7	5.7	5.7	5.3	5.3	4.9	5.1	1.7	995.4
122,5°	4.5	4.2	4.5	4.5	4.7	4.7	4.7	4.5	4.7	4.2	4.4	1.3	996.7
125,0°	3.0	2.6	3.0	3.0	3.4	3.4	3.6	3.6	3.6	3.2	3.2	0.9	997.6
127,5°	2.0	2.0	1.8	2.2	2.2	2.8	2.8	3.0	2.6	2.8	2.4	0.6	998.2
130,0°	1.6	1.6	1.8	1.8	2.2	2.4	2.8	2.8	2.6	2.4	2.4	0.5	998.7
132,5°	1.2	1.2	1.2	1.4	1.6	2.0	2.2	2.4	2.6	2.4	2.4	0.4	999.0
135,0°	0.8	0.8	0.8	1.0	1.4	1.6	2.0	2.2	2.0	2.2	2.4	0.9	1000.0
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
165,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family LANTERN CLASSIC LED	Order number: 5XA5245NF14HP EAN: 4058352834695	LP number 58717_21
---------------------------------------------	-----------------------------------------------------------------	-------------------------------------

Dimming levels table	environmental temperature: 25°C	siteco
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W]
				start of lifetime	end of lifetime	average
100	254	254	3780	33.6	35.9	34.8
95	241	252	3587	31.3	33.5	32.4
90	229	250	3408	29.4	31.4	30.4
85	216	248	3214	27.3	29.2	28.2
80	203	246	3021	25.4	27.1	26.2
75	190	243	2828	23.5	25.1	24.3
70	178	241	2649	21.9	23.3	22.6
65	165	238	2456	20.1	21.4	20.8
60	152	235	2262	18.4	19.5	19.0
55	140	232	2083	16.8	17.9	17.4
50	127	229	1890	15.2	16.2	15.7
45	114	225	1697	13.6	14.5	14.0
40	102	221	1518	12.2	13.0	12.6
35	89	216	1324	10.7	11.3	11.0
30	76	210	1131	9.2	9.7	9.4
25	63	203	938	7.8	8.2	8.0
20	51	195	759	6.6	6.9	6.8
15	38	184	566	5.2	5.5	5.4
11	28	173	417	4.1	4.4	4.2