
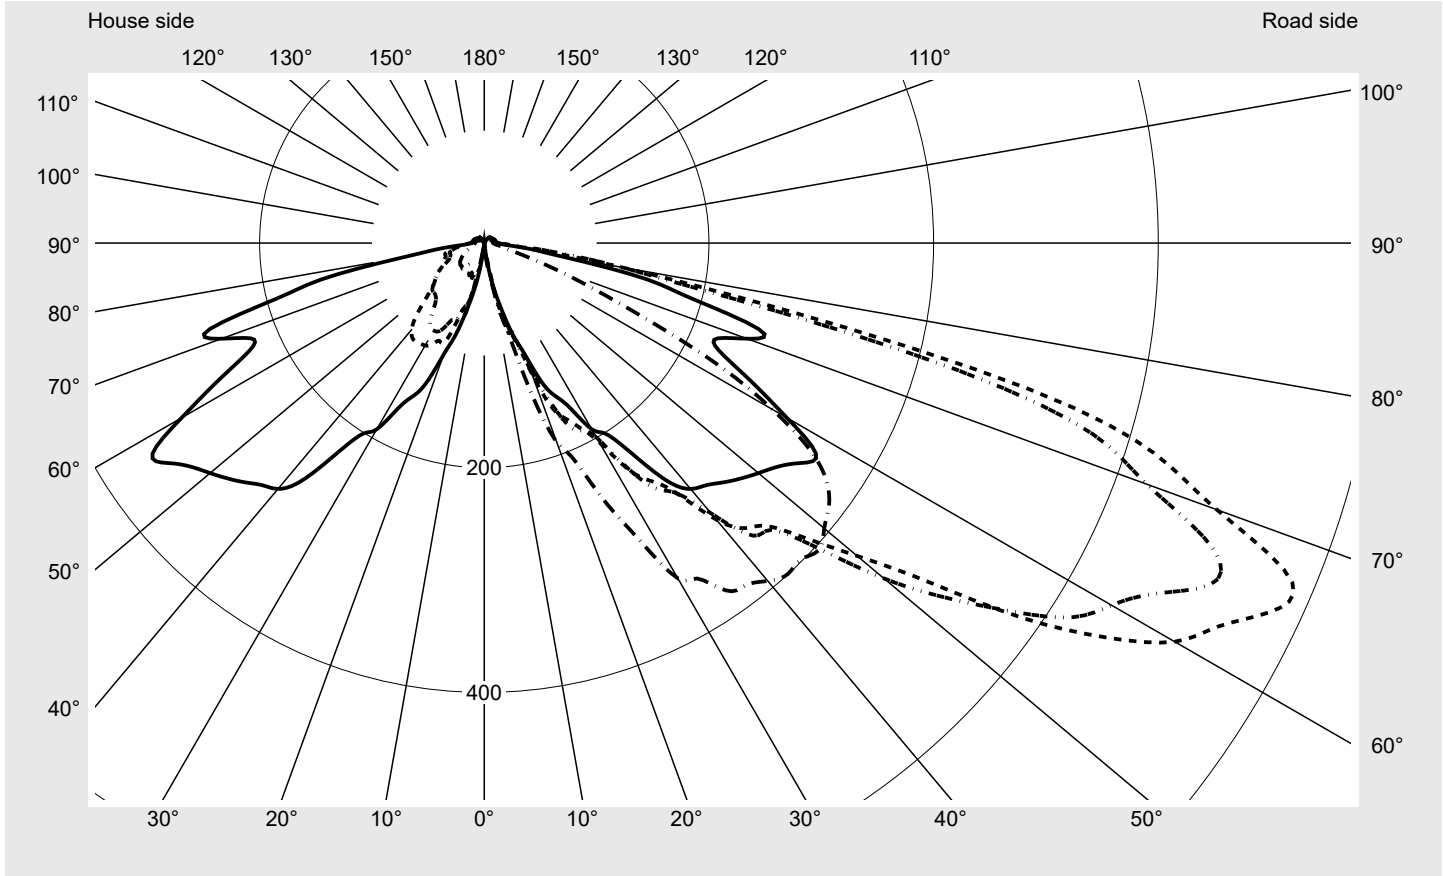


# Photometric test report

<b>Family</b> <b>CITY-LIGHT 400 LED</b>	<b>Order number: 5XA5305KF14HP</b> <b>EAN: 4058352835975</b>	<b>LP number</b> <b>58722_51</b>
	<b>Version</b> post-top- or mounting to wall arm <b>Optic</b> asymmetric, wide distribution (ST1.2a) <b>Cover</b> cover transparent, PMMA <b>Lamps</b> LED 4000 K   CRI ≥ 70 <b>Controlgear</b> ECG SITECO iQ <b>Rated values</b> Net luminous flux = 4940 lm Power consumption = 33.6 W Luminous efficacy = 147 lm/W	<b>serial documentation</b> <b>24.05.2022</b>



**Luminous intensity in cd/klm** C180-0 C205-25 C210-30 C270-90 **Imax: 775 cd/klm**




Luminaire output ratios	
Eta	100.0%
Eta 0° - 90°	95.9%
Eta 90° - 180°	4.1%
Measurement conditions	
DIN EN 13032 and DIN 5032	

Luminous intensity class acc. to EN13201-2	
Class:	G2
Imax 70°	693.9
Imax 80°	135.9
Imax 90°	11.6
Imax >90°	11.2
Imax >95°	10.7

**Photometric test report**

<b>Family</b> <b>CITY-LIGHT 400 LED</b>	<b>Order number: 5XA5305KF14HP</b> <b>EAN: 4058352835975</b>	<b>LP number</b> <b>58722_51</b>
--	---	-------------------------------------

**Envelope curve in cd/klm**      **KMK 67.5°**    **KMK 65°**    **KMK 62.5°**    **KMK 60°**      **siteco**

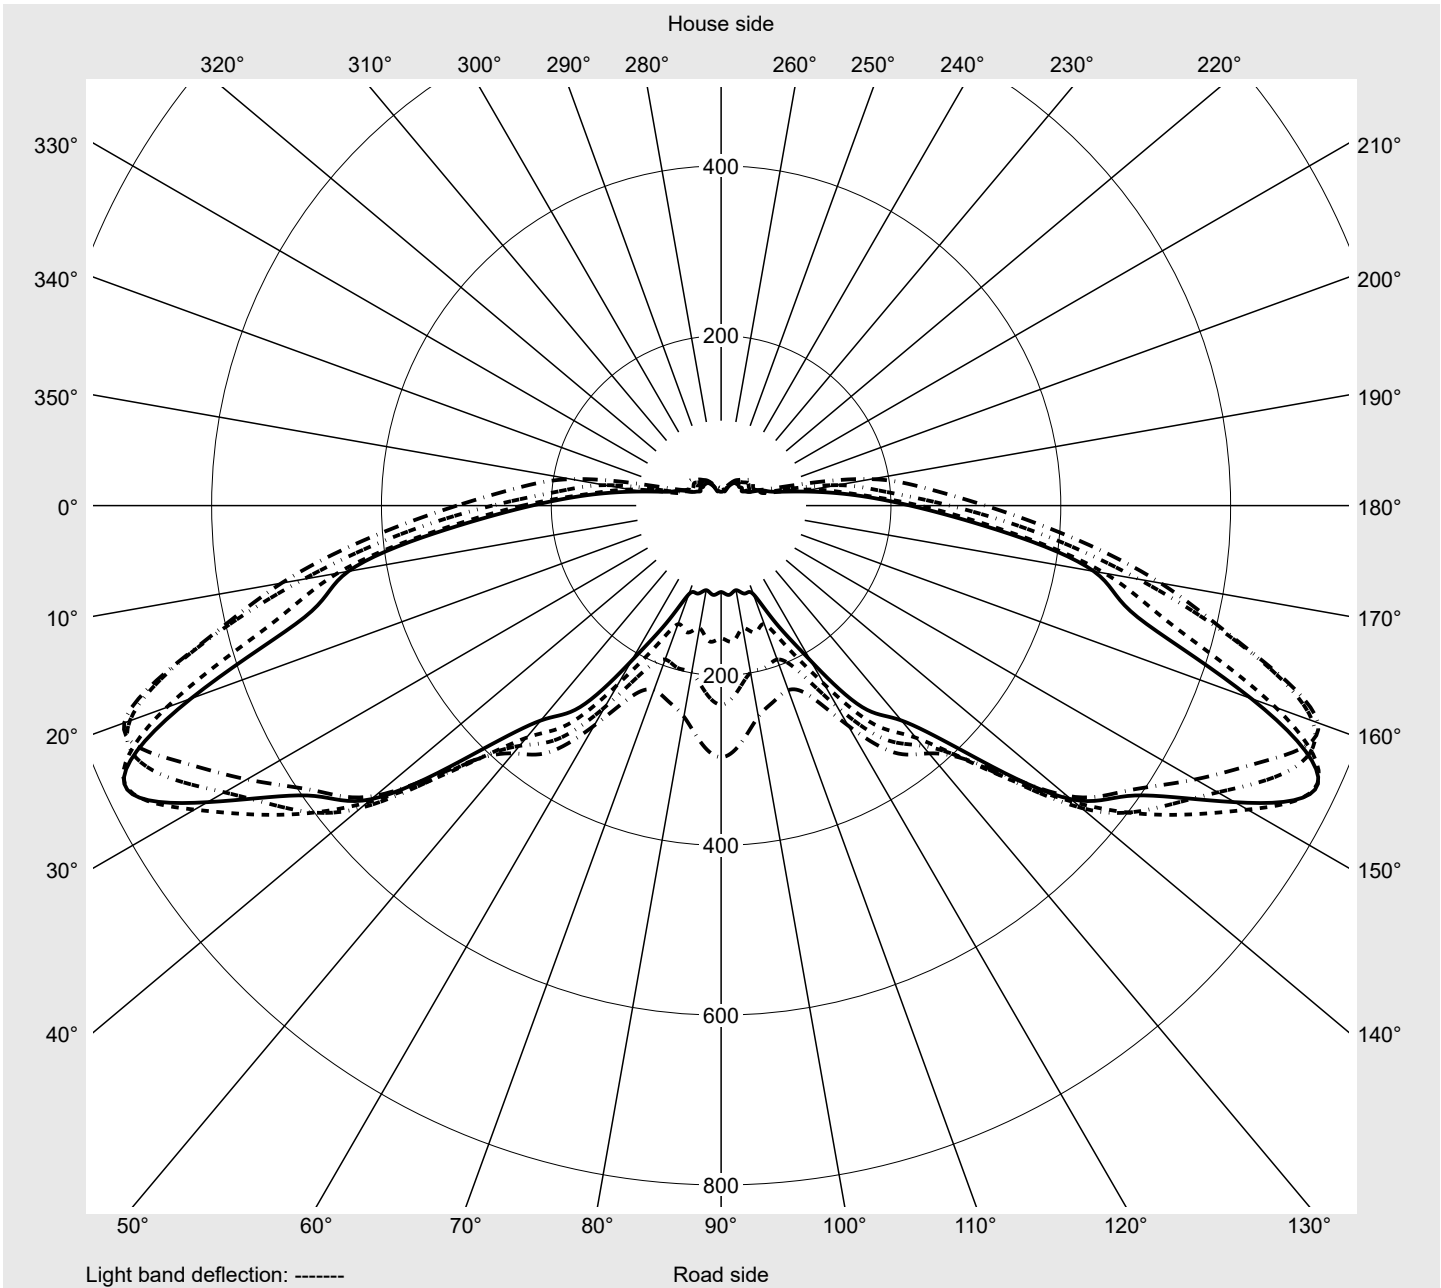

## Photometric test report

<b>Family</b> <b>CITY-LIGHT 400 LED</b>	<b>Order number: 5XA5305KF14HP</b> <b>EAN: 4058352835975</b>	<b>LP number</b> <b>58722_51</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
		<b>siteco</b>

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
$\gamma$	Luminous intensity in cd/klm												
0,0°	0.4	0.4	0.4	0.4	0.4	0.4	0.4	0.4	0.4	0.4	0.4	0.4	0.4
2,5°	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.7	0.5	0.7
5,0°	1.4	1.4	2.0	1.9	2.6	2.2	2.9	2.2	3.1	2.6	3.4	3.1	4.3
7,5°	7.7	7.5	9.9	7.5	7.0	5.6	5.4	5.3	5.6	6.6	8.5	10.9	13.1
10,0°	27.1	25.9	26.6	21.8	24.7	16.0	18.1	11.6	18.1	16.5	23.0	21.3	23.0
12,5°	45.6	41.4	45.8	36.3	44.6	50.2	59.1	52.4	54.7	50.2	47.8	39.3	34.7
15,0°	64.7	57.7	57.9	68.5	70.7	81.9	74.1	62.8	65.4	63.2	75.6	74.6	76.5
17,5°	87.0	93.8	101.0	96.5	93.8	83.9	90.2	100.6	109.1	104.7	112.4	100.5	102.8
20,0°	105.4	122.9	137.1	116.1	131.8	123.6	118.7	112.0	110.7	107.6	120.7	136.2	132.6
22,5°	134.5	157.5	163.6	161.9	176.9	159.4	152.6	140.1	134.2	131.5	142.2	156.1	156.5
25,0°	150.5	143.7	158.7	160.7	173.5	172.8	180.5	180.7	165.5	149.8	160.1	159.2	188.8
27,5°	165.5	175.0	186.5	178.1	189.0	185.8	188.0	208.6	197.5	188.2	185.1	181.0	204.0
30,0°	191.4	204.2	220.3	211.0	218.1	204.7	199.9	212.7	210.8	221.9	216.9	196.5	219.0
32,5°	201.3	207.9	217.3	227.2	237.4	239.1	237.5	230.7	227.2	239.4	255.2	231.7	243.8
35,0°	228.0	231.6	244.5	238.0	244.3	258.5	266.8	274.8	260.0	264.1	276.5	274.1	280.6
37,5°	266.5	272.3	283.9	282.2	287.1	279.9	280.4	294.1	295.6	289.8	288.1	297.1	305.8
40,0°	285.7	283.2	290.2	298.3	320.6	321.5	314.0	305.0	307.2	323.4	308.7	305.0	324.2
42,5°	292.4	288.5	302.8	305.8	331.5	344.1	353.2	337.5	320.5	347.5	332.0	314.0	335.6
45,0°	301.2	302.1	332.9	339.2	362.4	356.2	361.2	368.5	367.3	361.0	348.0	330.0	338.9
47,5°	310.1	330.7	383.0	391.0	404.4	389.3	400.8	392.2	403.2	385.0	370.5	347.0	346.3
50,0°	318.6	359.5	430.8	434.2	463.5	433.4	464.5	437.6	412.4	397.1	385.5	354.5	339.5
52,5°	327.6	369.2	452.4	474.2	530.9	492.3	518.8	490.6	435.2	399.6	391.1	367.1	337.7
55,0°	341.6	380.6	458.4	526.0	612.8	578.9	571.1	526.8	467.9	415.5	396.2	377.8	335.6
57,5°	350.4	403.7	494.5	595.3	692.4	652.3	620.0	552.7	499.8	425.0	388.9	376.8	320.1
60,0°	311.1	410.4	525.6	636.7	748.0	709.7	644.8	584.9	531.6	431.3	380.9	354.9	299.2
62,5°	269.4	376.5	499.4	634.1	741.1	738.2	675.3	621.9	553.9	434.2	369.3	335.6	274.1
65,0°	233.8	334.9	458.9	553.6	695.1	774.8	716.0	634.8	543.7	437.1	356.9	314.5	242.8
67,5°	222.9	325.9	445.8	507.9	664.4	775.4	698.5	595.1	537.9	415.5	330.3	289.6	211.1
70,0°	248.9	348.7	438.5	503.9	609.4	693.9	627.5	552.6	467.8	376.8	299.3	261.5	173.7
72,5°	257.6	353.3	396.2	483.1	586.6	627.5	570.1	490.2	372.7	310.6	237.5	207.6	142.2
75,0°	191.9	302.9	326.9	397.6	480.4	501.5	434.7	347.2	243.0	211.1	195.7	181.7	124.8
77,5°	146.6	204.3	211.3	259.2	274.5	270.2	221.0	184.6	149.3	139.6	140.8	146.8	94.8
80,0°	74.1	90.4	109.0	135.9	114.3	124.0	124.6	121.6	97.9	74.2	53.5	72.0	39.0
82,5°	42.9	48.5	51.9	71.0	49.0	49.6	66.6	85.0	60.3	42.6	25.9	19.4	13.5
85,0°	19.8	22.3	20.6	24.5	17.5	24.9	31.5	40.5	21.8	18.9	12.4	11.9	10.6
87,5°	14.8	15.0	14.0	15.3	14.6	16.3	16.7	16.0	13.6	12.4	10.4	10.0	9.4
90,0°	11.6	11.6	11.6	11.6	11.2	10.9	10.6	10.6	10.0	9.7	9.4	9.0	8.7
92,5°	11.1	11.2	10.9	10.9	10.6	10.4	10.0	9.9	9.5	9.4	8.9	8.7	8.3
95,0°	10.9	10.7	10.6	10.6	10.2	10.0	9.5	9.5	9.2	8.9	8.5	8.3	8.2
97,5°	10.6	10.4	10.2	10.2	9.9	9.9	9.4	9.2	8.9	8.7	8.3	8.2	8.2
100,0°	10.4	10.2	10.0	9.9	9.7	9.5	9.2	8.9	8.5	8.5	8.2	8.0	7.8
102,5°	10.2	10.0	9.9	9.7	9.5	9.2	9.0	8.9	8.5	8.5	8.2	7.8	7.8
105,0°	10.0	9.7	9.7	9.5	9.4	9.0	8.9	8.5	8.5	8.2	8.0	7.8	7.8
107,5°	9.7	9.7	9.5	9.4	9.2	9.0	8.7	8.5	8.3	8.2	8.0	7.8	7.8
110,0°	9.4	9.4	9.4	9.2	9.0	8.7	8.3	8.3	8.3	8.0	7.8	7.7	7.7
112,5°	9.4	9.2	9.0	9.0	8.7	8.7	8.3	8.3	8.2	8.0	7.8	7.7	7.7

## Photometric test report

<b>Family</b> <b>CITY-LIGHT 400 LED</b>	<b>Order number: 5XA5305KF14HP</b> <b>EAN: 4058352835975</b>	<b>LP number</b> <b>58722_51</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
		<b>sitEco</b>

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	0.4	0.4	0.4	0.4	0.4	0.4	0.4	0.4	0.4	0.4	0.4	0.4	0.4
2,5°	0.5	0.5	0.3	0.5	0.5	0.3	0.7	0.7	0.7	0.5	0.7	0.5	0.5
5,0°	3.2	4.3	3.4	4.9	3.7	5.1	1.5	1.4	1.4	1.0	1.2	1.0	1.2
7,5°	12.3	14.5	14.0	17.4	17.7	20.1	8.0	4.6	5.8	3.6	4.8	3.4	4.6
10,0°	21.6	25.5	24.0	29.1	26.4	29.6	32.0	28.3	31.0	26.9	23.8	19.9	21.6
12,5°	30.7	35.1	39.5	56.0	56.4	61.3	39.0	31.0	34.1	25.9	29.5	35.9	37.5
15,0°	70.3	70.7	71.9	84.6	78.7	84.1	56.0	58.7	56.7	57.9	66.4	55.5	56.2
17,5°	92.1	104.6	95.4	119.2	138.1	142.7	82.4	78.5	73.4	63.2	60.8	58.6	58.2
20,0°	133.3	133.0	134.5	156.8	169.8	188.3	116.0	111.0	94.3	76.6	82.1	73.6	69.0
22,5°	167.2	172.3	170.4	178.8	202.5	208.4	116.3	121.6	112.7	108.5	96.5	73.9	60.4
25,0°	198.2	207.1	204.8	209.3	229.2	253.4	136.2	129.2	111.0	104.2	95.9	82.1	68.5
27,5°	215.9	229.9	250.1	274.0	289.5	296.6	154.1	134.3	116.0	104.0	102.0	88.7	68.6
30,0°	243.3	251.5	263.8	287.9	310.4	344.6	163.3	159.9	131.8	109.0	105.2	89.9	64.9
32,5°	258.5	285.0	300.2	307.9	329.3	354.2	179.8	164.0	141.8	125.3	106.3	89.1	66.9
35,0°	291.3	312.5	318.6	321.7	341.4	378.0	212.3	184.1	149.3	132.1	106.9	83.4	64.9
37,5°	306.2	322.5	331.5	339.4	354.0	383.5	233.1	209.3	161.3	139.3	105.6	74.4	62.3
40,0°	318.6	329.0	336.5	344.8	357.6	392.7	246.6	218.0	169.4	142.4	100.5	67.1	64.4
42,5°	335.6	338.5	345.8	355.0	365.2	399.8	270.1	231.9	173.9	141.3	91.4	64.0	66.7
45,0°	348.7	344.0	356.2	364.6	372.2	398.5	291.0	253.0	179.5	138.4	78.8	62.8	67.6
47,5°	349.1	341.9	359.1	364.7	375.5	404.2	303.1	262.9	187.1	130.3	67.4	62.5	65.7
50,0°	339.5	329.0	352.8	365.2	373.8	395.0	307.5	263.3	187.1	114.3	59.4	59.8	62.0
52,5°	320.8	308.4	338.9	352.8	364.6	386.5	311.3	262.1	183.2	97.1	55.5	55.9	58.6
55,0°	296.5	283.5	313.7	330.9	348.9	372.6	316.5	254.7	169.1	80.0	52.1	51.8	55.2
57,5°	272.4	261.9	282.7	299.0	321.3	345.0	296.1	226.8	136.1	62.2	48.9	47.8	50.9
60,0°	247.2	231.2	238.9	252.4	279.3	296.3	240.3	179.6	97.4	56.2	44.3	43.4	46.0
62,5°	214.9	192.9	197.9	199.9	219.7	234.3	192.1	138.8	68.1	50.6	40.5	38.5	39.7
65,0°	183.7	148.7	154.6	146.6	160.4	156.3	157.3	109.1	58.4	48.0	38.7	34.7	33.9
67,5°	152.7	111.0	107.3	101.1	105.6	101.8	151.4	95.5	63.2	52.1	38.5	33.0	29.6
70,0°	127.2	87.9	69.3	60.1	64.7	64.7	167.7	100.8	69.5	52.8	36.6	32.0	28.1
72,5°	97.4	68.3	46.3	37.5	37.1	37.1	153.8	95.5	62.8	47.7	36.3	31.8	26.6
75,0°	74.8	39.2	32.5	25.4	23.5	23.2	97.9	67.9	53.8	39.5	35.8	31.8	26.1
77,5°	52.6	25.4	22.5	18.1	17.4	17.0	73.9	52.8	44.6	36.6	32.0	29.3	24.9
80,0°	20.9	15.3	14.8	13.5	13.6	13.6	50.6	43.1	38.5	33.9	28.1	26.4	22.5
82,5°	12.8	11.2	10.7	10.4	10.4	10.2	32.2	31.7	29.6	26.1	23.8	22.1	19.1
85,0°	9.7	9.0	9.0	9.0	8.9	9.2	18.9	21.1	22.8	23.2	20.8	18.9	16.5
87,5°	8.9	8.5	8.5	8.2	8.2	8.2	14.8	16.3	15.5	16.3	14.6	15.0	13.5
90,0°	8.3	8.2	8.0	7.8	7.8	7.8	11.4	11.4	11.1	11.1	10.9	10.7	10.6
92,5°	8.2	7.8	7.8	7.8	7.5	7.5	11.1	11.1	11.1	10.9	10.7	10.6	10.4
95,0°	8.0	7.8	7.8	7.5	7.5	7.5	10.9	10.7	10.7	10.7	10.6	10.4	10.2
97,5°	7.8	7.8	7.7	7.5	7.5	7.5	10.6	10.7	10.7	10.6	10.4	10.2	10.0
100,0°	7.8	7.5	7.5	7.5	7.5	7.5	10.6	10.6	10.4	10.4	10.2	10.2	10.0
102,5°	7.8	7.5	7.5	7.5	7.5	7.5	10.2	10.4	10.4	10.4	10.0	10.0	9.9
105,0°	7.7	7.5	7.5	7.5	7.5	7.5	10.0	10.2	10.0	10.0	10.0	9.7	9.5
107,5°	7.5	7.5	7.5	7.3	7.2	7.2	9.9	10.0	9.7	9.7	9.7	9.5	9.4
110,0°	7.5	7.3	7.3	7.2	7.2	7.2	9.7	9.7	9.7	9.5	9.4	9.0	9.0
112,5°	7.5	7.3	7.3	7.2	7.2	6.8	9.4	9.4	9.4	9.2	9.0	8.9	8.5

## Photometric test report

<b>Family</b> <b>CITY-LIGHT 400 LED</b>	<b>Order number: 5XA5305KF14HP</b> <b>EAN: 4058352835975</b>	<b>LP number</b> <b>58722_51</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
		<b>siteco</b>

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0,0°	0.4	0.4	0.4	0.4	0.4	0.4	0.4	0.4	0.4	0.4	0.4	0.0	0.0
2,5°	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.3	0.5	0.3	0.0	0.0
5,0°	1.0	1.2	1.0	1.0	0.9	0.9	0.9	0.9	0.9	1.0	0.7	0.0	0.1
7,5°	2.9	3.9	2.7	3.2	2.4	2.9	2.4	2.6	2.2	2.6	2.4	0.2	0.3
10,0°	15.7	9.2	9.2	7.5	9.0	13.1	12.6	14.3	10.2	11.9	8.2	0.9	1.3
12,5°	28.4	21.1	10.7	12.4	13.6	20.1	18.7	22.5	22.3	23.3	27.6	2.1	3.4
15,0°	52.6	45.3	39.0	37.0	31.5	27.2	24.4	20.6	24.5	31.0	32.0	4.1	7.5
17,5°	52.8	47.7	35.9	31.5	34.1	31.2	24.2	23.5	27.6	30.8	31.7	6.2	13.7
20,0°	59.9	46.3	40.4	37.8	36.3	31.8	27.2	27.1	33.4	33.2	32.7	8.9	22.6
22,5°	53.6	39.7	35.6	34.2	33.4	32.5	29.3	28.9	31.8	29.3	28.6	11.7	34.3
25,0°	52.1	35.8	31.5	30.5	30.7	29.1	28.6	26.4	28.3	31.2	31.3	14.1	48.4
27,5°	50.6	36.6	31.7	31.5	29.8	28.8	27.9	25.5	25.9	28.4	28.3	17.4	65.8
30,0°	45.8	37.6	32.9	31.0	30.5	28.1	26.6	25.7	26.2	26.9	25.2	20.6	86.3
32,5°	55.0	48.2	39.7	37.0	31.3	28.4	26.6	25.7	24.7	24.9	23.5	24.1	110.4
35,0°	62.0	55.2	47.3	42.9	37.5	34.2	30.5	28.4	26.2	26.1	23.5	28.2	138.6
37,5°	63.5	55.3	48.5	43.9	40.2	36.4	33.7	32.0	29.6	30.1	27.6	32.4	170.9
40,0°	65.9	57.9	49.6	44.8	40.4	36.3	34.4	32.2	31.2	31.8	30.0	35.8	206.7
42,5°	67.4	60.1	51.9	46.7	42.4	38.1	34.9	32.0	30.5	30.5	29.3	39.3	246.0
45,0°	67.9	59.9	53.5	48.7	43.8	38.7	35.6	33.2	31.2	30.5	28.6	43.0	289.0
47,5°	66.6	59.1	52.4	47.7	43.4	38.7	35.4	33.0	31.3	30.1	28.9	47.0	336.0
50,0°	62.8	56.9	50.9	46.5	42.7	37.6	34.7	32.4	30.3	29.3	27.9	50.6	386.7
52,5°	59.4	54.3	49.2	44.8	40.5	35.9	32.7	30.7	29.3	28.1	27.2	53.8	440.5
55,0°	55.9	51.6	47.0	42.2	38.1	34.1	30.5	28.6	27.8	26.2	25.2	56.9	497.4
57,5°	51.6	48.0	44.3	39.7	36.1	32.0	28.1	26.2	25.7	24.5	23.8	59.2	556.6
60,0°	46.7	42.9	40.2	37.0	34.4	30.5	26.4	23.7	23.5	22.1	21.8	59.4	616.0
62,5°	41.2	38.7	36.3	34.7	32.7	29.6	24.9	21.3	21.3	20.3	20.1	57.7	673.7
65,0°	35.9	34.4	33.7	33.5	31.8	29.1	24.0	19.2	19.4	18.4	18.1	54.8	728.5
67,5°	32.0	30.7	31.3	31.3	30.7	27.4	22.8	17.5	17.5	16.5	16.3	51.9	780.4
70,0°	29.3	27.6	28.9	28.6	29.1	25.4	20.9	17.2	16.2	14.8	14.6	48.5	828.9
72,5°	26.1	25.9	26.9	26.1	26.2	21.6	19.6	16.3	15.2	13.8	13.6	43.7	872.6
75,0°	24.5	23.5	23.2	22.3	21.3	16.9	16.0	14.0	14.0	12.4	12.3	34.5	907.2
77,5°	21.8	19.8	18.6	17.7	16.7	14.0	13.6	12.6	12.8	11.6	10.9	22.6	929.8
80,0°	19.2	16.7	15.3	14.5	14.5	13.3	13.5	12.3	11.7	10.6	9.9	12.8	942.6
82,5°	17.2	14.5	13.6	12.8	12.9	12.3	12.6	11.6	11.2	10.0	9.2	7.6	950.2
85,0°	14.6	12.9	12.3	11.6	11.4	11.2	11.4	10.7	10.7	9.7	8.9	4.5	954.7
87,5°	12.9	11.6	11.4	10.7	10.7	10.4	10.4	10.2	10.2	9.2	8.5	3.4	958.0
90,0°	10.6	10.4	10.2	10.0	10.0	10.0	10.0	9.9	9.9	8.9	8.2	2.8	960.8
92,5°	10.2	10.2	10.0	10.0	10.0	9.9	9.9	9.7	9.7	8.9	8.2	2.7	963.4
95,0°	10.2	10.0	10.0	10.0	10.0	9.7	9.7	9.7	9.7	8.7	8.2	2.6	966.1
97,5°	10.0	10.0	9.9	9.7	9.7	9.7	9.7	9.5	9.5	8.5	7.8	2.5	968.6
100,0°	10.0	9.7	9.7	9.7	9.7	9.7	9.5	9.4	9.4	8.5	7.8	2.5	971.1
102,5°	9.7	9.7	9.5	9.4	9.4	9.4	9.4	9.2	9.2	8.2	7.5	2.4	973.5
105,0°	9.5	9.4	9.2	9.0	9.0	9.0	8.9	8.9	8.9	8.0	7.5	2.4	975.9
107,5°	9.4	9.0	9.0	8.7	8.7	8.5	8.5	8.3	8.3	7.7	7.2	2.3	978.1
110,0°	8.9	8.7	8.5	8.3	8.3	8.2	8.0	8.0	7.8	7.0	6.8	2.2	980.3
112,5°	8.3	8.3	8.0	7.8	7.8	7.8	7.7	7.5	7.7	5.6	5.4	2.1	982.4

## Photometric test report

<b>Family</b> CITY-LIGHT 400 LED	<b>Order number: 5XA5305KF14HP</b> <b>EAN: 4058352835975</b>	<b>LP number</b> 58722_51
-------------------------------------	---	------------------------------

<b>Table of values for luminous intensities</b>	<b>Maximum luminous intensity</b>	<b>siteco</b>
---	-----------------------------------	---------------

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
$\gamma$	Luminous intensity in cd/klm												
115,0°	8.9	9.0	8.9	8.7	8.5	8.3	8.2	8.2	8.0	8.0	7.7	7.7	7.7
117,5°	8.5	8.7	8.7	8.5	8.3	8.2	8.2	8.0	8.0	7.8	7.7	7.5	7.5
120,0°	8.2	8.3	8.3	8.3	8.2	8.2	8.0	8.2	8.0	8.0	7.7	7.5	7.5
122,5°	7.8	8.2	8.0	8.2	7.8	8.0	8.0	8.0	7.8	7.8	7.7	7.5	7.3
125,0°	7.5	7.8	7.7	7.8	7.8	7.8	7.8	8.0	7.8	7.8	7.5	7.3	7.3
127,5°	7.2	7.5	7.5	7.5	7.7	7.7	7.8	7.7	7.7	7.7	7.5	7.3	7.2
130,0°	7.2	7.3	7.2	7.5	7.3	7.3	7.5	7.7	7.7	7.7	7.3	7.2	7.0
132,5°	6.8	7.0	7.0	7.2	7.0	7.3	7.2	7.5	7.5	7.3	7.2	7.2	7.0
135,0°	6.5	6.6	6.8	6.8	7.0	7.0	7.2	7.3	7.5	7.3	7.2	7.0	6.8
137,5°	6.1	6.3	6.5	6.6	6.6	6.8	6.8	7.0	7.2	7.2	7.0	6.8	6.6
140,0°	5.8	6.0	6.1	6.5	6.3	6.5	6.8	7.0	6.8	7.0	6.6	6.5	6.5
142,5°	5.4	5.6	6.0	6.1	6.0	6.3	6.5	6.6	6.8	6.8	6.6	6.5	6.3
145,0°	5.1	5.6	5.6	5.8	5.8	6.0	6.1	6.3	6.5	6.6	6.5	6.3	6.1
147,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

## Photometric test report

<b>Family</b> <b>CITY-LIGHT 400 LED</b>	<b>Order number: 5XA5305KF14HP</b> <b>EAN: 4058352835975</b>	<b>LP number</b> <b>58722_51</b>
		<b>siteco</b>

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
$\gamma$	Luminous intensity in cd/klm												
115,0°	7.3	7.2	7.2	7.2	6.8	6.8	8.9	9.0	8.7	8.7	8.7	8.3	8.2
117,5°	7.3	7.2	7.2	6.8	6.5	6.5	8.5	8.7	8.5	8.3	8.3	8.0	7.8
120,0°	7.3	7.0	7.0	6.8	6.5	6.1	8.2	8.3	8.2	8.0	7.8	7.7	7.3
122,5°	7.2	7.0	6.8	6.6	6.1	6.1	7.8	7.8	7.7	7.7	7.3	7.3	7.2
125,0°	7.2	7.0	6.8	6.5	6.0	5.8	7.5	7.5	7.5	7.3	7.2	7.0	6.8
127,5°	6.8	7.0	6.6	6.3	5.8	5.8	7.2	7.2	7.2	7.0	6.8	6.6	6.5
130,0°	6.8	6.6	6.6	6.1	5.4	5.4	7.0	7.0	6.8	6.8	6.5	6.3	6.1
132,5°	6.8	6.5	6.3	5.8	5.1	4.8	6.6	6.6	6.5	6.5	6.1	6.1	5.8
135,0°	6.6	6.5	6.3	5.1	4.4	3.7	6.5	6.3	6.1	6.1	5.8	5.8	5.6
137,5°	6.5	6.1	6.0	4.3	3.4	2.4	6.1	6.0	6.0	5.8	5.6	5.4	5.3
140,0°	6.3	6.1	5.3	3.9	2.4	1.7	5.6	5.8	5.6	5.6	5.4	5.3	5.1
142,5°	6.0	5.8	4.9	3.6	2.4	1.7	5.6	5.6	5.3	5.3	5.1	4.9	4.8
145,0°	6.0	5.4	4.3	3.1	1.9	1.4	5.3	5.3	5.3	5.1	4.9	4.8	4.6
147,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
$\gamma$	Luminous intensity in cd/klm											Luminous flux in lm/klm	
115,0°	8.0	7.8	7.7	7.5	7.5	7.5	7.3	7.2	7.2	4.9	5.1	1.9	984.3
117,5°	7.7	7.3	7.3	7.2	7.2	7.2	7.0	7.0	6.6	4.6	4.8	1.8	986.2
120,0°	7.3	7.0	6.8	6.8	6.8	6.8	6.6	6.6	6.1	4.4	5.1	1.8	987.9
122,5°	6.8	6.8	6.5	6.3	6.5	6.5	6.5	6.5	5.8	4.6	5.1	1.7	989.6
125,0°	6.5	6.3	6.1	6.1	6.1	6.1	6.3	6.1	5.4	4.8	5.1	1.6	991.1
127,5°	6.1	6.1	5.8	5.8	5.8	6.0	6.1	6.0	5.3	4.4	4.8	1.5	992.6
130,0°	5.8	5.8	5.8	5.6	5.6	5.6	5.6	5.6	5.1	4.6	4.8	1.4	993.9
132,5°	5.8	5.4	5.4	5.3	5.4	5.4	5.4	5.4	4.8	4.3	4.4	1.3	995.2
135,0°	5.4	5.4	5.3	5.3	5.3	5.1	5.1	5.1	4.4	3.9	3.7	1.2	996.4
137,5°	5.3	4.9	4.9	4.9	4.9	4.9	4.9	4.8	4.1	3.7	3.4	1.1	997.4
140,0°	4.9	4.9	4.8	4.8	4.8	4.6	4.9	4.3	4.1	3.7	3.1	1.0	998.4
142,5°	4.8	4.6	4.6	4.4	4.4	4.6	4.6	4.3	3.9	3.4	3.1	0.9	999.2
145,0°	4.6	4.4	4.4	4.4	4.3	4.4	4.4	3.7	3.7	3.4	3.1	0.8	1000.0
147,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

## Photometric test report

<b>Family</b> CITY-LIGHT 400 LED	<b>Order number: 5XA5305KF14HP</b> <b>EAN: 4058352835975</b>	<b>LP number</b> 58722_51
-------------------------------------	---	------------------------------

<b>Dimming levels table</b>	environmental temperature: 25°C	<b>siteco</b>
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W] start of lifetime	Power consumption [W] end of lifetime	Power consumption [W] average
100	254	254	4940	33.6	35.9	34.8
95	241	252	4687	31.4	33.5	32.4
90	229	250	4454	29.4	31.4	30.4
85	216	248	4201	27.4	29.2	28.3
80	203	246	3948	25.5	27.1	26.3
75	190	243	3695	23.6	25.2	24.4
70	178	241	3462	21.9	23.3	22.6
65	165	238	3209	20.2	21.5	20.8
60	152	235	2956	18.5	19.6	19.0
55	140	232	2723	16.9	18.0	17.4
50	127	229	2470	15.3	16.2	15.8
45	114	225	2217	13.7	14.5	14.1
40	102	221	1984	12.3	13.0	12.6
35	89	216	1731	10.8	11.4	11.1
30	76	210	1478	9.3	9.8	9.6
25	63	203	1225	7.8	8.2	8.0
20	51	195	992	6.6	6.9	6.8
15	38	184	739	5.2	5.5	5.4
11	28	173	545	4.1	4.4	4.2