

Photometric test report

Family
LITEPOLE 2

Order number: **5XA5425KF14HP**
EAN: **4058352836637**

LP number
58904_19



Version post-top- or mounting to wall arm
Optic asymmetric, wide distribution (ST1.2a)
Cover cover transparent, PMMA
Lamps LED 4000 K | CRI ≥ 70
Controlgear ECG SITECO iQ
Rated values Net luminous flux = 4980 lm
Power consumption = 33.6 W
Luminous efficacy = 148.2 lm/W

serial
documentation
24.05.2022

siteco

Luminous intensity in cd/klm


C180-0

C205-25

C210-30

C270-90

Imax: 821 cd/klm

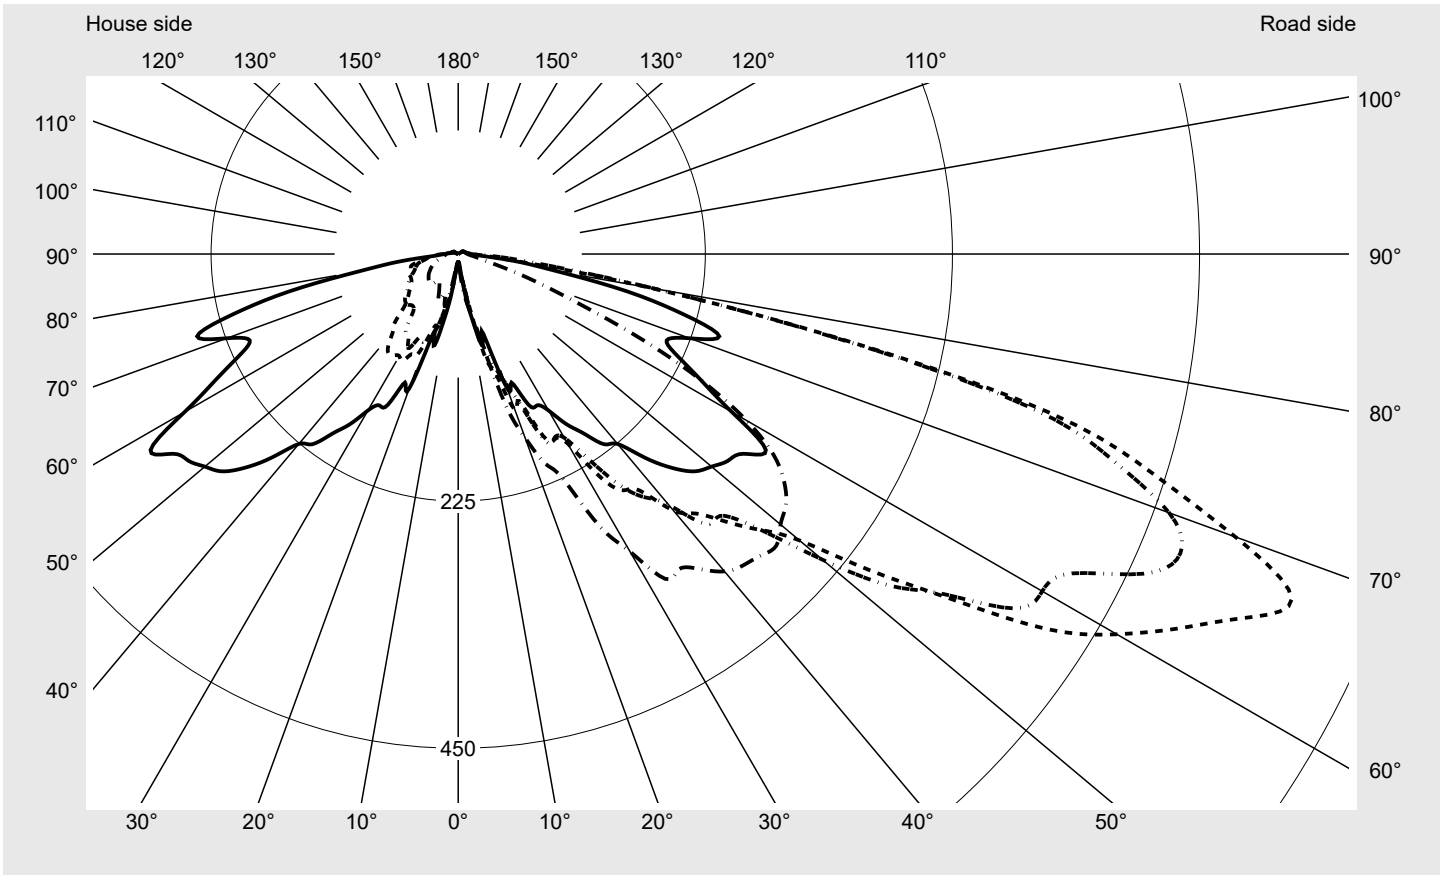

Luminaire output ratios

Eta	100.0%
Eta 0° - 90°	97.5%
Eta 90° - 180°	2.5%

Luminous intensity class acc. to EN13201-2

Class:	G1
Imax 70°	753.0
Imax 80°	194.4
Imax 90°	12.7
Imax >90°	11.4
Imax >95°	8.1


Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family LITEPOLE 2	Order number: 5XA5425KF14HP EAN: 4058352836637	LP number 58904_19
------------------------------------	---	-------------------------------------

Envelope curve in cd/klm **KMK 67.5°** **KMK 65°** **KMK 62.5°** **KMK 60°**

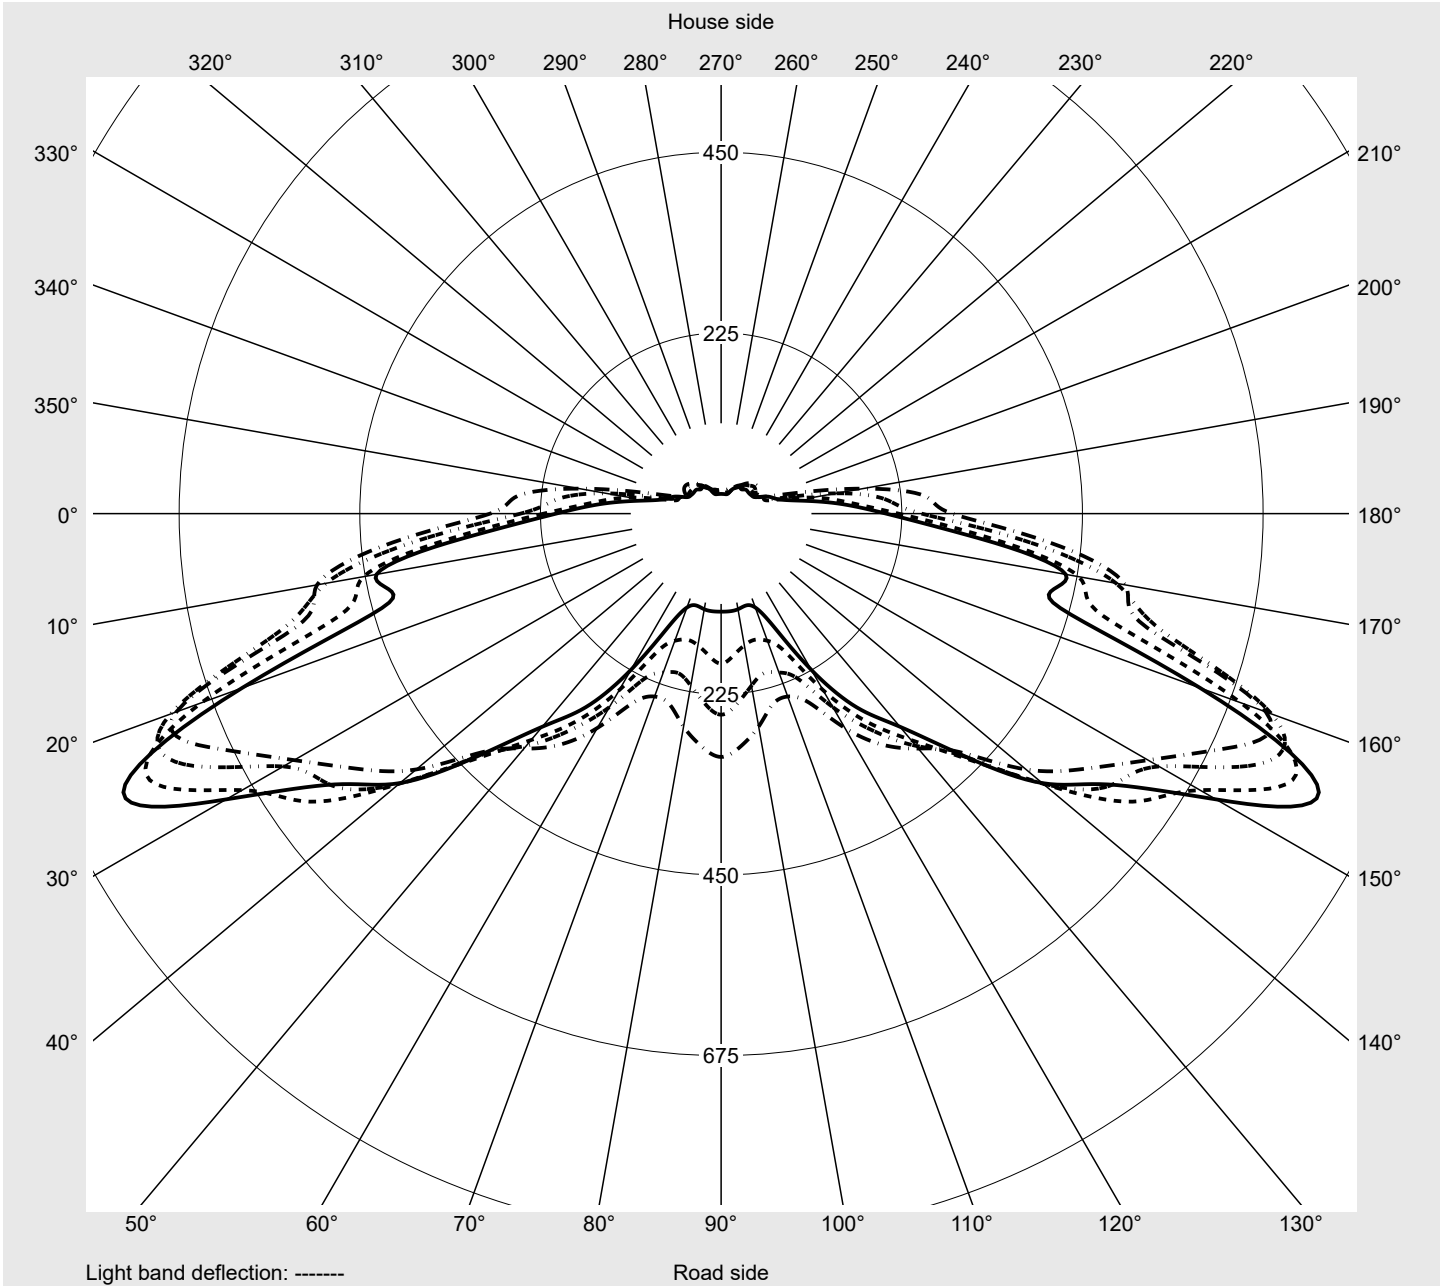

Photometric test report

Family LITEPOLE 2	Order number: 5XA5425KF14HP EAN: 4058352836637	LP number 58904_19
------------------------------------	---	-------------------------------------



Table of values for luminous intensities Maximum luminous intensity

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	7.6	7.6	7.6	7.6	7.6	7.6	7.6	7.6	7.6	7.6	7.6	7.6	7.6
2,5°	7.4	7.4	7.4	7.5	7.5	7.5	7.5	7.7	7.8	7.8	7.8	8.0	8.1
5,0°	8.1	8.4	8.7	9.0	9.3	9.9	10.3	10.6	11.2	11.4	12.0	12.3	12.7
7,5°	13.3	13.7	14.9	16.3	17.7	18.9	20.0	20.4	21.3	21.6	22.3	23.7	25.6
10,0°	40.5	38.1	39.0	36.2	33.0	30.0	28.2	26.9	28.2	30.5	32.5	35.0	39.2
12,5°	65.0	54.4	53.8	52.8	55.9	57.8	61.2	67.3	65.9	64.4	62.1	59.0	59.0
15,0°	86.3	75.1	83.4	79.7	93.6	100.4	85.4	83.7	80.9	87.2	86.9	87.2	88.1
17,5°	76.1	91.8	104.8	95.3	105.8	114.9	104.5	119.7	121.5	109.2	111.2	116.3	123.6
20,0°	130.4	124.6	126.4	143.2	137.6	151.1	124.2	115.9	110.7	118.6	135.8	145.8	153.4
22,5°	126.7	156.7	147.7	137.5	172.2	144.9	149.0	145.9	122.7	128.8	144.6	151.2	167.3
25,0°	151.4	173.1	160.7	164.7	176.5	182.6	187.7	182.9	160.7	152.0	150.2	160.4	179.2
27,5°	155.4	169.3	171.6	160.4	182.9	190.2	189.2	199.0	195.4	184.0	167.8	166.0	201.6
30,0°	164.5	198.2	201.8	201.0	190.1	199.1	193.2	206.2	204.1	215.8	201.0	191.7	212.1
32,5°	183.9	204.4	206.5	225.4	208.9	240.8	222.0	216.1	218.3	228.8	239.3	223.8	242.0
35,0°	199.6	223.2	220.1	224.7	230.2	262.7	257.4	245.7	234.3	256.3	260.5	254.1	266.5
37,5°	218.3	252.3	263.4	249.4	250.0	271.4	279.2	279.4	275.5	265.3	277.3	294.5	297.9
40,0°	225.7	258.4	277.0	282.2	294.3	305.0	298.0	287.8	303.9	308.4	290.9	299.5	318.3
42,5°	251.4	274.1	286.2	299.9	315.6	320.5	333.3	319.7	313.5	324.3	324.5	303.5	326.5
45,0°	275.4	293.0	307.9	312.0	339.2	344.6	337.2	345.6	346.0	339.8	335.7	316.2	339.0
47,5°	292.8	315.2	359.2	332.6	379.3	371.5	369.5	360.1	383.3	360.8	360.7	338.4	339.8
50,0°	301.1	340.1	423.7	350.5	448.5	405.6	433.0	413.7	395.7	373.1	374.1	346.9	336.6
52,5°	309.4	351.2	444.2	384.9	511.0	473.6	496.4	460.5	408.0	377.2	384.0	359.9	336.1
55,0°	317.1	354.3	436.1	429.7	566.0	547.2	539.8	503.0	440.5	393.2	388.0	366.9	332.9
57,5°	332.2	392.5	470.8	508.5	654.0	635.5	600.6	520.9	475.7	403.1	386.0	365.7	328.6
60,0°	287.7	410.1	511.0	549.4	722.0	692.4	614.0	553.9	495.6	420.0	382.0	351.5	308.2
62,5°	249.7	376.6	499.5	571.0	729.8	738.5	629.7	590.8	523.1	427.5	377.5	330.1	278.3
65,0°	220.8	330.5	452.2	492.7	689.0	785.2	688.7	625.4	523.3	431.5	368.1	316.5	253.8
67,5°	205.5	308.6	435.8	427.9	635.0	821.4	711.8	588.0	522.1	425.9	346.5	294.6	224.7
70,0°	224.2	338.7	435.2	464.9	597.2	753.0	688.8	554.5	497.1	397.9	322.8	274.1	193.1
72,5°	249.2	359.9	396.3	467.6	559.6	661.9	625.3	503.3	408.4	351.5	288.2	237.5	157.4
75,0°	212.7	335.6	359.8	411.7	511.8	556.2	538.7	396.0	294.9	256.0	232.4	198.7	131.7
77,5°	158.2	225.3	262.4	317.2	352.1	355.7	350.6	241.4	187.9	175.2	182.7	177.4	115.4
80,0°	93.6	120.8	148.6	187.4	194.4	178.9	182.3	147.8	122.1	105.1	91.8	91.8	58.5
82,5°	57.5	61.5	71.0	99.6	81.4	66.5	88.0	100.5	88.7	55.9	36.2	27.1	19.2
85,0°	25.6	31.0	35.3	44.9	37.8	32.7	48.5	58.2	35.9	27.5	16.0	13.5	12.1
87,5°	17.1	17.4	17.6	17.4	16.1	18.8	22.9	22.6	18.0	15.2	11.5	10.9	10.1
90,0°	12.1	12.0	11.8	11.7	11.4	10.8	10.5	10.2	9.9	9.6	9.3	9.2	8.7
92,5°	10.6	10.8	10.6	10.3	10.2	9.8	9.5	9.3	9.0	8.7	8.4	8.4	8.1
95,0°	9.0	9.2	9.3	9.0	8.7	8.7	8.4	8.1	8.1	8.0	7.8	7.8	7.8
97,5°	8.0	8.1	8.1	8.1	7.8	7.8	7.7	7.5	7.5	7.5	7.2	7.2	7.2
100,0°	7.2	7.4	7.5	7.4	7.2	7.2	7.2	7.1	6.9	6.9	6.9	6.9	6.9
102,5°	6.5	6.8	6.9	6.9	6.9	6.8	6.7	6.7	6.7	6.7	6.7	6.7	6.7
105,0°	6.2	6.4	6.5	6.4	6.4	6.4	6.4	6.4	6.4	6.4	6.4	6.4	6.4
107,5°	5.9	5.9	6.1	6.1	6.1	6.1	6.1	6.1	6.1	6.1	6.1	6.1	6.1
110,0°	5.6	5.6	5.8	5.8	5.9	5.8	5.9	5.9	5.9	5.9	5.9	6.1	6.1
112,5°	5.3	5.5	5.5	5.8	5.6	5.6	5.8	5.8	5.8	5.8	5.8	5.8	5.9

Photometric test report

Family LITEPOLE 2	Order number: 5XA5425KF14HP EAN: 4058352836637	LP number 58904_19
Table of values for luminous intensities		Maximum luminous intensity
siteco		

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	7.6	7.6	7.6	7.6	7.6	7.6	7.6	7.6	7.6	7.6	7.6	7.6	7.6
2,5°	8.1	8.1	8.3	8.3	8.3	8.3	7.4	7.4	7.4	7.4	7.4	7.4	7.4
5,0°	13.2	13.3	13.5	13.7	13.6	13.9	8.1	8.1	7.8	7.7	7.7	7.8	7.7
7,5°	26.9	28.2	29.9	30.9	31.2	31.0	12.7	11.8	11.2	11.4	10.9	10.6	10.3
10,0°	41.5	41.5	42.4	44.5	46.4	45.5	42.9	39.9	41.1	36.2	34.7	39.6	33.7
12,5°	59.7	58.1	58.7	60.5	59.4	58.8	57.8	60.0	69.0	57.2	46.6	45.5	46.7
15,0°	94.5	84.7	86.8	88.8	86.8	85.1	67.0	56.6	61.5	61.8	67.1	62.7	67.4
17,5°	121.5	118.1	124.6	133.0	146.5	145.2	79.2	79.4	75.7	73.0	68.1	77.2	78.8
20,0°	156.2	156.5	156.0	158.9	169.5	178.0	112.2	113.5	105.7	84.8	82.6	82.6	73.2
22,5°	181.8	185.5	193.3	195.7	205.9	206.4	132.0	122.4	117.1	105.1	100.5	86.2	70.5
25,0°	185.5	196.7	210.2	227.6	231.0	225.9	133.2	119.4	111.6	106.9	100.7	83.7	71.7
27,5°	210.2	212.0	229.3	247.2	271.1	280.3	152.0	131.1	114.9	115.4	109.5	96.5	71.5
30,0°	223.9	236.5	263.9	284.3	304.4	312.8	174.0	149.9	125.8	113.8	107.3	90.8	68.3
32,5°	267.3	274.2	287.2	295.0	324.3	350.6	178.6	154.6	134.7	129.3	109.4	86.5	66.1
35,0°	278.8	300.2	315.2	318.3	335.0	350.3	198.1	165.3	141.5	136.7	110.6	82.2	65.3
37,5°	292.5	315.6	316.6	323.4	344.6	361.6	223.9	182.6	145.6	138.4	104.2	68.6	67.1
40,0°	305.5	323.1	326.4	336.6	358.0	377.2	237.5	191.9	154.0	139.4	92.7	63.3	66.8
42,5°	320.6	330.4	336.3	348.6	364.5	384.3	265.5	210.3	168.2	144.0	86.3	63.1	68.7
45,0°	344.7	335.0	338.5	353.9	373.1	388.8	295.9	229.1	177.4	138.5	71.8	65.2	70.2
47,5°	342.4	332.7	341.3	359.8	378.3	392.9	304.7	236.8	180.2	123.3	63.7	65.0	70.1
50,0°	335.6	328.2	340.3	355.5	371.8	383.1	301.6	233.4	182.1	101.4	59.3	63.3	67.4
52,5°	316.0	309.8	326.1	341.9	360.5	376.1	304.2	234.4	180.8	83.1	56.2	59.9	63.4
55,0°	295.2	286.0	307.6	326.8	344.4	362.5	304.1	230.0	170.9	67.1	53.1	56.2	60.3
57,5°	280.6	266.4	282.5	302.9	323.7	340.6	295.2	215.5	142.1	62.7	50.7	53.7	58.1
60,0°	260.0	242.4	246.4	269.3	290.2	303.0	254.1	179.2	101.4	63.6	49.1	52.2	56.0
62,5°	227.2	210.6	205.8	217.6	237.0	250.4	205.2	145.6	73.3	59.6	48.3	49.1	52.0
65,0°	190.8	168.5	162.6	166.6	177.2	186.8	159.4	115.3	64.4	55.9	48.0	47.2	47.5
67,5°	155.5	124.5	118.6	120.9	122.1	122.1	145.6	94.2	71.1	61.9	48.5	44.3	43.2
70,0°	131.9	95.0	76.9	78.5	79.2	80.7	150.8	91.9	76.7	63.1	47.6	42.1	38.9
72,5°	103.9	77.8	51.3	47.5	46.4	51.1	158.9	92.5	75.1	56.6	45.2	40.7	36.2
75,0°	81.2	55.0	37.4	32.1	29.4	30.5	108.1	71.1	63.3	47.3	44.6	38.9	34.3
77,5°	60.6	33.4	27.1	22.8	20.8	21.0	86.0	58.7	50.7	42.9	41.1	36.4	32.1
80,0°	31.9	20.8	18.5	16.7	16.3	16.6	56.5	49.5	45.5	39.0	33.0	31.5	28.7
82,5°	16.0	13.9	13.2	12.9	13.0	13.0	40.2	36.4	36.7	31.0	29.3	28.1	25.3
85,0°	11.2	10.6	10.3	10.5	10.6	10.6	23.8	25.0	26.8	26.6	25.1	23.2	20.8
87,5°	9.6	9.3	9.3	9.3	9.5	9.5	18.0	19.8	21.6	21.7	20.5	19.2	17.9
90,0°	8.7	8.4	8.4	8.4	8.4	8.3	12.4	12.7	12.7	12.7	12.7	12.6	12.4
92,5°	8.1	8.1	8.0	7.8	7.8	8.0	11.1	11.2	11.4	11.4	11.4	11.2	11.1
95,0°	7.7	7.5	7.5	7.5	7.4	7.4	9.3	9.3	9.5	9.5	9.3	9.2	9.2
97,5°	7.2	7.2	7.1	7.1	7.1	7.1	8.1	8.1	8.1	8.0	7.8	7.8	7.7
100,0°	6.9	6.9	6.9	6.8	6.8	6.8	7.2	7.2	7.2	7.1	6.9	6.8	6.8
102,5°	6.7	6.7	6.7	6.7	6.7	6.5	6.7	6.7	6.7	6.5	6.4	6.2	6.2
105,0°	6.4	6.4	6.4	6.4	6.5	6.2	6.2	6.1	6.1	5.9	5.9	5.8	5.6
107,5°	6.2	6.2	6.2	6.2	6.2	6.2	5.8	5.8	5.8	5.6	5.5	5.3	5.3
110,0°	6.1	6.1	6.2	6.1	6.2	6.2	5.5	5.5	5.5	5.3	5.2	5.0	5.0
112,5°	5.9	5.9	5.9	5.9	5.9	5.9	5.2	5.2	5.2	5.0	5.0	4.7	4.7

Photometric test report

Family LITEPOLE 2	Order number: 5XA5425KF14HP EAN: 4058352836637	LP number 58904_19
Table of values for luminous intensities		Maximum luminous intensity
		siteco


C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0,0°	7.6	7.6	7.6	7.6	7.6	7.6	7.6	7.6	7.6	7.6	7.6	0.0	0.0
2,5°	7.4	7.4	7.4	7.5	7.7	7.7	7.5	7.5	7.7	7.5	7.4	0.1	0.1
5,0°	7.7	7.7	7.7	7.8	8.0	7.8	7.8	7.8	7.7	7.8	8.0	0.2	0.3
7,5°	10.1	9.8	9.5	9.5	9.3	9.3	9.5	9.3	9.3	9.3	9.2	0.6	0.9
10,0°	29.3	26.6	23.7	23.5	22.6	20.0	20.5	18.3	17.6	17.0	17.4	1.6	2.5
12,5°	43.5	38.4	31.0	31.8	32.4	34.9	37.5	39.2	39.8	39.9	42.3	3.1	5.6
15,0°	51.7	50.4	45.2	44.6	40.1	39.6	40.2	40.4	43.0	46.7	48.2	5.0	10.5
17,5°	77.6	60.6	53.4	49.5	48.9	47.3	47.2	43.0	40.7	38.0	38.4	7.3	17.8
20,0°	62.1	55.3	49.8	48.9	48.6	46.7	47.2	43.9	42.6	40.2	40.2	9.8	27.6
22,5°	57.5	47.2	43.8	43.2	41.7	41.1	41.7	42.6	43.8	46.7	45.8	12.1	39.7
25,0°	56.0	41.5	40.4	37.8	37.5	38.4	39.9	40.7	41.4	41.7	42.3	14.5	54.2
27,5°	51.3	40.2	37.7	37.5	35.8	36.2	38.6	38.7	39.2	38.3	37.5	17.0	71.3
30,0°	51.4	47.2	40.8	37.8	36.8	36.7	37.5	36.2	35.3	34.6	34.3	20.1	91.4
32,5°	56.3	52.0	46.6	42.7	39.3	38.1	37.5	34.6	33.1	32.1	31.6	23.6	115.0
35,0°	63.7	56.8	49.2	43.9	40.2	38.4	36.8	34.1	32.2	30.9	30.2	27.1	142.1
37,5°	68.6	61.6	54.8	49.2	44.8	41.1	38.7	35.5	33.0	31.3	30.5	30.8	172.9
40,0°	68.9	61.9	55.7	50.7	46.6	43.3	40.4	38.0	35.9	34.7	34.6	34.4	207.3
42,5°	69.0	62.4	55.4	50.1	46.1	43.3	40.8	38.6	37.0	36.5	36.7	38.0	245.3
45,0°	70.8	63.7	57.7	51.7	47.0	43.2	40.5	38.9	37.0	36.2	36.4	41.6	286.9
47,5°	71.0	64.3	57.5	52.8	48.0	43.8	40.8	38.6	36.8	36.1	36.1	45.3	332.2
50,0°	68.4	61.9	55.9	51.3	46.9	43.2	40.4	38.1	36.2	35.5	35.2	48.8	381.0
52,5°	64.6	59.6	54.0	49.5	45.1	41.4	39.2	37.1	35.0	34.0	34.0	51.9	433.0
55,0°	62.1	57.8	52.5	47.7	43.6	39.6	37.0	35.5	33.9	33.0	32.8	54.6	487.6
57,5°	59.4	55.9	51.1	45.4	41.4	37.3	34.4	33.6	32.4	31.6	31.3	57.9	545.5
60,0°	56.0	53.2	49.1	43.5	39.9	35.3	31.9	31.0	30.0	29.6	29.6	58.9	604.4
62,5°	52.6	49.4	46.6	42.9	38.0	34.3	29.9	29.1	28.2	28.1	28.1	57.9	662.3
65,0°	47.2	45.4	42.0	42.6	37.8	33.9	27.9	27.2	26.5	26.3	26.3	55.5	717.8
67,5°	43.0	42.4	39.5	40.1	37.1	33.6	27.2	25.0	24.7	24.5	24.5	52.8	770.6
70,0°	39.6	38.9	38.7	37.7	34.0	33.1	25.6	22.6	22.2	22.2	22.5	50.7	821.3
72,5°	35.0	34.4	34.6	34.3	33.1	28.4	24.4	21.0	20.1	20.1	20.4	46.6	867.9
75,0°	31.5	31.3	31.8	30.9	28.4	24.2	22.0	19.5	18.0	18.0	18.3	39.4	907.3
77,5°	28.7	28.4	26.8	25.4	22.8	19.7	18.3	16.7	16.3	16.1	16.6	28.6	935.9
80,0°	25.7	23.4	21.7	20.7	18.6	16.4	15.8	14.9	14.6	14.5	14.5	17.3	953.3
82,5°	23.2	20.3	18.2	16.9	16.6	15.8	15.1	14.0	13.5	13.3	13.3	10.0	963.3
85,0°	18.9	17.0	15.8	14.9	14.6	14.3	13.7	13.2	12.6	12.6	12.1	6.1	969.4
87,5°	16.3	15.1	14.0	13.3	13.0	12.9	12.3	12.1	11.8	11.8	11.5	4.1	973.5
90,0°	12.3	12.3	12.0	11.7	11.7	11.4	11.2	11.2	11.1	10.9	10.9	3.0	976.5
92,5°	10.9	10.9	10.8	10.8	10.5	10.5	10.3	10.3	10.2	10.1	10.1	2.7	979.3
95,0°	9.0	8.9	8.9	8.7	8.6	8.4	8.3	8.3	8.1	8.1	8.0	2.3	981.6
97,5°	7.7	7.4	7.4	7.2	7.1	7.1	6.8	6.8	6.8	6.7	6.5	2.0	983.6
100,0°	6.8	6.5	6.5	6.4	6.2	6.1	5.9	5.9	5.9	5.6	5.6	1.8	985.4
102,5°	6.1	5.9	5.9	5.6	5.6	5.3	5.3	5.3	5.0	5.0	5.0	1.7	987.1
105,0°	5.6	5.5	5.3	5.3	5.0	5.0	4.9	4.7	4.7	4.7	4.7	1.6	988.7
107,5°	5.2	5.0	5.0	5.0	4.7	4.7	4.7	4.4	4.4	4.4	4.4	1.5	990.2
110,0°	4.9	4.7	4.7	4.7	4.4	4.4	4.4	4.1	4.1	4.1	4.1	1.4	991.5
112,5°	4.7	4.6	4.4	4.4	4.4	4.1	4.1	4.1	4.1	4.0	3.8	1.3	992.9

Photometric test report

Family LITEPOLE 2	Order number: 5XA5425KF14HP EAN: 4058352836637	LP number 58904_19
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
115,0°	5.0	5.2	5.5	5.5	5.5	5.5	5.5	5.5	5.5	5.6	5.6	5.6	5.8
117,5°	4.9	5.0	5.2	5.2	5.2	5.2	5.2	5.3	5.3	5.3	5.3	5.5	5.6
120,0°	4.6	4.9	4.9	4.9	4.9	5.0	5.0	5.0	5.0	5.0	5.2	5.3	5.3
122,5°	4.3	4.3	4.4	4.4	4.4	4.6	4.6	4.7	4.7	4.7	4.7	4.7	5.0
125,0°	3.5	3.5	3.5	3.7	3.8	3.8	3.8	3.8	3.8	3.8	4.0	4.1	4.1
127,5°	2.5	2.4	2.7	2.7	2.7	2.7	2.7	2.7	2.7	2.7	2.7	2.7	2.8
130,0°	1.8	1.6	1.6	1.6	1.6	1.5	1.5	1.5	1.5	1.5	1.5	1.6	1.8
132,5°	1.5	1.5	1.5	1.5	1.5	1.5	1.3	1.5	1.3	1.2	1.3	1.3	1.3
135,0°	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2
137,5°	1.2	1.2	1.0	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9
140,0°	0.9	0.9	0.9	0.9	0.9	0.7	0.6	0.6	0.6	0.6	0.6	0.6	0.6
142,5°	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.4	0.4	0.4	0.3	0.3
145,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
147,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
152,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
155,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
157,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
162,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
165,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
167,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
172,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
175,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
177,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family LITEPOLE 2	Order number: 5XA5425KF14HP EAN: 4058352836637	LP number 58904_19
Table of values for luminous intensities		Maximum luminous intensity
		

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
115,0°	5.8	5.8	5.9	5.9	5.9	5.9	5.0	5.0	4.9	4.9	4.7	4.7	4.6
117,5°	5.6	5.6	5.6	5.6	5.6	5.6	4.9	4.7	4.7	4.7	4.4	4.4	4.4
120,0°	5.3	5.3	5.3	5.6	5.6	5.6	4.6	4.6	4.4	4.4	4.3	4.1	4.1
122,5°	5.0	5.0	5.0	5.2	5.0	5.0	4.3	4.1	4.1	4.1	3.8	3.8	3.8
125,0°	4.1	4.1	4.3	4.3	4.4	4.4	3.4	3.5	3.3	3.3	3.3	3.3	3.3
127,5°	2.8	3.0	3.0	3.0	3.0	3.0	2.5	2.5	2.4	2.4	2.4	2.4	2.4
130,0°	1.6	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.8
132,5°	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5
135,0°	1.2	1.2	1.2	1.2	1.2	1.2	1.3	1.3	1.2	1.3	1.5	1.5	1.5
137,5°	0.9	0.9	0.9	0.9	0.9	0.9	1.2	1.2	1.2	1.2	1.2	1.2	1.2
140,0°	0.6	0.6	0.6	0.6	0.6	0.6	0.9	0.9	0.9	0.9	0.9	0.9	1.0
142,5°	0.3	0.3	0.3	0.3	0.3	0.3	0.6	0.6	0.7	0.7	0.7	0.9	0.9
145,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
147,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
152,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
155,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
157,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
162,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
165,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
167,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
172,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
175,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
177,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family LITEPOLE 2	Order number: 5XA5425KF14HP EAN: 4058352836637	LP number 58904_19
Table of values for luminous intensities		Maximum luminous intensity
		sITeco

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
115,0°	4.4	4.4	4.4	4.1	4.1	4.1	3.8	3.8	3.8	3.8	3.8	1.2	994.1
117,5°	4.1	4.1	4.1	4.0	3.8	3.8	3.8	3.7	3.7	3.5	3.5	1.2	995.3
120,0°	4.1	4.0	3.8	3.8	3.8	3.7	3.5	3.5	3.5	3.5	3.5	1.1	996.4
122,5°	3.8	3.7	3.5	3.5	3.5	3.4	3.4	3.3	3.3	3.3	3.3	1.0	997.3
125,0°	3.3	3.1	3.1	3.0	3.0	2.8	2.8	2.8	2.7	2.7	2.7	0.8	998.1
127,5°	2.4	2.4	2.2	2.2	2.2	2.2	2.1	2.1	2.1	2.1	2.1	0.5	998.7
130,0°	1.8	1.8	1.8	1.8	1.8	1.8	1.6	1.6	1.5	1.5	1.5	0.4	999.0
132,5°	1.5	1.6	1.6	1.6	1.6	1.6	1.5	1.5	1.5	1.5	1.5	0.3	999.3
135,0°	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.2	1.2	1.2	1.2	0.2	999.6
137,5°	1.2	1.2	1.3	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	0.2	999.8
140,0°	1.0	1.0	1.0	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.1	999.9
142,5°	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.7	0.6	0.1	1000.0
145,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
147,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
152,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
155,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
157,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
160,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
162,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
165,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
167,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
170,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
172,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
175,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
177,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family LITEPOLE 2	Order number: 5XA5425KF14HP EAN: 4058352836637	LP number 58904_19
-----------------------------	---	------------------------------

Dimming levels table	environmental temperature: 25°C	siteco
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W]
				start of lifetime	end of lifetime	average
100	254	254	4980	33.6	35.9	34.8
95	241	252	4725	31.4	33.5	32.4
90	229	250	4490	29.4	31.4	30.4
85	216	248	4235	27.4	29.2	28.3
80	203	246	3980	25.5	27.1	26.3
75	190	243	3725	23.6	25.2	24.4
70	178	241	3490	21.9	23.3	22.6
65	165	238	3235	20.2	21.5	20.8
60	152	235	2980	18.5	19.6	19.0
55	140	232	2745	16.9	18.0	17.4
50	127	229	2490	15.3	16.2	15.8
45	114	225	2235	13.7	14.5	14.1
40	102	221	2000	12.3	13.0	12.6
35	89	216	1745	10.8	11.4	11.1
30	76	210	1490	9.3	9.8	9.6
25	63	203	1235	7.8	8.2	8.0
20	51	195	1000	6.6	6.9	6.8
15	38	184	745	5.2	5.5	5.4
11	28	173	549	4.1	4.4	4.2