

Photometric test report

Family
Silica® 21



Order number: **51MX30TCT9W**
EAN: **4058352795835**

LP number
59412_48

Version Suspended luminaire, with homogeneous illumination, cover, opal, direct-/ indirect distribution, extremely wide distribution, UGR≤25, tunable white

Lamps LED 4000 K | CRI ≥ 80

Controlgear ECG-DALI

Setting factory setting


Rated values Net luminous flux = 10300 lm
Power consumption = 88.7 W
Luminous efficacy = 116.1 lm/W

serial
documentation
03.05.2023

siteco

Luminous intensity in cd/klm **C180-0** **C270-90**

Imax: 204 cd/klm

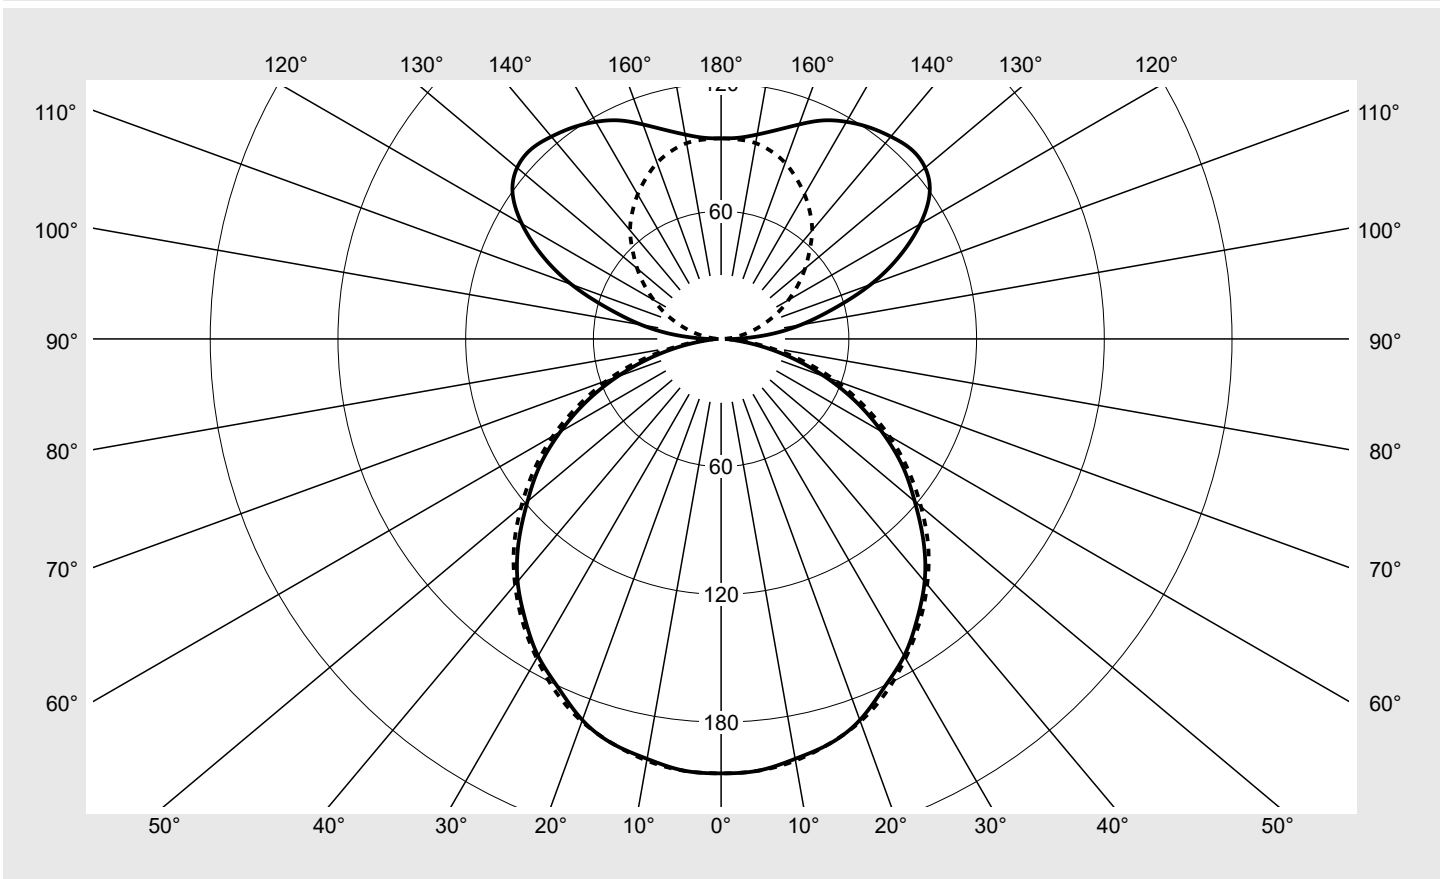

Classifications

DIN 5040 C 4 2
CIE N1=47 N2=79 N3=96
N4=58 N5=100

Luminaire light output ratios

η_{LB} 100.0%
 ϕ_u 57.8%
 ϕ_o 42.2%

Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family Silica® 21	Order number: 51MX30TCT9W EAN: 4058352795835	LP number 59412_48
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes γ	0° 180°	15°	30°	45°	60°	75°	90° 270°	Phi-zone	Total Phi-zone
		165° 195° 345°	150° 210° 330°	135° 225° 315°	120° 240° 300°	105° 255° 285°			
Luminous intensity in cd/klm							Luminous flux in lm/klm		
0°	204.1	204.1	204.1	204.1	204.1	204.1	204.1	1.2	1.2
5°	203.5	203.8	203.3	203.3	203.4	203.8	203.6	9.7	10.9
10°	200.3	199.9	199.8	200.3	201.2	200.6	201.1	19.1	30.0
15°	196.9	196.3	195.1	196.0	196.7	197.0	196.8	27.9	57.9
20°	190.5	190.1	188.7	189.7	189.8	190.2	191.2	35.6	93.5
25°	180.9	181.1	180.3	181.3	182.3	182.2	183.2	42.1	135.5
30°	172.0	171.7	170.5	171.9	173.3	173.2	173.3	47.2	182.7
35°	160.6	160.7	159.7	160.3	160.9	161.7	162.5	50.6	233.3
40°	148.7	148.4	148.5	148.2	149.1	149.3	150.6	52.5	285.7
45°	134.5	134.5	134.8	134.8	135.4	135.8	137.6	52.4	338.1
50°	118.7	119.6	120.0	120.5	121.6	121.8	122.6	50.7	388.8
55°	104.0	104.1	104.8	105.3	106.3	106.3	107.2	47.3	436.2
60°	87.2	87.5	88.1	88.4	89.8	89.9	91.2	42.2	478.3
65°	70.0	70.7	71.5	72.5	73.2	73.9	73.9	35.9	514.2
70°	52.0	53.0	53.5	54.9	56.0	56.6	57.0	28.2	542.4
75°	34.3	35.1	35.7	36.9	38.2	39.1	39.4	19.6	562.0
80°	18.0	18.4	19.0	19.8	21.0	21.9	22.2	10.8	572.8
85°	5.8	6.0	6.3	6.8	7.4	8.1	8.3	3.8	576.6
90°	6.3	6.1	6.5	6.3	3.9	1.8	1.1	2.6	579.2
95°	21.6	22.1	23.8	22.9	15.1	7.9	4.1	9.5	588.7
100°	38.0	39.1	40.0	35.9	24.8	14.2	9.4	16.0	604.7
105°	54.7	56.0	55.9	49.2	34.1	21.4	15.7	22.2	626.9
110°	74.8	75.5	71.9	60.8	43.8	28.8	22.2	28.3	655.2
115°	92.7	92.3	86.1	71.6	53.1	36.3	29.5	33.2	688.4
120°	108.0	106.6	98.3	80.7	62.0	43.6	36.5	36.7	725.0
125°	119.6	116.6	106.6	89.4	69.8	50.5	44.0	38.5	763.5
130°	125.1	122.5	111.1	94.7	75.6	57.5	51.4	38.5	802.0
135°	126.1	123.5	112.8	98.1	79.9	63.9	58.8	36.9	838.9
140°	124.1	122.0	113.0	100.2	83.2	69.8	66.5	34.3	873.1
145°	121.3	120.0	112.4	100.8	86.1	75.2	72.7	31.0	904.1
150°	117.8	117.1	110.2	99.7	88.4	80.4	78.4	27.1	931.3
155°	113.3	112.8	106.2	98.4	90.0	85.0	83.4	22.8	954.1
160°	107.2	106.9	101.9	96.9	91.4	88.5	88.0	18.2	972.3
165°	101.6	101.0	98.5	95.2	92.8	91.2	91.2	13.6	985.9
170°	97.5	97.0	96.2	94.8	93.7	93.4	93.4	9.1	994.9
175°	94.9	94.8	94.2	94.0	94.0	94.0	94.0	4.5	999.4
180°	94.2	94.2	94.2	94.2	94.2	94.2	94.2	0.6	1000.0

Photometric test report

Family Silica® 21	Order number: 51MX30TCT9W EAN: 4058352795835	LP number 59412_48
-----------------------------	---	------------------------------

UGR-Table	Standard room	siteco
------------------	----------------------	---------------

Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	View crosswise (C0)					View endwise (C90)					
x	y										
2H	2H	18.5	19.6	19.3	20.4	21.5	18.7	19.7	19.5	20.6	21.6
	3H	19.9	20.8	20.8	21.7	22.8	20.2	21.2	21.1	22.0	23.1
	4H	20.4	21.3	21.3	22.1	23.3	20.8	21.7	21.7	22.6	23.7
	6H	20.6	21.4	21.5	22.3	23.5	21.1	21.9	22.0	22.8	24.0
	8H	20.6	21.4	21.5	22.3	23.5	21.1	21.9	22.0	22.8	24.0
	12H	20.6	21.3	21.5	22.2	23.4	21.2	21.9	22.1	22.8	24.0
4H	2H	19.1	20.0	20.0	20.9	22.0	19.2	20.1	20.1	20.9	22.1
	3H	20.7	21.4	21.6	22.3	23.5	20.9	21.6	21.8	22.5	23.7
	4H	21.3	21.9	22.2	22.8	24.0	21.6	22.3	22.5	23.2	24.4
	6H	21.6	22.1	22.5	23.1	24.3	22.1	22.6	23.0	23.6	24.8
	8H	21.7	22.2	22.6	23.1	24.3	22.2	22.7	23.1	23.6	24.9
	12H	21.6	22.1	22.6	23.0	24.3	22.2	22.7	23.2	23.6	24.9
8H	4H	21.4	22.0	22.4	22.9	24.1	21.7	22.2	22.7	23.2	24.4
	6H	21.9	22.3	22.9	23.3	24.5	22.3	22.7	23.3	23.7	24.9
	8H	22.0	22.4	23.0	23.4	24.6	22.5	22.9	23.5	23.9	25.1
	12H	22.0	22.3	23.0	23.3	24.6	22.6	22.9	23.6	23.9	25.2
12H	4H	21.4	21.8	22.4	22.8	24.1	21.7	22.1	22.6	23.1	24.3
	6H	21.9	22.3	22.9	23.2	24.5	22.3	22.6	23.3	23.6	24.9
	8H	22.0	22.3	23.0	23.3	24.6	22.5	22.8	23.5	23.8	25.1

Luminance table	Max. for $\gamma \geq 65^\circ$	Photometric dimensions in mm:	L = 3000 B = 50
------------------------	---	--------------------------------------	----------------------------------

C-planes	γ	Luminance in cd/m ²							
		0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°	
45°		13056.9	13064.8	13089.5	13091.1	13149.4	13184.0	13358.8	
50°		12684.2	12780.7	12817.0	12871.3	12990.5	13013.1	13094.5	
55°		12454.4	12468.3	12543.2	12605.7	12721.9	12722.9	12839.1	
60°		11975.5	12023.3	12093.0	12140.8	12334.0	12350.5	12522.3	
65°		11373.7	11487.6	11620.0	11774.2	11887.0	12006.4	12005.7	
70°		10439.1	10635.5	10743.7	11017.5	11233.4	11371.9	11444.2	
75°		9099.0	9314.4	9464.8	9792.2	10122.5	10385.5	10454.7	
80°		7119.8	7256.2	7506.2	7831.2	8302.6	8656.9	8762.5	
85°		4582.2	4744.5	5001.3	5371.6	5850.7	6349.4	6571.6	

Photometric test report

Family Silica® 21	Order number: 51MX30TCT9W EAN: 4058352795835	LP number 59412_48
------------------------------------	---	-------------------------------------

Luminance values in cd/m²

γ 65°
 γ 70°
 γ 75°
 γ 80°
 γ 85°

siteco

