

Photometric test report

Family
Silica® 21

Order number: 51MX32DA47BB
EAN: 4058352884669

LP number
59279_102



Version Suspended luminaire, reflector, black, direct-/indirect distribution, wide distribution, UGR≤16 (L65≤1000cd/m²)

Lamps LED 4000 K | CRI ≥ 80


Controlgear ECG-DALI

Rated values Net luminous flux = 7290 lm
Power consumption = 43.8 W
Luminous efficacy = 166.4 lm/W

serial documentation
02.08.2023

sitEco

Luminous intensity in cd/klm C180-0 C270-90 **Imax: 425 cd/klm**

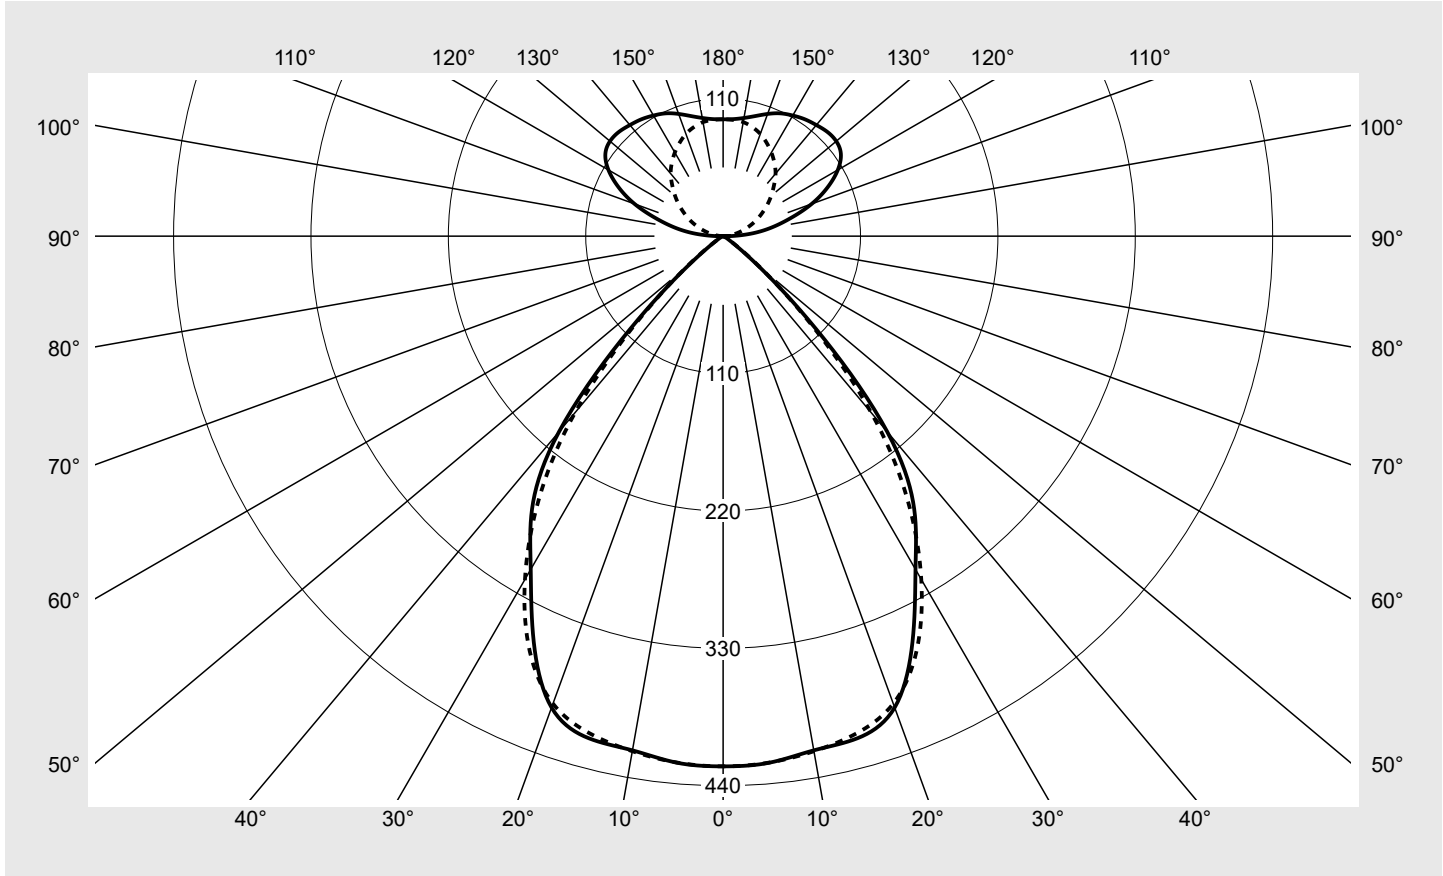

Classifications

DIN 5040	C 6 2
CIE	N1=86 N2=99 N3=100 N4=59 N5=100

Luminaire light output ratios

η_{LB}	100.0%
ϕ_u	59.2%
ϕ_o	40.8%

Measurement conditions
DIN EN 13032 and DIN 5032

Photometric test report

Family Silica® 21	Order number: 51MX32DA47BB EAN: 4058352884669	LP number 59279_102
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes γ	0° 180°	15°	30°	45°	60°	75°	90° 270°	Phi-zone	Total Phi-zone
		165° 195° 345°	150° 210° 330°	135° 225° 315°	120° 240° 300°	105° 255° 285°			
Luminous intensity in cd/klm								Luminous flux in lm/klm	
0°	424.5	424.5	424.5	424.5	424.5	424.5	424.5	2.5	2.5
5°	423.2	423.7	423.1	423.1	423.3	423.7	423.1	20.2	22.8
10°	418.0	417.2	417.3	418.4	419.3	417.7	418.7	39.8	62.6
15°	416.1	416.5	413.5	413.8	413.5	412.7	412.2	58.7	121.3
20°	401.6	404.7	402.8	404.0	399.5	397.4	398.3	75.3	196.5
25°	358.7	364.9	370.6	376.3	375.4	369.4	366.5	85.7	282.2
30°	308.1	312.2	314.3	321.5	326.7	320.5	317.3	87.1	369.4
35°	266.7	269.2	262.0	257.7	262.2	261.4	257.3	82.5	451.9
40°	204.3	207.3	203.4	196.7	194.2	189.2	184.5	69.6	521.5
45°	105.6	109.2	112.9	113.5	110.1	103.6	98.8	42.1	563.6
50°	35.1	38.0	43.5	46.6	44.5	40.2	37.5	17.4	581.0
55°	9.3	10.9	14.6	18.5	15.5	12.0	10.3	6.1	587.1
60°	3.6	4.0	5.4	7.2	5.8	4.5	4.1	2.4	589.5
65°	1.2	1.4	2.0	2.5	2.2	1.8	1.6	0.9	590.5
70°	0.8	0.8	0.6	0.6	0.7	0.9	0.9	0.4	590.8
75°	0.2	0.2	0.2	0.3	0.2	0.3	0.2	0.1	591.0
80°	0.0	0.0	0.0	0.1	0.1	0.1	0.1	0.0	591.0
85°	0.4	0.4	0.4	0.4	0.4	0.4	0.4	0.2	591.2
90°	4.7	4.5	4.8	4.8	2.8	1.0	0.4	1.9	593.1
95°	21.9	22.4	24.0	22.7	14.5	7.5	3.9	9.5	602.5
100°	39.1	40.2	40.5	35.5	23.8	13.4	8.9	16.0	618.5
105°	56.1	57.3	56.2	48.0	32.8	20.3	14.9	22.1	640.6
110°	75.4	75.7	70.9	59.1	42.1	27.5	21.3	27.8	668.4
115°	92.2	91.4	84.2	69.3	51.0	34.7	28.4	32.4	700.7
120°	106.0	104.3	95.1	77.6	59.4	41.8	35.4	35.5	736.3
125°	115.1	111.9	101.7	85.2	66.4	48.4	42.8	36.9	773.1
130°	118.2	115.6	104.8	89.7	71.8	55.3	50.2	36.5	809.6
135°	118.0	115.6	106.0	92.7	76.1	61.7	57.6	34.9	844.5
140°	116.1	114.4	106.3	94.9	79.7	67.7	65.3	32.5	877.0
145°	114.2	113.0	106.3	96.1	83.1	73.4	71.6	29.6	906.6
150°	111.5	111.1	105.1	96.0	85.8	78.8	77.3	26.1	932.7
155°	108.5	108.2	102.4	95.6	87.9	83.6	82.4	22.1	954.8
160°	104.1	103.9	99.3	94.8	89.7	87.3	87.1	17.8	972.6
165°	99.5	99.0	96.7	93.7	91.6	90.3	90.4	13.4	986.0
170°	96.1	95.6	95.0	93.7	92.8	92.7	92.7	9.0	995.0
175°	94.1	94.0	93.5	93.3	93.3	93.4	93.4	4.5	999.4
180°	93.6	93.6	93.6	93.6	93.6	93.6	93.6	0.6	1000.0

Photometric test report

Family Silica® 21	Order number: 51MX32DA47BB EAN: 4058352884669	LP number 59279_102
-----------------------------	--	-------------------------------

UGR-Table	Standard room	siteco
------------------	----------------------	---------------

Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	View crosswise (C0)					View endwise (C90)					
x	y										
2H	2H	16.3	17.1	17.1	18.0	19.0	16.1	17.0	16.9	17.8	18.8
	3H	16.0	16.7	16.9	17.6	18.7	15.8	16.6	16.7	17.5	18.5
	4H	15.8	16.5	16.7	17.4	18.5	15.7	16.4	16.6	17.3	18.4
	6H	15.7	16.3	16.6	17.2	18.3	15.5	16.2	16.5	17.1	18.2
	8H	15.6	16.1	16.5	17.1	18.2	15.4	15.9	16.3	16.9	18.0
	12H	15.5	16.0	16.4	16.9	18.1	15.3	15.9	16.3	16.8	18.0
4H	2H	15.9	16.6	16.8	17.5	18.6	15.7	16.4	16.6	17.3	18.4
	3H	15.6	16.2	16.5	17.1	18.3	15.4	16.0	16.3	16.9	18.1
	4H	15.5	16.0	16.4	16.9	18.1	15.3	15.8	16.2	16.7	17.9
	6H	15.3	15.7	16.2	16.7	17.9	15.1	15.6	16.1	16.5	17.7
	8H	15.2	15.6	16.2	16.5	17.8	15.0	15.4	16.0	16.4	17.6
	12H	15.1	15.4	16.1	16.4	17.6	14.9	15.3	15.9	16.2	17.5
8H	4H	15.2	15.6	16.2	16.6	17.8	15.0	15.4	16.0	16.4	17.6
	6H	15.1	15.4	16.1	16.4	17.6	14.9	15.2	15.8	16.1	17.4
	8H	15.0	15.3	16.0	16.3	17.5	14.8	15.1	15.8	16.1	17.3
	12H	14.9	15.1	15.9	16.1	17.4	14.7	15.0	15.7	15.9	17.2
12H	4H	15.1	15.5	16.1	16.4	17.7	14.9	15.3	15.9	16.2	17.4
	6H	15.0	15.3	16.0	16.2	17.5	14.8	15.1	15.8	16.0	17.3
	8H	14.9	15.1	15.9	16.1	17.4	14.7	14.9	15.7	15.9	17.2


Luminance table	Max. for $\gamma \geq 65^\circ$	Photometric dimensions in mm:	L = 1176 B = 49
------------------------	---	--------------------------------------	----------------------------------

C-planes	γ	Luminance in cd/m ²							
		0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°	
45°		18899.4	19534.5	20198.6	20312.6	19701.6	18543.1	17683.5	
50°		6913.1	7477.4	8559.5	9162.5	8756.1	7918.2	7387.8	
55°		2044.6	2413.0	3214.9	4080.4	3424.2	2637.1	2267.4	
60°		914.4	1019.2	1361.5	1812.4	1471.3	1147.7	1042.4	
65°		372.7	428.1	593.0	752.9	667.8	528.3	484.9	
70°		296.3	308.9	228.2	214.9	258.6	332.5	335.5	
75°		82.1	110.0	89.4	125.1	114.9	137.8	120.2	
80°		21.1	21.1	30.6	45.9	61.9	71.4	81.6	
85°		571.9	571.9	555.9	542.9	535.6	534.2	545.8	

Photometric test report

Family Silica® 21	Order number: 51MX32DA47BB EAN: 4058352884669	LP number 59279_102
-----------------------------	--	-------------------------------

Luminance values in cd/m² γ 65° γ 70° γ 75° γ 80° γ 85° **siteco**

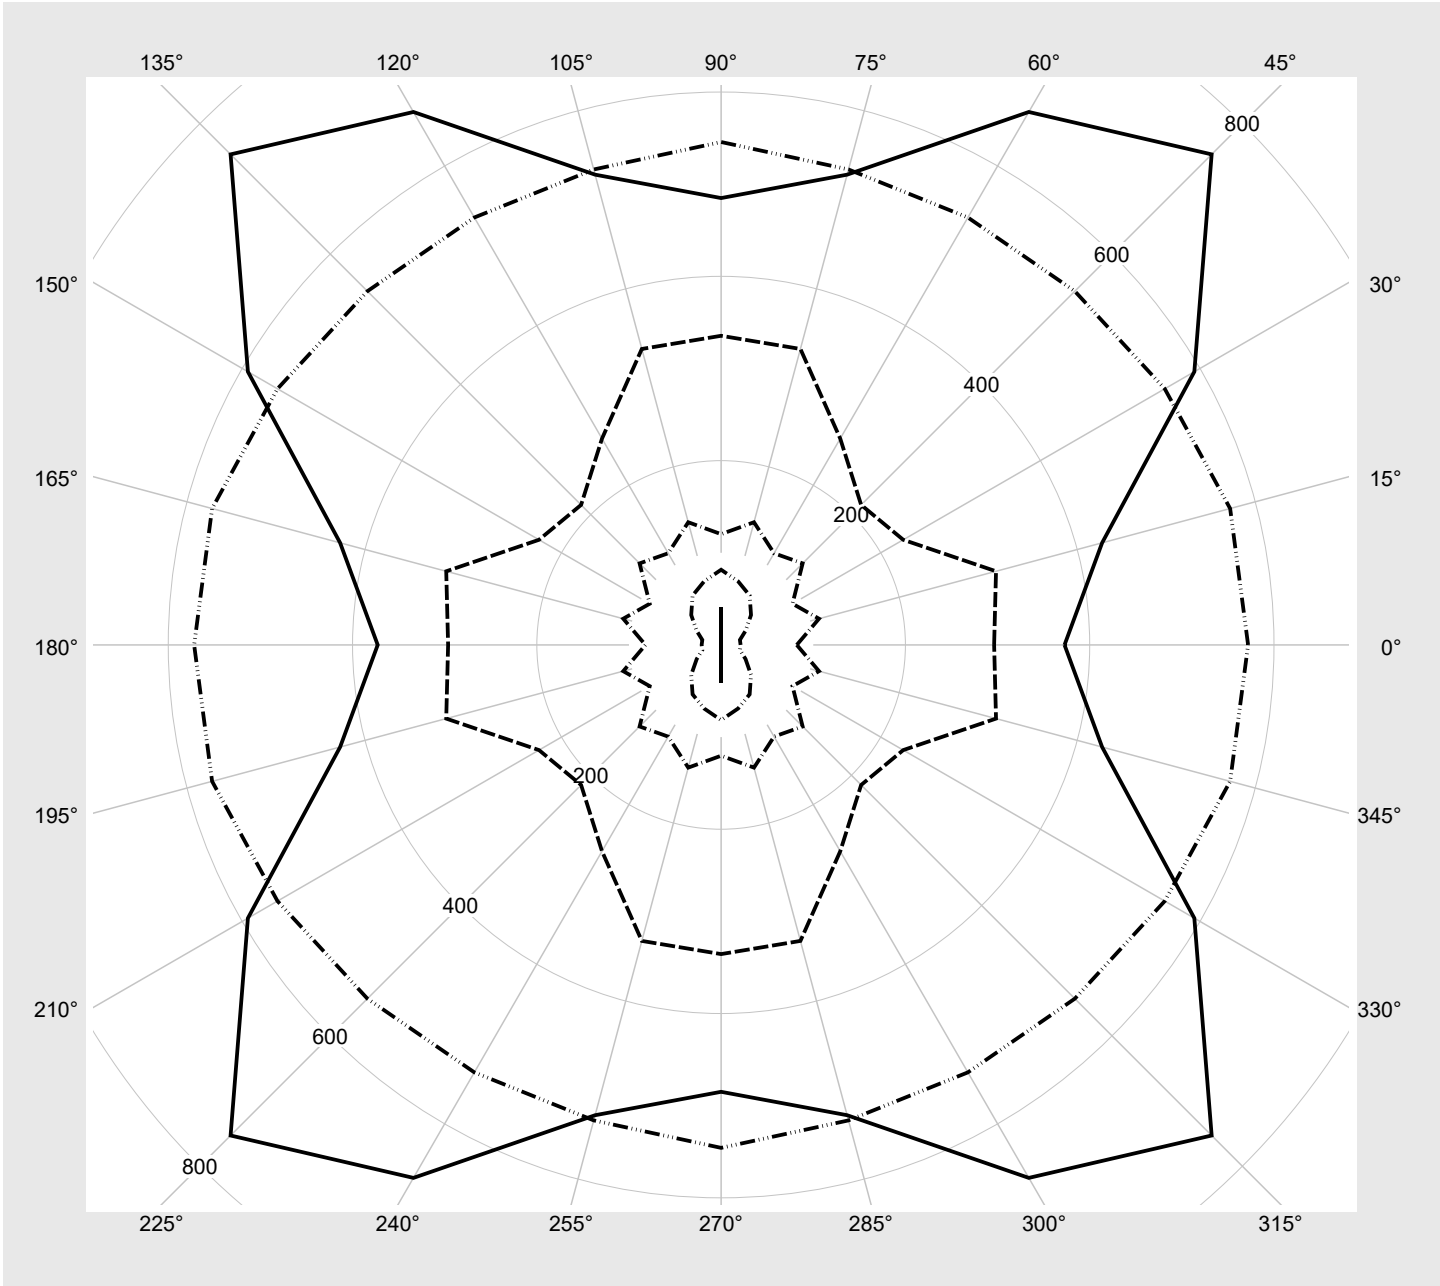

Photometric test report

Family Silica® 21	Order number: 51MX32DA47BB EAN: 4058352884669	LP number 59279_102
-----------------------------	--	-------------------------------

Dimming levels table	environmental temperature: 25°C	sITeco
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	254	254	7290	43.8
95	241	252	6937	41.6
90	227	250	6554	39.2
85	214	248	6196	37.0
80	201	245	5834	34.8
75	188	243	5471	32.6
70	175	240	5106	30.5
65	162	238	4739	28.4
60	149	234	4370	26.1
55	136	231	3997	24.0
50	124	228	3653	22.0
45	111	224	3276	19.9
40	99	219	2928	17.9
35	86	214	2548	15.8
30	74	209	2195	13.9
25	61	202	1809	11.7
20	49	194	1453	9.7
15	37	183	1096	7.7
10	25	169	737	5.8
5	13	145	377	4.0
2	6	117	165	3.4