




Photometric test report

Family Licross® 21 Protected	Order number: 52TP12DN4AXG EAN: 4058352903940	LP number 58524_231
	Version prismatic cover, frosted, wide distribution Lamps LED 4000 K CRI ≥ 80 Controlgear ECG-DALI Rated values Net luminous flux = 10000 lm Power consumption = 57.5 W Luminous efficacy = 173.9 lm/W	serial documentation 03.08.2023
		

Luminous intensity in cd/klm C180-0 C270-90 **Imax: 631 cd/klm**

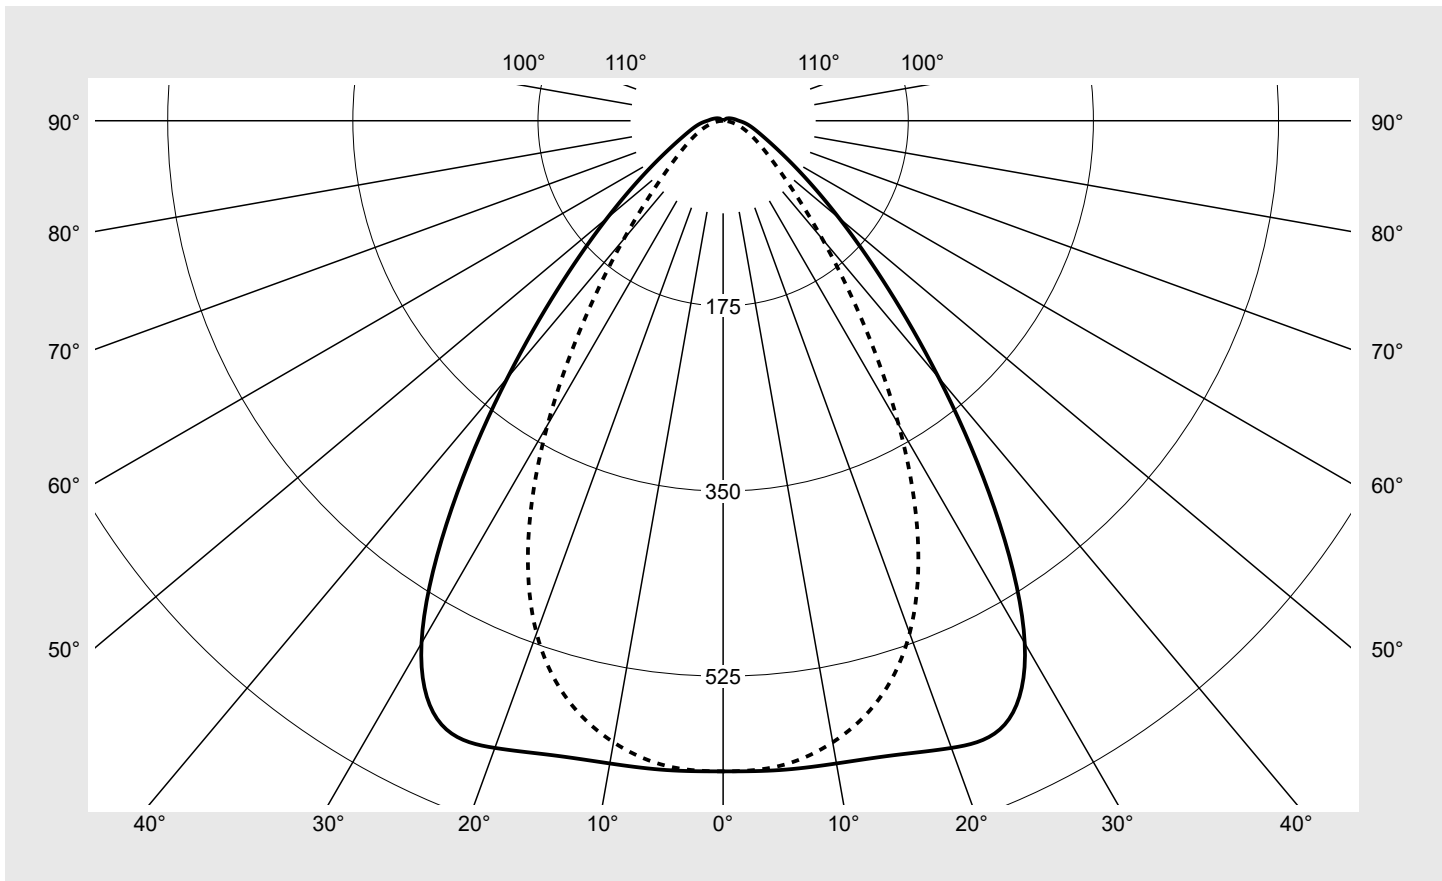

Classifications	
DIN 5040	A 5 1
CIE	N1=73 N2=92 N3=98 N4=99 N5=100

Luminaire light output ratios	
η_{LB}	100.0%
ϕ_u	98.6%
ϕ_o	1.4%

Measurement conditions
DIN EN 13032 and DIN 5032

Photometric test report

Family Licross® 21 Protected	Order number: 52TP12DN4AXG EAN: 4058352903940	LP number 58524_231
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes γ	0° 180°	15°	30°	45°	60°	75°	90° 270°	Phi-zone	Total Phi-zone
		165° 195° 345°	150° 210° 330°	135° 225° 315°	120° 240° 300°	105° 255° 285°			
Luminous intensity in cd/klm								Luminous flux in lm/klm	
0°	615.0	615.0	615.0	615.0	615.0	615.0	615.0	3.7	3.7
5°	616.1	614.1	609.7	611.1	612.9	611.9	612.2	29.3	32.9
10°	616.9	615.1	606.4	602.8	600.3	597.0	596.6	57.6	90.5
15°	620.9	617.8	600.9	587.5	576.7	568.6	566.8	83.8	174.3
20°	630.8	623.5	591.7	561.2	536.7	520.1	515.5	106.4	280.7
25°	629.8	620.7	576.3	523.2	476.9	445.6	435.5	122.6	403.3
30°	570.2	568.9	534.3	469.6	398.0	348.4	331.9	126.5	529.9
35°	447.2	456.9	450.2	394.1	307.5	246.5	227.0	114.9	644.8
40°	317.0	331.0	344.1	303.2	220.2	163.1	146.0	93.6	738.3
45°	213.9	226.3	244.1	214.7	147.7	105.6	94.0	70.6	808.9
50°	143.1	152.0	166.9	144.8	97.7	70.8	64.1	51.5	860.4
55°	96.6	102.1	111.9	95.1	64.8	49.7	46.3	37.0	897.4
60°	67.0	69.6	74.2	63.4	44.8	36.0	34.5	26.8	924.2
65°	49.0	49.5	50.0	42.8	32.0	26.6	25.7	19.7	943.9
70°	37.9	37.0	34.4	29.4	23.3	19.5	18.8	14.8	958.7
75°	30.5	28.7	24.6	20.4	16.6	13.6	12.7	11.1	969.8
80°	24.8	22.7	18.1	14.1	11.2	8.8	7.6	8.2	978.0
85°	19.7	17.8	13.4	9.8	7.1	4.8	3.4	5.9	983.8
90°	14.9	13.4	9.7	6.4	4.0	1.9	0.4	3.9	987.8
95°	12.2	11.1	8.2	5.4	3.1	1.2	0.3	3.2	991.0
100°	10.0	9.2	6.9	4.5	2.4	0.7	0.3	2.6	993.6
105°	8.2	7.6	5.7	3.6	1.7	0.4	0.3	2.1	995.6
110°	6.8	6.2	4.6	2.7	1.1	0.3	0.3	1.6	997.2
115°	5.5	5.0	3.7	2.0	0.7	0.4	0.4	1.2	998.4
120°	4.3	3.8	2.7	1.4	0.6	0.5	0.5	0.9	999.3
125°	3.1	2.7	1.8	0.9	0.6	0.6	0.6	0.6	1000.0
130°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
135°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
140°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
145°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
150°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
155°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
160°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
165°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
170°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
175°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Licross® 21 Protected	Order number: 52TP12DN4AXG EAN: 4058352903940	LP number 58524_231
--	--	-------------------------------

UGR-Table		Standard room									
Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		View crosswise (C0)					View endwise (C90)				
x	y										
2H	2H	21.3	22.7	21.6	23.0	23.3	18.0	19.4	18.4	19.7	20.1
	3H	21.7	22.9	22.1	23.3	23.6	18.4	19.6	18.7	20.0	20.3
	4H	21.9	23.1	22.3	23.4	23.8	18.5	19.7	18.9	20.1	20.4
	6H	22.2	23.3	22.6	23.6	24.0	18.6	19.7	19.1	20.1	20.5
	8H	22.5	23.4	22.9	23.7	24.2	18.7	19.7	19.2	20.1	20.5
	12H	22.6	23.5	23.0	23.9	24.3	18.8	19.7	19.2	20.1	20.5
4H	2H	21.3	22.5	21.7	22.9	23.2	18.5	19.7	18.9	20.1	20.4
	3H	21.9	22.9	22.3	23.3	23.7	19.0	20.0	19.4	20.4	20.8
	4H	22.2	23.1	22.7	23.5	23.9	19.2	20.1	19.7	20.5	21.0
	6H	22.6	23.4	23.1	23.8	24.3	19.4	20.2	19.9	20.6	21.1
	8H	22.9	23.5	23.3	24.0	24.5	19.5	20.2	20.0	20.6	21.1
	12H	23.2	23.7	23.6	24.2	24.7	19.6	20.2	20.1	20.6	21.1
8H	4H	22.2	22.9	22.7	23.4	23.8	19.5	20.1	19.9	20.6	21.1
	6H	22.7	23.3	23.2	23.8	24.3	19.8	20.3	20.2	20.8	21.3
	8H	23.0	23.5	23.5	24.0	24.5	19.9	20.4	20.4	20.9	21.4
	12H	23.4	23.8	24.0	24.3	24.9	20.0	20.4	20.5	20.9	21.4
12H	4H	22.2	22.8	22.7	23.3	23.8	19.5	20.1	20.0	20.6	21.1
	6H	22.7	23.2	23.2	23.7	24.2	19.9	20.3	20.4	20.8	21.3
	8H	23.1	23.5	23.6	24.0	24.5	20.0	20.4	20.5	20.9	21.5

Luminance table		Max. for $\gamma \geq 65^\circ$		Photometric dimensions in mm:		L = 1480	H(C0) = 13	H(C180) = 13
						B = 78	H(C90) = 0	H(C270) = 0
C-planes	γ	0°	15°	30°	45°	60°	75°	90°
		180°	165°	150°	135°	120°	105°	270°
		195°	210°	225°	240°	255°		
		345°	330°	315°	300°	285°		
		Luminance in cd/m ²						
45°		22464.1	23874.9	26131.3	23526.8	16699.7	12403.9	11520.0
50°		16084.8	17187.6	19196.0	17115.3	11977.8	9071.5	8632.9
55°		11779.2	12532.9	14007.7	12293.1	8746.3	7065.3	6993.6
60°		9013.0	9428.1	10287.3	9119.2	6775.5	5809.5	5970.4
65°		7405.4	7547.6	7819.0	6995.6	5559.8	4998.7	5267.6
70°		6585.4	6504.0	6247.2	5630.1	4793.0	4423.0	4751.7
75°		6295.6	6005.5	5341.9	4746.5	4232.0	3922.7	4266.3
80°		6364.4	5924.2	4971.0	4217.5	3808.0	3518.6	3792.8
85°		6728.8	6217.7	5042.4	4135.2	3638.1	3216.0	3425.0


Photometric test report

Family Licross® 21 Protected	Order number: 52TP12DN4AXG EAN: 4058352903940	LP number 58524_231
---	--	--------------------------------------

Luminance values in cd/m²

γ 65°	γ 70°	γ 75°	γ 80°	γ 85°
--------------	--------------	--------------	--------------	--------------

siteco

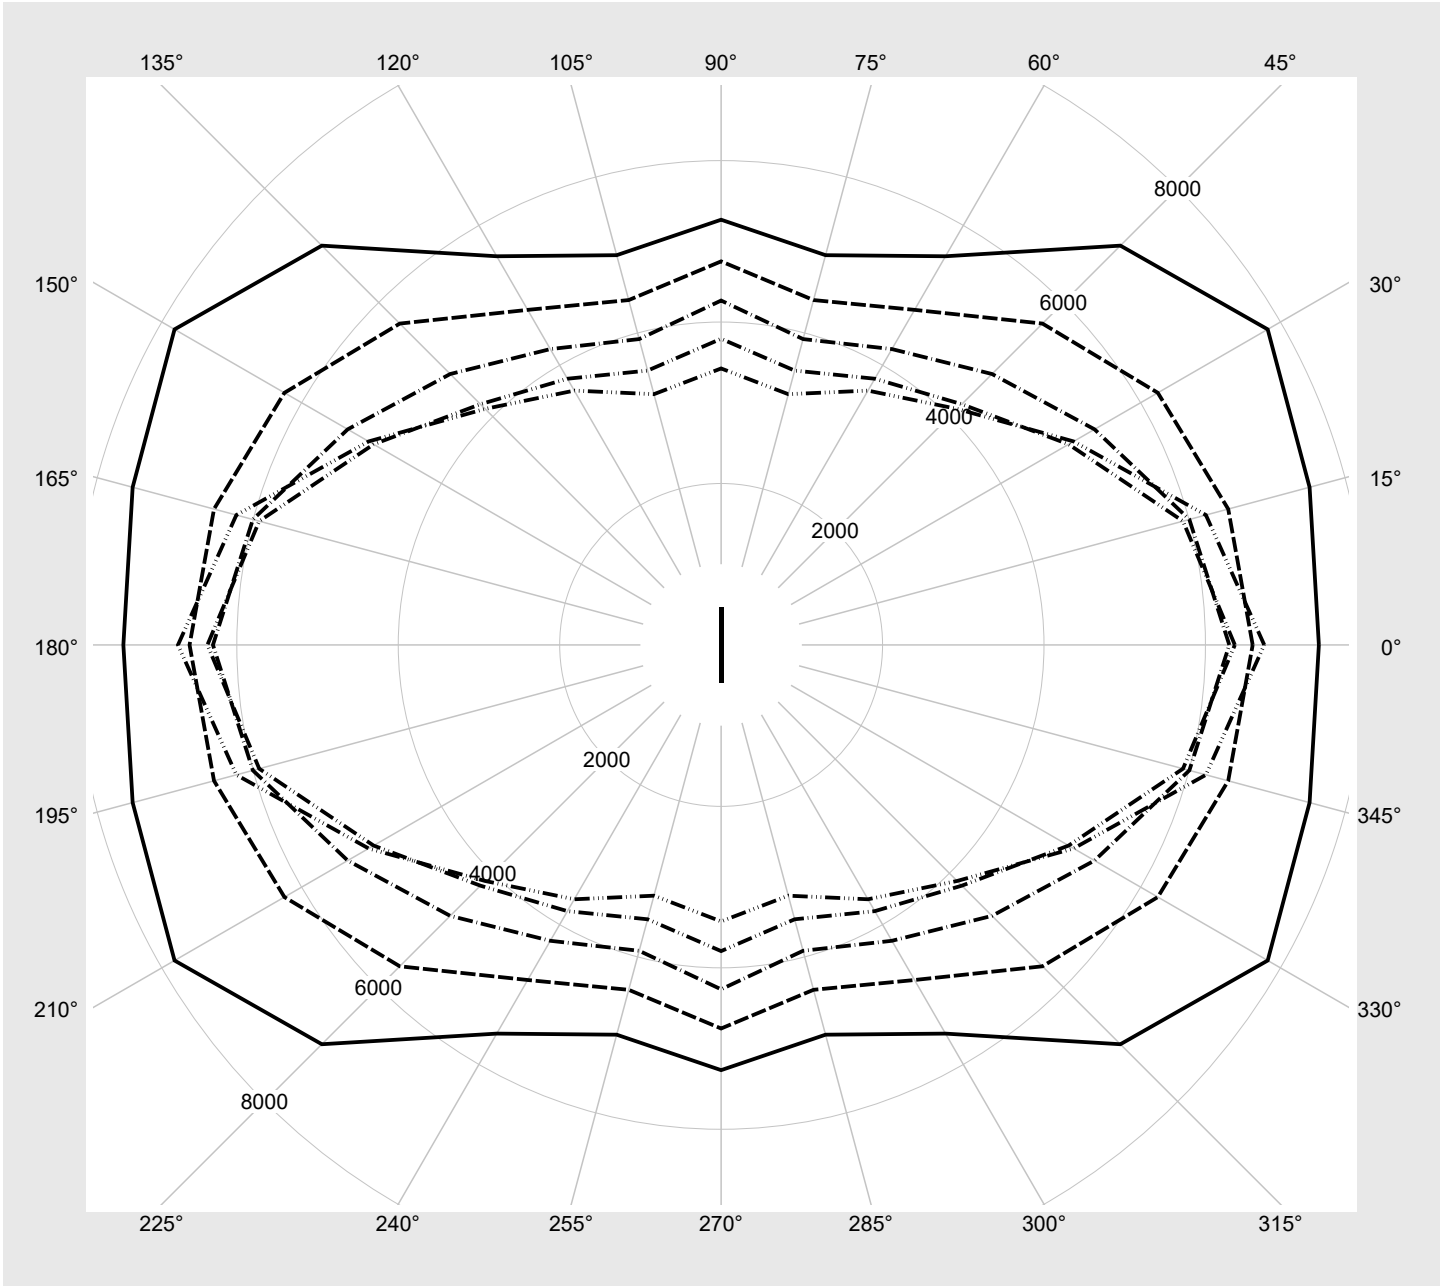

Photometric test report

Family Licross® 21 Protected	Order number: 52TP12DN4AXG EAN: 4058352903940	LP number 58524_231
--	--	--------------------------------------

Dimming levels table	environmental temperature: 25°C	sITeco
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	254	254	10000	57.5
95	240	252	9492	54.3
90	227	250	9015	51.4
85	213	248	8497	48.2
80	200	245	8011	45.4
75	186	243	7482	42.2
70	173	240	6986	39.3
65	160	237	6487	36.5
60	147	234	5983	33.5
55	135	231	5515	31.0
50	122	227	5003	28.0
45	109	223	4485	25.3
40	97	219	4002	22.7
35	85	214	3516	20.1
30	72	208	2987	17.4
25	60	201	2495	14.9
20	48	193	1998	12.3
15	36	182	1499	9.6
10	24	168	996	7.1
5	12	142	493	4.7
2	4	102	153	3.0