




Photometric test report

Family Licross® 21 Protected	Order number: 52TP12DN4A5G3S4 EAN: 4058352908365	LP number 58524_255
	Version prismatic cover, frosted, wide distribution Lamps LED 4000 K CRI ≥ 80 Controlgear ECG-DALI Setting AC-mode Rated values Net luminous flux = 10700 lm Power consumption = 65.8 W Luminous efficacy = 162.6 lm/W	serial documentation 17.08.2023
		

Luminous intensity in cd/klm C180-0 C270-90 **Imax: 631 cd/klm**

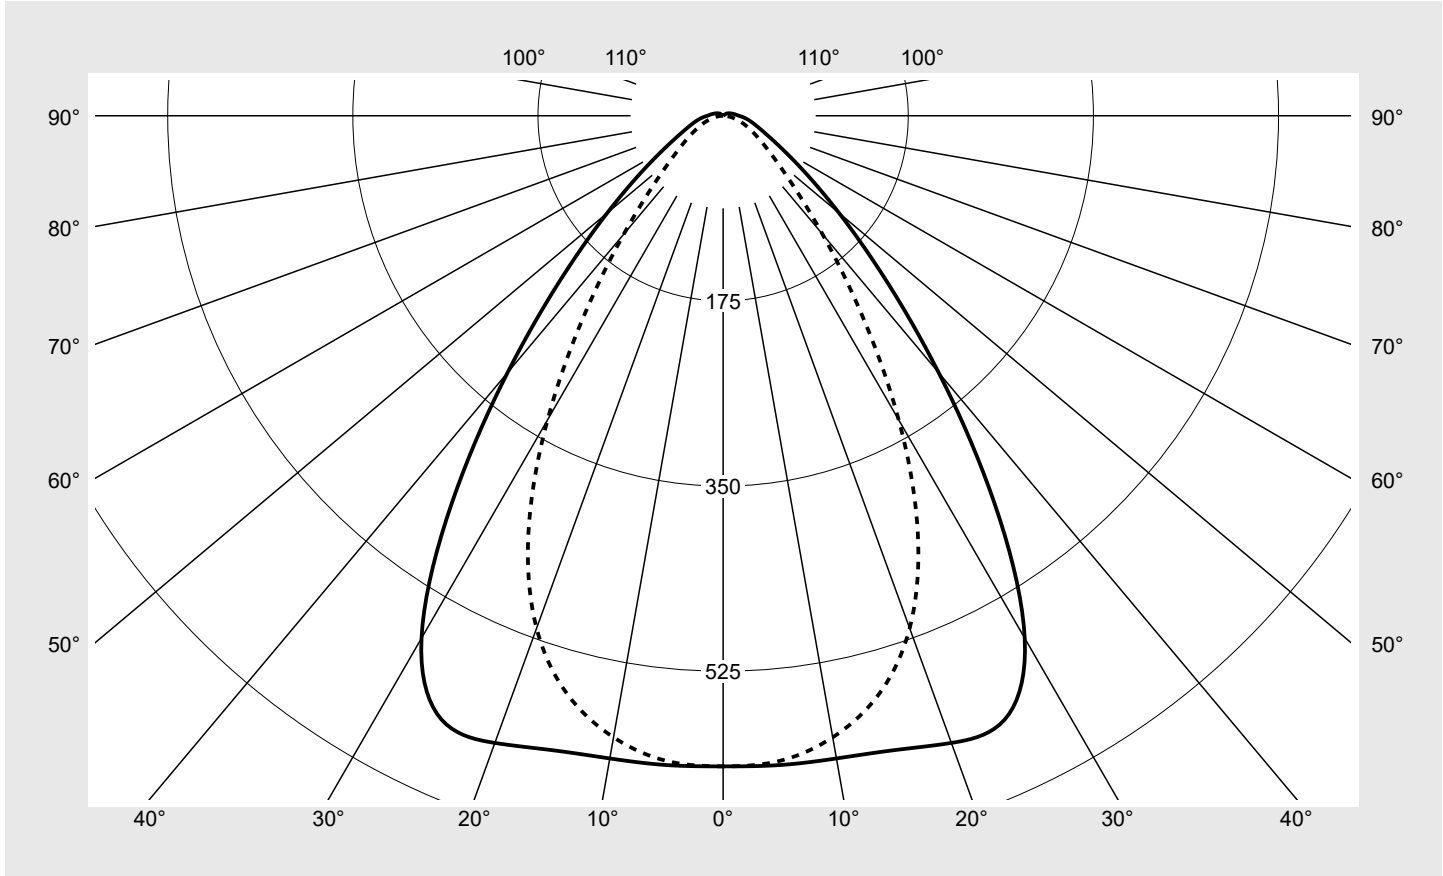

Classifications	
DIN 5040	A 5 1
CIE	N1=73 N2=92 N3=98 N4=99 N5=100

Luminaire light output ratios	
η_{LB}	100.0%
ϕ_u	98.6%
ϕ_o	1.4%

Measurement conditions
 DIN EN 13032 and DIN 5032

Photometric test report

Family Licross® 21 Protected	Order number: 52TP12DN4A5G3S4 EAN: 4058352908365	LP number 58524_255
Table of values for luminous intensities		Maximum luminous intensity
		sITeco

C-planes γ	0° 180°	15°	30°	45°	60°	75°	90° 270°	Phi-zone	Total Phi-zone
		165° 195° 345°	150° 210° 330°	135° 225° 315°	120° 240° 300°	105° 255° 285°			
Luminous intensity in cd/klm								Luminous flux in lm/klm	
0°	615.0	615.0	615.0	615.0	615.0	615.0	615.0	3.7	3.7
5°	616.1	614.1	609.7	611.1	612.9	611.9	612.2	29.3	32.9
10°	616.9	615.1	606.4	602.8	600.3	597.0	596.6	57.6	90.5
15°	620.9	617.8	600.9	587.5	576.7	568.6	566.8	83.8	174.3
20°	630.8	623.5	591.7	561.2	536.7	520.1	515.5	106.4	280.7
25°	629.8	620.7	576.3	523.2	476.9	445.6	435.5	122.6	403.3
30°	570.2	568.9	534.3	469.6	398.0	348.4	331.9	126.5	529.9
35°	447.2	456.9	450.2	394.1	307.5	246.5	227.0	114.9	644.8
40°	317.0	331.0	344.1	303.2	220.2	163.1	146.0	93.6	738.3
45°	213.9	226.3	244.1	214.7	147.7	105.6	94.0	70.6	808.9
50°	143.1	152.0	166.9	144.8	97.7	70.8	64.1	51.5	860.4
55°	96.6	102.1	111.9	95.1	64.8	49.7	46.3	37.0	897.4
60°	67.0	69.6	74.2	63.4	44.8	36.0	34.5	26.8	924.2
65°	49.0	49.5	50.0	42.8	32.0	26.6	25.7	19.7	943.9
70°	37.9	37.0	34.4	29.4	23.3	19.5	18.8	14.8	958.7
75°	30.5	28.7	24.6	20.4	16.6	13.6	12.7	11.1	969.8
80°	24.8	22.7	18.1	14.1	11.2	8.8	7.6	8.2	978.0
85°	19.7	17.8	13.4	9.8	7.1	4.8	3.4	5.9	983.8
90°	14.9	13.4	9.7	6.4	4.0	1.9	0.4	3.9	987.8
95°	12.2	11.1	8.2	5.4	3.1	1.2	0.3	3.2	991.0
100°	10.0	9.2	6.9	4.5	2.4	0.7	0.3	2.6	993.6
105°	8.2	7.6	5.7	3.6	1.7	0.4	0.3	2.1	995.6
110°	6.8	6.2	4.6	2.7	1.1	0.3	0.3	1.6	997.2
115°	5.5	5.0	3.7	2.0	0.7	0.4	0.4	1.2	998.4
120°	4.3	3.8	2.7	1.4	0.6	0.5	0.5	0.9	999.3
125°	3.1	2.7	1.8	0.9	0.6	0.6	0.6	0.6	1000.0
130°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
135°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
140°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
145°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
150°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
155°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
160°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
165°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
170°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
175°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Licross® 21 Protected	Order number: 52TP12DN4A5G3S4 EAN: 4058352908365	LP number 58524_255
----------------------------------------	-------------------------------------------------------------------	-------------------------------

UGR-Table	Standard room	siteco
------------------	----------------------	---------------

Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	View crosswise (C0)					View endwise (C90)					
x	y										
2H	2H	21.5	22.9	21.9	23.2	23.6	18.2	19.7	18.6	20.0	20.3
	3H	21.9	23.2	22.3	23.5	23.9	18.6	19.9	19.0	20.2	20.6
	4H	22.2	23.3	22.6	23.7	24.0	18.8	20.0	19.1	20.3	20.7
	6H	22.5	23.5	22.9	23.9	24.3	18.9	20.0	19.3	20.4	20.7
	8H	22.7	23.6	23.1	24.0	24.4	19.0	20.0	19.4	20.4	20.8
	12H	22.9	23.7	23.3	24.1	24.5	19.0	19.9	19.4	20.3	20.7
4H	2H	21.6	22.8	22.0	23.1	23.5	18.8	19.9	19.2	20.3	20.7
	3H	22.1	23.1	22.5	23.5	23.9	19.3	20.2	19.7	20.6	21.0
	4H	22.4	23.3	22.9	23.7	24.2	19.5	20.4	19.9	20.8	21.2
	6H	22.9	23.6	23.3	24.0	24.5	19.7	20.4	20.1	20.9	21.3
	8H	23.1	23.8	23.6	24.2	24.7	19.7	20.4	20.2	20.9	21.4
	12H	23.4	23.9	23.9	24.4	24.9	19.8	20.4	20.3	20.9	21.4
8H	4H	22.5	23.2	22.9	23.6	24.1	19.7	20.4	20.2	20.8	21.3
	6H	23.0	23.5	23.4	24.0	24.5	20.0	20.5	20.5	21.0	21.5
	8H	23.3	23.8	23.8	24.3	24.8	20.1	20.6	20.6	21.1	21.6
	12H	23.7	24.1	24.2	24.6	25.1	20.2	20.6	20.7	21.1	21.7
12H	4H	22.5	23.1	22.9	23.5	24.0	19.8	20.3	20.3	20.8	21.3
	6H	23.0	23.5	23.5	23.9	24.5	20.1	20.5	20.6	21.0	21.6
	8H	23.3	23.7	23.8	24.2	24.8	20.2	20.6	20.8	21.1	21.7


Luminance table	Max. for $\gamma \geq 65^\circ$	Photometric dimensions in mm:	L = 1480	H(C0) = 13	H(C180) = 13
			B = 78	H(C90) = 0	H(C270) = 0

C-planes	γ	Luminance in cd/m ²							
		0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°	
	45°	24036.6	25546.1	27960.5	25173.6	17868.7	13272.2	12326.4	
	50°	17210.8	18390.7	20539.7	18313.4	12816.2	9706.5	9237.2	
	55°	12603.7	13410.2	14988.2	13153.6	9358.6	7559.9	7483.1	
	60°	9643.9	10088.0	11007.4	9757.5	7249.8	6216.2	6388.3	
	65°	7923.8	8075.9	8366.3	7485.3	5949.0	5348.6	5636.3	
	70°	7046.3	6959.3	6684.5	6024.2	5128.5	4732.6	5084.3	
	75°	6736.3	6425.9	5715.8	5078.7	4528.3	4197.3	4565.0	
	80°	6809.9	6338.9	5319.0	4512.7	4074.5	3764.9	4058.3	
	85°	7199.8	6652.9	5395.3	4424.7	3892.8	3441.1	3664.8	

Photometric test report

Family Licross® 21 Protected	Order number: 52TP12DN4A5G3S4 EAN: 4058352908365	LP number 58524_255
----------------------------------------	-------------------------------------------------------------------	--------------------------------------

Luminance values in cd/m² γ 65° γ 70° γ 75° γ 80° γ 85° **siteco**

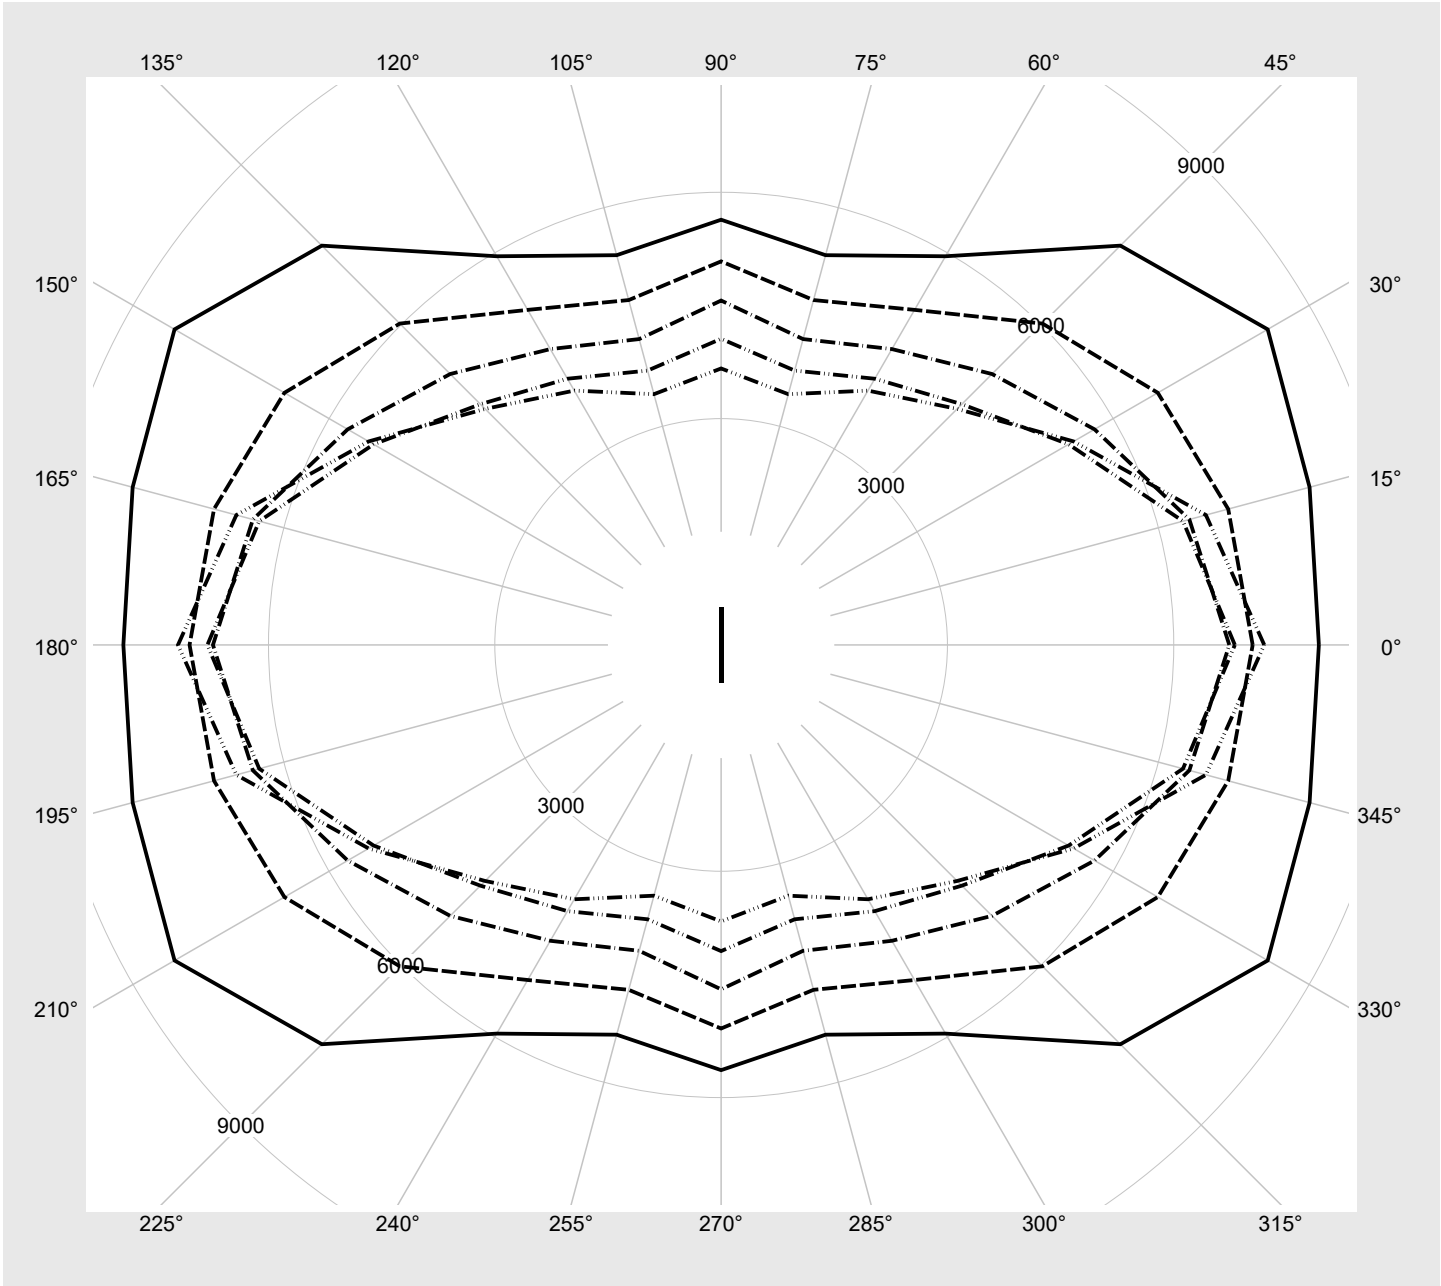

Photometric test report

Family Licross® 21 Protected	Order number: 52TP12DN4A5G3S4 EAN: 4058352908365	LP number 58524_255
----------------------------------------	-------------------------------------------------------------------	--------------------------------------

Dimming levels table	environmental temperature: 25°C	sITeco
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	----	----	----	----
100	253	254	10662	65.6
95	240	252	10162	62.4
90	226	250	9618	58.9
85	213	248	9106	55.7
80	199	245	8548	52.3
75	186	243	8024	49.3
70	173	240	7495	46.1
65	160	237	6962	43.0
60	147	234	6424	39.9
55	134	231	5880	36.8
50	121	227	5331	33.7
45	109	223	4821	30.9
40	96	218	4261	27.9
35	84	213	3740	25.2
30	72	208	3214	22.4
25	60	201	2684	19.7
20	48	193	2151	16.8
15	36	182	1616	14.0
10	24	168	1076	11.3
5	12	142	532	8.7
2	4	102	166	6.9