




Photometric test report

Family Floodlight FL11	Order number: 5XA779224Q01AA EAN: 4058352537855	LP number 59465_31
	Version standard bracket Optic symmetric distribution RS4 Cover toughened safety glass Lamps LED 5700 K CRI ≥ 90 Controlgear ECG-DMX Rated values Ta = 10 °C Net luminous flux = 139160 lm Power consumption = 1334.7 W Luminous efficacy = 104.3 lm/W	serial documentation 06.09.2023
		

Luminous intensity in cd/klm C180-0 C185-5 C270-90 **Imax: 28210 cd/klm**

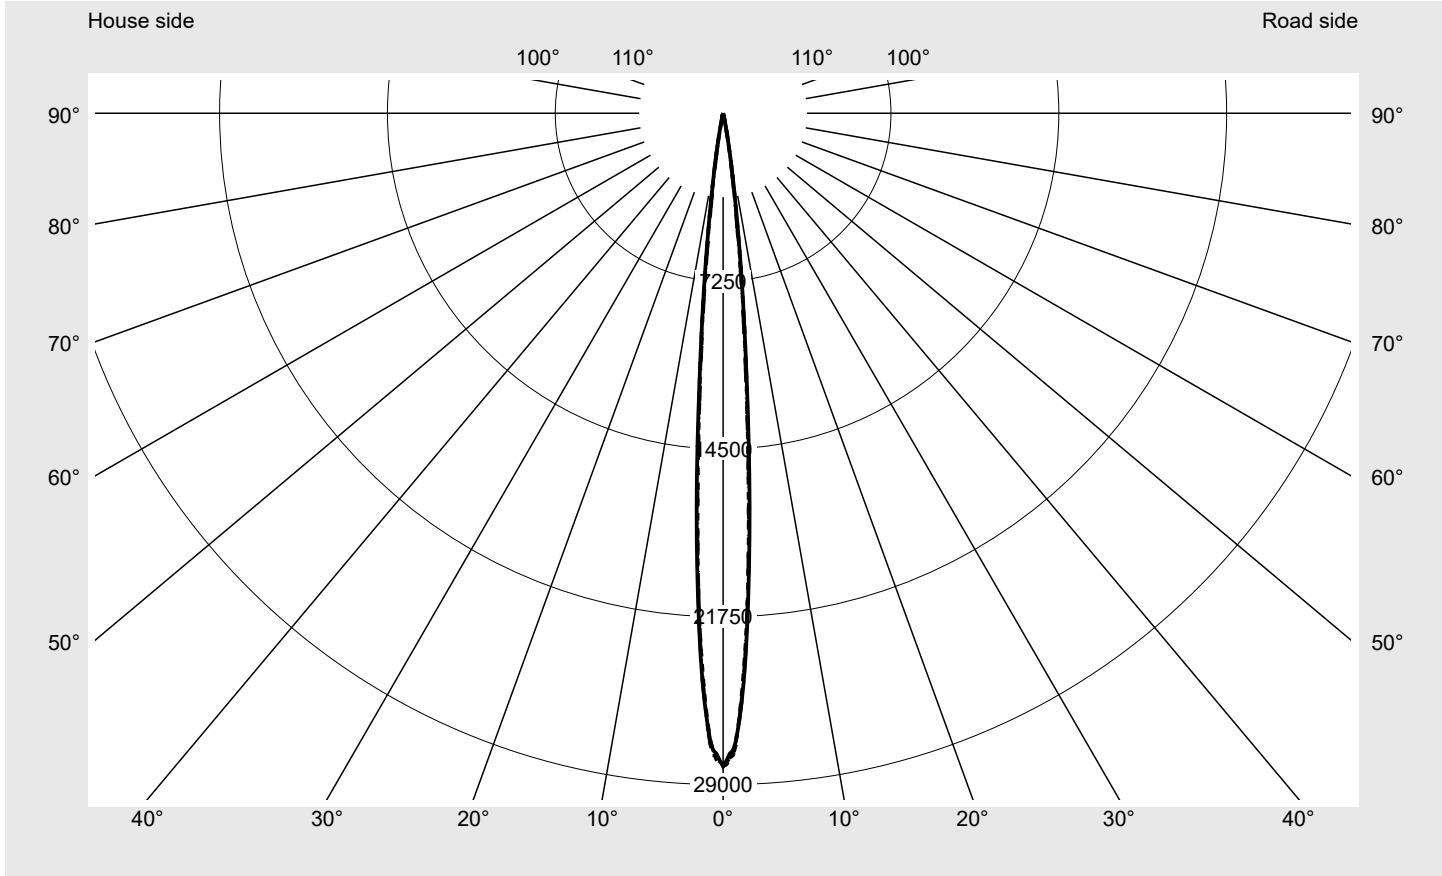

Luminaire output ratios	
Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%


Luminous intensity class acc. to EN13201-2	
Class:	G6
Imax 70°	14.0
Imax 80°	6.3
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0

Measurement conditions
DIN EN 13032 and DIN 5032

Photometric test report

Family Floodlight FL11	Order number: 5XA779224Q01AA EAN: 4058352537855	LP number 59465_31
---	--	-------------------------------------

Envelope curve in cd/klm **KMK 0°** **siteco**

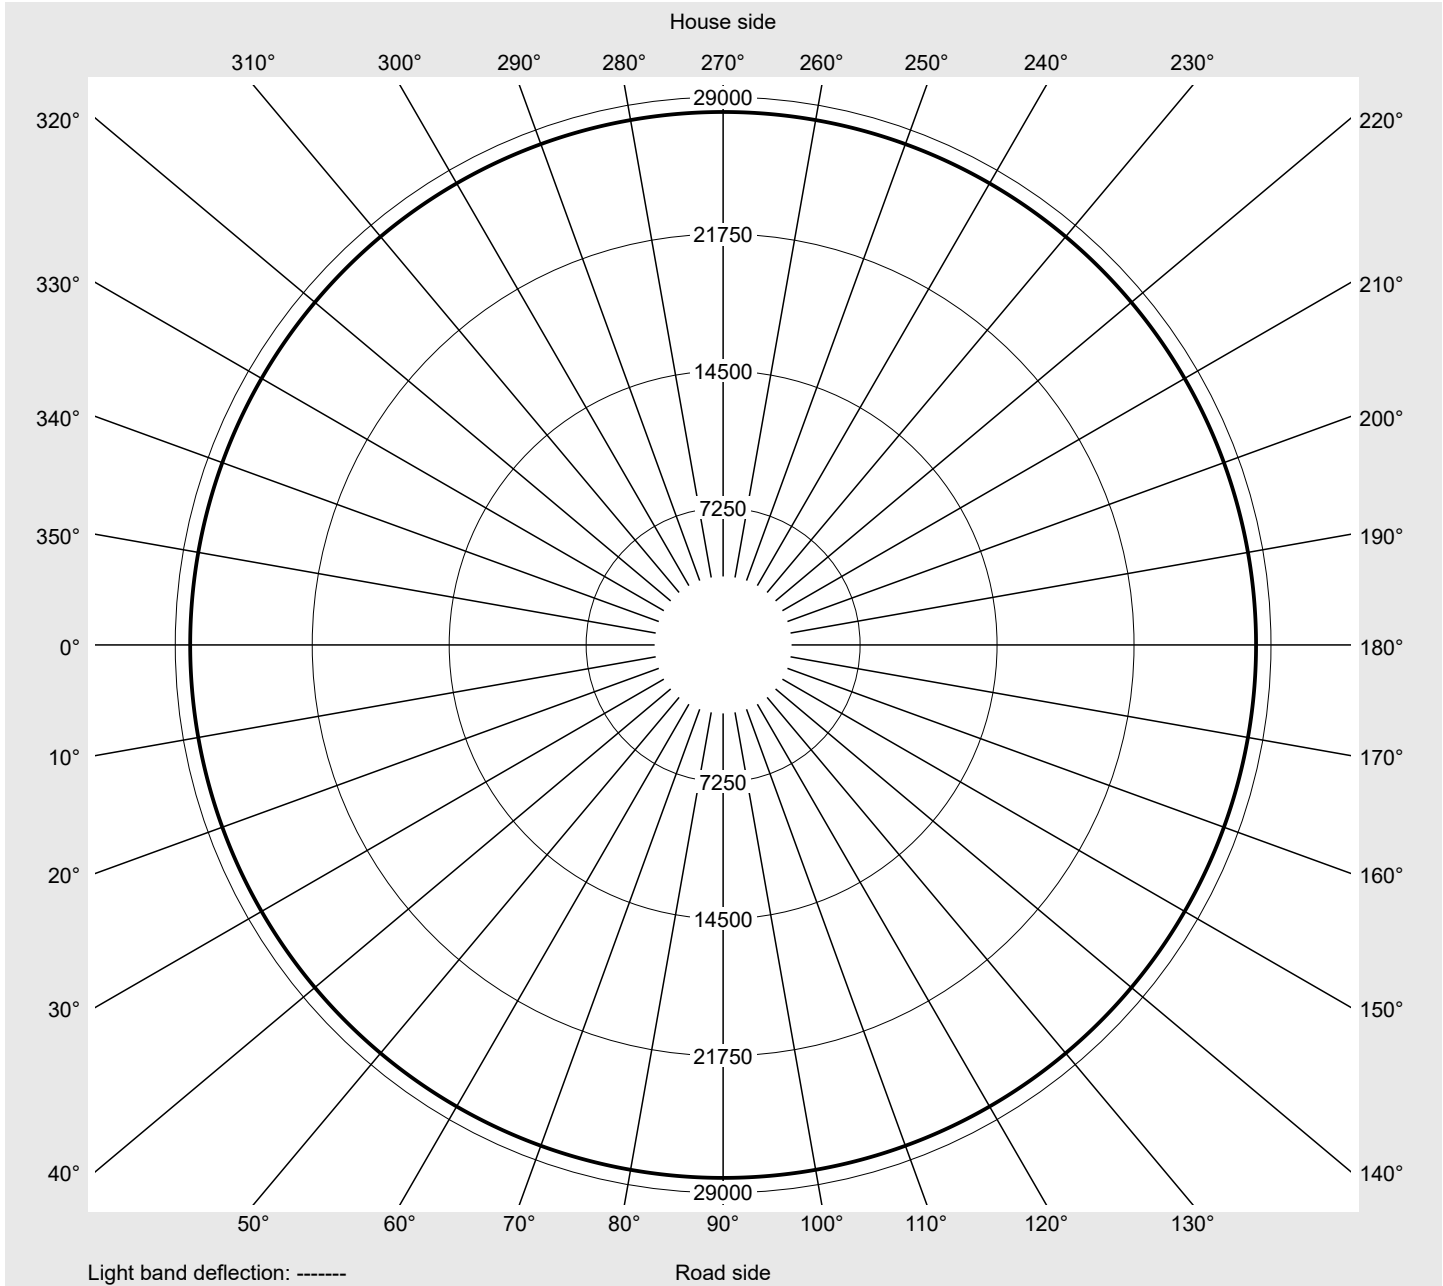

Photometric test report

Family Floodlight FL11	Order number: 5XA779224Q01AA EAN: 4058352537855	LP number 59465_31
----------------------------------	--	------------------------------

siteco

Table of values for luminous intensities	Maximum luminous intensity
---	-----------------------------------

C- planes	0° 180°	5°	10°	15°	20°	25°	30°	35°	40°	45°
		175° 185° 355°	170° 190° 350°	165° 195° 345°	160° 200° 340°	155° 205° 335°	150° 210° 330°	145° 215° 325°	140° 220° 320°	135° 225° 315°
γ Luminous intensity in cd/klm										
0,0°	28210.3	28210.3	28210.3	28210.3	28210.3	28210.3	28210.3	28210.3	28210.3	28210.3
0,5°	27726.4	27992.9	27732.1	27998.7	27737.9	27998.7	27806.6	28024.5	27769.4	28041.7
1,0°	27422.6	27414.0	27448.4	27422.6	27457.0	27425.5	27474.2	27448.4	27497.1	27459.9
1,5°	26299.1	26233.2	26310.6	26230.3	26293.4	26233.2	26307.7	26247.5	26304.8	26241.8
2,0°	24825.9	24522.1	24828.8	24519.3	24814.5	24522.1	24817.3	24530.7	24820.2	24507.8
3,0°	20807.7	20566.9	20773.3	20544.0	20764.7	20532.6	20779.0	20509.6	20704.5	20446.6
4,0°	16330.9	15663.1	16276.4	15645.9	16276.4	15654.5	16279.3	15640.2	16219.1	15562.8
5,0°	11768.1	11581.8	11791.0	11587.5	11822.6	11636.3	11854.1	11639.1	11831.2	11587.5
6,0°	8292.1	8219.9	8314.2	8256.9	8373.5	8328.5	8438.6	8383.8	8459.2	8324.2
7,0°	5582.5	5471.9	5600.0	5524.1	5688.9	5639.0	5786.3	5693.7	5780.9	5655.3
8,0°	3591.2	3538.2	3625.9	3604.7	3746.5	3755.1	3895.3	3890.4	3964.4	3889.8
9,0°	2245.3	2224.9	2278.2	2284.3	2371.7	2403.5	2516.7	2564.6	2651.1	2631.9
10,0°	1313.2	1276.5	1338.2	1349.3	1427.9	1501.0	1557.7	1589.8	1666.3	1658.6
15,0°	153.9	151.5	153.7	151.9	156.5	156.8	163.2	163.9	170.4	168.4
20,0°	72.2	70.0	71.4	68.3	69.2	66.5	67.8	65.4	67.4	65.1
30,0°	34.1	34.1	34.1	33.8	33.0	33.3	33.6	33.3	33.1	33.0
45,0°	34.6	33.0	33.8	34.0	33.6	32.5	32.0	31.3	31.1	31.4
60,0°	22.8	23.3	24.9	26.3	21.8	19.9	18.9	18.6	19.2	19.1
75,0°	10.0	9.2	8.5	8.2	8.6	8.9	8.8	8.1	8.3	8.2
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Floodlight FL11	Order number: 5XA779224Q01AA EAN: 4058352537855	LP number 59465_31
----------------------------------	--	------------------------------

sitEco

Table of values for luminous intensities	Maximum luminous intensity
---	-----------------------------------

C-planes	50°	55°	60°	65°	70°	75°	80°	85°	90°	Phi-zone	Total Phi-zone	
	130°	125°	120°	115°	110°	105°	100°	95°				
	230°	235°	240°	245°	250°	255°	260°	265°	270°			
	310°	305°	300°	295°	290°	285°	280°	275°				
γ	Luminous intensity in cd/klm										Luminous flux in lm/klm	
0,0°	28210.3	28210.3	28210.3	28210.3	28210.3	28210.3	28210.3	28210.3	28210.3	28210.3	1.7	1.7
0,5°	27786.6	28067.5	27806.6	28093.3	27849.6	28119.0	27869.7	28127.6	27881.2	27881.2	13.4	15.0
1,0°	27508.6	27479.9	27534.4	27500.0	27563.0	27520.0	27586.0	27525.8	27606.0	27606.0	26.3	41.4
1,5°	26276.2	26244.6	26313.4	26250.4	26299.1	26253.2	26310.6	26244.6	26310.6	26310.6	37.7	79.1
2,0°	24780.1	24487.7	24794.4	24464.8	24774.3	24447.6	24765.7	24433.3	24757.1	24757.1	75.2	154.2
3,0°	20650.1	20377.8	20578.4	20309.0	20532.6	20248.8	20483.8	20223.0	20498.2	20498.2	117.9	272.1
4,0°	16150.3	15462.5	16024.2	15319.2	15909.6	15175.9	15815.0	15135.7	15809.3	15809.3	120.8	392.9
5,0°	11742.3	11438.5	11553.1	11243.6	11372.6	11108.9	11240.7	11011.5	11229.3	11229.3	110.2	503.1
6,0°	8299.9	8174.0	8239.1	7966.3	8043.3	7775.1	7897.2	7682.8	7869.1	7869.1	93.8	596.9
7,0°	5698.3	5534.7	5550.7	5338.6	5313.1	5085.6	5105.3	4937.1	5017.9	5017.9	73.3	670.2
8,0°	3904.7	3783.2	3740.8	3552.5	3466.2	3283.9	3249.3	3152.1	3198.0	3198.0	55.5	725.6
9,0°	2617.3	2503.8	2416.7	2267.6	2190.8	2085.1	2056.4	2005.7	2022.3	2022.3	40.2	765.9
10,0°	1658.6	1560.9	1502.1	1391.0	1340.3	1263.2	1226.7	1184.2	1181.6	1181.6	89.8	855.6
15,0°	168.9	158.6	154.8	146.8	144.7	139.0	139.0	135.4	137.1	137.1	21.8	877.4
20,0°	66.6	64.0	65.5	63.5	65.0	63.1	65.0	63.3	65.2	65.2	19.8	897.2
30,0°	33.1	33.2	33.5	33.1	32.6	32.6	32.6	32.7	32.7	32.7	23.6	920.8
45,0°	31.1	30.9	31.1	31.2	31.6	31.8	31.5	30.8	31.6	31.6	37.1	957.9
60,0°	19.1	18.6	18.5	18.2	18.0	21.1	20.5	19.4	19.2	19.2	28.9	986.8
75,0°	8.0	7.6	8.3	8.3	8.0	7.6	7.7	8.2	8.7	8.7	13.2	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Floodlight FL11	Order number: 5XA779224Q01AA EAN: 4058352537855	LP number 59465_31
----------------------------------	--	------------------------------

Dimming levels table	environmental temperature: 10°C	sITeco
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Luminous flux [lm]	Power consumption [W]
100	255	139160	1334.7
95	235	132387	1226.5
90	217	125348	1129.2
85	201	118317	1043.2
80	185	111497	956.9
75	170	104475	876.6
70	157	97562	807.7
65	143	90515	734.2
60	130	83589	666.3
55	118	76257	604.3
50	104	69492	531.4
45	93	62510	475.0
40	82	55881	419.1
35	71	49021	362.6
30	60	41817	307.0
25	49	35182	251.7
20	39	27998	202.4
15	28	20563	148.6
10	19	13982	104.3
5	9	6982	56.1
1	2	1885	20.5

Dimming levels table	environmental temperature: 25°C
-----------------------------	---------------------------------

Luminous flux %	Dimming level linear	Luminous flux [lm]	Power consumption [W]
100	----	----	----
95	----	----	----
90	213	119643	1099.8
85	197	113056	1014.0
80	181	106278	928.2
75	166	99727	848.6
70	152	93063	775.0
65	139	86402	707.2
60	126	79505	640.3
55	115	73177	582.0
50	101	66434	510.9
45	90	59622	455.3
40	79	53076	399.7
35	68	46417	343.7
30	58	39806	293.8
25	47	33023	239.3
20	37	26380	190.5
15	27	19664	141.9
10	18	13412	98.2
5	9	6919	55.5
1	2	1870	20.2

Photometric test report

Family Floodlight FL11	Order number: 5XA779224Q01AA EAN: 4058352537855	LP number 59465_31
----------------------------------	--	------------------------------

Luminousfluxs table



Temperature °C	Luminous flux lm	Power consumption W
10.0	139160.0	1334.7
25.0	120230.0	1109.4