

## Photometric test report

Family  
DL® 20 LED

Order number: 5XA512832A008  
EAN: 4058352546314

LP number  
59487\_24



Version	post-top mounting
Optic	asymmetric, wide distribution (ST1.2a)
Cover	toughened safety glass
Lamps	LED 2200 K   CRI ≥ 70
Controlgear	ECG Plus
Rated values	Net luminous flux = 3020 lm Power consumption = 30.4 W Luminous efficacy = 99.3 lm/W

serial  
documentation  
07.12.2023

siteco

Luminous intensity in cd/klm


C180-0

C205-25

C210-30

C270-90

Imax: 411 cd/klm

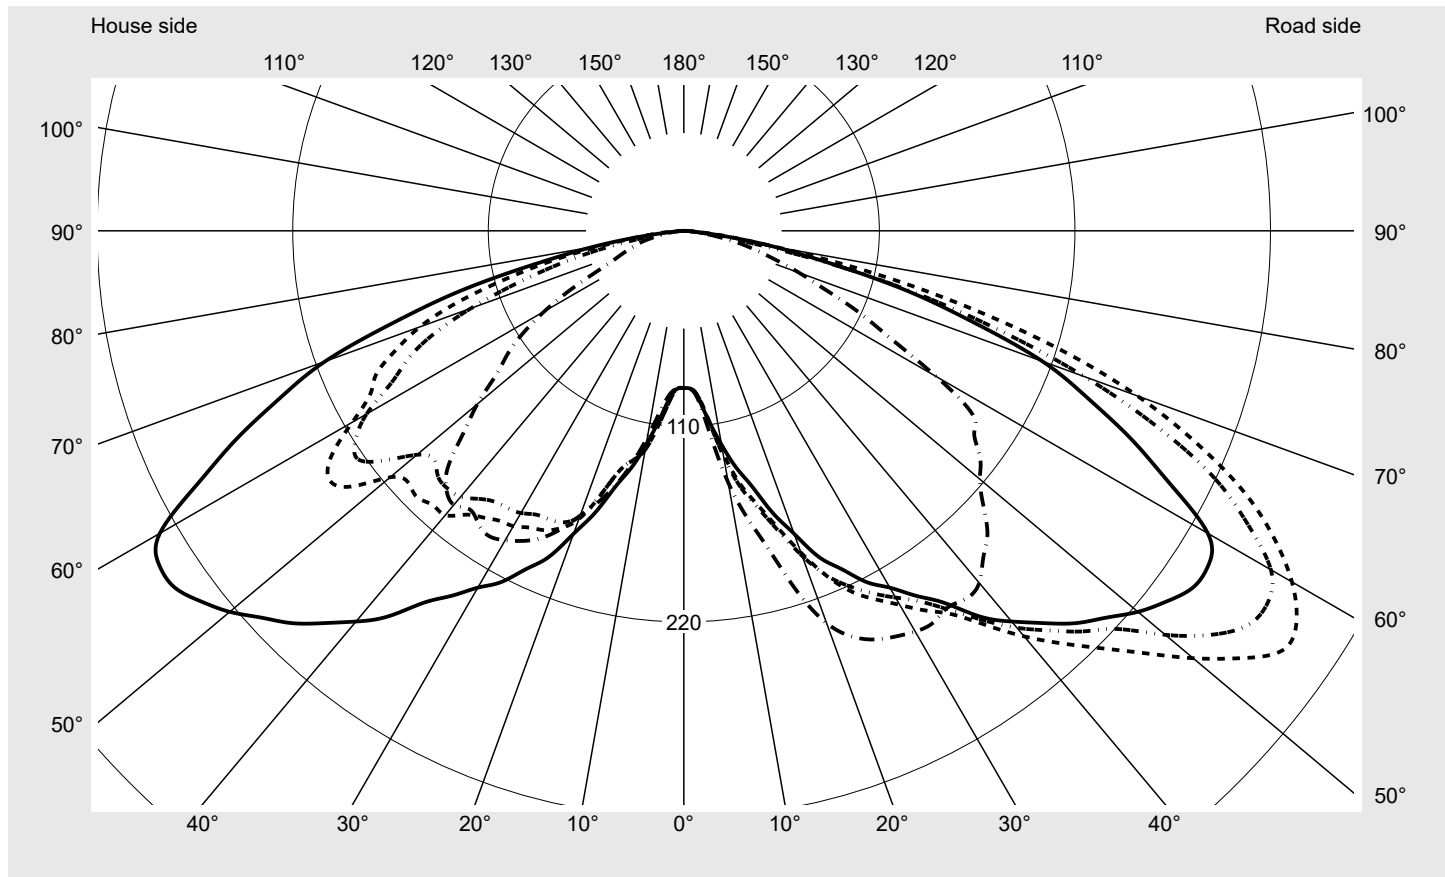

#### Luminaire output ratios

Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%

#### Luminous intensity class acc. to EN13201-2

Class:	G6
Imax 70°	272.5
Imax 80°	53.2
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0


#### Measurement conditions

DIN EN 13032 and DIN 5032

**Photometric test report**

<b>Family</b> <b>DL® 20 LED</b>	<b>Order number: 5XA512832A008</b> <b>EAN: 4058352546314</b>	<b>LP number</b> <b>59487_24</b>
------------------------------------	---	-------------------------------------

**Envelope curve in cd/klm**      **KMK 55°**    **KMK 52,5°**    **KMK 50°**    **KMK 47,5°**      **siteco**

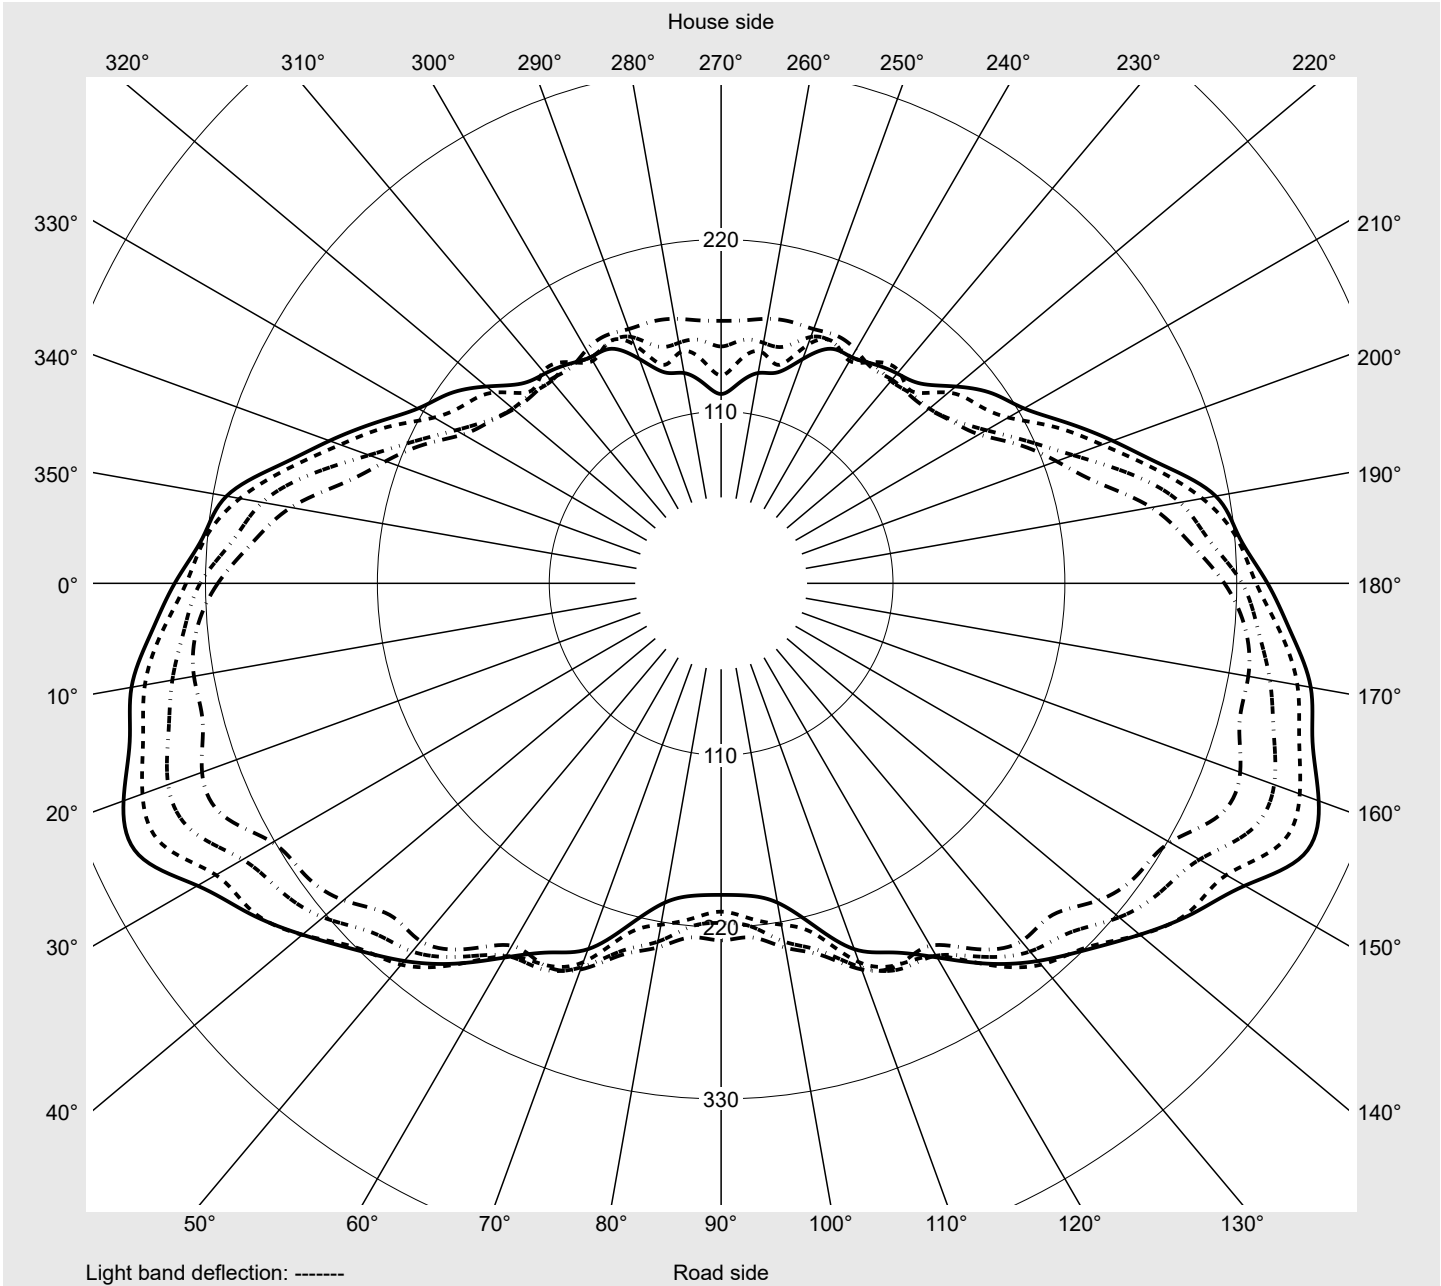

## Photometric test report

<b>Family</b> <b>DL® 20 LED</b>	<b>Order number: 5XA512832A008</b> <b>EAN: 4058352546314</b>	<b>LP number</b> <b>59487_24</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
		<b>siteco</b>

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	88.5	88.5	88.5	88.5	88.5	88.5	88.5	88.5	88.5	88.5	88.5	88.5	88.5
2,5°	89.1	88.8	88.7	88.8	88.8	88.8	89.0	89.0	88.9	89.0	89.1	89.2	89.2
5,0°	95.0	95.0	94.4	94.2	94.0	93.8	93.8	93.9	94.0	94.2	94.4	94.7	95.0
7,5°	107.9	107.4	106.9	107.2	107.3	107.3	108.0	108.7	109.4	110.4	111.2	112.2	113.4
10,0°	122.1	122.9	123.4	124.9	125.9	126.9	128.8	129.7	130.6	132.5	133.3	134.4	136.6
12,5°	136.6	137.9	140.2	142.4	143.9	145.6	147.8	148.0	148.8	150.6	150.3	151.3	153.8
15,0°	149.2	151.9	154.9	157.0	157.6	159.3	161.5	161.8	163.4	166.0	166.0	167.2	170.6
17,5°	166.4	168.4	171.4	172.3	172.7	174.8	177.1	179.2	183.1	187.2	189.2	191.7	195.8
20,0°	181.4	185.4	188.4	189.2	190.3	192.7	194.5	196.9	200.8	203.5	206.5	209.8	213.8
22,5°	198.6	202.0	205.4	206.2	208.6	210.1	209.8	210.1	211.3	211.7	215.4	219.4	223.3
25,0°	209.9	214.8	217.9	219.7	223.8	224.1	220.7	219.6	218.7	217.8	221.6	226.1	230.2
27,5°	222.8	227.4	229.3	230.9	235.0	233.7	229.8	228.3	225.1	225.2	228.7	232.4	236.4
30,0°	231.8	237.9	239.9	240.8	243.6	243.0	238.2	235.4	233.0	231.6	236.0	239.0	242.0
32,5°	243.5	250.4	252.6	251.0	253.2	253.3	247.2	244.2	243.2	239.9	241.4	243.5	247.4
35,0°	255.5	265.0	265.7	263.7	263.4	263.4	260.3	256.0	255.8	250.0	249.8	250.7	250.1
37,5°	273.4	285.9	282.5	279.6	280.8	279.7	275.9	272.9	267.3	263.8	261.5	258.5	255.2
40,0°	286.9	301.4	304.8	299.5	300.3	297.8	291.5	288.8	281.6	272.6	267.6	264.3	260.5
42,5°	299.3	315.0	322.9	317.0	321.4	314.8	305.0	301.1	293.2	283.4	277.4	272.3	261.8
45,0°	312.1	322.8	330.4	331.6	333.3	332.1	318.6	307.2	298.2	289.6	283.1	273.2	261.4
47,5°	322.1	336.9	342.6	343.5	353.5	351.7	331.6	325.2	315.5	300.1	299.0	285.8	267.8
50,0°	333.4	345.0	356.7	366.1	376.7	374.0	353.5	343.8	332.6	316.0	307.6	291.8	275.2
52,5°	342.4	359.3	374.5	383.0	394.1	394.9	373.3	366.1	349.9	329.8	318.6	298.0	275.5
55,0°	349.7	366.3	383.2	391.9	407.0	411.3	387.0	368.5	349.8	331.5	315.5	297.1	276.5
57,5°	349.9	363.2	378.2	392.7	410.1	408.7	389.4	364.3	344.6	322.1	301.2	279.9	269.2
60,0°	340.4	354.4	369.2	386.1	402.5	395.0	381.3	354.5	330.9	303.2	275.1	253.3	247.9
62,5°	308.5	331.8	352.4	366.5	381.2	374.3	357.7	326.0	303.9	273.2	249.2	235.2	226.2
65,0°	278.1	300.7	316.7	333.1	343.1	347.8	329.5	296.4	276.9	248.5	224.6	215.0	195.2
67,5°	245.9	260.8	278.7	298.7	308.0	312.3	288.5	263.1	247.3	212.8	192.2	177.8	155.7
70,0°	214.7	218.9	232.0	256.8	272.5	271.5	240.0	222.3	211.1	170.2	150.1	136.7	118.2
72,5°	170.3	180.3	189.5	209.5	223.5	221.7	186.3	173.9	161.8	132.2	115.0	99.9	87.6
75,0°	129.4	136.2	139.7	150.5	162.7	164.5	134.2	124.1	119.8	94.3	76.8	68.9	63.7
77,5°	84.1	91.7	89.7	93.7	104.1	107.1	80.8	75.0	77.3	55.3	46.0	41.3	40.1
80,0°	51.7	51.9	48.0	46.2	49.9	53.2	33.9	36.4	41.0	24.0	23.0	22.8	23.5
82,5°	23.2	23.6	22.2	20.6	22.4	25.5	13.7	16.2	19.6	10.1	10.0	10.6	11.6
85,0°	6.0	6.0	6.0	6.0	7.3	10.7	5.4	7.3	9.1	4.5	4.3	4.4	4.7
87,5°	2.0	2.0	2.0	1.9	1.9	2.4	1.8	1.7	1.7	1.6	1.6	1.5	1.6
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

## Photometric test report

<b>Family</b> <b>DL® 20 LED</b>	<b>Order number: 5XA512832A008</b> <b>EAN: 4058352546314</b>	<b>LP number</b> <b>59487_24</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
<b>siteco</b>		

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	88.5	88.5	88.5	88.5	88.5	88.5	88.5	88.5	88.5	88.5	88.5	88.5	88.5
2,5°	89.3	89.3	89.4	89.4	89.3	89.2	88.9	88.9	89.1	89.0	89.1	89.2	89.1
5,0°	95.3	95.5	95.9	96.0	96.0	96.2	95.9	96.3	96.8	97.0	97.1	97.1	97.0
7,5°	114.1	114.8	115.9	116.2	116.5	116.9	108.5	109.1	109.9	110.3	110.7	111.0	111.0
10,0°	137.6	139.1	141.4	141.9	142.8	143.8	122.7	123.4	124.3	124.4	124.8	125.0	124.9
12,5°	154.6	156.8	160.6	161.9	163.9	165.6	135.1	134.1	134.2	133.1	132.3	132.2	132.0
15,0°	171.6	174.9	179.5	181.2	183.7	186.1	147.0	144.2	142.8	141.2	139.7	139.6	139.1
17,5°	197.6	201.3	206.8	208.7	210.9	213.3	163.3	160.1	158.5	157.4	156.2	155.7	154.2
20,0°	217.8	222.9	228.2	230.9	233.2	234.9	180.7	177.8	175.7	174.5	172.5	170.9	168.2
22,5°	229.6	235.6	240.4	244.8	246.9	247.0	195.8	192.5	188.2	185.5	181.1	177.5	174.5
25,0°	237.2	243.2	246.8	252.2	254.6	253.6	208.5	203.2	196.4	192.4	185.8	179.1	176.3
27,5°	243.6	249.3	251.5	257.0	259.0	257.3	219.9	212.2	204.1	197.0	188.2	180.0	177.5
30,0°	248.1	251.6	253.3	258.6	261.3	260.3	229.3	219.8	210.1	200.7	191.8	183.3	179.4
32,5°	250.8	253.5	256.5	260.6	261.5	261.3	238.2	230.6	217.0	205.1	193.4	184.8	178.6
35,0°	251.6	255.3	258.9	260.7	259.9	258.7	248.7	239.2	223.2	209.3	196.9	185.9	180.1
37,5°	255.6	257.3	260.4	261.7	259.4	260.9	260.3	247.0	231.5	217.8	201.3	190.0	182.0
40,0°	262.6	262.4	261.7	260.2	260.1	258.5	274.1	257.4	239.5	223.2	208.8	195.3	186.1
42,5°	267.2	267.0	258.6	253.4	249.5	249.3	283.3	267.7	246.0	225.6	209.2	196.7	189.5
45,0°	266.6	267.0	254.6	243.7	238.6	241.5	295.2	268.4	246.4	227.0	212.1	195.5	185.0
47,5°	269.3	263.0	246.2	236.8	227.5	228.5	301.0	279.6	249.3	228.5	210.0	190.6	180.6
50,0°	272.3	261.4	243.3	232.9	220.5	217.4	313.7	298.2	270.9	239.8	215.7	196.0	181.8
52,5°	269.2	258.0	232.4	221.8	215.4	210.1	331.4	312.8	285.8	259.4	236.4	212.2	199.8
55,0°	260.7	249.2	226.1	207.5	200.7	199.4	333.1	321.4	292.5	266.7	243.6	223.9	211.9
57,5°	248.6	231.5	221.9	193.0	182.3	192.8	324.6	302.6	280.6	258.2	234.8	218.9	207.6
60,0°	233.2	208.6	194.3	174.6	161.0	163.9	308.1	283.8	270.6	239.5	215.3	206.0	191.9
62,5°	211.0	184.4	158.7	148.5	139.5	131.3	289.1	265.4	245.6	221.5	198.8	185.6	171.6
65,0°	183.8	160.4	128.4	126.1	118.6	108.9	260.0	241.7	221.3	205.2	190.9	171.6	151.9
67,5°	150.3	133.3	100.8	100.3	97.5	85.7	232.2	215.5	203.1	187.5	175.4	153.0	133.3
70,0°	112.0	99.3	77.8	78.8	76.7	69.1	203.4	186.8	176.9	170.2	157.9	127.3	116.4
72,5°	80.4	69.5	60.4	59.6	56.6	54.0	160.4	150.2	142.9	139.9	133.0	99.2	93.1
75,0°	56.7	48.6	47.0	44.1	42.0	41.9	116.1	110.2	104.7	106.2	102.0	73.1	64.7
77,5°	37.8	33.1	32.6	33.3	31.8	31.4	79.5	74.8	68.9	74.3	72.9	48.1	41.4
80,0°	22.8	20.7	20.9	21.4	20.8	19.9	47.3	43.9	37.9	40.3	43.4	23.3	22.9
82,5°	12.2	11.3	11.8	11.7	11.3	11.1	22.0	20.4	17.3	18.6	23.9	10.2	11.2
85,0°	4.8	4.8	5.1	5.0	4.9	4.9	6.0	6.3	6.0	7.2	12.1	5.2	4.9
87,5°	1.5	1.5	1.6	1.4	1.4	1.4	2.0	2.0	2.0	1.9	2.7	1.8	1.7
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

## Photometric test report

<b>Family</b> <b>DL® 20 LED</b>	<b>Order number: 5XA512832A008</b> <b>EAN: 4058352546314</b>	<b>LP number</b> <b>59487_24</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
		<b>sITeco</b>

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0,0°	88.5	88.5	88.5	88.5	88.5	88.5	88.5	88.5	88.5	88.5	88.5	0.1	0.1
2,5°	89.1	89.1	89.1	88.9	88.9	88.8	88.8	88.9	88.7	88.7	89.0	1.1	1.2
5,0°	96.7	96.5	95.9	95.4	94.8	94.1	93.6	93.2	92.5	92.2	92.5	2.3	3.5
7,5°	110.7	110.2	109.5	108.5	107.7	106.2	105.1	104.2	102.8	102.4	102.6	3.9	7.4
10,0°	124.4	124.2	123.3	122.5	122.0	120.4	119.3	119.1	117.7	117.2	117.7	6.1	13.4
12,5°	131.4	132.1	131.9	131.9	132.9	132.4	132.9	133.7	133.0	133.1	133.8	8.4	21.9
15,0°	138.2	139.3	140.1	140.5	142.3	143.0	144.5	146.4	146.4	147.1	148.1	11.0	32.8
17,5°	152.1	152.1	152.8	153.3	154.7	156.0	157.2	158.6	159.5	160.1	160.0	14.2	47.0
20,0°	165.1	163.1	163.5	164.0	164.6	167.1	169.2	170.3	172.0	171.6	170.5	17.7	64.7
22,5°	171.4	168.9	169.5	170.3	171.3	175.5	178.1	178.9	182.7	183.4	181.8	20.9	85.6
25,0°	173.5	170.8	172.7	173.5	174.3	180.2	184.0	185.0	189.9	192.6	190.8	24.0	109.6
27,5°	173.6	172.2	175.8	177.6	177.9	183.4	188.1	190.7	196.1	197.9	196.7	27.0	136.7
30,0°	174.9	173.5	178.6	182.9	182.9	186.9	190.4	194.2	199.7	201.4	201.0	30.0	166.6
32,5°	174.7	173.5	180.8	184.4	185.0	187.3	192.5	198.1	202.7	202.9	203.7	33.0	199.6
35,0°	173.3	174.4	181.5	185.6	186.5	188.3	194.2	199.5	201.8	202.1	201.4	36.0	235.6
37,5°	174.5	176.0	183.3	189.9	190.9	190.1	196.1	202.1	203.2	200.3	197.6	39.4	275.0
40,0°	179.5	179.6	185.1	190.4	191.5	192.3	198.9	202.1	203.8	202.5	201.2	42.9	317.9
42,5°	178.5	177.1	181.1	183.0	188.5	188.5	195.7	195.7	199.8	199.5	197.6	45.8	363.7
45,0°	175.1	173.4	176.1	178.1	178.3	181.1	188.7	188.0	187.8	189.1	187.5	48.1	411.8
47,5°	173.4	170.5	170.1	168.3	172.5	174.9	173.2	173.3	171.9	169.0	168.0	50.4	462.1
50,0°	174.0	171.7	169.1	170.4	167.0	169.8	167.8	156.9	156.3	156.3	151.6	53.4	515.6
52,5°	189.9	173.5	177.1	172.9	164.4	170.3	162.5	144.8	150.2	143.9	133.1	56.9	572.5
55,0°	196.0	180.8	175.3	171.1	167.1	165.6	152.8	139.8	136.7	128.5	121.2	58.9	631.4
57,5°	191.0	175.2	161.9	155.6	160.3	154.5	140.2	129.5	123.3	113.1	107.3	58.7	690.0
60,0°	175.3	161.7	143.8	142.2	148.1	140.1	125.6	115.5	107.1	96.7	90.5	56.5	746.5
62,5°	159.2	137.0	125.3	128.8	123.2	116.5	109.7	100.5	90.2	77.4	72.0	52.5	799.0
65,0°	141.4	119.2	106.0	111.5	96.4	90.6	93.7	78.0	66.1	58.5	53.7	47.7	846.7
67,5°	127.9	100.8	85.8	87.6	72.2	69.7	74.2	59.2	45.9	43.2	42.3	41.9	888.6
70,0°	110.1	75.8	59.5	66.7	46.1	47.3	55.7	42.1	35.2	35.4	35.7	35.2	923.8
72,5°	86.3	58.3	39.8	39.2	30.1	31.4	37.8	30.6	28.7	28.4	29.7	28.0	951.8
75,0°	65.3	44.3	27.1	24.2	23.7	23.4	26.2	25.4	23.9	23.5	24.8	20.7	972.5
77,5°	48.8	32.1	17.4	16.9	18.0	18.3	18.6	19.5	19.5	18.6	18.1	13.9	986.4
80,0°	31.4	16.4	10.7	11.3	12.5	13.5	13.2	13.7	13.9	13.2	12.3	7.8	994.2
82,5°	18.1	7.0	6.3	6.8	7.7	8.0	7.9	8.4	8.7	8.0	7.8	3.8	998.0
85,0°	9.0	3.6	3.4	3.4	3.8	3.8	3.7	3.8	3.9	3.7	3.5	1.5	999.5
87,5°	2.1	1.6	1.6	1.5	1.6	1.4	1.4	1.4	1.3	1.2	1.2	0.5	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

## Photometric test report

<b>Family</b> DL® 20 LED	<b>Order number: 5XA512832A008</b> <b>EAN: 4058352546314</b>	<b>LP number</b> <b>59487_24</b>
-----------------------------	---	-------------------------------------

<b>Dimming levels table</b>	environmental temperature: 25°C	<b>sITeco</b>
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Luminous flux [lm]	Power consumption [W] start of lifetime	Power consumption [W] end of lifetime	Power consumption [W] average
100	254	3020	30.4	31.3	30.8
95	241	2874	29.0	29.7	29.4
90	227	2715	27.3	28.0	27.6
85	214	2566	25.8	26.5	26.2
80	201	2417	24.3	24.9	24.6
75	188	2267	22.8	23.4	23.1
70	175	2116	21.3	21.8	21.6
65	162	1964	19.8	20.3	20.0
60	149	1811	18.4	18.8	18.6
55	136	1657	16.9	17.3	17.1
50	124	1513	15.5	15.9	15.7
45	111	1358	14.2	14.5	14.4
40	99	1213	12.9	13.1	13.0
35	86	1055	11.5	11.7	11.6
30	74	909	10.2	10.5	10.4
25	61	750	8.9	9.0	9.0
20	49	602	7.6	7.7	7.6
15	38	465	6.4	6.5	6.4