


Photometric test report

Family DL 11 iQ	Order number 5XA5565EY14HP00022 + 5XA54000XBXL	LP number 59426_83
Version	post-top- or mounting to wall arm, shielding on building side, Smart Interface up/down	serial documentation 18.03.2024
Optic	asymmetric, wide distribution (ST1.2a)	
Cover	cover transparent, PMMA	
Lamps	LED 3000 K CRI ≥ 70	
Controlgear	EVG SITECO iQ - Smart Interface	
Rated values	Net luminous flux = 4660 lm Power consumption = 33.5 W Luminous efficacy = 139.1 lm/W	siteco

Luminous intensity in cd/klm C180-0 C205-25 C210-30 C270-90 **Imax: 762 cd/klm**

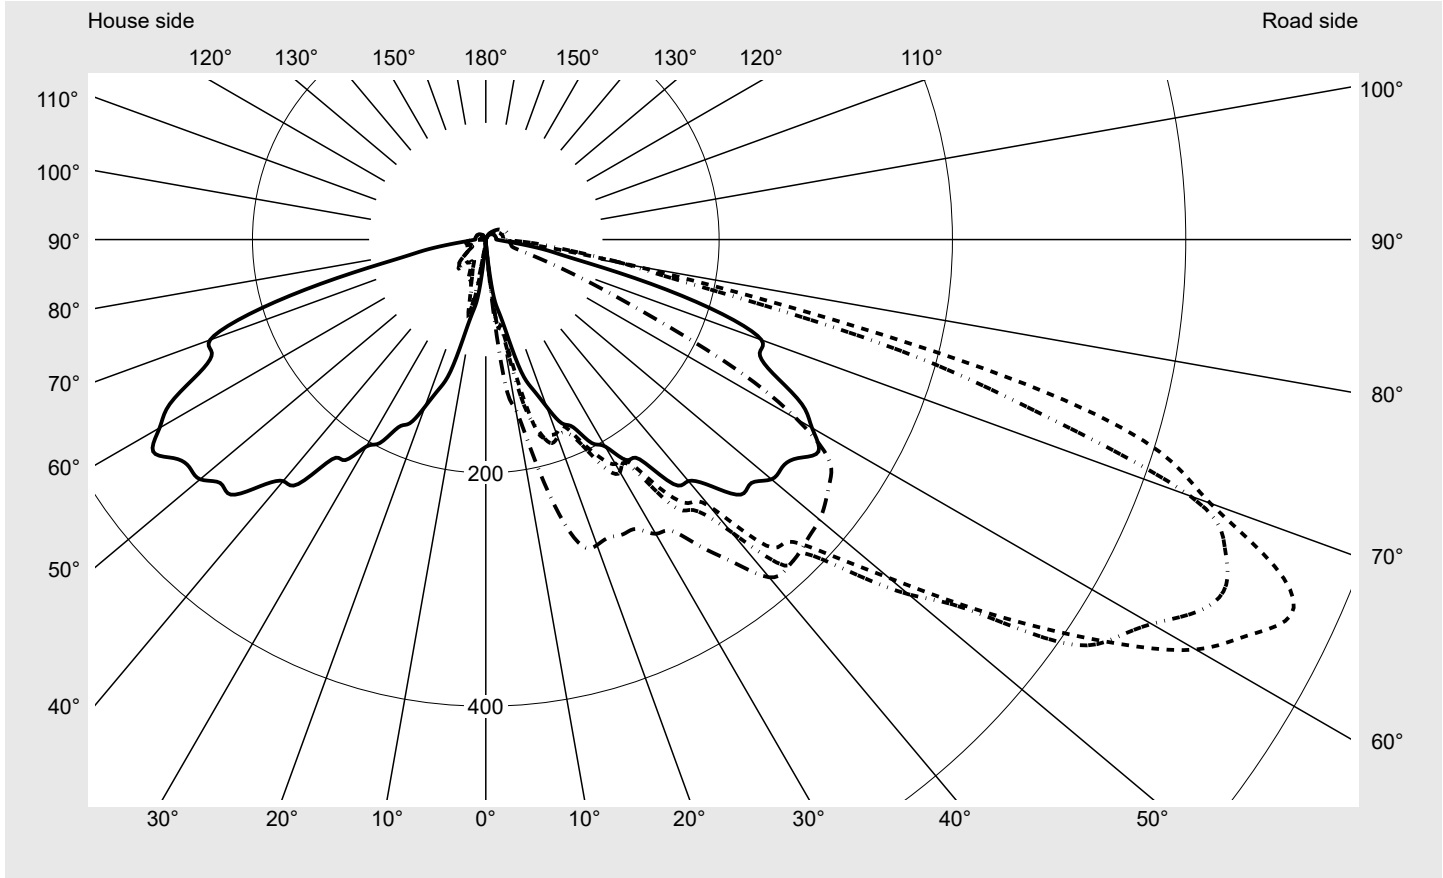

Luminaire output ratios

Eta	100.0%
Eta 0° - 90°	95.3%
Eta 90° - 180°	4.7%

Luminous intensity class acc. to EN13201-2

Class:	G1
Imax 70°	660.8
Imax 80°	154.4
Imax 90°	20.3
Imax >90°	20.3
Imax >95°	20.1


Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family DL 11 iQ	Order number 5XA5565EY14HP00022 + 5XA54000XBXL	LP number 59426_83
---------------------------	--	------------------------------

Envelope curve in cd/klm	KMK 65°	KMK 62,5°	KMK 60°	KMK 57,5°	siteco
---------------------------------	----------------	------------------	----------------	------------------	---------------

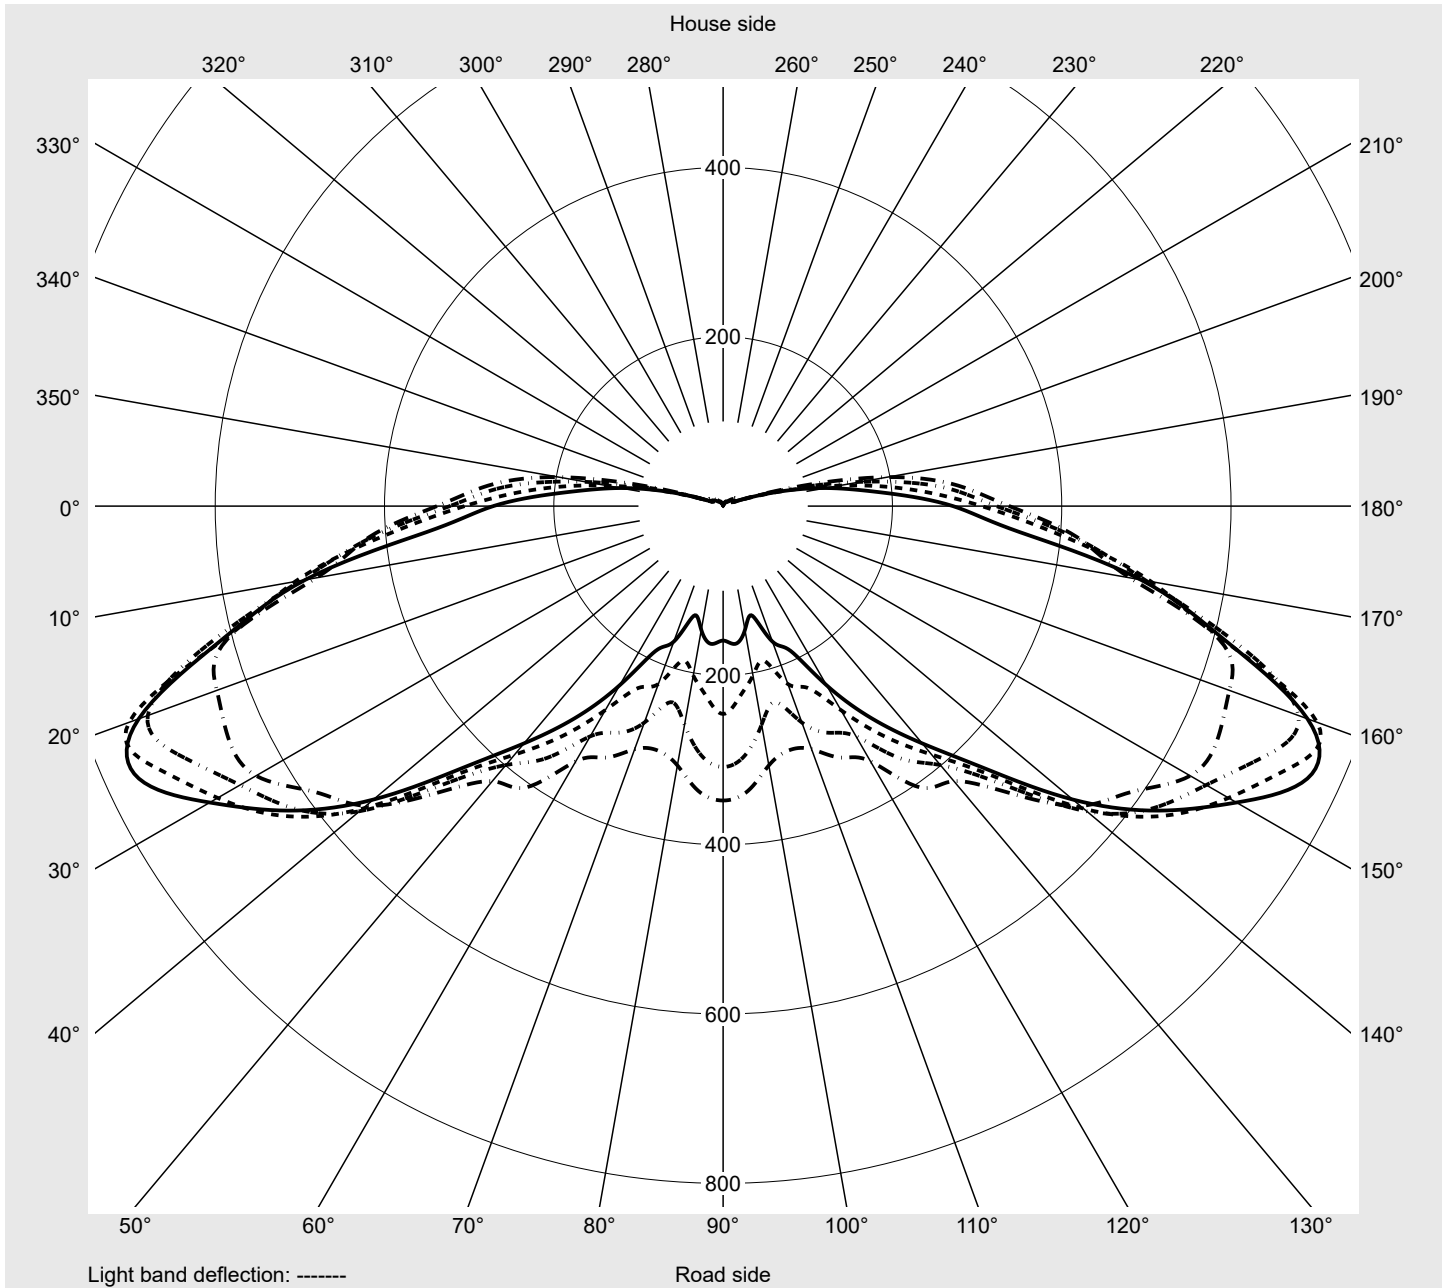

Photometric test report

Family DL 11 iQ	Order number 5XA5565EY14HP00022 + 5XA54000XBXL	LP number 59426_83
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0
2,5°	4.4	4.4	4.7	4.9	5.1	5.2	5.6	5.8	5.9	6.1	6.1	6.4	6.4
5,0°	9.7	11.2	12.9	14.1	15.4	17.9	21.2	24.7	27.1	29.6	30.8	31.3	31.2
7,5°	45.0	52.8	60.1	64.5	69.6	72.6	72.8	70.1	69.9	70.9	72.8	76.5	85.0
10,0°	62.1	66.5	68.9	72.8	75.3	75.5	77.5	83.3	91.4	105.8	119.2	126.1	132.6
12,5°	82.1	84.1	90.4	96.7	103.8	118.7	136.0	155.1	162.9	158.8	154.2	158.1	165.6
15,0°	117.2	121.9	138.5	149.0	162.4	170.2	166.8	172.5	178.6	179.8	180.5	186.6	190.3
17,5°	134.9	153.4	167.4	175.2	174.1	176.3	182.7	192.5	192.2	192.8	200.8	204.5	208.1
20,0°	152.5	162.5	166.6	173.4	177.3	176.8	180.1	177.9	188.8	192.3	195.2	202.3	209.3
22,5°	170.5	182.3	183.7	178.6	177.1	173.0	179.0	188.4	194.7	193.5	206.9	215.5	222.1
25,0°	177.6	181.5	195.7	193.7	197.9	189.3	193.4	202.7	209.4	214.9	219.1	231.1	245.5
27,5°	196.6	211.3	201.3	200.5	202.7	209.6	220.3	223.5	231.4	234.5	245.8	254.0	266.0
30,0°	204.9	212.0	221.5	215.2	215.7	222.1	230.1	252.1	257.5	261.6	270.2	284.8	292.2
32,5°	224.2	227.6	220.4	221.8	222.5	224.5	229.1	248.2	268.9	281.7	290.5	304.3	309.7
35,0°	229.9	237.4	247.2	237.2	249.2	260.2	278.0	295.6	305.6	326.4	332.9	335.4	343.5
37,5°	264.1	262.1	254.5	264.3	275.1	284.8	292.2	315.6	334.2	343.5	360.6	362.7	368.4
40,0°	270.2	270.7	270.1	268.4	277.3	298.5	326.8	342.9	362.2	376.7	378.2	391.4	396.5
42,5°	287.0	288.5	300.2	304.9	323.7	355.7	379.1	396.0	407.4	422.1	421.9	420.9	412.6
45,0°	309.2	301.5	308.8	309.3	329.1	366.2	380.3	411.3	434.8	448.2	453.8	431.7	430.9
47,5°	308.8	309.2	323.6	337.8	358.6	400.1	419.6	450.9	455.4	456.8	461.4	445.3	443.3
50,0°	319.7	342.0	368.4	399.2	393.8	451.2	473.1	485.8	468.7	461.5	458.7	444.6	432.1
52,5°	320.3	368.9	398.4	476.6	470.9	514.0	520.5	525.9	498.4	481.9	459.0	446.3	414.3
55,0°	326.6	395.0	425.6	538.7	556.5	579.5	602.2	555.0	535.9	486.6	451.6	431.7	375.9
57,5°	338.1	419.6	488.0	606.1	636.4	645.4	637.1	588.7	550.8	479.5	424.1	405.7	348.1
60,0°	322.9	415.5	507.3	629.2	723.3	702.8	659.0	621.5	560.8	463.4	399.2	363.3	314.1
62,5°	305.4	402.1	513.3	612.1	746.8	735.5	689.4	637.5	556.0	450.7	383.1	331.8	278.2
65,0°	271.6	351.5	501.2	614.6	734.6	761.6	700.3	627.1	539.3	438.9	365.9	306.1	244.3
67,5°	254.1	307.3	450.7	571.3	709.1	731.9	685.4	611.9	514.7	406.5	341.7	278.2	208.1
70,0°	251.4	326.1	450.5	563.1	644.7	660.8	642.5	541.6	452.2	369.9	306.8	245.5	179.1
72,5°	212.8	328.5	389.6	530.8	607.8	606.1	503.0	453.1	364.9	290.2	232.6	189.8	151.9
75,0°	146.5	260.4	336.6	456.0	486.6	479.5	368.1	318.6	216.5	190.6	183.7	170.3	141.9
77,5°	81.4	146.5	219.6	291.4	322.2	266.2	195.4	173.2	146.3	131.2	131.4	131.4	122.1
80,0°	54.0	73.5	108.7	132.1	154.4	127.7	122.8	133.6	104.0	75.5	57.7	51.3	60.3
82,5°	30.8	39.8	45.0	58.1	67.4	57.2	73.7	95.3	78.9	50.5	31.5	27.4	22.5
85,0°	16.9	19.0	17.8	17.6	18.3	24.9	47.6	58.2	45.0	29.5	23.5	21.5	20.1
87,5°	11.7	12.2	13.2	14.4	16.6	19.8	25.2	27.3	22.2	19.3	19.6	19.6	19.5
90,0°	9.1	10.5	11.5	12.5	14.1	15.2	16.3	17.1	17.6	18.3	18.6	19.0	19.1
92,5°	9.1	10.5	11.3	12.4	13.9	15.1	16.3	16.9	17.6	18.1	18.5	19.0	19.1
95,0°	9.1	10.2	11.2	12.4	13.7	15.1	16.1	16.9	17.6	18.1	18.5	18.8	19.1
97,5°	9.0	10.2	11.2	12.4	13.7	14.9	15.9	16.9	17.6	17.9	18.5	18.8	19.1
100,0°	9.0	10.2	11.2	12.0	13.7	14.9	15.9	16.8	17.3	17.9	18.3	18.6	18.8
102,5°	8.8	10.0	11.2	12.0	13.5	14.9	15.7	16.6	17.3	17.8	18.1	18.5	18.8
105,0°	8.8	10.0	10.8	12.0	13.4	14.6	15.6	16.4	16.9	17.4	17.8	18.5	18.6
107,5°	8.6	9.8	10.8	11.7	13.2	14.2	15.2	16.1	16.8	17.1	17.8	18.1	18.3
110,0°	8.5	9.7	10.5	11.5	12.9	13.9	14.9	15.7	16.4	16.8	17.4	17.8	17.9
112,5°	8.5	9.5	10.5	11.2	12.5	13.5	14.4	15.2	15.9	16.4	16.9	17.3	17.6

Photometric test report

Family DL 11 iQ	Order number 5XA5565EY14HP00022 + 5XA54000XBXL	LP number 59426_83
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0
2,5°	6.8	6.6	6.8	6.8	6.8	6.8	4.2	4.1	4.1	4.1	3.9	3.9	3.9
5,0°	29.5	28.6	26.9	25.7	24.9	24.0	8.6	8.0	7.1	6.4	5.8	5.4	4.7
7,5°	95.5	104.8	107.9	110.7	121.1	120.9	38.6	29.0	19.6	14.6	9.7	6.9	5.8
10,0°	139.5	141.2	143.2	142.4	144.4	148.0	62.8	68.7	66.4	56.2	42.2	27.3	17.1
12,5°	173.4	187.6	189.6	187.8	189.8	192.3	75.3	72.0	64.7	60.6	63.3	65.5	59.9
15,0°	203.8	219.1	230.1	235.3	244.7	244.5	106.8	93.3	71.3	55.4	52.8	50.3	48.8
17,5°	215.0	228.7	245.2	259.4	269.7	275.3	117.8	101.4	70.3	46.7	42.5	41.3	40.1
20,0°	222.0	237.4	255.0	269.0	275.8	278.7	137.5	122.2	82.8	44.5	37.8	34.5	31.2
22,5°	230.6	238.2	253.1	267.3	275.6	276.3	158.5	144.3	100.4	49.8	39.8	29.6	24.0
25,0°	255.2	258.9	266.2	275.6	278.7	278.7	165.4	147.6	101.1	40.3	33.9	25.6	20.7
27,5°	274.8	277.2	283.9	286.1	282.1	279.7	183.9	160.7	107.7	32.8	28.3	21.8	19.0
30,0°	301.5	299.0	292.9	291.6	288.3	291.2	191.3	178.6	112.3	28.1	23.9	20.1	18.3
32,5°	320.3	315.1	304.6	301.0	301.5	296.0	217.2	193.9	119.2	26.9	22.0	19.8	18.5
35,0°	343.9	333.4	323.0	320.7	322.0	321.4	214.5	189.8	119.2	29.1	23.9	19.8	19.1
37,5°	372.7	369.8	355.6	344.9	349.3	348.8	245.3	211.1	133.1	30.3	24.7	23.0	22.7
40,0°	402.8	393.8	362.5	357.1	369.9	377.9	248.9	219.1	135.6	31.7	26.6	25.7	25.1
42,5°	421.9	400.8	369.8	371.8	380.1	382.0	274.3	222.1	133.2	34.7	33.5	29.1	28.1
45,0°	429.5	404.0	367.7	372.8	381.1	379.9	299.8	242.8	144.6	34.2	32.5	34.0	32.7
47,5°	432.2	391.4	366.7	374.0	380.3	376.2	295.8	225.4	126.6	32.3	30.8	31.7	31.8
50,0°	424.6	377.7	358.8	368.4	376.5	373.5	296.1	225.4	121.9	28.8	27.4	28.6	25.9
52,5°	402.6	364.0	349.6	357.6	369.1	367.4	292.9	227.2	114.1	25.6	23.9	24.2	21.8
55,0°	365.2	342.2	335.1	342.5	359.6	360.3	295.3	222.6	101.9	22.7	20.0	20.7	18.8
57,5°	327.8	305.6	298.8	311.0	337.6	347.8	278.5	197.1	84.0	20.1	17.3	17.6	16.6
60,0°	295.4	272.1	239.7	262.1	295.6	308.1	259.4	164.9	71.1	17.3	14.2	14.7	14.7
62,5°	237.0	223.7	189.5	203.2	225.9	245.5	223.5	139.7	61.0	17.6	13.7	13.0	12.4
65,0°	188.8	170.3	134.3	148.5	163.4	158.8	186.7	122.9	62.5	19.5	14.6	13.5	11.5
67,5°	154.2	119.5	84.1	95.0	100.6	98.2	176.9	113.4	59.8	19.8	15.2	13.4	10.8
70,0°	129.5	92.1	51.6	48.4	51.6	56.6	170.7	112.1	60.1	17.6	13.5	11.9	10.2
72,5°	106.0	60.4	35.6	29.3	28.4	30.5	149.8	102.9	56.2	20.1	15.4	12.2	10.5
75,0°	86.2	34.4	27.4	24.0	23.5	23.4	102.9	74.5	49.3	23.5	21.0	16.1	12.0
77,5°	53.3	26.6	23.2	22.2	22.2	22.3	57.9	48.6	42.3	23.0	20.7	16.3	11.7
80,0°	24.4	22.2	21.5	21.5	21.5	21.7	44.7	42.0	34.2	22.2	19.5	17.3	12.9
82,5°	21.0	20.5	20.7	20.8	21.0	21.0	28.8	26.6	23.9	17.4	15.9	13.2	10.2
85,0°	20.0	20.0	20.3	20.5	20.7	20.7	15.6	15.6	16.6	17.4	15.7	13.0	8.8
87,5°	19.6	20.0	20.1	20.5	20.5	20.3	11.0	11.0	11.7	11.7	10.7	9.1	7.6
90,0°	19.5	19.8	20.1	20.1	20.3	20.3	8.0	6.6	5.4	4.7	4.1	3.7	3.4
92,5°	19.5	19.8	20.1	20.1	20.3	20.3	7.8	6.4	5.2	4.4	4.1	3.6	3.2
95,0°	19.5	19.8	20.0	20.1	20.1	20.3	7.8	6.4	5.2	4.4	4.1	3.6	3.2
97,5°	19.5	19.5	19.8	20.1	20.1	20.0	7.8	6.4	5.1	4.6	3.9	3.6	3.2
100,0°	19.1	19.5	19.8	20.0	20.1	20.0	7.8	6.4	5.2	4.6	4.1	3.6	3.4
102,5°	19.1	19.5	19.8	19.8	20.0	19.6	7.8	6.4	5.2	4.4	3.9	3.6	3.0
105,0°	18.8	19.1	19.5	19.6	19.6	19.6	7.6	6.3	5.1	4.4	3.9	3.6	3.2
107,5°	18.6	18.8	19.1	19.5	19.3	19.3	7.5	6.1	5.1	4.4	3.9	3.6	3.0
110,0°	18.3	18.6	18.8	19.1	19.1	19.0	7.5	6.1	5.1	4.4	3.9	3.6	3.0
112,5°	17.8	18.1	18.5	18.6	18.6	18.6	7.5	6.1	5.1	4.4	3.9	3.6	3.0

Photometric test report

Family DL 11 iQ	Order number 5XA5565EY14HP00022 + 5XA54000XBXL	LP number 59426_83
Table of values for luminous intensities		Maximum luminous intensity
		sITeco

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0,0°	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	0.0	0.0
2,5°	3.9	3.9	3.9	4.2	4.4	4.7	4.4	4.2	4.2	3.9	3.7	0.1	0.1
5,0°	4.4	4.1	3.9	3.7	3.6	3.4	3.4	3.4	3.4	3.2	3.0	0.3	0.4
7,5°	4.7	3.9	3.7	3.6	3.4	3.6	3.6	3.4	3.2	3.2	3.0	1.6	2.0
10,0°	11.7	8.5	5.6	4.4	3.4	2.9	2.7	2.5	2.4	2.2	2.0	3.1	5.1
12,5°	43.5	27.3	15.1	7.1	3.7	3.2	2.5	2.2	1.9	1.9	1.7	5.4	10.5
15,0°	48.1	50.6	46.2	29.8	12.0	4.6	2.2	1.7	1.5	1.5	1.7	8.0	18.5
17,5°	38.3	36.6	35.2	24.2	14.6	6.9	2.0	1.7	1.5	1.5	1.4	9.9	28.4
20,0°	29.3	27.3	26.6	17.6	10.3	4.9	1.9	1.7	1.5	1.5	1.4	11.4	39.8
22,5°	22.2	21.3	18.8	13.2	7.6	3.9	1.7	1.5	1.4	1.2	1.4	13.1	52.9
25,0°	19.1	17.3	15.6	11.2	6.4	3.4	1.7	1.5	1.4	1.2	1.0	15.3	68.2
27,5°	18.1	15.9	15.1	10.7	5.8	3.4	1.7	1.5	1.4	1.2	1.0	17.8	86.0
30,0°	17.9	16.8	15.7	11.3	5.8	3.2	1.9	1.5	1.4	1.2	1.0	20.6	106.6
32,5°	18.1	17.4	16.1	11.2	6.4	3.4	1.9	1.5	1.4	1.2	1.0	23.2	129.7
35,0°	19.8	17.8	16.1	11.5	7.1	3.7	1.9	1.4	1.4	1.2	1.0	27.0	156.7
37,5°	20.0	18.3	15.7	11.5	7.8	3.9	1.7	1.5	1.4	1.2	1.0	31.2	187.9
40,0°	23.9	20.1	14.9	11.2	9.0	4.4	1.9	1.4	1.2	1.2	1.0	34.8	222.7
42,5°	26.2	20.8	15.9	12.2	8.8	5.4	2.2	1.5	1.2	1.0	1.0	39.6	262.3
45,0°	27.3	21.0	15.6	11.9	9.3	5.2	2.7	2.0	1.2	1.0	1.0	43.0	305.3
47,5°	27.4	20.1	14.7	11.3	9.3	5.4	2.5	1.9	1.4	1.0	1.0	45.9	351.2
50,0°	21.8	17.8	13.7	10.7	9.5	5.6	2.5	1.9	1.4	1.0	1.0	49.2	400.4
52,5°	18.8	15.1	11.7	9.3	8.5	5.8	2.7	1.9	1.2	1.0	1.0	52.7	453.1
55,0°	16.3	13.4	10.0	8.1	7.3	5.2	2.7	2.0	1.2	1.0	0.7	55.9	509.0
57,5°	14.2	11.3	8.3	7.1	6.4	4.9	2.7	1.9	1.2	0.8	0.7	57.9	566.8
60,0°	12.0	9.0	6.8	6.3	5.9	4.2	2.5	1.9	1.2	1.0	0.7	58.1	624.9
62,5°	10.3	7.6	5.9	5.4	5.4	4.1	2.7	1.9	1.2	1.0	0.7	56.5	681.5
65,0°	9.0	7.1	5.9	5.2	5.1	4.1	2.9	2.0	1.5	1.2	1.0	53.9	735.4
67,5°	8.8	7.3	5.9	5.1	4.9	4.2	3.0	2.2	1.7	1.4	1.0	50.1	785.6
70,0°	8.8	7.3	5.9	5.1	4.6	4.1	3.0	2.4	1.9	1.5	1.4	46.3	831.9
72,5°	8.6	6.8	5.6	4.6	4.1	3.7	2.9	2.2	1.9	1.5	1.4	40.3	872.2
75,0°	9.5	6.3	5.1	4.2	3.6	3.0	2.5	2.0	1.9	1.7	1.4	31.6	903.8
77,5°	8.3	5.8	4.4	3.7	3.0	2.5	2.2	1.9	1.7	1.4	1.4	20.6	924.4
80,0°	8.1	5.1	3.9	3.2	2.7	2.4	2.0	1.7	1.4	1.4	1.4	12.0	936.5
82,5°	8.1	4.6	3.4	2.9	2.4	2.0	1.9	1.5	1.4	1.4	1.4	7.2	943.7
85,0°	5.9	4.1	3.0	2.5	2.2	1.9	1.7	1.5	1.4	1.4	1.4	4.6	948.3
87,5°	5.6	3.4	2.7	2.4	2.0	1.9	1.7	1.4	1.4	1.4	1.0	3.4	951.7
90,0°	3.0	2.7	2.5	2.4	2.0	1.9	1.7	1.4	1.4	1.4	1.0	2.8	954.4
92,5°	3.0	2.7	2.4	2.4	2.0	1.7	1.7	1.5	1.4	1.4	1.0	2.8	957.2
95,0°	3.0	2.7	2.4	2.4	2.0	1.9	1.7	1.5	1.4	1.4	1.0	2.7	960.0
97,5°	3.0	2.7	2.4	2.2	2.0	1.9	1.7	1.5	1.4	1.4	1.0	2.7	962.7
100,0°	3.0	2.7	2.4	2.4	2.0	1.9	1.7	1.5	1.4	1.4	1.0	2.7	965.4
102,5°	3.0	2.7	2.4	2.2	2.0	1.7	1.7	1.5	1.4	1.4	1.0	2.6	968.0
105,0°	3.0	2.7	2.4	2.2	1.9	1.7	1.5	1.5	1.4	1.4	1.4	2.6	970.6
107,5°	2.7	2.5	2.4	2.0	1.9	1.7	1.5	1.4	1.4	1.4	1.0	2.5	973.1
110,0°	2.9	2.7	2.4	2.0	1.9	1.7	1.5	1.4	1.4	1.4	1.0	2.4	975.6
112,5°	2.9	2.7	2.4	2.0	1.9	1.7	1.7	1.4	1.4	1.4	1.0	2.3	977.9

Photometric test report

Family DL 11 iQ	Order number 5XA5565EY14HP00022 + 5XA54000XBXL	LP number 59426_83
Table of values for luminous intensities		Maximum luminous intensity
		sITeco

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
115,0°	8.5	9.5	10.3	11.2	12.2	13.2	14.1	14.7	15.4	16.1	16.4	16.8	17.1
117,5°	8.1	9.1	10.2	10.8	11.9	12.7	13.7	14.4	14.9	15.4	15.9	16.3	16.6
120,0°	8.1	9.1	9.8	10.5	11.3	12.4	13.0	13.7	14.4	14.7	15.2	15.7	15.9
122,5°	7.8	8.8	9.7	10.2	10.8	11.7	12.4	13.0	13.5	14.1	14.6	14.9	15.2
125,0°	7.6	8.5	9.3	9.8	10.3	11.0	11.9	12.4	12.9	13.4	13.7	14.1	14.2
127,5°	7.5	8.1	9.0	9.3	10.0	10.7	11.2	11.7	12.2	12.5	13.0	13.2	13.5
130,0°	7.1	7.8	8.6	9.0	9.5	10.0	10.7	11.0	11.5	11.9	12.2	12.5	12.7
132,5°	6.8	7.5	8.1	8.5	9.0	9.5	10.0	10.3	10.8	11.2	11.3	11.7	11.9
135,0°	6.3	6.9	7.6	8.0	8.3	8.8	9.3	9.7	9.8	10.2	10.5	10.8	10.8
137,5°	5.9	6.6	7.1	7.6	7.8	8.1	8.5	8.8	9.1	9.5	9.7	9.8	9.8
140,0°	5.6	6.3	6.6	6.9	7.3	7.6	7.8	8.1	8.5	8.5	8.8	9.0	9.0
142,5°	5.2	5.9	6.3	6.6	6.8	6.9	7.1	7.5	7.6	7.8	8.0	8.1	8.1
145,0°	4.9	5.4	5.8	5.9	6.3	6.4	6.4	6.8	6.8	7.1	7.1	7.3	7.5
147,5°	4.7	4.9	5.2	5.4	5.8	5.8	6.1	6.1	6.4	6.4	6.4	6.8	6.8
150,0°	4.2	4.4	4.6	4.7	5.1	5.1	5.4	5.4	5.4	5.8	5.8	5.8	5.8
152,5°	3.6	3.7	4.1	4.1	4.4	4.4	4.4	4.6	4.7	4.7	4.7	4.7	4.9
155,0°	2.7	3.0	3.0	3.4	3.4	3.4	3.6	3.6	3.7	3.7	3.7	3.7	3.7
157,5°	2.0	2.0	2.4	2.4	2.4	2.4	2.5	2.4	2.5	2.7	2.7	2.7	2.7
160,0°	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7
162,5°	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4
165,0°	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4
167,5°	1.4	1.4	1.4	1.4	1.4	1.4	1.2	1.2	1.2	1.4	1.4	1.4	1.4
170,0°	1.2	1.0	1.2	1.2	1.0	1.2	1.2	1.2	1.2	1.2	1.2	1.0	1.0
172,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
175,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
177,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family DL 11 iQ	Order number 5XA5565EY14HP00022 + 5XA54000XBXL	LP number 59426_83
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
115,0°	17.4	17.6	17.9	18.1	18.3	18.3	7.3	6.1	5.1	4.6	3.9	3.6	3.2
117,5°	16.8	17.1	17.4	17.4	17.6	17.6	7.1	6.1	5.1	4.6	4.1	3.6	3.2
120,0°	16.3	16.6	16.8	16.9	16.9	16.9	7.1	6.1	5.2	4.6	4.1	3.7	3.4
122,5°	15.4	15.6	15.7	15.9	15.9	15.9	6.9	5.9	4.9	4.6	4.1	3.6	3.4
125,0°	14.6	14.9	14.9	14.9	15.1	14.9	6.8	5.9	4.9	4.6	4.1	3.7	3.4
127,5°	13.9	13.9	14.1	14.2	14.2	14.2	6.6	5.8	4.9	4.4	4.1	3.6	3.4
130,0°	12.9	12.9	13.0	13.2	13.2	13.2	6.3	5.6	4.9	4.2	3.9	3.6	3.2
132,5°	11.9	12.0	12.2	12.2	12.2	12.2	5.9	5.2	4.6	4.1	3.7	3.4	3.0
135,0°	11.0	11.2	11.2	11.2	11.2	11.2	5.8	5.1	4.6	3.9	3.7	3.2	3.0
137,5°	10.2	10.2	10.2	10.2	10.2	10.2	5.4	4.9	4.2	3.7	3.4	3.2	2.7
140,0°	9.1	9.1	9.1	9.1	9.1	9.1	5.2	4.6	4.1	3.7	3.4	2.9	2.7
142,5°	8.1	8.1	8.1	8.1	8.1	8.5	4.9	4.4	3.9	3.6	3.2	3.0	2.7
145,0°	7.5	7.5	7.5	7.5	7.5	7.5	4.7	4.2	3.9	3.6	3.2	2.9	2.5
147,5°	6.8	6.8	6.8	6.8	6.8	6.8	4.4	4.1	3.7	3.4	3.0	2.7	2.5
150,0°	5.8	5.8	5.9	5.8	5.8	5.8	3.9	3.6	3.2	3.0	2.7	2.5	2.4
152,5°	5.1	5.1	4.9	4.7	4.7	4.7	3.4	3.0	2.7	2.5	2.4	2.2	2.0
155,0°	3.7	3.7	3.7	3.7	3.7	3.7	2.7	2.4	2.4	2.0	2.0	1.7	1.7
157,5°	2.7	2.7	2.7	2.7	2.7	2.7	2.0	2.0	1.7	1.7	1.7	1.7	1.5
160,0°	1.7	1.7	1.9	1.7	1.7	1.7	1.7	1.7	1.5	1.4	1.5	1.4	1.4
162,5°	1.4	1.4	1.4	1.4	1.4	1.4	1.5	1.4	1.4	1.4	1.4	1.4	1.4
165,0°	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4
167,5°	1.4	1.4	1.2	1.0	1.2	1.4	1.4	1.4	1.4	1.2	1.4	1.4	1.4
170,0°	1.4	1.0	1.2	1.4	1.2	1.0	1.2	1.2	1.2	1.2	1.4	1.4	1.4
172,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
175,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
177,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family DL 11 iQ	Order number 5XA5565EY14HP00022 + 5XA54000XBXL	LP number 59426_83
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
115,0°	3.0	2.7	2.4	2.4	2.0	1.9	1.7	1.5	1.4	1.4	1.4	2.3	980.2
117,5°	3.0	2.7	2.4	2.4	2.0	1.9	1.7	1.5	1.4	1.4	1.4	2.2	982.3
120,0°	3.0	2.7	2.4	2.4	2.0	1.9	1.7	1.7	1.4	1.4	1.4	2.1	984.4
122,5°	3.0	2.7	2.4	2.2	2.0	1.7	1.7	1.5	1.4	1.4	1.4	1.9	986.3
125,0°	3.0	2.7	2.4	2.4	2.0	1.9	1.7	1.5	1.5	1.4	1.4	1.8	988.1
127,5°	3.0	2.7	2.4	2.2	2.0	1.9	1.7	1.5	1.5	1.4	1.4	1.6	989.7
130,0°	2.9	2.5	2.4	2.0	2.0	1.7	1.7	1.7	1.5	1.4	1.4	1.5	991.2
132,5°	2.7	2.4	2.4	2.0	2.0	1.7	1.7	1.7	1.7	1.4	1.4	1.4	992.6
135,0°	2.7	2.4	2.0	2.0	1.9	1.7	1.7	1.7	1.5	1.7	1.4	1.2	993.8
137,5°	2.4	2.4	2.0	2.0	1.7	1.7	1.7	1.5	1.5	1.4	1.4	1.1	994.9
140,0°	2.4	2.0	2.0	1.7	1.7	1.7	1.5	1.4	1.4	1.4	1.4	1.0	995.9
142,5°	2.4	2.0	1.9	1.7	1.7	1.7	1.7	1.5	1.4	1.4	1.4	0.8	996.7
145,0°	2.4	2.0	1.9	1.7	1.7	1.7	1.7	1.4	1.4	1.5	1.4	0.7	997.4
147,5°	2.2	2.0	1.7	1.7	1.7	1.7	1.4	1.4	1.5	1.4	1.4	0.6	998.1
150,0°	2.0	1.9	1.7	1.7	1.5	1.4	1.5	1.4	1.4	1.4	1.4	0.5	998.6
152,5°	1.9	1.7	1.7	1.5	1.4	1.4	1.4	1.4	1.4	1.4	1.4	0.4	999.0
155,0°	1.7	1.7	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	0.3	999.3
157,5°	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	0.2	999.5
160,0°	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	0.1	999.7
162,5°	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	0.1	999.8
165,0°	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.2	1.0	0.1	999.9
167,5°	1.4	1.4	1.4	1.4	1.4	1.2	1.4	1.4	1.4	1.4	1.4	0.1	999.9
170,0°	1.4	1.2	1.2	1.4	1.4	1.2	1.4	1.4	1.4	1.4	1.4	0.1	1000.0
172,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
175,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
177,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family DL 11 iQ	Order number 5XA5565EY14HP00022 + 5XA54000XBXL	LP number 59426_83
---------------------------	--	------------------------------

Dimming levels table	environmental temperature: 25°C	siteco
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W] start of lifetime	Power consumption [W] end of lifetime	Power consumption [W] average
100	254	254	4660	33.5	36.0	34.8
95	241	252	4421	31.3	33.5	32.4
90	229	250	4201	29.3	31.3	30.3
85	216	248	3963	27.3	29.2	28.2
80	203	246	3724	25.4	27.1	26.2
75	190	243	3486	23.4	25.0	24.2
70	178	241	3266	21.7	23.2	22.4
65	165	238	3027	20.0	21.3	20.6
60	152	235	2789	18.2	19.4	18.8
55	140	232	2569	16.7	17.7	17.2
50	127	229	2330	15.0	16.0	15.5
45	114	225	2091	13.4	14.3	13.8
40	102	221	1871	12.0	12.7	12.4
35	89	216	1633	10.4	11.1	10.8
30	76	210	1394	8.9	9.4	9.2
25	63	203	1156	7.5	7.9	7.7
20	51	195	936	6.2	6.6	6.4
15	38	184	697	4.8	5.0	4.9
11	28	173	514	3.8	3.9	3.8