




Photometric test report

Family Trunking Flex 31	Order number: 51RE11MA46B EAN: 4058352586563	LP number 59298_8
	Version primary light control with lens, transparent, PMMA, narrow distribution Lamps LED 4000 K CRI ≥ 80 Controlgear ECG Multilumen Rated values Net luminous flux = 6400 lm Power consumption = 40.0 W Luminous efficacy = 160 lm/W	serial documentation 27.03.2024
		

Luminous intensity in cd/klm C180-0 C270-90 **Imax: 2264 cd/klm**

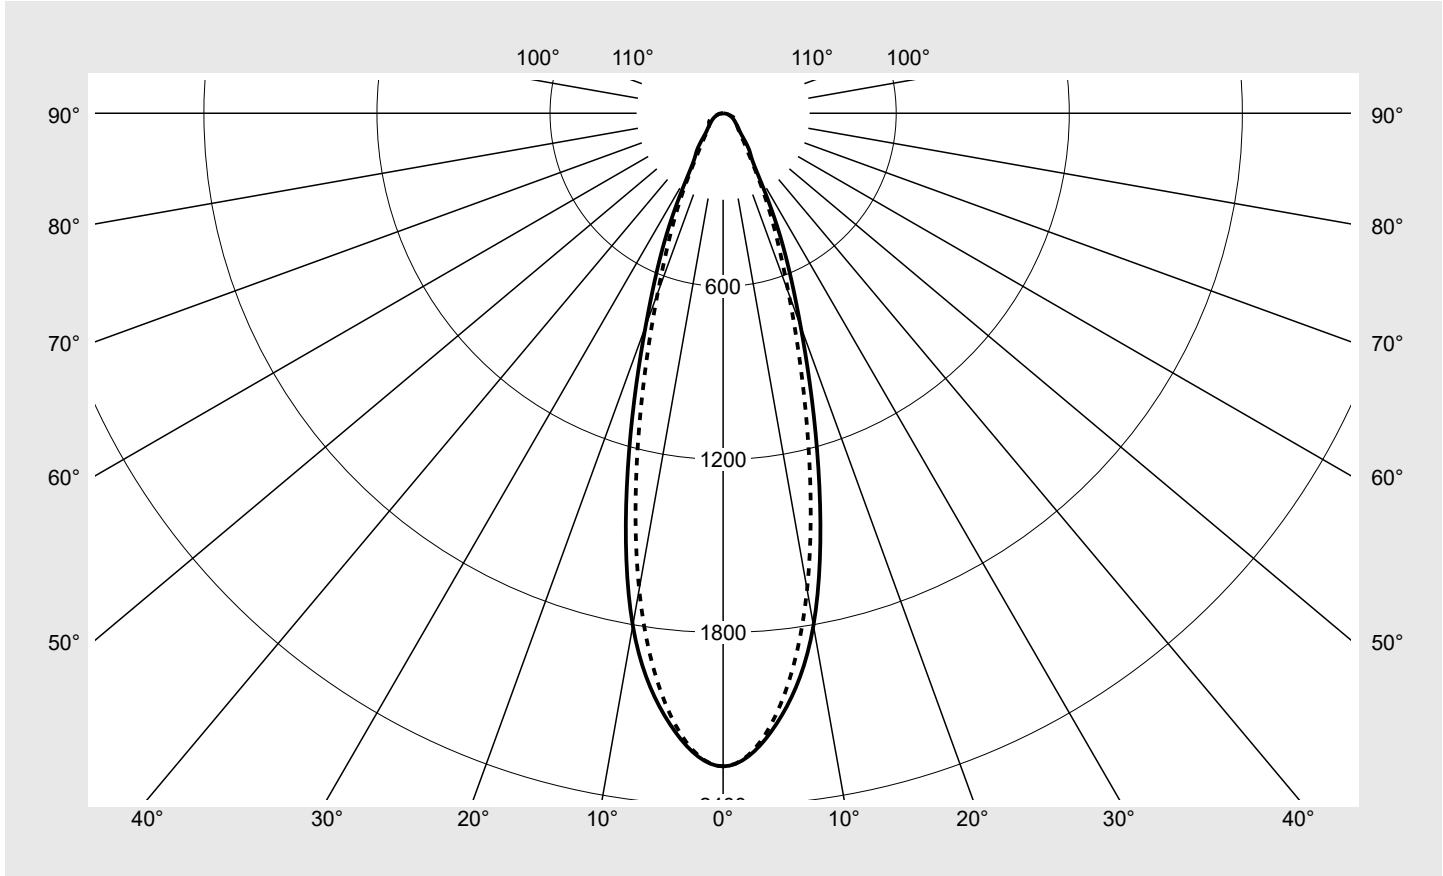

Classifications	
DIN 5040	A 7 1
CIE	N1=83 N2=93 N3=98 N4=100 N5=100

Luminaire light output ratios	
η_{LB}	100.0%
ϕ_u	99.6%
ϕ_o	0.4%

Measurement conditions
DIN EN 13032 and DIN 5032

Photometric test report

Family Trunking Flex 31	Order number: 51RE11MA46B EAN: 4058352586563	LP number 59298_8
Table of values for luminous intensities		Maximum luminous intensity



C-planes γ	0° 180°	15°	30°	45°	60°	75°	90° 270°	Phi-zone	Total Phi-zone
		165° 195° 345°	150° 210° 330°	135° 225° 315°	120° 240° 300°	105° 255° 285°			
Luminous intensity in cd/klm								Luminous flux in lm/klm	
0°	2264.0	2264.0	2264.0	2264.0	2264.0	2264.0	2264.0	13.5	13.5
5°	2124.6	2117.3	2110.0	2106.4	2102.8	2098.6	2094.4	100.7	114.2
10°	1803.1	1798.4	1793.7	1758.4	1723.0	1699.6	1676.2	166.8	281.0
15°	1276.6	1263.1	1249.6	1218.9	1188.2	1155.9	1123.7	172.0	453.0
20°	785.2	773.2	761.2	738.3	715.4	689.4	663.4	137.5	590.6
25°	464.9	459.0	453.1	430.5	408.0	399.6	391.2	99.5	690.1
30°	231.5	245.6	259.7	243.1	226.4	219.0	211.5	64.6	754.8
35°	159.7	155.6	151.5	146.8	142.0	136.2	130.5	46.0	800.7
40°	102.9	101.3	99.7	98.2	96.6	94.1	91.5	34.5	835.2
45°	75.8	74.7	73.5	74.4	75.2	73.4	71.7	28.7	863.9
50°	60.6	60.0	59.4	61.7	64.1	63.5	63.0	25.9	889.9
55°	50.2	50.1	50.0	53.9	57.9	58.8	59.6	24.4	914.2
60°	41.8	41.5	41.2	46.6	51.9	53.9	55.8	22.5	936.7
65°	33.8	33.4	32.9	37.5	42.1	45.1	48.0	19.2	955.9
70°	26.2	26.2	26.2	27.6	29.0	31.8	34.7	14.7	970.6
75°	20.4	20.2	20.1	21.5	22.8	21.7	20.6	11.2	981.8
80°	14.1	14.0	14.0	15.4	16.8	16.1	15.5	8.2	990.0
85°	7.7	7.7	7.8	9.4	11.0	10.5	10.0	5.0	995.0
90°	1.9	1.9	1.9	3.7	5.5	4.9	4.4	1.9	996.9
95°	0.0	0.0	0.0	1.4	2.7	3.0	3.2	0.8	997.7
100°	0.0	0.0	0.0	1.0	2.1	2.5	2.9	0.6	998.3
105°	0.0	0.0	0.0	1.0	1.9	2.2	2.5	0.6	998.9
110°	0.0	0.0	0.0	0.8	1.6	1.9	2.2	0.5	999.4
115°	0.0	0.0	0.0	0.7	1.3	1.5	1.8	0.4	999.7
120°	0.0	0.0	0.0	0.5	1.1	1.2	1.4	0.3	1000.0
125°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
130°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
135°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
140°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
145°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
150°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
155°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
160°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
165°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
170°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
175°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Trunking Flex 31	Order number: 51RE11MA46B EAN: 4058352586563	LP number 59298_8
-----------------------------------	---	-----------------------------

UGR-Table	Standard room	siteco
------------------	----------------------	---------------

Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	View crosswise (C0)					View endwise (C90)					
x	y										
2H	2H	16.0	17.2	16.4	17.5	17.9	17.1	18.4	17.5	18.7	19.0
	3H	17.2	18.3	17.6	18.6	19.0	18.8	19.9	19.2	20.2	20.6
	4H	17.8	18.8	18.2	19.2	19.5	19.3	20.3	19.7	20.7	21.0
	6H	18.3	19.2	18.7	19.6	20.0	19.8	20.7	20.2	21.1	21.5
	8H	18.6	19.3	19.0	19.7	20.1	20.2	20.9	20.6	21.3	21.7
	12H	18.7	19.4	19.2	19.8	20.2	20.4	21.1	20.8	21.5	21.9
4H	2H	16.7	17.7	17.1	18.0	18.4	17.6	18.6	18.0	19.0	19.3
	3H	18.0	18.9	18.5	19.3	19.7	19.4	20.2	19.8	20.6	21.0
	4H	18.7	19.5	19.2	19.9	20.3	20.0	20.8	20.5	21.2	21.6
	6H	19.4	20.0	19.8	20.4	20.9	20.7	21.3	21.2	21.8	22.2
	8H	19.6	20.2	20.1	20.6	21.1	21.0	21.6	21.5	22.0	22.5
	12H	19.8	20.3	20.3	20.7	21.2	21.4	21.8	21.9	22.3	22.8
8H	4H	19.1	19.6	19.6	20.1	20.6	20.3	20.8	20.7	21.3	21.8
	6H	19.8	20.3	20.3	20.8	21.3	21.1	21.5	21.6	22.0	22.5
	8H	20.1	20.5	20.6	21.0	21.6	21.5	21.9	22.0	22.4	22.9
	12H	20.4	20.7	20.9	21.2	21.8	22.0	22.3	22.5	22.8	23.4
12H	4H	19.2	19.6	19.7	20.1	20.6	20.3	20.8	20.8	21.2	21.7
	6H	20.0	20.3	20.5	20.8	21.4	21.2	21.5	21.7	22.0	22.6
	8H	20.3	20.6	20.8	21.2	21.7	21.7	22.0	22.2	22.5	23.0

Luminance table	Max. for $\gamma \geq 65^\circ$	Photometric dimensions in mm:	L = 1146	H(C0) = 5	H(C180) = 5
			B = 61	H(C90) = 5	H(C270) = 5

C-planes	γ	Luminance in cd/m ²								
		0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°		
45°		9070.2	8948.9	8872.2	9076.4	9322.3	9273.5	9238.5		
50°		7858.5	7796.3	7780.3	8196.5	8664.8	8782.4	8923.6		
55°		7165.9	7167.0	7218.8	7915.0	8681.9	9049.4	9460.3		
60°		6706.4	6669.8	6688.8	7708.4	8825.9	9451.2	10148.0		
65°		6235.9	6168.4	6162.4	7185.9	8324.9	9258.0	10305.5		
70°		5716.9	5745.3	5846.0	6325.2	6902.1	7961.8	9175.5		
75°		5520.8	5509.1	5585.5	6183.9	6919.0	7013.5	7166.9		
80°		5062.9	5076.9	5202.7	6016.3	7048.1	7430.9	7970.5		
85°		4151.5	4238.2	4473.9	5825.3	7649.5	8556.3	10021.4		


Photometric test report

Family Trunking Flex 31	Order number: 51RE11MA46B EAN: 4058352586563	LP number 59298_8
-----------------------------------	---	-----------------------------



Luminance values in cd/m²

γ 65°
 γ 70°
 γ 75°
 γ 80°
 γ 85°

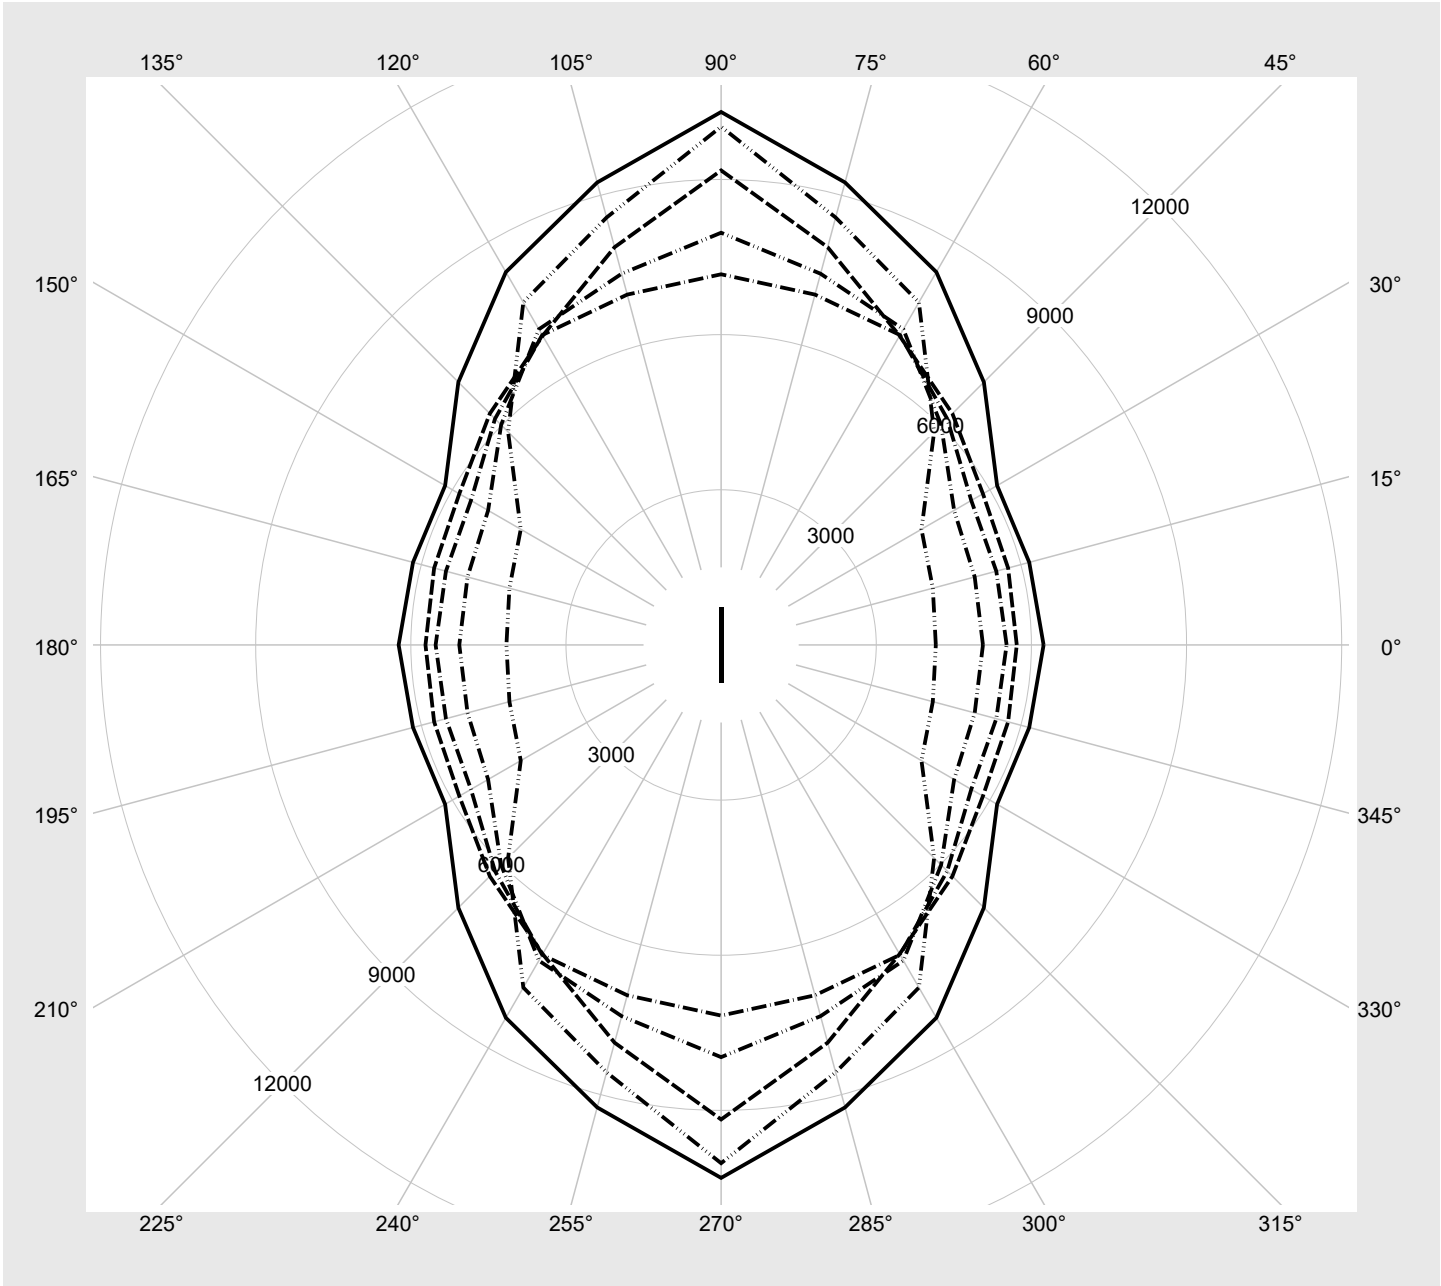

Photometric test report

Family Trunking Flex 31	Order number: 51RE11MA46B EAN: 4058352586563	LP number 59298_8
-----------------------------------	---	-----------------------------

Multilumen Table	environmental temperature: 25°C	siteco
-------------------------	---------------------------------	---------------

DIP-Step	Switch Setting		Luminous flux [lm]	Power consumption [W]
	1	2		
3	ON	ON	6400	40.0
2	ON	OFF	5610	34.0
1	OFF	ON	4450	27.0
0	OFF	OFF	3300	20.0