




# Photometric test report

<b>Family</b> <b>Trunking Flex 31</b>	<b>Order number: 51RE18MB48B</b> <b>EAN: 4058352586631</b>	<b>LP number</b> <b>59334_19</b>
	<b>Version</b> primary light control with lens, transparent, PMMA, medium distribution	<b>serial documentation</b> <b>27.03.2024</b>
	<b>Lamps</b> LED 4000 K   CRI ≥ 80 <b>Controlgear</b> ECG Multilumen <b>Rated values</b> Net luminous flux = 8000 lm Power consumption = 50.0 W Luminous efficacy = 160 lm/W	
		

Luminous intensity in cd/klm C180-0 C270-90 Imax: 770 cd/klm

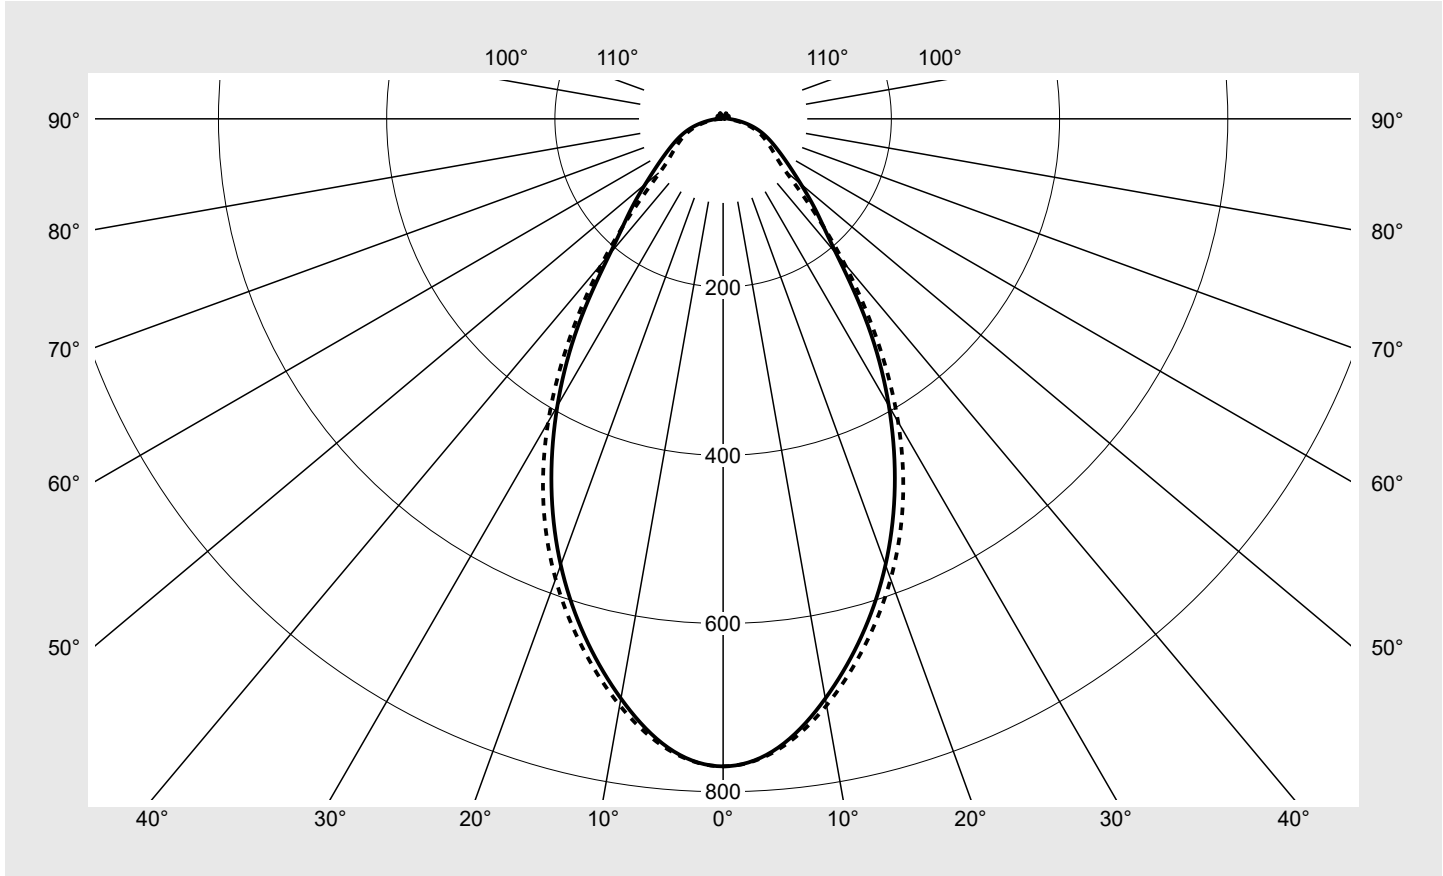

Classifications	
DIN 5040	A 5 2
CIE	N1=71 N2=89 N3=97 N4=97 N5=100

Luminaire light output ratios	
$\eta_{LB}$	100.0%
$\phi_u$	96.8%
$\phi_o$	3.2%

Measurement conditions
DIN EN 13032 and DIN 5032

## Photometric test report

<b>Family</b> Trunking Flex 31	<b>Order number: 51RE18MB48B</b> <b>EAN: 4058352586631</b>	<b>LP number</b> 59334_19
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
		<b>sITeco</b>

C-planes $\gamma$	0° 180°	15°	30°	45°	60°	75°	90° 270°	Phi-zone	Total Phi-zone
		165° 195° 345°	150° 210° 330°	135° 225° 315°	120° 240° 300°	105° 255° 285°			
Luminous intensity in cd/klm							Luminous flux in lm/klm		
0°	769.8	769.8	769.8	769.8	769.8	769.8	769.8	4.6	4.6
5°	750.5	750.8	751.0	751.1	751.5	752.0	752.6	35.9	40.5
10°	699.8	700.6	701.6	702.7	704.7	706.5	708.1	66.9	107.4
15°	636.4	638.3	639.3	639.4	641.6	644.9	649.2	90.9	198.4
20°	564.4	568.9	570.3	568.4	569.0	573.7	582.3	107.0	305.4
25°	482.9	489.3	491.0	488.2	487.1	492.8	505.4	113.6	419.0
30°	394.1	398.1	399.5	398.3	397.9	403.8	416.0	109.8	528.7
35°	300.6	301.5	301.8	301.7	304.2	309.6	317.7	95.8	624.5
40°	209.5	209.2	209.1	209.3	214.0	218.8	223.9	75.0	699.5
45°	157.8	146.3	142.8	147.3	155.5	155.1	146.2	58.1	757.6
50°	120.7	109.0	105.6	110.3	116.9	112.5	96.9	46.4	804.0
55°	94.5	85.7	83.1	86.7	91.1	87.4	75.9	38.9	842.8
60°	76.1	70.2	68.5	71.0	73.3	70.8	63.5	33.5	876.4
65°	62.1	58.4	57.3	58.8	59.8	58.0	53.5	29.0	905.3
70°	49.8	47.5	46.7	47.4	47.4	46.0	43.1	24.2	929.5
75°	37.3	35.8	35.2	35.3	34.8	33.6	31.6	18.5	948.0
80°	24.2	23.4	23.0	22.8	22.2	21.1	19.5	12.1	960.0
85°	13.1	12.7	12.2	11.7	10.8	9.8	8.5	6.2	966.2
90°	6.4	6.3	6.0	5.6	4.9	4.1	3.2	2.9	969.1
95°	5.8	5.7	5.4	4.9	4.2	3.5	3.0	2.6	971.7
100°	5.9	5.7	5.6	5.5	4.4	3.6	3.0	2.6	974.3
105°	7.0	6.6	6.2	5.8	4.5	3.7	3.3	2.8	977.1
110°	6.9	7.0	6.6	5.6	4.5	3.8	3.6	2.8	980.0
115°	7.4	6.5	5.9	5.4	4.6	4.2	3.9	2.7	982.6
120°	7.2	6.5	5.8	5.4	4.8	4.4	4.3	2.6	985.2
125°	6.6	6.4	6.1	5.6	5.0	4.7	4.7	2.5	987.7
130°	6.6	6.5	6.2	5.8	5.3	5.1	5.1	2.4	990.2
135°	6.7	6.6	6.3	6.0	5.6	5.4	5.4	2.3	992.5
140°	6.9	6.8	6.5	6.1	5.9	5.8	5.8	2.2	994.7
145°	7.0	6.9	6.6	6.2	6.1	6.1	6.1	2.0	996.7
150°	6.9	6.7	6.5	6.4	6.3	6.3	6.3	1.8	998.5
155°	6.7	6.6	6.6	6.6	6.5	6.5	6.5	1.5	1000.0
160°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
165°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
170°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
175°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

## Photometric test report

<b>Family</b> Trunking Flex 31	<b>Order number: 51RE18MB48B</b> <b>EAN: 4058352586631</b>	<b>LP number</b> 59334_19
-----------------------------------	---	------------------------------

<b>UGR-Table</b>	<b>Standard room</b>	<b>siteco</b>
------------------	----------------------	---------------

Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	View crosswise (C0)					View endwise (C90)					
x	y										
2H	2H	20.0	21.4	20.3	21.7	22.1	20.2	21.7	20.6	22.0	22.3
	3H	21.2	22.5	21.6	22.9	23.2	21.4	22.7	21.8	23.0	23.4
	4H	21.8	23.0	22.2	23.4	23.7	21.9	23.1	22.3	23.5	23.9
	6H	22.3	23.4	22.7	23.8	24.1	22.4	23.5	22.8	23.8	24.2
	8H	22.5	23.5	22.9	23.9	24.3	22.6	23.6	23.0	23.9	24.3
	12H	22.6	23.6	23.1	24.0	24.4	22.7	23.6	23.1	24.0	24.4
4H	2H	20.5	21.7	20.9	22.1	22.4	20.7	21.9	21.1	22.2	22.6
	3H	21.9	23.0	22.4	23.3	23.8	22.1	23.1	22.5	23.5	23.9
	4H	22.7	23.6	23.1	24.0	24.4	22.8	23.7	23.2	24.1	24.5
	6H	23.2	24.0	23.7	24.5	24.9	23.4	24.1	23.8	24.6	25.0
	8H	23.5	24.2	23.9	24.6	25.1	23.6	24.3	24.0	24.7	25.2
	12H	23.7	24.3	24.2	24.7	25.2	23.7	24.3	24.2	24.8	25.3
8H	4H	23.0	23.7	23.4	24.1	24.6	23.1	23.8	23.6	24.2	24.7
	6H	23.7	24.3	24.2	24.7	25.2	23.8	24.4	24.3	24.8	25.3
	8H	24.0	24.5	24.5	25.0	25.5	24.0	24.6	24.5	25.0	25.6
	12H	24.2	24.6	24.7	25.1	25.7	24.3	24.7	24.8	25.2	25.7
12H	4H	23.0	23.6	23.5	24.1	24.6	23.1	23.7	23.6	24.2	24.7
	6H	23.8	24.3	24.3	24.7	25.3	23.9	24.3	24.4	24.8	25.4
	8H	24.1	24.5	24.6	25.0	25.6	24.2	24.6	24.7	25.1	25.6


<b>Luminance table</b>	<b>Max. for <math>\gamma \geq 65^\circ</math></b>	<b>Photometric dimensions in mm:</b>	<b>L = 1433</b>	<b>H(C0) = 5</b>	<b>H(C180) = 5</b>
			<b>B = 61</b>	<b>H(C90) = 5</b>	<b>H(C270) = 5</b>

C-planes	$\gamma$	Luminance in cd/m <sup>2</sup>							
		0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°	
45°		18875.2	17529.2	17229.0	17983.4	19272.7	19588.3	18852.0	
50°		15657.1	14173.0	13834.2	14654.4	15819.3	15555.1	13737.7	
55°		13503.0	12268.9	12010.1	12741.3	13669.8	13478.8	12050.2	
60°		12191.8	11287.9	11142.3	11768.1	12470.8	12434.6	11558.8	
65°		11436.2	10796.0	10740.5	11281.4	11824.3	11924.3	11496.1	
70°		10868.9	10409.4	10410.8	10884.5	11325.0	11532.4	11433.5	
75°		10093.1	9752.9	9779.9	10185.3	10575.7	10875.8	11022.2	
80°		8701.9	8490.9	8569.7	8952.3	9353.8	9741.7	10058.2	
85°		7125.9	6965.6	7006.9	7257.5	7560.2	8009.5	8617.6	

**Photometric test report**

<b>Family</b> Trunking Flex 31	<b>Order number: 51RE18MB48B</b> <b>EAN: 4058352586631</b>	<b>LP number</b> 59334_19
-----------------------------------	---	------------------------------

**Luminance values in cd/m<sup>2</sup>**       $\gamma$  65°      $\gamma$  70°      $\gamma$  75°      $\gamma$  80°      $\gamma$  85°

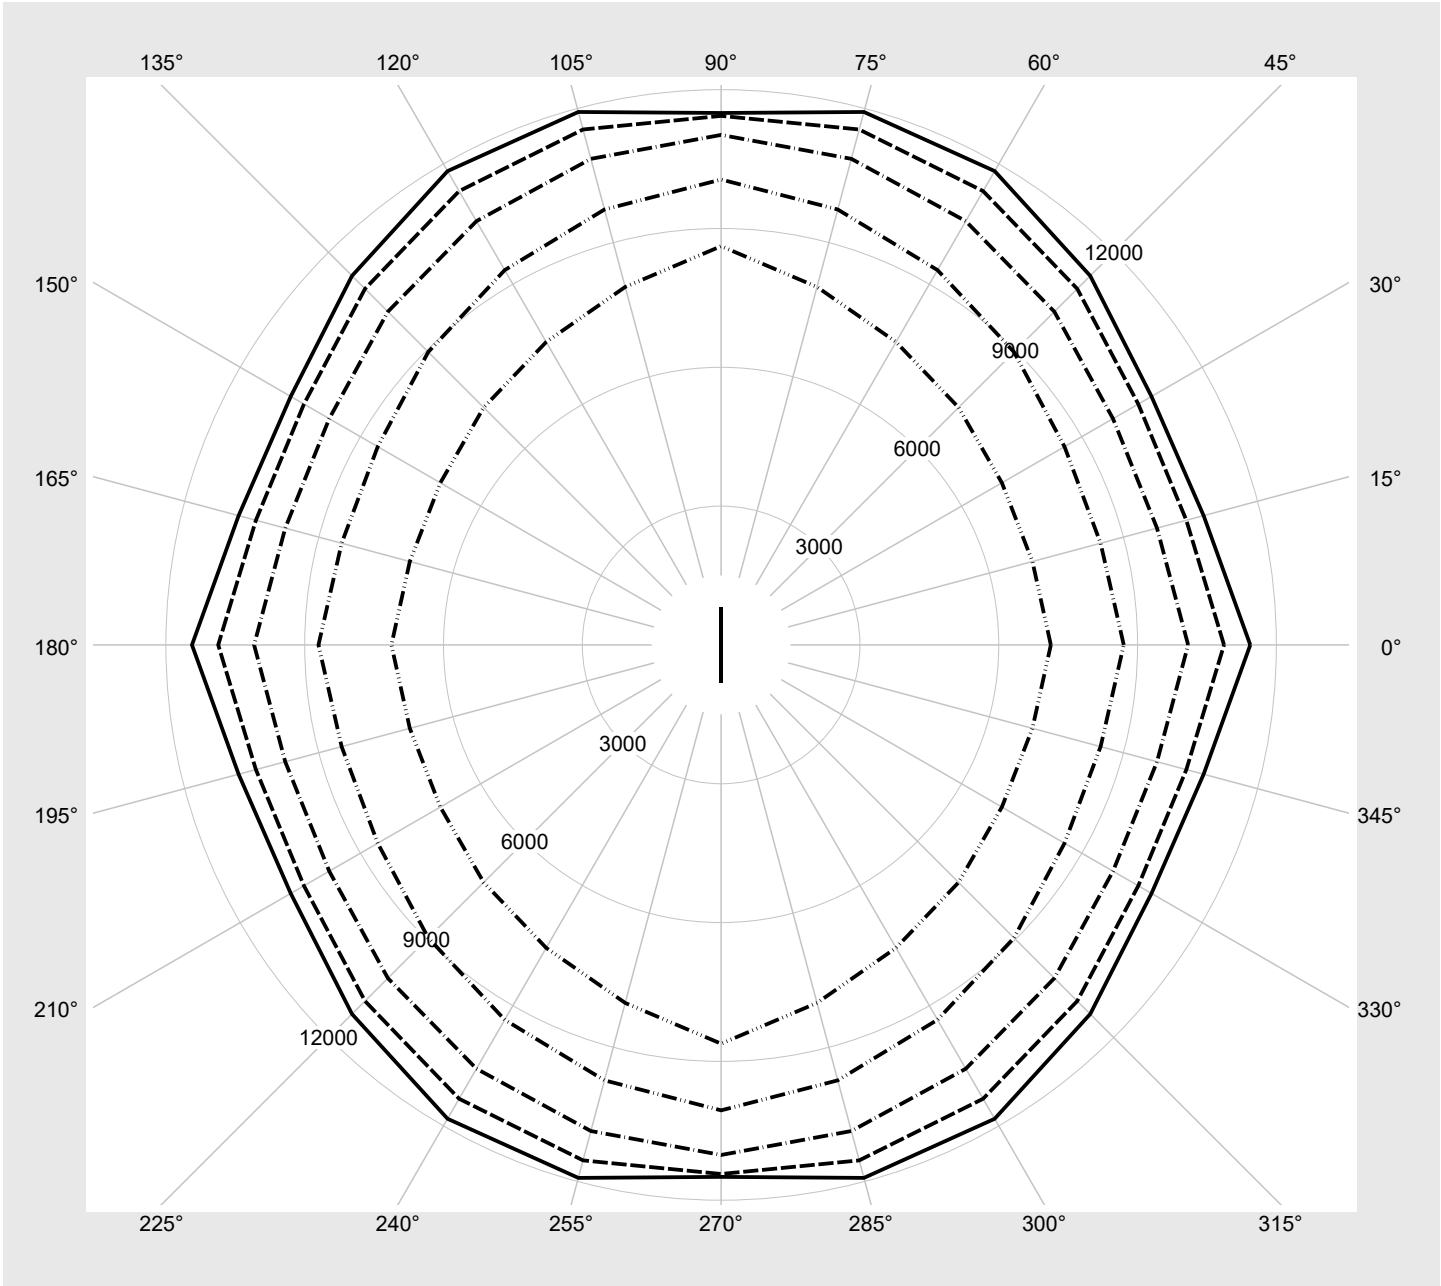

### Photometric test report

<b>Family</b> Trunking Flex 31	<b>Order number: 51RE18MB48B</b> <b>EAN: 4058352586631</b>	<b>LP number</b> <b>59334_19</b>
-----------------------------------	---	-------------------------------------

<b>Multilumen Table</b>	environmental temperature: 25°C	<b>sITeco</b>
-------------------------	---------------------------------	---------------

DIP-Step	Switch Setting		Luminous flux [lm]	Power consumption [W]
	1	2		
3	ON	ON	8000	50.0
2	ON	OFF	6850	42.0
1	OFF	ON	5610	34.0
0	OFF	OFF	4130	25.0