


Photometric test report

Family Silica® 31	Order number: 51MY6LDS44BA EAN: 4069025073204	LP number 59650_6
	Version	recessed luminaire for lay-in mounting, black, square M600, reflector, black, wide distribution, UGR≤19 (L65≤1000cd/m²)
	Lamps	LED 4000 K CRI ≥ 80
	Controlgear	ECG-DALI
	Setting	factory setting: DIP-Step=10
	Rated values	Net luminous flux = 4620 lm Power consumption = 28.0 W Luminous efficacy = 165 lm/W
		serial documentation 28.06.2024
		

Luminous intensity in cd/klm C180-0 C270-90 **Imax: 590 cd/klm**

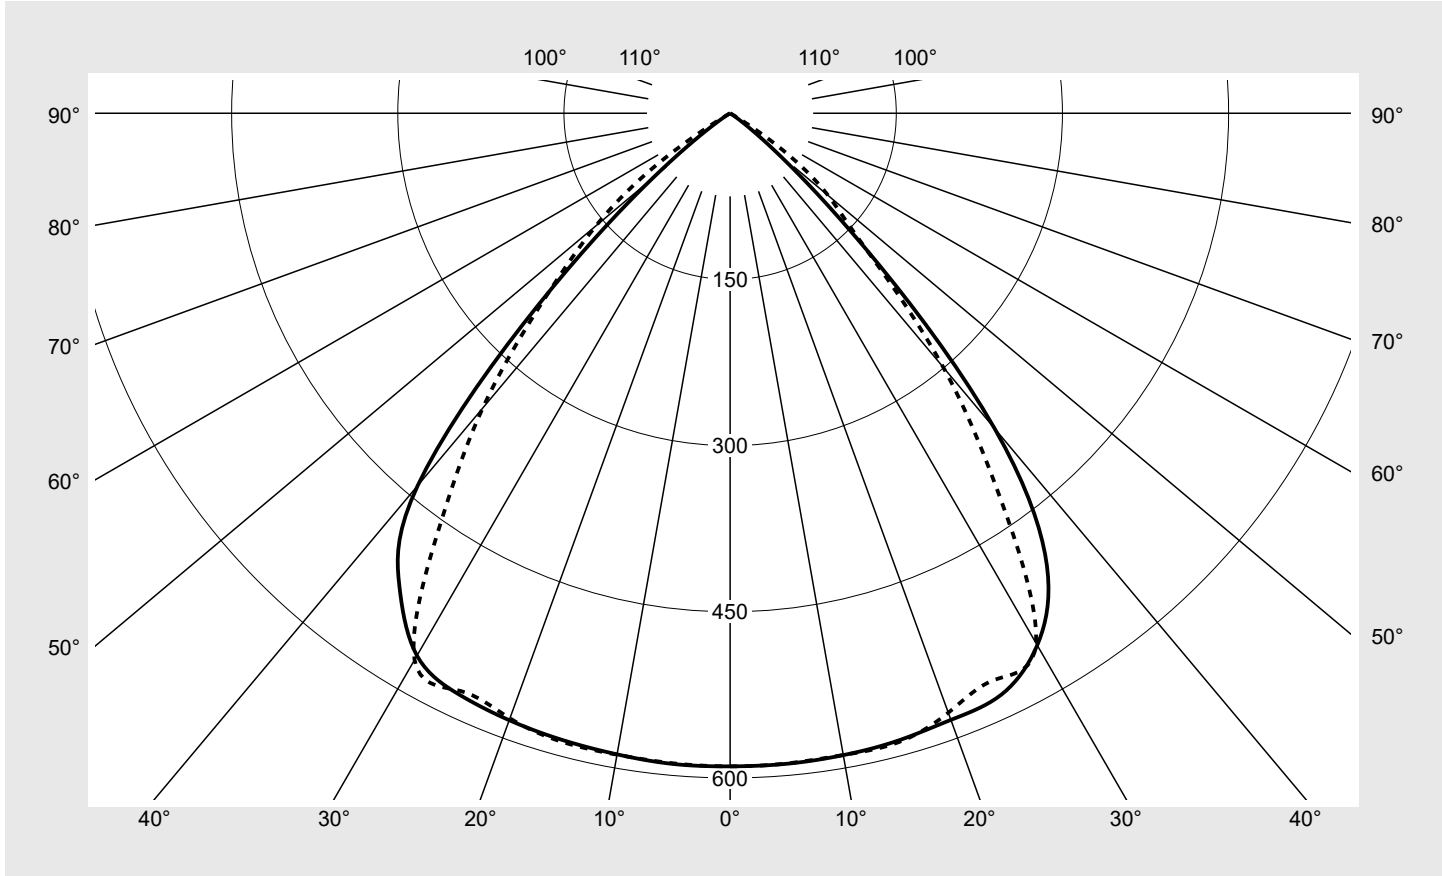

Classifications	
DIN 5040	A 6 0
CIE	N1=82 N2=100 N3=100 N4=100 N5=100

Luminaire light output ratios	
η_{LB}	100.0%
ϕ_u	100.0%
ϕ_o	0.0%

Measurement conditions
 DIN EN 13032 and DIN 5032

Photometric test report

Family Silica® 31	Order number: 51MY6LDS44BA EAN: 4069025073204	LP number 59650_6
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	0°	15°	30°	45°	60°	75°	90°	105°	120°	135°	150°	165°	180°
γ	Luminous intensity in cd/klm												
0°	589.6	589.6	589.6	589.6	589.6	589.6	589.6	589.6	589.6	589.6	589.6	589.6	589.6
5°	589.5	589.4	589.4	589.4	589.1	588.9	589.2	589.5	589.6	589.5	589.6	589.6	589.7
10°	588.4	588.4	588.5	588.4	588.4	588.1	588.3	588.8	588.4	588.3	587.8	587.7	587.7
15°	586.3	586.7	587.2	587.4	587.7	587.1	587.8	587.6	587.9	587.6	586.9	585.8	585.7
20°	582.8	583.8	584.9	586.9	579.9	576.4	575.9	577.8	581.6	586.4	584.6	583.0	583.1
25°	579.2	579.2	581.5	570.2	565.1	564.1	564.4	566.6	567.6	571.7	580.2	577.6	579.0
30°	554.5	553.6	560.9	539.2	545.9	549.7	552.3	555.3	547.8	540.2	561.0	561.0	565.4
35°	498.6	485.5	470.2	482.4	488.3	439.7	426.4	444.7	494.0	488.0	493.6	513.1	520.6
40°	371.4	369.8	347.4	366.4	347.6	303.2	299.4	314.1	345.6	402.6	363.9	402.3	438.8
45°	173.6	197.8	191.8	230.8	196.6	169.1	173.7	176.6	203.2	230.1	209.2	207.7	245.6
50°	53.2	68.1	63.9	99.8	75.7	99.3	115.6	109.0	73.3	118.0	90.8	77.6	91.9
55°	8.2	12.8	28.5	28.3	40.6	53.2	58.3	56.6	44.0	28.5	31.6	22.9	17.4
60°	0.5	1.7	6.4	13.2	16.3	8.1	0.6	8.4	15.6	16.0	11.1	2.3	1.9
65°	0.1	0.1	0.3	4.4	0.5	0.4	0.4	0.4	0.6	4.7	0.6	0.2	0.2
70°	0.1	0.1	0.1	0.1	0.3	0.2	0.2	0.3	0.4	0.2	0.1	0.1	0.1
75°	0.0	0.0	0.0	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.0	0.1
80°	0.0	0.0	0.1	0.1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
95°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
100°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
105°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
110°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
115°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
120°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
125°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
130°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
135°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
140°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
145°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
150°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
155°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
165°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
175°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Silica® 31	Order number: 51MY6LDS44BA EAN: 4069025073204	LP number 59650_6
Table of values for luminous intensities		Maximum luminous intensity
		sITeCO

C-planes	195°	210°	225°	240°	255°	270°	285°	300°	315°	330°	345°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0°	589.6	589.6	589.6	589.6	589.6	589.6	589.6	589.6	589.6	589.6	589.6	3.5	3.5
5°	589.5	589.3	589.3	589.4	589.3	589.1	588.8	589.2	589.5	589.5	589.5	28.2	31.7
10°	587.5	587.5	587.8	587.7	588.4	588.0	588.4	588.9	588.9	588.9	588.7	56.0	87.7
15°	585.8	586.7	586.7	587.0	586.5	587.4	587.6	588.6	588.4	587.7	587.0	83.3	171.0
20°	583.0	584.9	586.7	582.7	580.7	581.3	582.8	584.9	587.8	585.6	584.3	109.3	280.2
25°	578.6	581.4	576.5	573.9	573.7	575.5	576.6	575.9	575.8	582.3	578.8	133.1	413.4
30°	565.7	567.2	554.0	561.2	566.8	569.8	569.4	562.7	551.6	563.9	555.4	152.7	566.1
35°	519.1	512.8	512.1	516.7	470.5	458.8	472.3	512.1	508.2	485.7	495.3	153.4	719.5
40°	419.8	392.7	437.6	379.4	355.4	347.6	349.4	376.2	408.2	372.4	384.6	130.6	850.1
45°	224.5	235.9	266.4	242.6	230.4	237.2	228.0	224.8	263.5	221.4	214.1	83.9	934.0
50°	91.7	102.6	142.9	109.4	150.3	158.2	143.3	100.5	118.0	83.4	71.0	42.1	976.1
55°	27.0	36.0	36.8	66.0	78.6	80.0	77.1	54.2	36.8	37.9	13.2	18.2	994.3
60°	2.7	13.2	20.7	23.8	12.3	1.4	12.4	22.5	17.7	8.3	1.8	4.7	999.1
65°	0.1	1.0	6.4	1.9	1.1	1.0	1.1	1.9	6.4	0.5	0.1	0.7	999.8
70°	0.1	0.1	0.6	1.1	0.6	0.5	0.6	1.1	0.3	0.1	0.1	0.2	999.9
75°	0.0	0.0	0.1	0.3	0.1	0.0	0.1	0.3	0.0	0.0	0.0	0.0	1000.0
80°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
85°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
95°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
100°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
105°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
110°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
115°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
120°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
125°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
130°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
135°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
140°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
145°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
150°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
155°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
160°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
165°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
170°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
175°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Silica® 31	Order number: 51MY6LDS44BA EAN: 4069025073204	LP number 59650_6
-----------------------------	--	-----------------------------

UGR-Table	Standard room	siteco
------------------	----------------------	---------------

Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	View crosswise (C0)					View endwise (C90)					
x	y										
2H	2H	19.8	21.1	20.1	21.4	21.7	19.7	21.1	20.1	21.4	21.7
	3H	19.7	20.8	20.0	21.2	21.5	19.6	20.8	20.0	21.1	21.5
	4H	19.6	20.7	20.0	21.0	21.4	19.5	20.6	19.9	21.0	21.3
	6H	19.5	20.5	19.9	20.9	21.3	19.5	20.4	19.9	20.8	21.2
	8H	19.5	20.4	19.9	20.8	21.2	19.5	20.4	19.9	20.7	21.1
	12H	19.5	20.3	19.9	20.7	21.1	19.5	20.3	19.9	20.7	21.1
4H	2H	19.6	20.7	20.0	21.0	21.4	19.6	20.6	20.0	21.0	21.4
	3H	19.5	20.3	19.9	20.7	21.2	19.4	20.3	19.8	20.7	21.1
	4H	19.4	20.2	19.8	20.6	21.0	19.3	20.1	19.8	20.5	21.0
	6H	19.3	20.0	19.8	20.4	20.9	19.2	19.9	19.7	20.3	20.8
	8H	19.3	19.9	19.7	20.3	20.8	19.2	19.8	19.7	20.3	20.7
	12H	19.3	19.8	19.7	20.2	20.7	19.2	19.7	19.7	20.2	20.7
8H	4H	19.3	19.9	19.7	20.3	20.8	19.2	19.8	19.7	20.3	20.7
	6H	19.2	19.7	19.7	20.1	20.6	19.1	19.6	19.6	20.1	20.6
	8H	19.1	19.5	19.6	20.0	20.6	19.1	19.5	19.6	20.0	20.5
	12H	19.1	19.4	19.6	19.9	20.5	19.0	19.4	19.5	19.9	20.4
12H	4H	19.3	19.8	19.7	20.2	20.7	19.2	19.7	19.7	20.2	20.7
	6H	19.1	19.5	19.7	20.0	20.6	19.1	19.5	19.6	20.0	20.5
	8H	19.1	19.4	19.6	19.9	20.5	19.0	19.4	19.5	19.9	20.4


Luminance table	Max. for $\gamma \geq 65^\circ$	Photometric dimensions in mm:	L = 240	B = 240
------------------------	---	--------------------------------------	----------------	----------------

C-planes	0°	30°	60°	90°	120°	150°	180°	210°	240°	270°	300°	330°
γ	Luminance in cd/m ²											
45°	19696.3	21758.8	22302.8	19707.6	23050.7	23730.7	27855.8	26756.6	27515.9	26904.0	25498.7	25113.3
50°	6637.3	7976.2	9449.7	14423.9	9141.8	11331.0	11461.9	12803.4	13651.2	19734.8	12541.6	10409.7
55°	1146.0	3991.4	5673.5	8150.8	6157.0	4423.2	2436.6	5028.2	9223.8	11189.4	7579.3	5293.6
60°	80.4	1028.1	2612.4	92.1	2508.3	1772.6	308.6	2110.8	3812.8	229.1	3617.2	1336.1
65°	26.6	65.3	95.3	76.9	114.3	121.1	36.8	192.8	352.1	181.4	359.7	89.6
70°	13.8	22.7	76.2	55.3	90.1	26.7	26.0	17.6	261.0	113.3	263.1	13.6
75°	3.4	15.2	45.2	20.8	44.9	22.0	19.2	11.5	98.9	3.4	100.7	3.4
80°	0.0	30.0	10.6	0.0	6.9	21.7	15.7	5.1	0.9	0.0	1.4	3.2
85°	0.0	0.0	0.0	0.0	0.0	0.0	17.5	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Silica® 31	Order number: 51MY6LDS44BA EAN: 4069025073204	LP number 59650_6
------------------------------------	--	------------------------------------

Luminance values in cd/m² γ 65° γ 70° γ 75° γ 80° γ 85° **siteco**

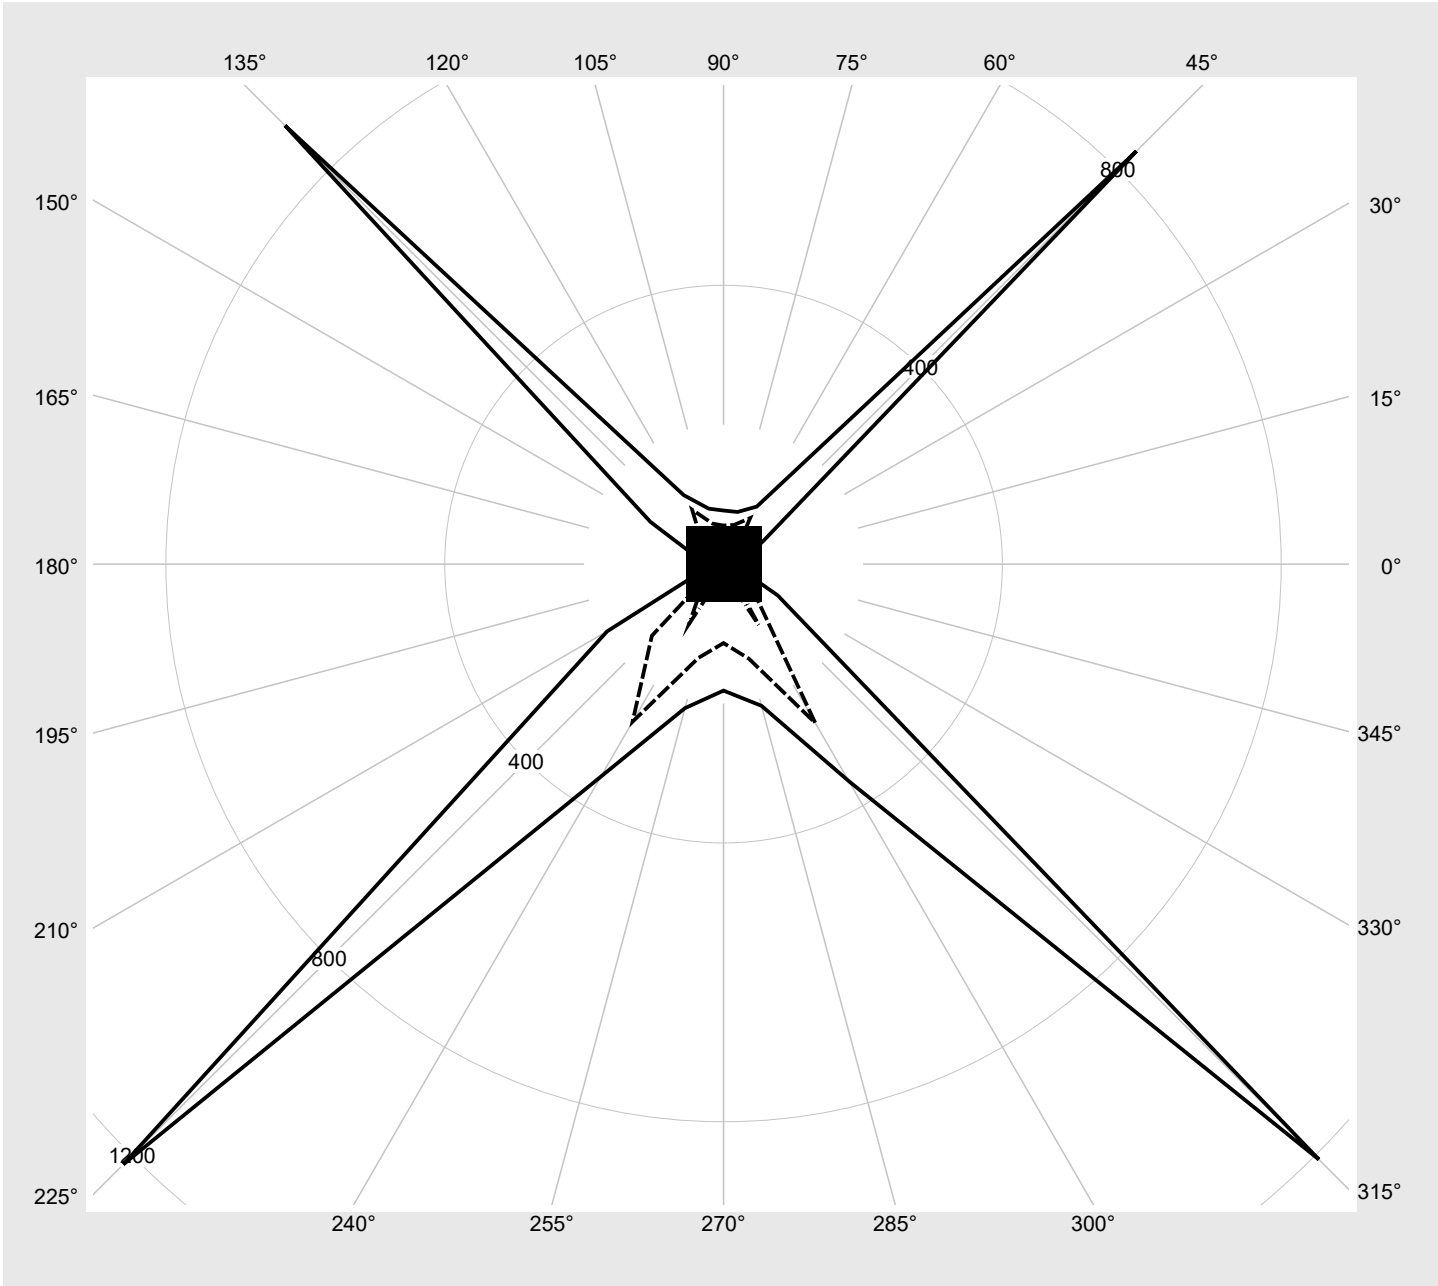

Photometric test report

Family Silica® 31	Order number: 51MY6LDS44BA EAN: 4069025073204	LP number 59650_6
-----------------------------	--	-----------------------------

Multilumen Table	environmental temperature: 25°C	sITeco
-------------------------	---------------------------------	---------------

DIP-Step	Switch Setting				Luminous flux [lm]	Power consumption [W]
	1	2	3	4		
0	OFF	OFF	OFF	OFF	6310	38.5
1	ON	OFF	OFF	OFF	6040	37.0
2	OFF	ON	OFF	OFF	5750	35.0
4	OFF	OFF	ON	OFF	5470	33.0
7	ON	ON	ON	OFF	5200	31.0
8	OFF	OFF	OFF	ON	4890	29.5
10	OFF	ON	OFF	ON	4620	28.0
12	OFF	OFF	ON	ON	4340	26.0
13	ON	OFF	ON	ON	4000	24.0
14	OFF	ON	ON	ON	3720	22.5