


# Photometric test report

<b>Family</b> <b>Silica® 31</b>	<b>Order number: 51MY6NDU34WA</b> <b>EAN: 4069025073471</b>	<b>LP number</b> <b>59651_4</b>
	<b>Version</b>	recessed luminaire for lay-in mounting, white, square M625, reflector, white, wide distribution, UGR≤19 (L65≤3000cd/m²)
	<b>Lamps</b>	LED 3000 K   CRI ≥ 80
	<b>Controlgear</b>	ECG-DALI
	<b>Setting</b>	factory setting: DIP-Step=10
	<b>Rated values</b>	Net luminous flux = 4540 lm Power consumption = 28.0 W Luminous efficacy = 162.1 lm/W
		<b>serial documentation</b> 28.06.2024
		

**Luminous intensity in cd/klm**
C180-0
C270-90
**Imax: 581 cd/klm**

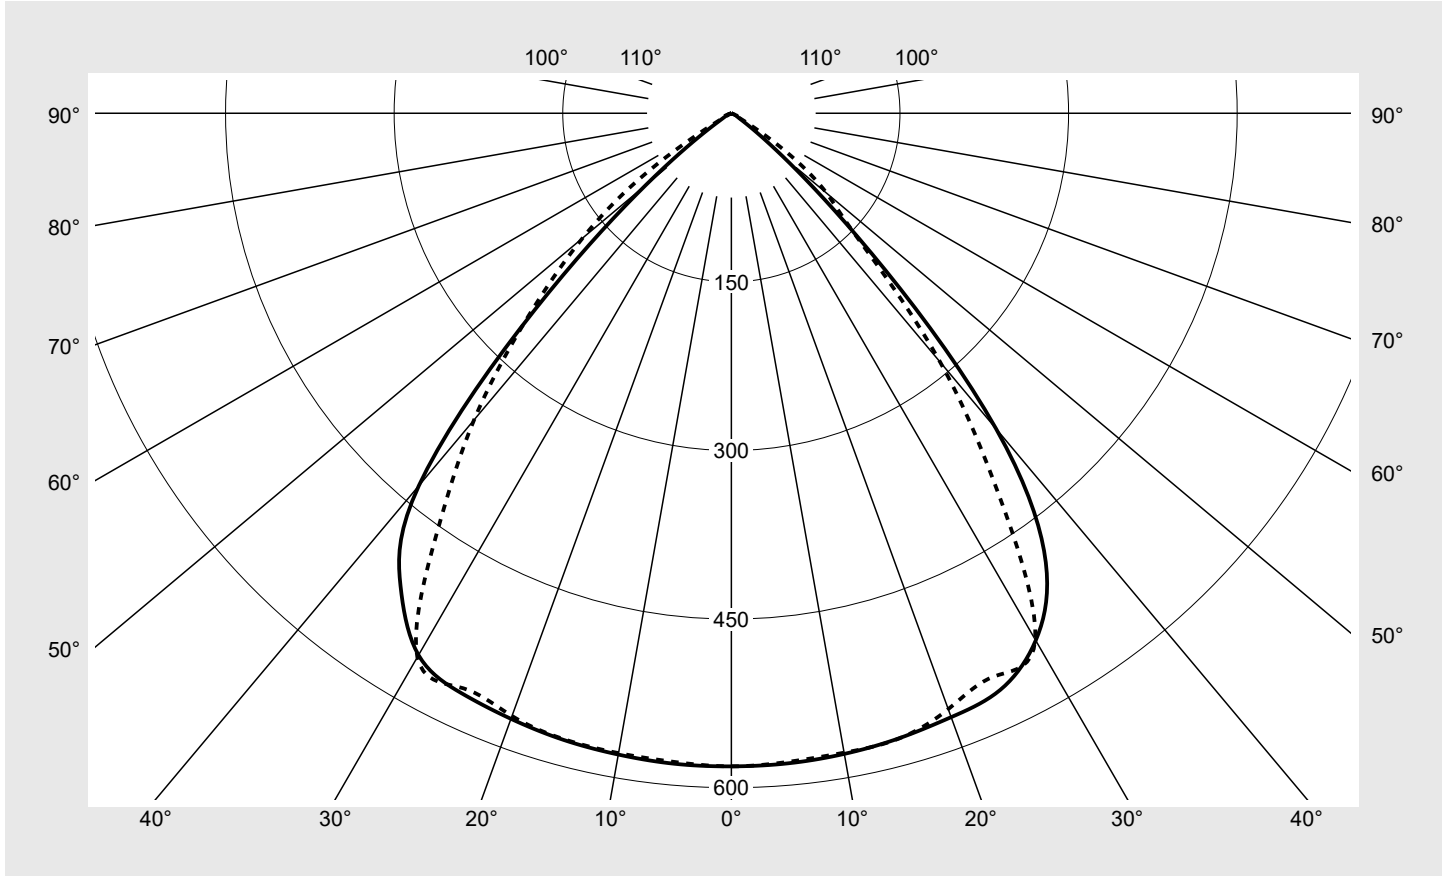

Classifications	
DIN 5040	A 6 0
CIE	N1=81 N2=99 N3=100 N4=100 N5=100

Luminaire light output ratios	
$\eta_{LB}$	100.0%
$\phi_u$	100.0%
$\phi_o$	0.0%

Measurement conditions
DIN EN 13032 and DIN 5032

## Photometric test report

<b>Family</b> <b>Silica® 31</b>	<b>Order number: 51MY6NDU34WA</b> <b>EAN: 4069025073471</b>	<b>LP number</b> <b>59651_4</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
		<b>siteco</b>

C-planes	0°	15°	30°	45°	60°	75°	90°	105°	120°	135°	150°	165°	180°
$\gamma$	Luminous intensity in cd/klm												
0°	581.0	581.0	581.0	581.0	581.0	581.0	581.0	581.0	581.0	581.0	581.0	581.0	581.0
5°	580.5	580.1	579.7	579.4	579.4	579.4	579.2	579.0	579.2	579.6	580.0	580.5	580.9
10°	578.7	578.5	578.4	578.3	578.0	577.7	577.6	577.5	578.2	578.7	578.6	578.8	579.3
15°	575.7	576.4	576.8	577.2	576.7	576.4	575.9	576.2	577.1	577.5	576.7	576.6	577.1
20°	571.7	572.8	573.6	576.1	569.0	564.9	564.1	566.2	570.5	575.8	575.1	572.8	573.3
25°	566.0	566.0	569.7	558.0	553.5	552.0	552.9	555.0	555.9	560.9	570.4	567.8	569.0
30°	541.6	540.0	546.9	525.4	533.0	536.9	540.7	543.2	535.9	528.0	550.7	551.3	556.7
35°	487.7	474.2	457.4	466.6	474.3	428.4	415.5	433.8	482.1	473.9	481.9	504.4	513.2
40°	366.3	361.1	338.8	353.2	337.9	294.5	289.0	304.8	337.6	388.1	355.1	393.3	432.6
45°	177.0	197.8	189.9	224.7	192.0	162.4	163.7	169.6	200.0	223.2	205.3	207.1	247.5
50°	59.6	73.0	68.9	101.0	76.5	96.8	110.7	105.6	75.4	118.3	93.8	83.2	99.3
55°	15.4	19.6	34.5	33.2	43.5	54.3	58.4	57.4	47.2	34.2	37.6	30.2	25.8
60°	6.2	7.6	11.7	17.6	20.1	12.5	5.7	12.8	19.7	20.8	16.2	8.0	8.2
65°	3.9	4.0	4.5	8.0	4.3	4.4	4.3	4.4	4.4	8.4	4.7	4.4	4.5
70°	2.5	2.7	2.8	2.8	3.1	3.0	2.9	3.0	3.1	2.9	2.9	2.7	3.0
75°	1.6	1.7	1.7	1.8	1.8	1.7	1.5	1.6	1.8	1.9	1.8	1.7	1.9
80°	0.9	1.0	1.0	0.9	0.4	0.1	0.0	0.1	0.4	0.8	1.0	1.0	1.2
85°	0.3	0.5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.5	0.6
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
95°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
100°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
105°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
110°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
115°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
120°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
125°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
130°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
135°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
140°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
145°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
150°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
155°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
165°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
175°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

## Photometric test report

<b>Family</b> <b>Silica® 31</b>	<b>Order number: 51MY6NDU34WA</b> <b>EAN: 4069025073471</b>	<b>LP number</b> <b>59651_4</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
		<b>sITeCO</b>

C-planes $\gamma$	195°	210°	225°	240°	255°	270°	285°	300°	315°	330°	345°	Phi-zone	Total Phi-zone
	Luminous intensity in cd/klm												
0°	581.0	581.0	581.0	581.0	581.0	581.0	581.0	581.0	581.0	581.0	581.0	3.5	3.5
5°	580.6	580.2	579.9	579.4	579.2	579.3	579.6	579.6	579.6	579.9	580.2	27.7	31.2
10°	578.7	578.5	579.0	578.9	578.0	578.0	578.3	578.9	579.0	578.8	578.6	55.1	86.2
15°	576.8	576.9	577.2	577.4	577.4	576.4	577.2	578.0	577.5	577.0	576.5	81.8	168.1
20°	573.4	575.5	576.5	572.6	571.3	570.6	571.8	573.3	576.3	573.9	572.8	107.3	275.4
25°	568.6	571.7	567.0	563.8	563.3	564.4	565.2	564.3	564.4	569.1	566.4	130.6	405.9
30°	556.7	557.9	546.1	551.7	555.8	558.7	557.7	551.5	541.1	552.6	542.8	149.6	555.5
35°	512.6	507.6	507.3	509.7	467.7	457.5	468.2	504.9	500.8	479.1	486.3	150.6	706.1
40°	418.8	394.7	438.8	381.7	362.9	356.1	354.7	376.9	409.9	373.1	383.3	129.2	835.4
45°	231.5	245.7	274.1	252.0	248.3	255.5	243.3	232.7	270.2	228.4	219.8	85.0	920.3
50°	100.9	114.3	152.3	123.7	166.7	172.8	157.5	112.9	125.8	91.5	77.8	44.8	965.1
55°	35.6	44.5	45.1	77.3	90.7	91.0	88.1	63.5	43.5	44.4	20.3	21.2	986.3
60°	9.0	19.9	27.4	32.0	20.3	8.7	20.2	30.1	23.2	14.3	8.1	7.5	993.9
65°	4.7	6.0	11.5	7.6	6.8	6.4	6.8	7.5	11.0	5.2	4.2	2.9	996.8
70°	2.9	3.3	4.3	5.1	4.5	4.2	4.5	5.1	3.8	3.1	2.9	1.7	998.5
75°	1.9	2.0	2.5	2.7	2.2	2.0	2.2	2.6	2.2	1.9	1.8	1.0	999.6
80°	1.1	1.2	1.0	0.5	0.1	0.0	0.1	0.5	1.0	1.1	1.1	0.4	999.9
85°	0.5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.5	0.1	1000.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
95°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
100°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
105°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
110°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
115°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
120°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
125°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
130°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
135°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
140°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
145°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
150°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
155°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
160°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
165°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
170°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
175°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

## Photometric test report

Family <b>Silica® 31</b>	Order number: <b>51MY6NDU34WA</b> EAN: <b>4069025073471</b>	LP number <b>59651_4</b>
-----------------------------	--	-----------------------------

<b>UGR-Table</b>	<b>Standard room</b>	<b>siteco</b>
------------------	----------------------	---------------

Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	View crosswise (C0)					View endwise (C90)					
x	y										
2H	2H	19.7	21.1	20.1	21.4	21.7	19.5	20.9	19.9	21.2	21.5
	3H	19.6	20.8	20.0	21.1	21.5	19.4	20.6	19.8	20.9	21.3
	4H	19.5	20.6	19.9	21.0	21.3	19.3	20.4	19.7	20.8	21.1
	6H	19.5	20.5	19.9	20.8	21.2	19.3	20.2	19.7	20.6	21.0
	8H	19.4	20.4	19.9	20.7	21.2	19.2	20.2	19.7	20.5	21.0
	12H	19.5	20.3	19.9	20.7	21.1	19.3	20.1	19.7	20.5	20.9
4H	2H	19.6	20.7	20.0	21.0	21.4	19.3	20.4	19.7	20.8	21.2
	3H	19.4	20.3	19.9	20.7	21.1	19.2	20.1	19.6	20.5	20.9
	4H	19.4	20.2	19.8	20.6	21.0	19.1	19.9	19.6	20.3	20.8
	6H	19.3	20.0	19.7	20.4	20.9	19.1	19.7	19.5	20.2	20.6
	8H	19.2	19.9	19.7	20.3	20.8	19.0	19.6	19.5	20.1	20.6
	12H	19.2	19.7	19.7	20.2	20.7	19.0	19.5	19.5	20.0	20.5
8H	4H	19.3	19.9	19.7	20.3	20.8	19.0	19.6	19.5	20.1	20.6
	6H	19.2	19.6	19.7	20.1	20.6	18.9	19.4	19.4	19.9	20.4
	8H	19.1	19.5	19.6	20.0	20.6	18.9	19.3	19.4	19.8	20.3
	12H	19.1	19.4	19.6	19.9	20.5	18.8	19.2	19.4	19.7	20.2
12H	4H	19.2	19.7	19.7	20.2	20.7	19.0	19.5	19.5	20.0	20.5
	6H	19.1	19.5	19.6	20.0	20.6	18.9	19.3	19.4	19.8	20.3
	8H	19.1	19.4	19.6	19.9	20.5	18.8	19.2	19.4	19.7	20.2


<b>Luminance table</b>	<b>Max. for <math>\gamma \geq 65^\circ</math></b>	<b>Photometric dimensions in mm:</b>	<b>L = 240</b>
			<b>B = 240</b>

C-planes	0°	30°	60°	90°	120°	150°	180°	210°	240°	270°	300°	330°
$\gamma$	Luminance in cd/m <sup>2</sup>											
45°	19732.7	21169.1	21403.0	18251.5	22293.8	22884.1	27583.4	27382.9	28084.5	28485.3	25935.1	25456.4
50°	7310.8	8453.8	9376.2	13573.1	9243.9	11499.1	12175.3	14014.1	15165.6	21192.6	13842.6	11214.9
55°	2119.7	4744.5	5971.9	8022.8	6481.2	5170.1	3547.3	6109.2	10624.3	12502.2	8732.5	6099.6
60°	969.5	1837.8	3163.8	896.8	3102.3	2560.7	1295.6	3137.0	5039.4	1366.9	4738.6	2258.3
65°	721.0	831.4	807.6	802.1	828.8	869.3	842.8	1119.0	1421.3	1202.0	1401.8	976.9
70°	585.1	649.0	709.8	670.8	712.6	660.2	691.8	752.9	1175.5	972.3	1169.8	719.9
75°	484.8	521.4	557.3	463.5	552.7	544.2	593.5	624.0	811.0	605.7	799.1	580.7
80°	401.3	466.6	187.0	0.0	178.8	473.9	529.7	561.5	232.4	0.0	233.8	520.6
85°	265.0	0.0	0.0	0.0	0.0	0.0	516.4	0.0	0.0	0.0	0.0	0.0

**Photometric test report**

<b>Family</b> <b>Silica® 31</b>	<b>Order number: 51MY6NDU34WA</b> <b>EAN: 4069025073471</b>	<b>LP number</b> <b>59651_4</b>
------------------------------------	--	------------------------------------

**Luminance values in cd/m<sup>2</sup>**     γ 65°   γ 70°   γ 75°   γ 80°   γ 85°     **siteco**

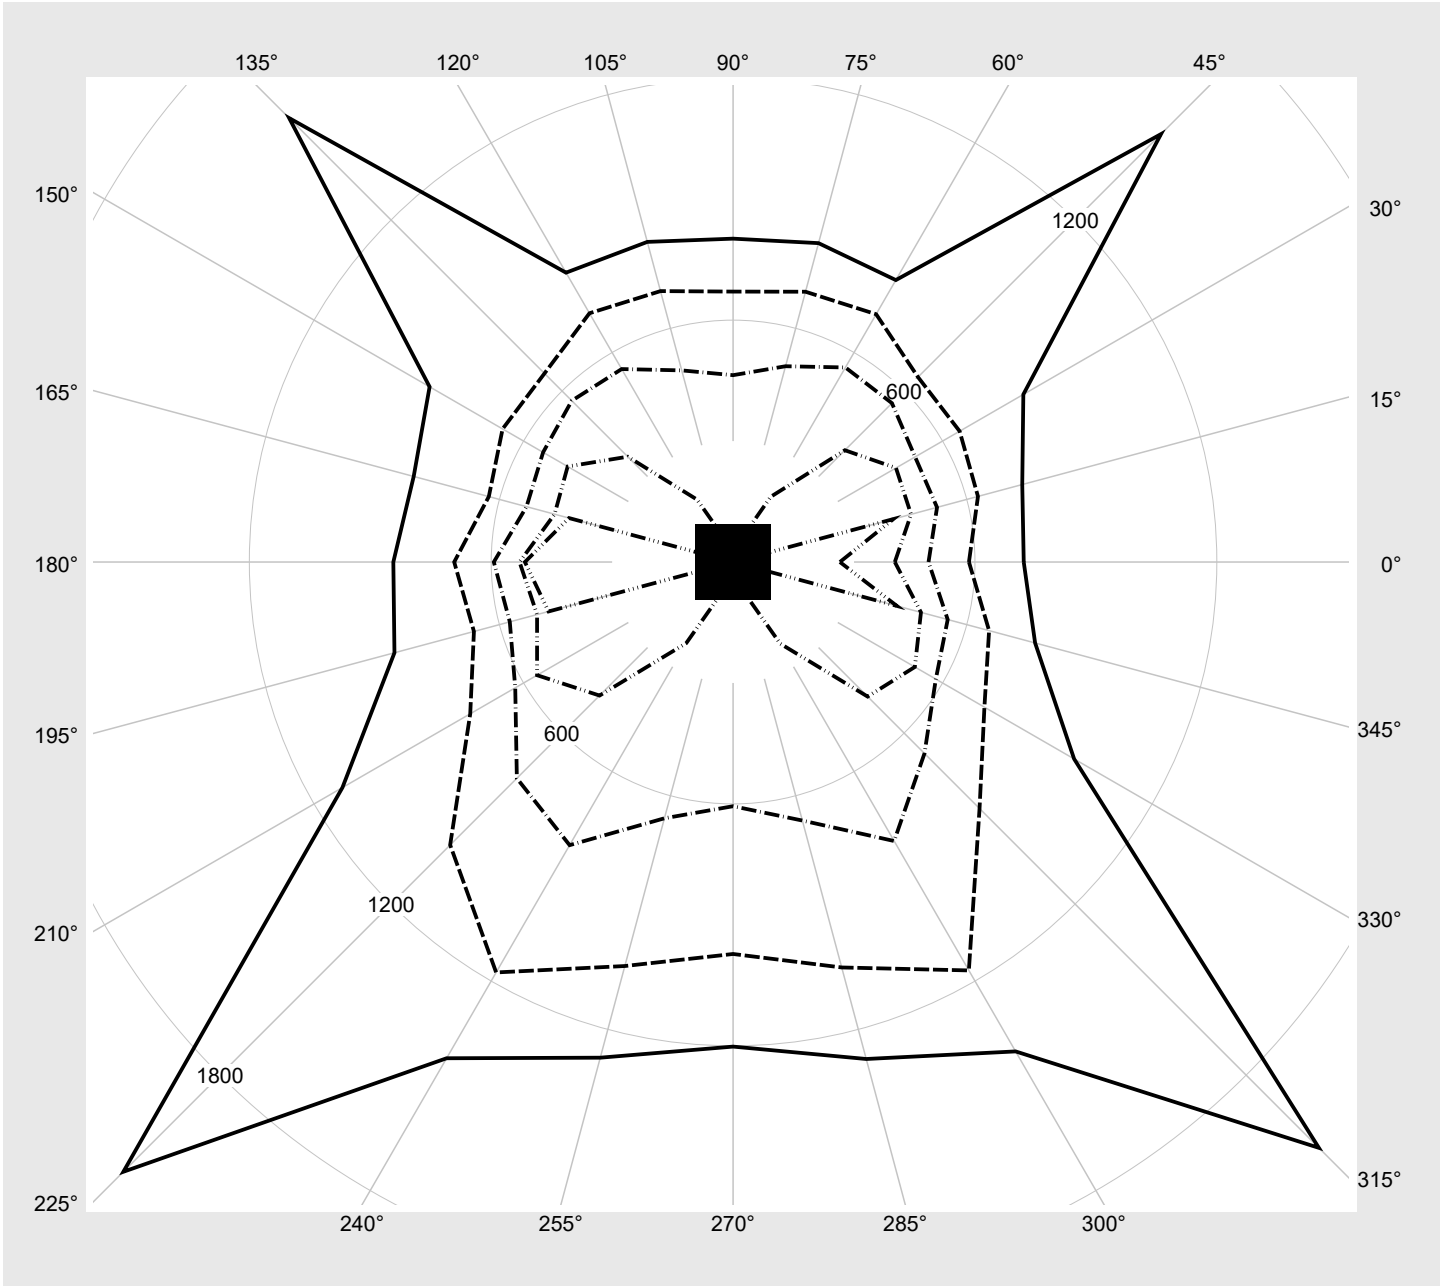

## Photometric test report

Family <b>Silica® 31</b>	Order number: <b>51MY6NDU34WA</b> EAN: <b>4069025073471</b>	LP number <b>59651_4</b>
-----------------------------	--	-----------------------------

<b>Multilumen Table</b>	environmental temperature: 25°C	<b>siteco</b>
-------------------------	---------------------------------	---------------

DIP-Step	Switch Setting				Luminous flux [lm]	Power consumption [W]
	1	2	3	4		
0	OFF	OFF	OFF	OFF	6230	38.5
1	ON	OFF	OFF	OFF	5960	37.0
2	OFF	ON	OFF	OFF	5680	35.0
4	OFF	OFF	ON	OFF	5400	33.0
7	ON	ON	ON	OFF	5130	31.0
8	OFF	OFF	OFF	ON	4820	29.5
10	OFF	ON	OFF	ON	4540	28.0
12	OFF	OFF	ON	ON	4330	26.0
13	ON	OFF	ON	ON	3960	24.0
14	OFF	ON	ON	ON	3670	22.5