


Photometric test report

Family Silica® 31	Order number: 51MY6NMU44WA EAN: 4069025073624	LP number 59651_2
	Version	recessed luminaire for lay-in mounting, white, square M625, reflector, white, wide distribution, UGR≤19 (L65≤3000cd/m²)
	Lamps	LED 4000 K CRI ≥ 80
	Controlgear	ECG Multilumen
	Setting	factory setting: DIP-Step=5
	Rated values	Net luminous flux = 4560 lm Power consumption = 24.5 W Luminous efficacy = 186.1 lm/W
		serial documentation 28.06.2024
		

Luminous intensity in cd/klm **C180-0** **C270-90** **Imax: 581 cd/klm**

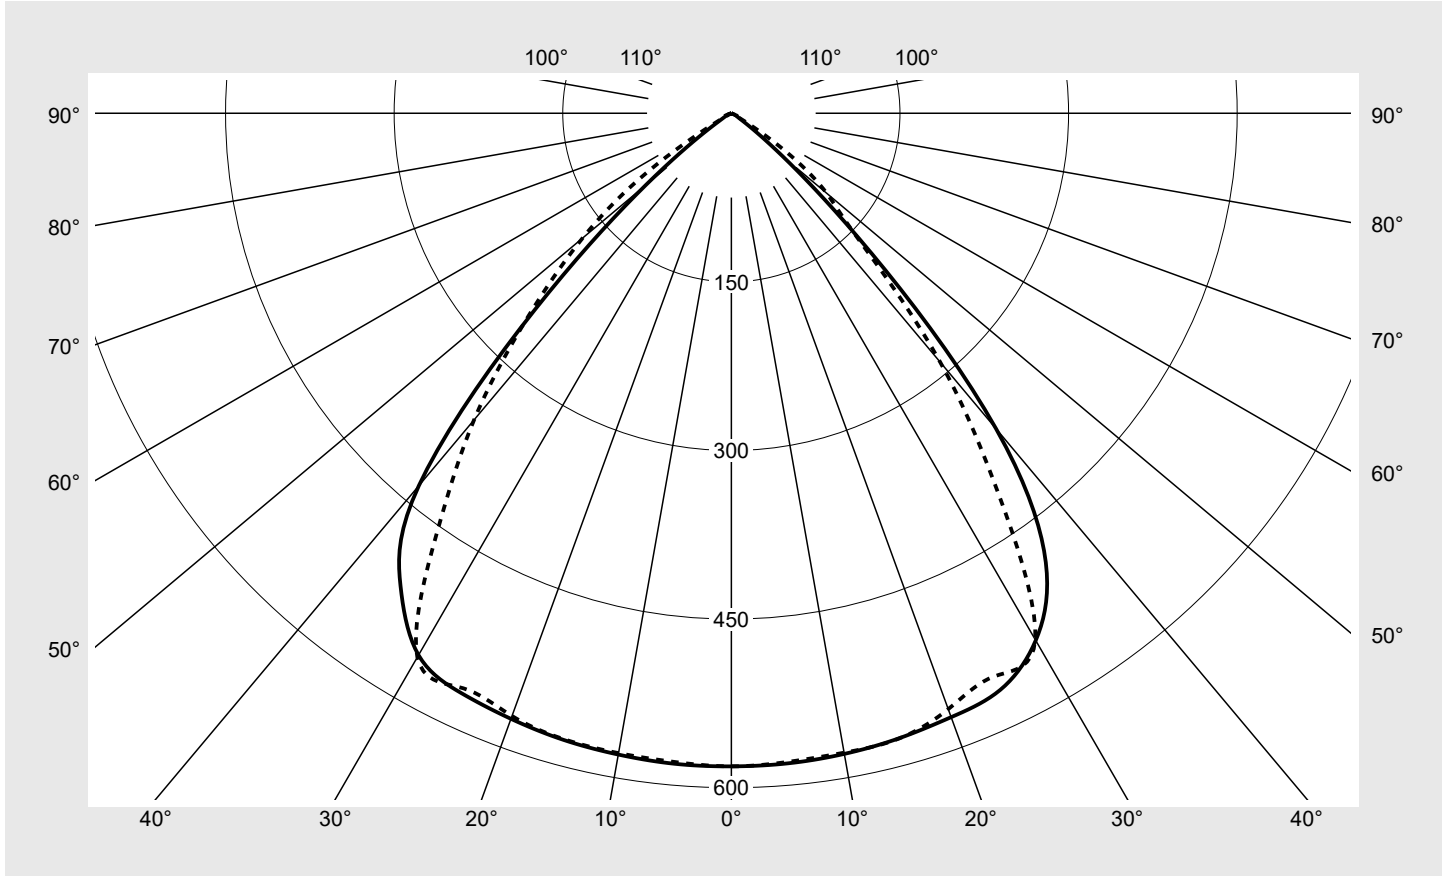

Classifications	
DIN 5040	A 6 0
CIE	N1=81 N2=99 N3=100 N4=100 N5=100

Luminaire light output ratios	
η_{LB}	100.0%
ϕ_u	100.0%
ϕ_o	0.0%

Measurement conditions
 DIN EN 13032 and DIN 5032

Photometric test report

Family Silica® 31	Order number: 51MY6NMU44WA EAN: 4069025073624	LP number 59651_2
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	0°	15°	30°	45°	60°	75°	90°	105°	120°	135°	150°	165°	180°
γ	Luminous intensity in cd/klm												
0°	581.0	581.0	581.0	581.0	581.0	581.0	581.0	581.0	581.0	581.0	581.0	581.0	581.0
5°	580.5	580.1	579.7	579.4	579.4	579.4	579.2	579.0	579.2	579.6	580.0	580.5	580.9
10°	578.7	578.5	578.4	578.3	578.0	577.7	577.6	577.5	578.2	578.7	578.6	578.8	579.3
15°	575.7	576.4	576.8	577.2	576.7	576.4	575.9	576.2	577.1	577.5	576.7	576.6	577.1
20°	571.7	572.8	573.6	576.1	569.0	564.9	564.1	566.2	570.5	575.8	575.1	572.8	573.3
25°	566.0	566.0	569.7	558.0	553.5	552.0	552.9	555.0	555.9	560.9	570.4	567.8	569.0
30°	541.6	540.0	546.9	525.4	533.0	536.9	540.7	543.2	535.9	528.0	550.7	551.3	556.7
35°	487.7	474.2	457.4	466.6	474.3	428.4	415.5	433.8	482.1	473.9	481.9	504.4	513.2
40°	366.3	361.1	338.8	353.2	337.9	294.5	289.0	304.8	337.6	388.1	355.1	393.3	432.6
45°	177.0	197.8	189.9	224.7	192.0	162.4	163.7	169.6	200.0	223.2	205.3	207.1	247.5
50°	59.6	73.0	68.9	101.0	76.5	96.8	110.7	105.6	75.4	118.3	93.8	83.2	99.3
55°	15.4	19.6	34.5	33.2	43.5	54.3	58.4	57.4	47.2	34.2	37.6	30.2	25.8
60°	6.2	7.6	11.7	17.6	20.1	12.5	5.7	12.8	19.7	20.8	16.2	8.0	8.2
65°	3.9	4.0	4.5	8.0	4.3	4.4	4.3	4.4	4.4	8.4	4.7	4.4	4.5
70°	2.5	2.7	2.8	2.8	3.1	3.0	2.9	3.0	3.1	2.9	2.9	2.7	3.0
75°	1.6	1.7	1.7	1.8	1.8	1.7	1.5	1.6	1.8	1.9	1.8	1.7	1.9
80°	0.9	1.0	1.0	0.9	0.4	0.1	0.0	0.1	0.4	0.8	1.0	1.0	1.2
85°	0.3	0.5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.5	0.6
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
95°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
100°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
105°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
110°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
115°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
120°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
125°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
130°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
135°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
140°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
145°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
150°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
155°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
165°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
175°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Silica® 31	Order number: 51MY6NMU44WA EAN: 4069025073624	LP number 59651_2
Table of values for luminous intensities		Maximum luminous intensity
		sITeco

C-planes	195°	210°	225°	240°	255°	270°	285°	300°	315°	330°	345°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0°	581.0	581.0	581.0	581.0	581.0	581.0	581.0	581.0	581.0	581.0	581.0	3.5	3.5
5°	580.6	580.2	579.9	579.4	579.2	579.3	579.6	579.6	579.6	579.9	580.2	27.7	31.2
10°	578.7	578.5	579.0	578.9	578.0	578.0	578.3	578.9	579.0	578.8	578.6	55.1	86.2
15°	576.8	576.9	577.2	577.4	577.4	576.4	577.2	578.0	577.5	577.0	576.5	81.8	168.1
20°	573.4	575.5	576.5	572.6	571.3	570.6	571.8	573.3	576.3	573.9	572.8	107.3	275.4
25°	568.6	571.7	567.0	563.8	563.3	564.4	565.2	564.3	564.4	569.1	566.4	130.6	405.9
30°	556.7	557.9	546.1	551.7	555.8	558.7	557.7	551.5	541.1	552.6	542.8	149.6	555.5
35°	512.6	507.6	507.3	509.7	467.7	457.5	468.2	504.9	500.8	479.1	486.3	150.6	706.1
40°	418.8	394.7	438.8	381.7	362.9	356.1	354.7	376.9	409.9	373.1	383.3	129.2	835.4
45°	231.5	245.7	274.1	252.0	248.3	255.5	243.3	232.7	270.2	228.4	219.8	85.0	920.3
50°	100.9	114.3	152.3	123.7	166.7	172.8	157.5	112.9	125.8	91.5	77.8	44.8	965.1
55°	35.6	44.5	45.1	77.3	90.7	91.0	88.1	63.5	43.5	44.4	20.3	21.2	986.3
60°	9.0	19.9	27.4	32.0	20.3	8.7	20.2	30.1	23.2	14.3	8.1	7.5	993.9
65°	4.7	6.0	11.5	7.6	6.8	6.4	6.8	7.5	11.0	5.2	4.2	2.9	996.8
70°	2.9	3.3	4.3	5.1	4.5	4.2	4.5	5.1	3.8	3.1	2.9	1.7	998.5
75°	1.9	2.0	2.5	2.7	2.2	2.0	2.2	2.6	2.2	1.9	1.8	1.0	999.6
80°	1.1	1.2	1.0	0.5	0.1	0.0	0.1	0.5	1.0	1.1	1.1	0.4	999.9
85°	0.5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.5	0.1	1000.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
95°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
100°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
105°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
110°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
115°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
120°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
125°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
130°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
135°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
140°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
145°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
150°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
155°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
160°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
165°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
170°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
175°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Silica® 31	Order number: 51MY6NMU44WA EAN: 4069025073624	LP number 59651_2
-----------------------------	----------------------------------------------------------------	-----------------------------

UGR-Table	Standard room	siteco
------------------	----------------------	---------------

Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	View crosswise (C0)					View endwise (C90)					
x	y										
2H	2H	19.7	21.1	20.1	21.4	21.7	19.5	20.9	19.9	21.2	21.5
	3H	19.6	20.8	20.0	21.1	21.5	19.4	20.6	19.8	20.9	21.3
	4H	19.5	20.6	19.9	21.0	21.4	19.3	20.4	19.7	20.8	21.2
	6H	19.5	20.5	19.9	20.8	21.2	19.3	20.3	19.7	20.6	21.0
	8H	19.5	20.4	19.9	20.8	21.2	19.3	20.2	19.7	20.6	21.0
	12H	19.5	20.3	19.9	20.7	21.1	19.3	20.1	19.7	20.5	20.9
4H	2H	19.6	20.7	20.0	21.0	21.4	19.4	20.5	19.8	20.8	21.2
	3H	19.5	20.3	19.9	20.7	21.2	19.2	20.1	19.7	20.5	20.9
	4H	19.4	20.2	19.8	20.6	21.0	19.2	19.9	19.6	20.4	20.8
	6H	19.3	20.0	19.8	20.4	20.9	19.1	19.8	19.5	20.2	20.7
	8H	19.3	19.9	19.7	20.3	20.8	19.0	19.6	19.5	20.1	20.6
	12H	19.3	19.8	19.7	20.2	20.7	19.0	19.5	19.5	20.0	20.5
8H	4H	19.3	19.9	19.7	20.3	20.8	19.0	19.6	19.5	20.1	20.6
	6H	19.2	19.7	19.7	20.1	20.7	18.9	19.4	19.4	19.9	20.4
	8H	19.1	19.6	19.6	20.0	20.6	18.9	19.3	19.4	19.8	20.3
	12H	19.1	19.4	19.6	19.9	20.5	18.9	19.2	19.4	19.7	20.3
12H	4H	19.3	19.8	19.7	20.2	20.7	19.0	19.5	19.5	20.0	20.5
	6H	19.1	19.6	19.7	20.0	20.6	18.9	19.3	19.4	19.8	20.3
	8H	19.1	19.4	19.6	19.9	20.5	18.9	19.2	19.4	19.7	20.3


Luminance table	Max. for $\gamma \geq 65^\circ$	Photometric dimensions in mm:	L = 240	B = 240
------------------------	---------------------------------------------------	--------------------------------------	----------------	----------------

C-planes	0°	30°	60°	90°	120°	150°	180°	210°	240°	270°	300°	330°
γ	Luminance in cd/m ²											
45°	19819.6	21262.4	21497.3	18331.9	22392.1	22984.9	27704.9	27503.5	28208.2	28610.8	26049.4	25568.5
50°	7343.0	8491.0	9417.5	13632.9	9284.7	11549.7	12228.9	14075.9	15232.4	21286.0	13903.6	11264.3
55°	2129.0	4765.4	5998.2	8058.2	6509.7	5192.8	3562.9	6136.1	10671.1	12557.3	8770.9	6126.4
60°	973.8	1845.9	3177.8	900.8	3116.0	2572.0	1301.3	3150.8	5061.6	1372.9	4759.5	2268.3
65°	724.2	835.1	811.1	805.7	832.5	873.1	846.5	1123.9	1427.6	1207.3	1407.9	981.2
70°	587.7	651.8	712.9	673.8	715.7	663.2	694.9	756.2	1180.7	976.6	1174.9	723.1
75°	487.0	523.7	559.8	465.5	555.2	546.6	596.2	626.7	814.5	608.4	802.6	583.3
80°	403.0	468.7	187.8	0.0	179.6	476.0	532.0	564.0	233.4	0.0	234.8	522.9
85°	266.1	0.0	0.0	0.0	0.0	0.0	518.7	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Silica® 31	Order number: 51MY6NMU44WA EAN: 4069025073624	LP number 59651_2
------------------------------------	----------------------------------------------------------------	------------------------------------

Luminance values in cd/m² γ 65° γ 70° γ 75° γ 80° γ 85° **siteco**

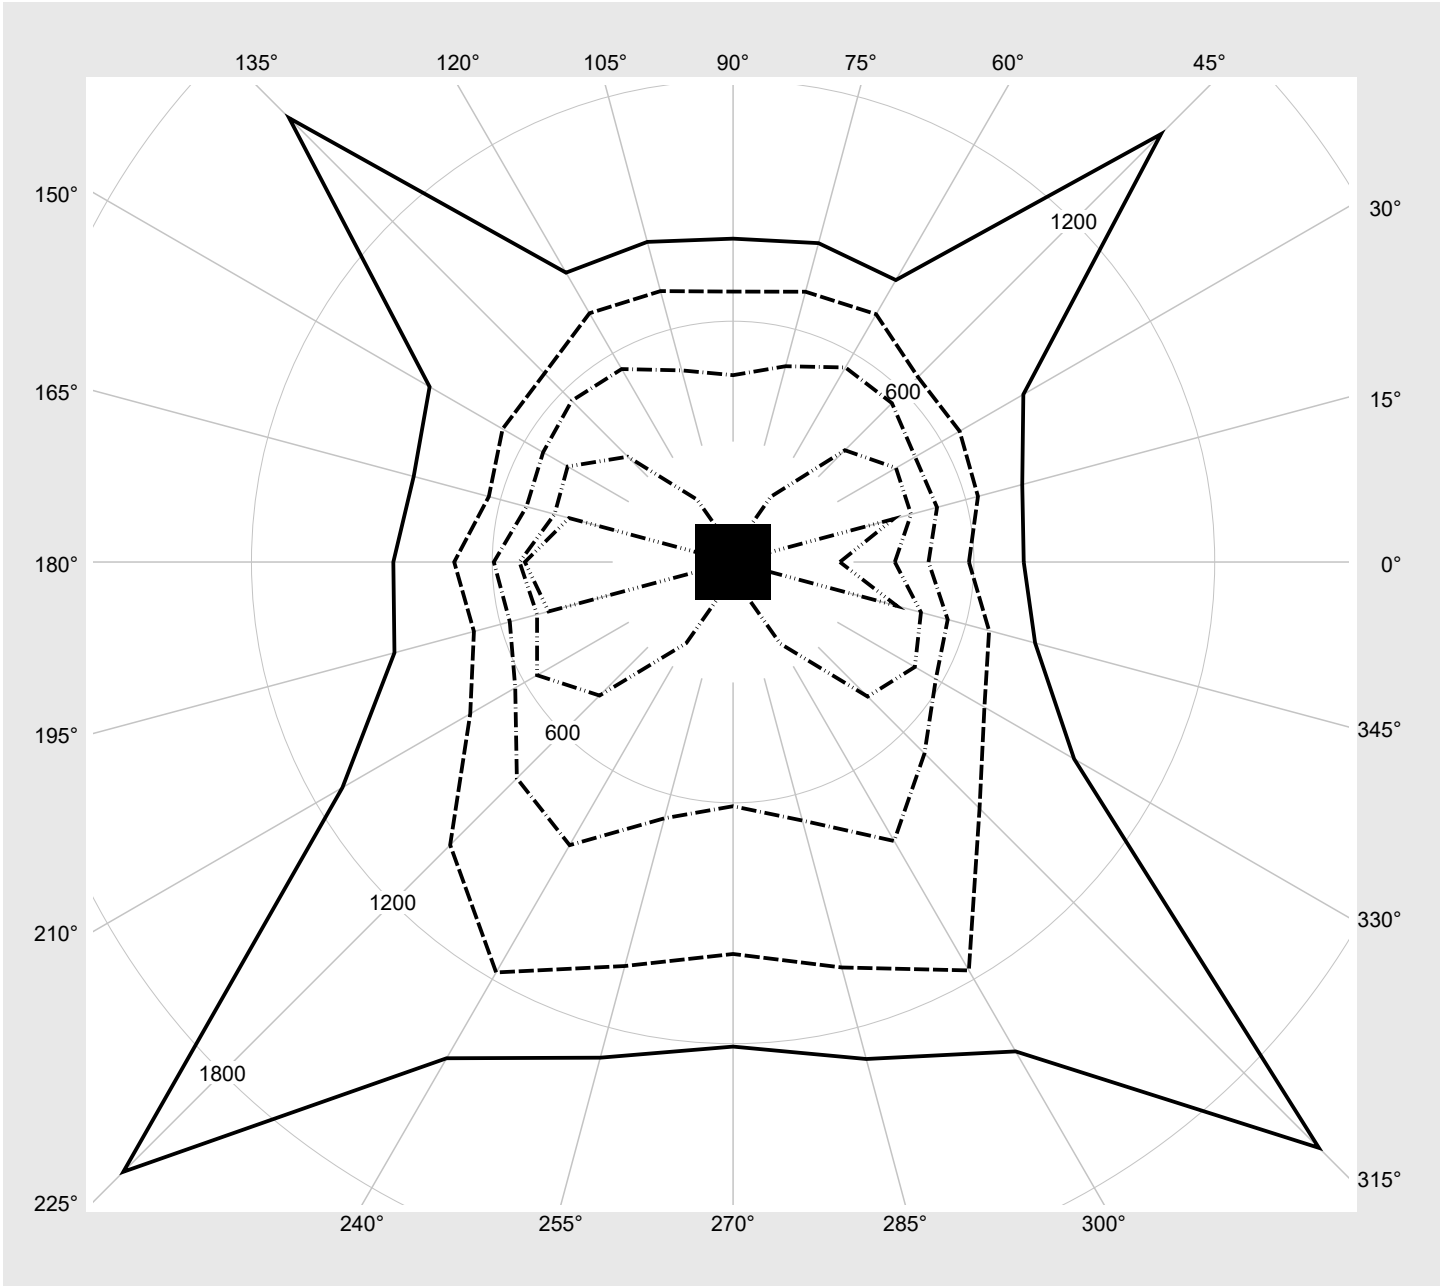

Photometric test report

Family Silica® 31	Order number: 51MY6NMU44WA EAN: 4069025073624	LP number 59651_2
-----------------------------	----------------------------------------------------------------	-----------------------------

Multilumen Table	environmental temperature: 25°C	siteco
-------------------------	---------------------------------	---------------

DIP-Step	Switch Setting				Luminous flux [lm]	Power consumption [W]
	1	2	3	4		
15	ON	ON	ON	ON	6970	39.0
14	OFF	ON	ON	ON	6670	37.0
13	ON	OFF	ON	ON	6370	35.0
12	OFF	OFF	ON	ON	6070	33.0
10	OFF	ON	OFF	ON	5780	31.5
9	ON	OFF	OFF	ON	5500	30.0
8	OFF	OFF	OFF	ON	5130	28.0
6	OFF	ON	ON	OFF	4840	26.0
5	ON	OFF	ON	OFF	4560	24.5
4	OFF	OFF	ON	OFF	4260	22.5
2	OFF	ON	OFF	OFF	3940	21.0
1	ON	OFF	OFF	OFF	3610	19.0
0	OFF	OFF	OFF	OFF	3290	17.5