


Photometric test report

Family Rondel 31	Order number: 51WC10MB34A + 51WC10E EAN: 4058352616970 + 4058352616871	LP number 59345_29
Version	enclosure, PC, transparent, opal, emergency light element 3h operating duration, diffuse beam	serial documentation 18.11.2022
Lamps	LED 3000 K CRI ≥ 80	
Controlgear	ECG Multilumen	
Rated values	Net luminous flux = 4250 lm Power consumption = 36.2 W Luminous efficacy = 117.4 lm/W	



Luminous intensity in cd/klm C180-0 **Imax: 297 cd/klm**

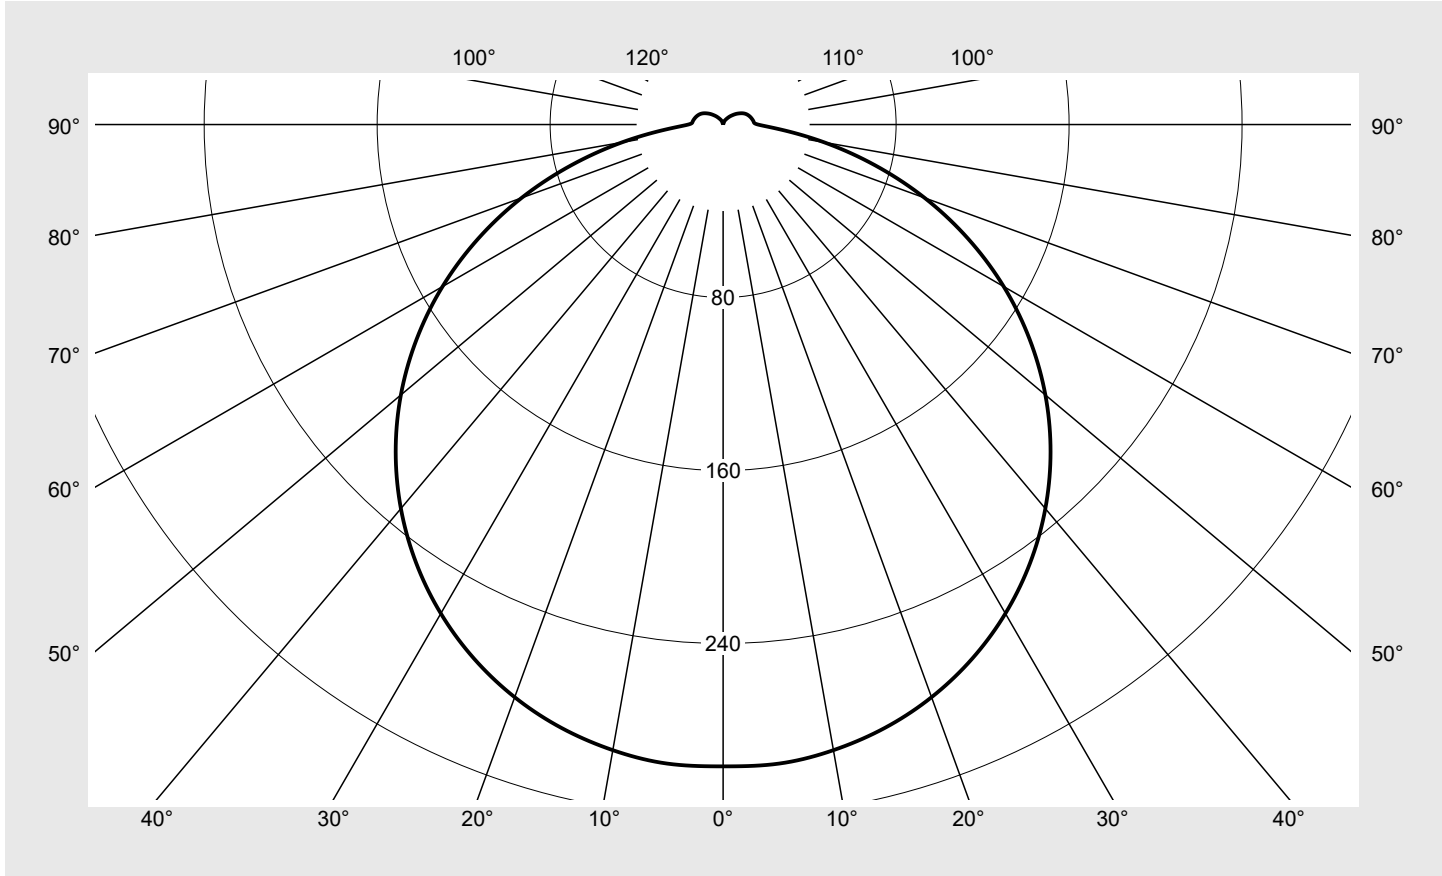

Classifications	
DIN 5040	A 4 1
CIE	N1=44 N2=75 N3=94 N4=94 N5=100

Luminaire light output ratios	
η_{LB}	100.0%
ϕ_u	94.2%
ϕ_o	5.8%

Measurement conditions
DIN EN 13032 and DIN 5032

Photometric test report

Family Rondel 31	Order number: 51WC10MB34A + 51WC10E EAN: 4058352616970 + 4058352616871	LP number 59345_29
----------------------------	---	------------------------------

sITeco

Table of values for luminous intensities	Maximum luminous intensity
---	-----------------------------------

C-planes	0°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm	Luminous flux in lm/klm	
0°	296.8	1.8	1.8
5°	296.7	14.2	15.9
10°	293.8	28.0	43.9
15°	288.9	41.0	84.9
20°	281.8	52.8	137.7
25°	272.6	63.1	200.9
30°	261.1	71.6	272.4
35°	247.5	77.8	350.2
40°	231.8	81.7	431.9
45°	214.2	83.0	514.9
50°	194.6	81.7	596.6
55°	173.0	77.7	674.3
60°	149.9	71.1	745.5
65°	125.1	62.1	807.6
70°	99.2	51.1	858.7
75°	72.7	38.5	897.2
80°	47.5	25.7	922.8
85°	26.9	14.7	937.5
90°	16.1	8.8	946.3
95°	14.2	7.7	954.1
100°	13.7	7.4	961.5
105°	13.1	7.0	968.4
110°	12.4	6.4	974.8
115°	11.6	5.8	980.6
120°	10.4	4.9	985.5
125°	9.0	4.0	989.6
130°	7.6	3.2	992.7
135°	6.1	2.4	995.1
140°	4.9	1.7	996.8
145°	3.8	1.2	998.0
150°	2.9	0.8	998.8
155°	2.2	0.5	999.3
160°	1.6	0.3	999.6
165°	1.3	0.2	999.8
170°	1.2	0.1	999.9
175°	1.2	0.1	1000.0
180°	1.2	0.0	1000.0

Photometric test report

Family Rondel 31	Order number: 51WC10MB34A + 51WC10E EAN: 4058352616970 + 4058352616871	LP number 59345_29
----------------------------	---	------------------------------

UGR-Table	Standard room	siteco
------------------	----------------------	---------------

Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	View crosswise (C0)					View endwise (C90)					
x	y										
2H	2H	18.8	20.5	19.1	20.8	21.2	18.8	20.5	19.1	20.8	21.2
	3H	20.5	22.1	20.9	22.4	22.8	20.5	22.1	20.9	22.4	22.8
	4H	21.2	22.7	21.6	23.0	23.4	21.2	22.7	21.6	23.0	23.4
	6H	21.7	23.1	22.2	23.5	23.9	21.7	23.1	22.2	23.5	23.9
	8H	22.0	23.3	22.4	23.6	24.0	22.0	23.3	22.4	23.6	24.0
	12H	22.1	23.3	22.6	23.7	24.2	22.1	23.3	22.6	23.7	24.2
4H	2H	19.6	21.1	20.0	21.4	21.8	19.6	21.1	20.0	21.4	21.8
	3H	21.5	22.8	21.9	23.1	23.5	21.5	22.8	21.9	23.1	23.5
	4H	22.3	23.5	22.7	23.9	24.3	22.3	23.5	22.7	23.9	24.3
	6H	23.0	24.0	23.4	24.4	24.9	23.0	24.0	23.4	24.4	24.9
	8H	23.2	24.1	23.7	24.6	25.1	23.2	24.1	23.7	24.6	25.1
	12H	23.4	24.3	23.9	24.7	25.2	23.4	24.3	23.9	24.7	25.2
8H	4H	22.7	23.6	23.1	24.0	24.5	22.7	23.6	23.1	24.0	24.5
	6H	23.5	24.2	24.0	24.7	25.2	23.5	24.2	24.0	24.7	25.2
	8H	23.8	24.5	24.3	25.0	25.5	23.8	24.5	24.3	25.0	25.5
	12H	24.1	24.7	24.6	25.2	25.7	24.1	24.7	24.6	25.2	25.7
12H	4H	22.7	23.6	23.2	24.0	24.5	22.7	23.6	23.2	24.0	24.5
	6H	23.6	24.3	24.1	24.7	25.2	23.6	24.3	24.1	24.7	25.2
	8H	23.9	24.5	24.5	25.0	25.6	23.9	24.5	24.5	25.0	25.6

Luminance table	Max. for $\gamma \geq 65^\circ$	Photometric dimensions in mm: D = 480	H(C0) = 30 H(C90) = 30	H(C180) = 30 H(C270) = 30
------------------------	---	---------------------------------------	---------------------------	------------------------------

C-planes	0°
γ	Luminance in cd/m ²
45°	6588.9
50°	6492.8
55°	6361.8
60°	6186.4
65°	5937.0
70°	5588.9
75°	5085.1
80°	4430.3
85°	3789.3


Photometric test report

Family Rondel 31	Order number: 51WC10MB34A + 51WC10E EAN: 4058352616970 + 4058352616871	LP number 59345_29
-----------------------------------	---	-------------------------------------

Luminance values in cd/m²


γ 65°
 γ 70°
 γ 75°
 γ 80°
 γ 85°

siteco

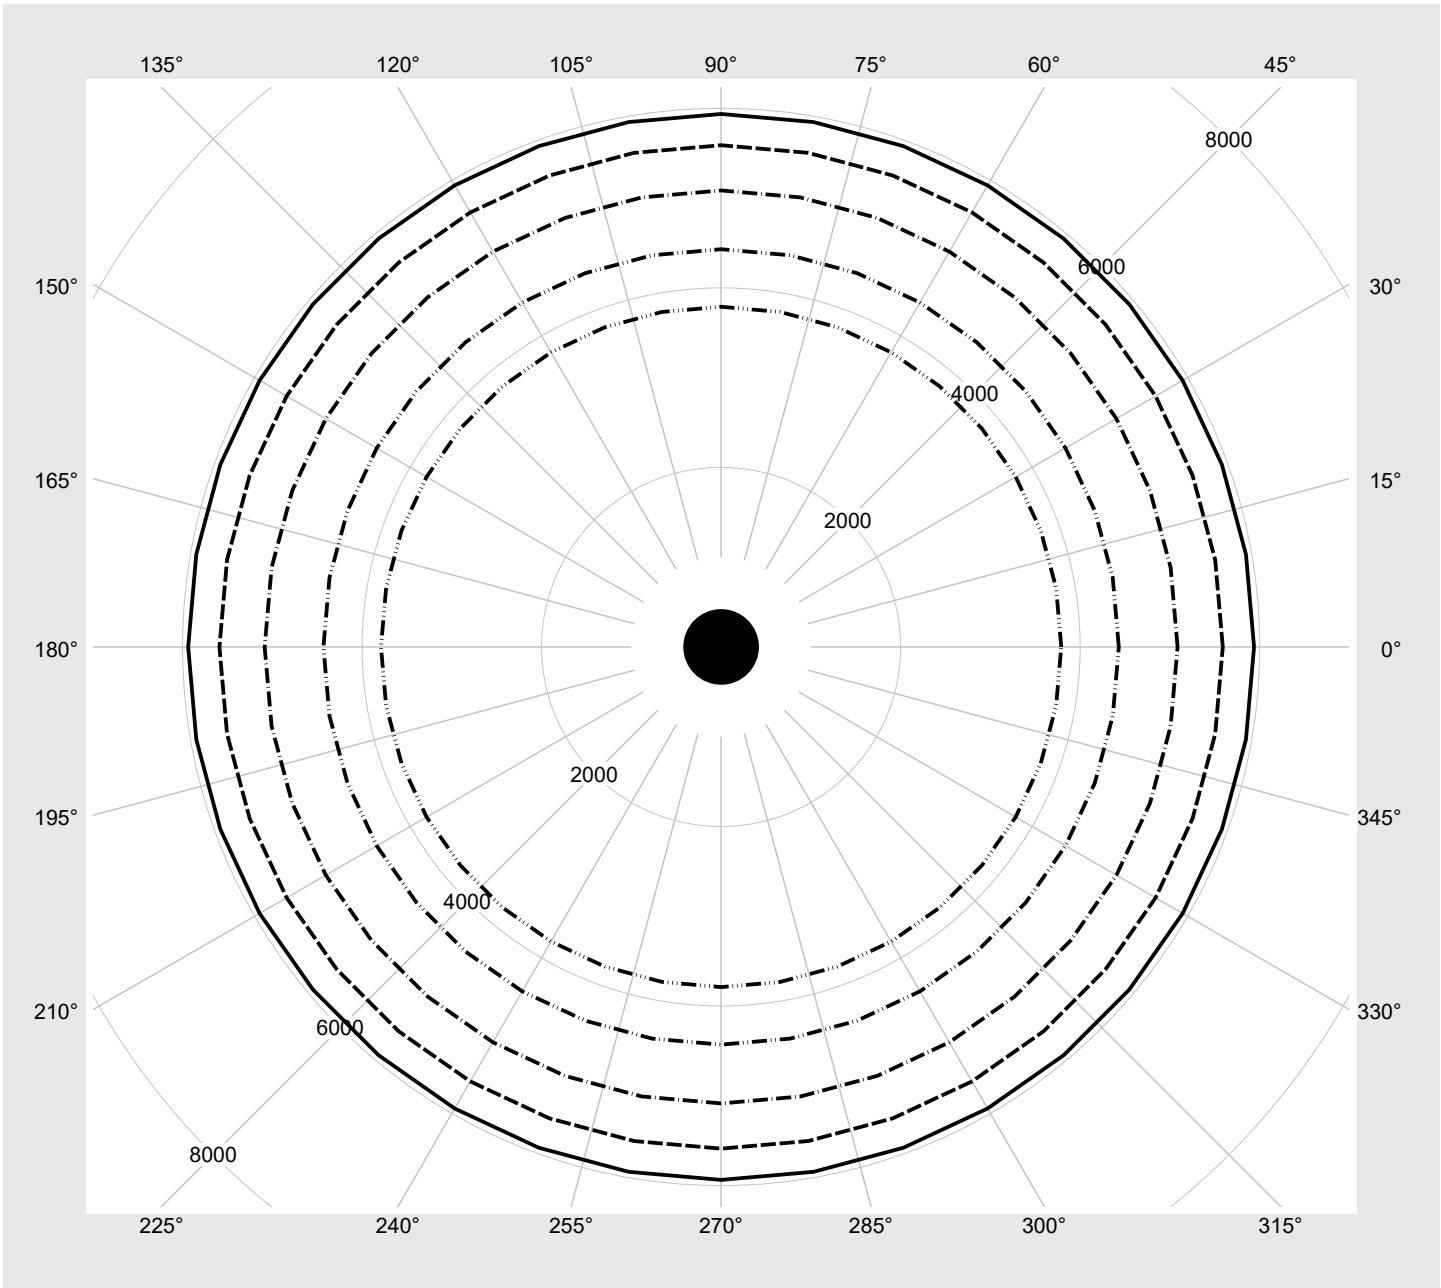

Photometric test report

Family Rondel 31	Order number: 51WC10MB34A + 51WC10E EAN: 4058352616970 + 4058352616871	LP number 59345_29
-----------------------------------	---	-------------------------------------

Multilumen Table	environmental temperature: 25°C	
-------------------------	---------------------------------	---

DIP-Step	Switch Setting		Luminous flux [lm]	Power consumption [W]
	1	2		
3	ON	ON	4250	36.2
2	ON	OFF	4070	34.7
1	OFF	ON	3850	32.7
0	OFF	OFF	3600	30.7