

Photometric test report

Family
Silica® 21

Order number: 51MX31DB39SB
EAN: 4058352886731

LP number
59281_71



Version Suspended luminaire, reflector, black, direct-/ indirect distribution, narrow distribution, $UGR \leq 16$ ($L65 \leq 3000 \text{ cd/m}^2$)

Lamps LED 3000 K | CRI ≥ 80

Controlgear ECG-DALI

Rated values Net luminous flux = 9120 lm
Power consumption = 58.6 W
Luminous efficacy = 155.6 lm/W

serial
documentation
02.08.2023


siteco

Luminous intensity in cd/klm

C180-0

C270-90

Imax: 959 cd/klm

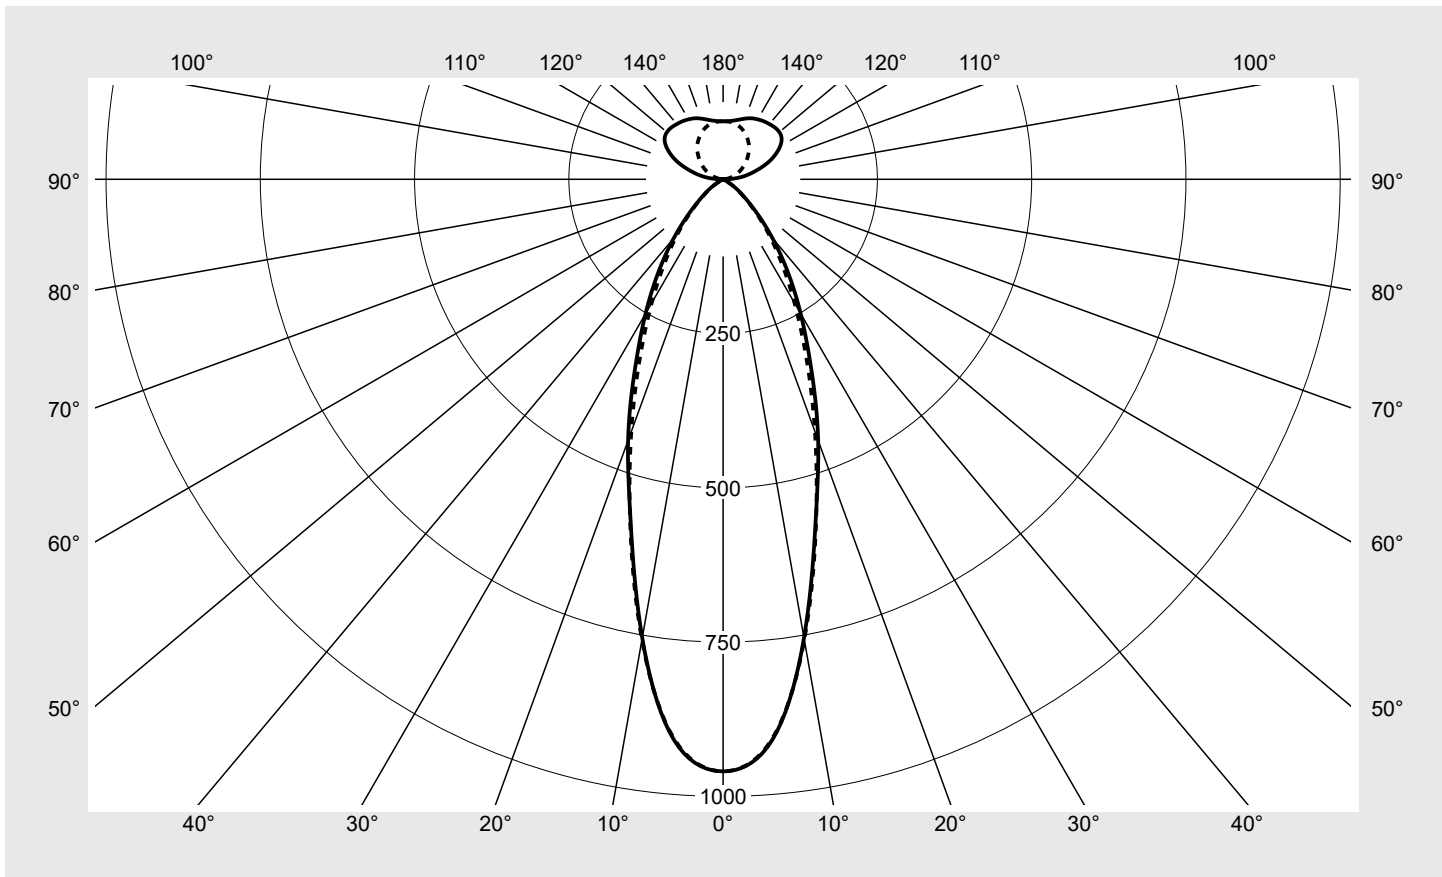

Classifications

DIN 5040 C 7 2
CIE N1=86 N2=99 N3=100
N4=59 N5=100

Luminaire light output ratios

η_{LB} 100.0%
 ϕ_u 59.0%
 ϕ_o 41.0%

Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family Silica® 21	Order number: 51MX31DB39SB EAN: 4058352886731	LP number 59281_71
Table of values for luminous intensities		Maximum luminous intensity
		sITeco

C-planes γ	0° 180°	15°	30°	45°	60°	75°	90° 270°	Phi-zone	Total Phi-zone
		165° 195° 345°	150° 210° 330°	135° 225° 315°	120° 240° 300°	105° 255° 285°			
Luminous intensity in cd/klm								Luminous flux in lm/klm	
0°	959.4	959.4	959.4	959.4	959.4	959.4	959.4	5.7	5.7
5°	912.2	913.2	911.7	911.4	911.5	911.7	910.3	43.6	49.3
10°	754.6	755.9	762.5	767.9	766.9	758.5	757.5	72.5	121.8
15°	578.2	581.5	588.5	595.2	592.8	584.9	581.1	83.3	205.1
20°	450.2	447.9	438.1	432.3	432.3	433.7	435.2	82.1	287.1
25°	337.4	332.5	314.5	302.7	311.9	319.4	319.2	73.7	360.8
30°	251.3	246.8	227.0	216.4	227.8	237.2	231.6	63.8	424.6
35°	181.9	180.8	165.4	156.1	165.0	174.0	165.2	53.2	477.8
40°	124.1	124.5	116.4	111.0	116.6	120.7	113.9	41.6	519.4
45°	77.3	77.7	75.1	73.6	76.6	76.5	72.7	29.4	548.8
50°	44.9	46.1	46.4	46.4	47.6	45.7	43.0	19.3	568.1
55°	25.0	26.0	27.2	27.9	28.2	25.7	24.0	11.9	580.0
60°	7.9	9.6	14.5	15.8	15.1	10.6	8.6	5.8	585.9
65°	2.5	3.1	4.5	8.1	4.9	3.1	2.7	2.2	588.0
70°	1.0	1.1	0.9	1.6	1.1	1.3	1.3	0.6	588.6
75°	0.2	0.3	0.3	0.3	0.3	0.3	0.3	0.2	588.8
80°	0.0	0.1	0.1	0.1	0.1	0.1	0.1	0.0	588.8
85°	0.4	0.4	0.4	0.4	0.4	0.4	0.4	0.2	589.1
90°	4.7	4.6	4.9	4.8	2.9	1.0	0.4	1.9	590.9
95°	22.0	22.5	24.1	22.8	14.6	7.5	3.9	9.5	600.4
100°	39.3	40.4	40.8	35.7	24.0	13.5	8.9	16.1	616.5
105°	56.4	57.6	56.5	48.2	33.0	20.5	15.0	22.2	638.7
110°	75.8	76.1	71.3	59.4	42.3	27.6	21.4	27.9	666.6
115°	92.7	91.8	84.7	69.7	51.3	34.9	28.6	32.5	699.2
120°	106.6	104.9	95.6	78.0	59.7	42.0	35.6	35.7	734.9
125°	115.7	112.5	102.2	85.6	66.8	48.7	43.0	37.1	771.9
130°	118.9	116.2	105.4	90.1	72.2	55.6	50.5	36.7	808.6
135°	118.7	116.2	106.6	93.2	76.5	62.0	57.9	35.1	843.7
140°	116.7	115.0	106.9	95.4	80.1	68.1	65.7	32.7	876.4
145°	114.8	113.6	106.8	96.6	83.5	73.7	72.0	29.7	906.1
150°	112.1	111.6	105.6	96.5	86.2	79.2	77.7	26.2	932.3
155°	109.0	108.7	103.0	96.1	88.3	84.0	82.9	22.2	954.6
160°	104.7	104.4	99.9	95.3	90.2	87.8	87.5	17.9	972.5
165°	100.1	99.5	97.2	94.2	92.0	90.8	90.9	13.5	985.9
170°	96.6	96.1	95.5	94.2	93.3	93.1	93.2	9.0	994.9
175°	94.6	94.5	94.0	93.8	93.8	93.9	93.9	4.5	999.4
180°	94.1	94.1	94.1	94.1	94.1	94.1	94.1	0.6	1000.0

Photometric test report

Family Silica® 21	Order number: 51MX31DB39SB EAN: 4058352886731	LP number 59281_71
-----------------------------	--	------------------------------

UGR-Table	Standard room	siteco
------------------	----------------------	---------------

Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	View crosswise (C0)					View endwise (C90)					
x	y										
2H	2H	14.3	15.1	15.1	15.9	17.0	14.2	15.0	15.0	15.8	16.9
	3H	14.0	14.7	14.9	15.6	16.7	13.9	14.6	14.8	15.5	16.6
	4H	13.8	14.5	14.7	15.4	16.5	13.8	14.5	14.7	15.3	16.4
	6H	13.7	14.3	14.6	15.2	16.3	13.6	14.2	14.5	15.1	16.3
	8H	13.6	14.1	14.5	15.0	16.2	13.5	14.0	14.4	14.9	16.1
	12H	13.5	14.0	14.4	14.9	16.1	13.4	13.9	14.4	14.8	16.0
4H	2H	14.0	14.7	14.9	15.6	16.7	13.9	14.5	14.8	15.4	16.5
	3H	13.7	14.3	14.7	15.2	16.4	13.6	14.2	14.5	15.1	16.2
	4H	13.6	14.1	14.5	15.0	16.2	13.5	14.0	14.4	14.9	16.1
	6H	13.4	13.8	14.4	14.8	16.0	13.3	13.7	14.3	14.7	15.9
	8H	13.3	13.7	14.3	14.6	15.9	13.2	13.6	14.2	14.6	15.8
	12H	13.2	13.5	14.2	14.5	15.7	13.1	13.5	14.1	14.4	15.7
8H	4H	13.3	13.7	14.3	14.7	15.9	13.2	13.6	14.2	14.5	15.8
	6H	13.2	13.5	14.2	14.5	15.7	13.0	13.3	14.0	14.3	15.6
	8H	13.1	13.4	14.1	14.3	15.6	13.0	13.3	14.0	14.2	15.5
	12H	13.0	13.2	14.0	14.2	15.5	12.9	13.1	13.9	14.1	15.4
12H	4H	13.2	13.6	14.2	14.5	15.8	13.1	13.4	14.1	14.4	15.6
	6H	13.1	13.3	14.1	14.3	15.6	13.0	13.2	14.0	14.2	15.5
	8H	13.0	13.2	14.0	14.2	15.5	12.9	13.1	13.9	14.1	15.4

Luminance table	Max. for $\gamma \geq 65^\circ$	Photometric dimensions in mm:	L = 1470 B = 49
------------------------	---	--------------------------------------	----------------------------------

C-planes	γ	Luminance in cd/m ²							
		0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°	
45°		13833.7	13904.5	13449.7	13183.4	13716.1	13704.6	13019.0	
50°		8851.1	9078.4	9131.6	9147.6	9383.9	9001.6	8476.3	
55°		5513.1	5735.8	5999.8	6164.7	6224.3	5678.4	5287.7	
60°		2000.5	2427.9	3682.7	3989.6	3827.8	2677.6	2169.7	
65°		734.3	920.1	1347.0	2421.0	1466.2	931.4	809.8	
70°		377.2	400.6	337.2	584.5	411.7	463.1	472.4	
75°		95.4	134.5	133.1	170.2	165.8	159.0	129.6	
80°		30.6	40.8	40.8	51.0	66.4	75.8	80.9	
85°		616.0	600.0	584.0	550.6	537.5	530.2	537.5	


Photometric test report

Family Silica® 21	Order number: 51MX31DB39SB EAN: 4058352886731	LP number 59281_71
------------------------------------	--	-------------------------------------



Luminance values in cd/m²

γ 65°
 γ 70°
 γ 75°
 γ 80°
 γ 85°

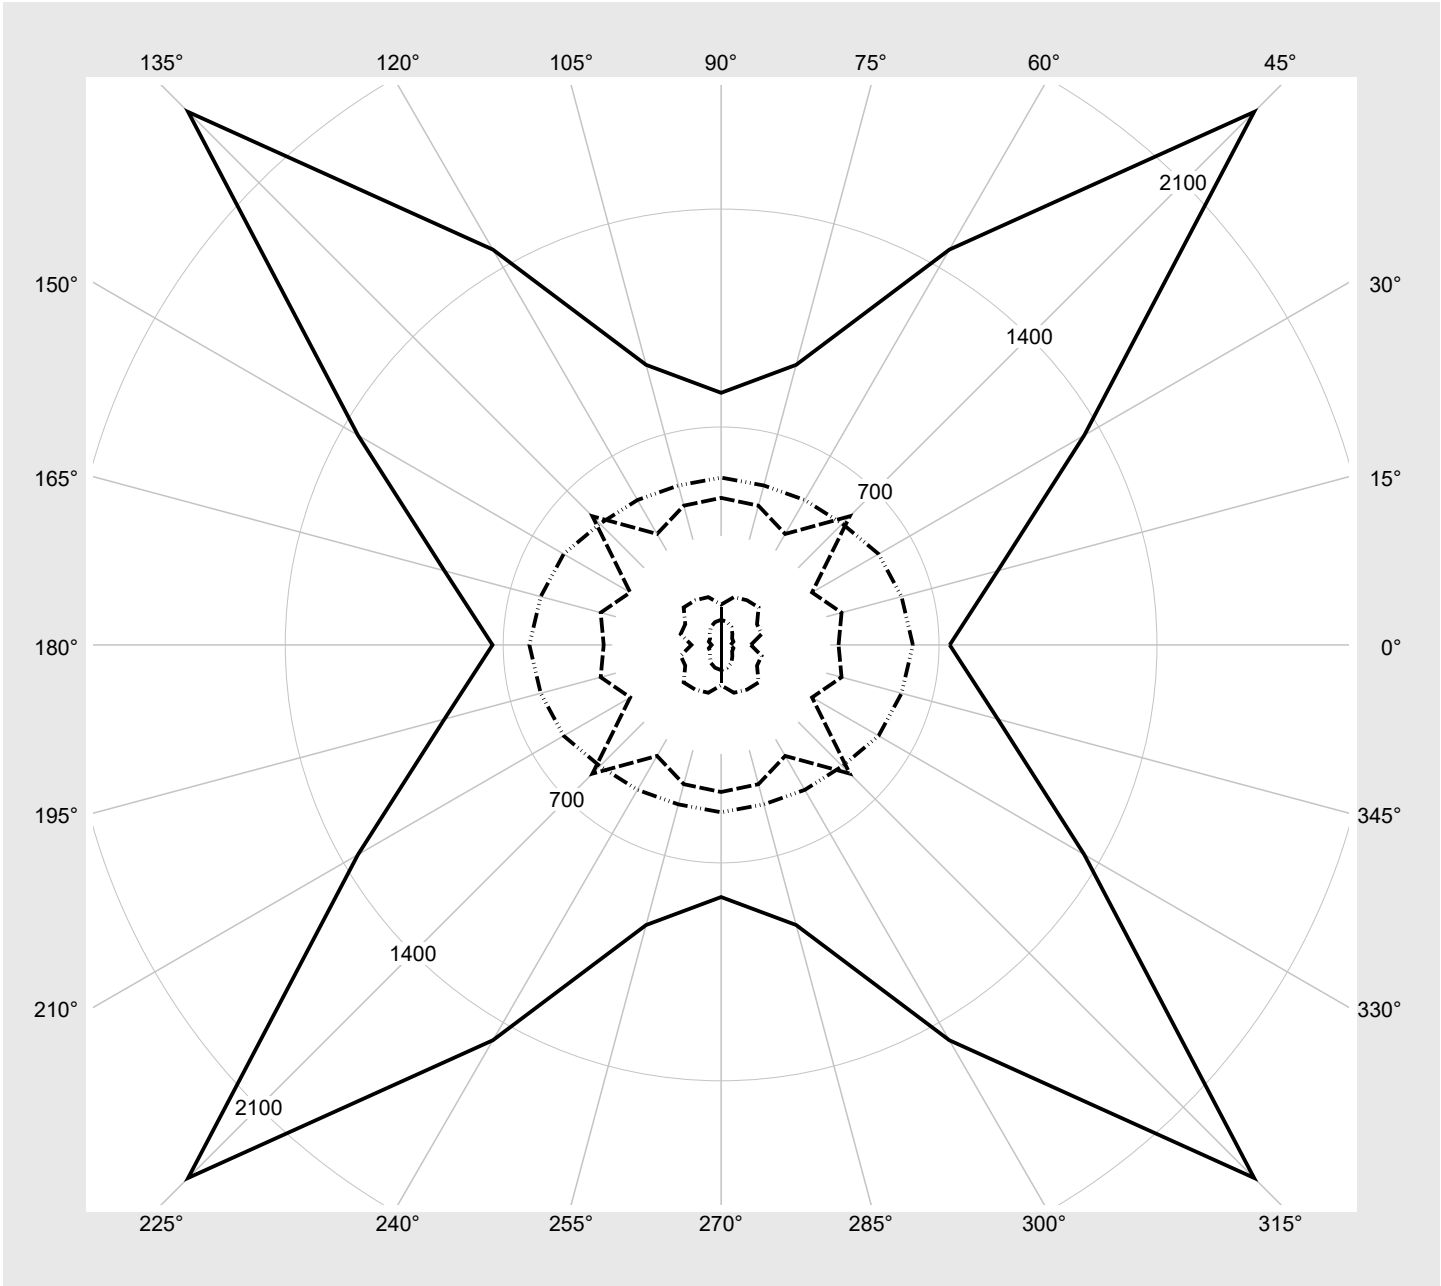

Photometric test report

Family Silica® 21	Order number: 51MX31DB39SB EAN: 4058352886731	LP number 59281_71
-----------------------------	--	------------------------------

Dimming levels table	environmental temperature: 25°C	sITeco
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	254	254	9120	58.6
95	240	252	8648	55.4
90	227	250	8206	52.5
85	214	248	7761	49.5
80	201	245	7312	46.5
75	187	243	6825	43.5
70	174	240	6369	40.6
65	161	237	5911	37.6
60	149	234	5486	34.9
55	136	231	5021	32.1
50	123	227	4553	29.2
45	111	224	4118	26.5
40	98	219	3645	23.6
35	86	214	3205	21.0
30	73	208	2726	18.2
25	61	202	2278	15.5
20	49	194	1831	12.8
15	37	183	1381	10.2
10	25	169	930	7.6
5	12	142	438	5.0
2	5	110	172	4.2