


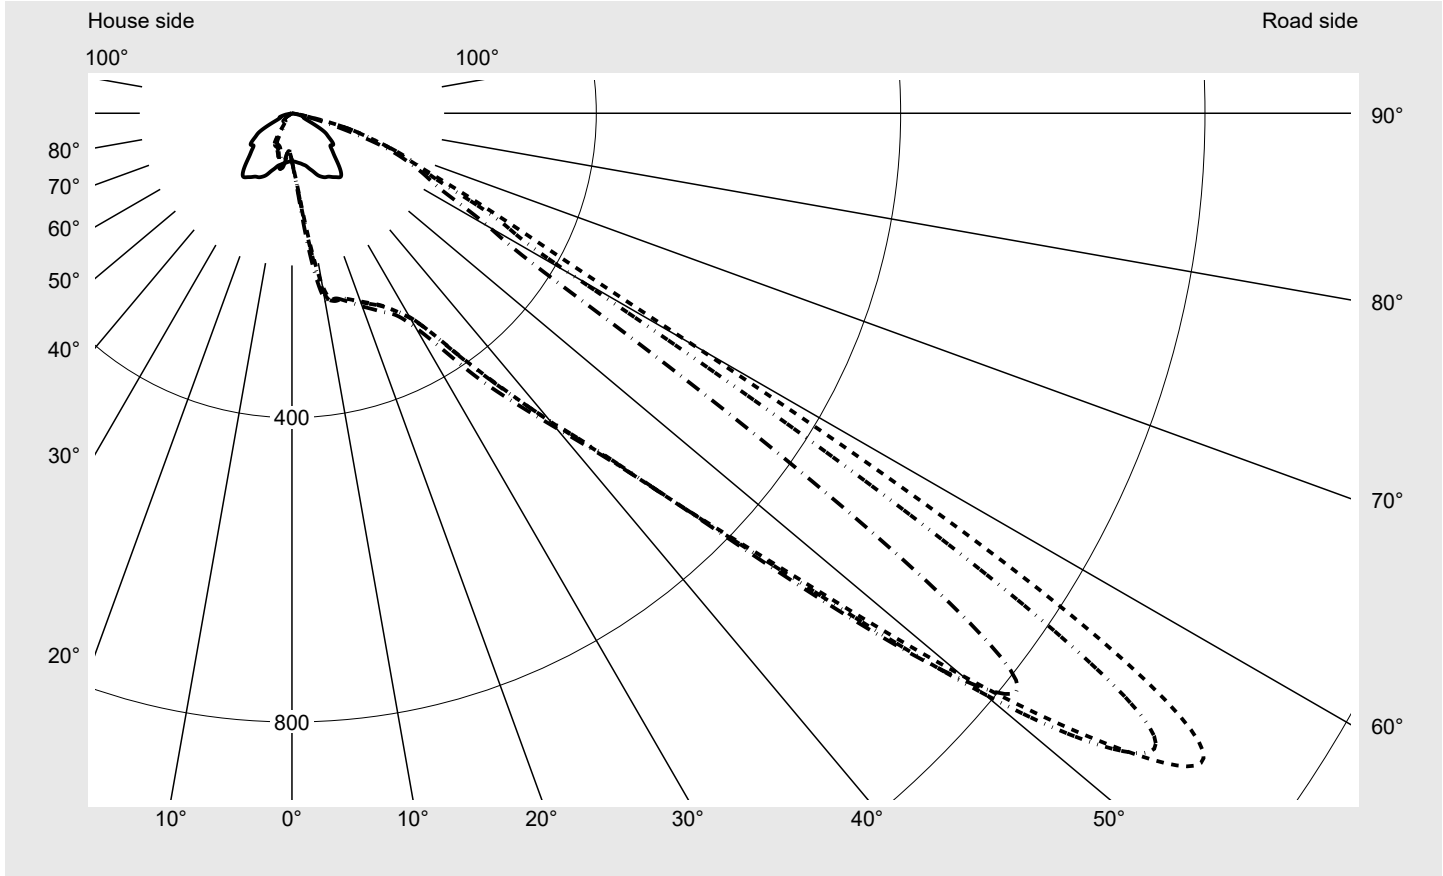
Photometric test report

Family Floodlight FL11	Order number: 5XA779416W01AA EAN: 4058352977606	LP number 59473_15
	Version standard bracket Optic asymmetric distribution PL64 with Back Light Control Cover toughened safety glass Lamps LED 4000 K CRI ≥ 70 Controlgear ECG-DALI Rated values Ta = 10 °C Net luminous flux = 94090 lm Power consumption = 1016.5 W Luminous efficacy = 92.6 lm/W	serial documentation 30.10.2023





Luminous intensity in cd/klm C180-0 C240-60 C245-65 C270-90 **Imax: 1462 cd/klm**



Luminaire output ratios

Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%

Luminous intensity class acc. to EN13201-2

Class:	G6
Imax 70°	145.7
Imax 80°	16.4
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0


Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family Floodlight FL11	Order number: 5XA779416W01AA EAN: 4058352977606	LP number 59473_15
----------------------------------	--	------------------------------

Envelope curve in cd/klm **KMK 55°** **KMK 52,5°** **KMK 50°** **KMK 47,5°** **siteco**

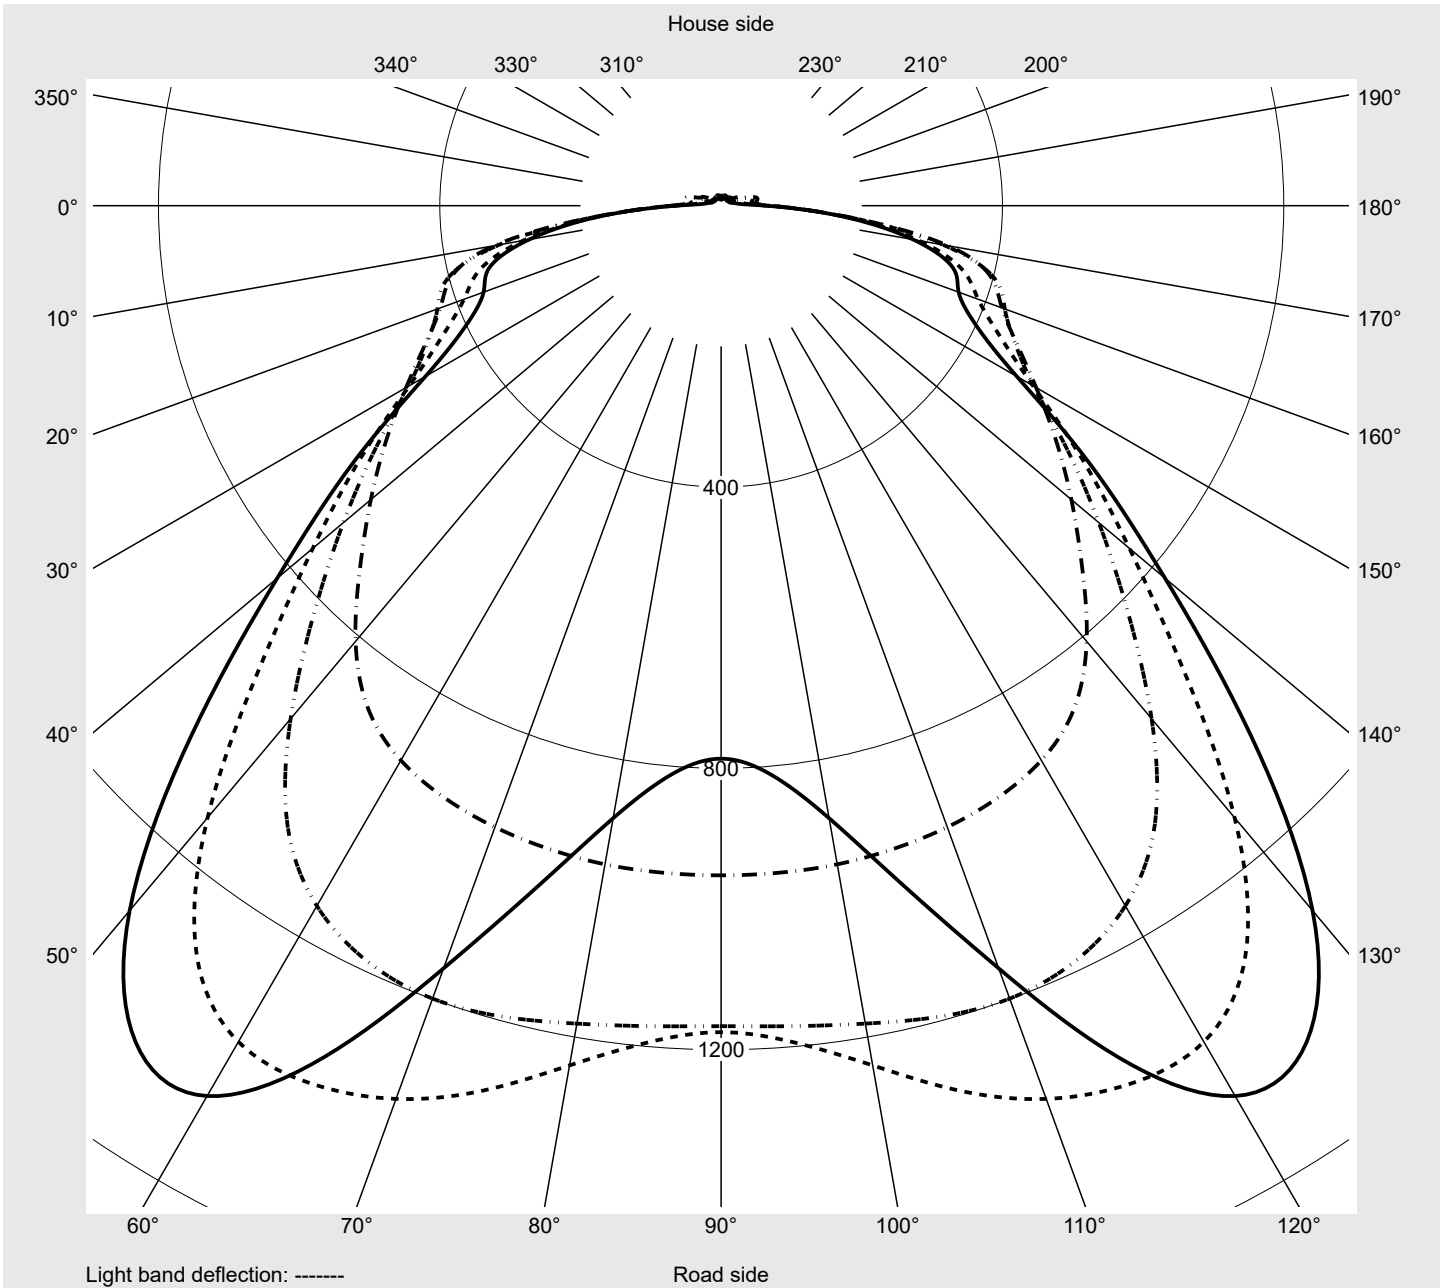

Photometric test report

Family Floodlight FL11	Order number: 5XA779416W01AA EAN: 4058352977606	LP number 59473_15
Table of values for luminous intensities		Maximum luminous intensity
siteco		

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	63.1	63.1	63.1	63.1	63.1	63.1	63.1	63.1	63.1	63.1	63.1	63.1	63.1
2,5°	63.4	64.7	66.1	67.6	69.2	70.8	72.3	73.7	75.1	76.3	77.4	78.2	79.1
5,0°	64.4	67.5	71.0	74.6	78.0	81.5	84.9	88.4	92.1	95.9	99.7	103.4	106.9
7,5°	65.7	70.6	76.4	81.9	87.5	93.9	101.5	110.2	120.0	130.7	141.9	152.8	163.0
10,0°	67.1	74.4	82.2	90.0	99.5	111.7	126.9	145.4	165.5	184.9	203.0	217.9	229.6
12,5°	69.2	79.1	89.2	101.1	117.5	139.6	166.3	194.5	219.9	238.4	248.9	252.3	252.6
15,0°	71.6	84.3	97.4	115.2	140.8	174.2	209.2	237.6	252.0	255.5	255.0	253.8	252.6
17,5°	76.3	91.9	109.1	135.3	172.4	213.9	246.0	259.0	260.5	259.6	258.2	257.2	256.7
20,0°	81.3	100.8	123.0	158.6	204.9	242.6	264.2	267.8	267.6	266.1	264.6	263.5	263.1
22,5°	87.8	111.1	139.8	186.4	237.8	267.8	276.0	278.3	277.5	275.7	273.0	271.0	270.2
25,0°	92.0	119.6	155.9	212.2	260.8	280.4	287.7	290.0	288.6	285.6	282.2	279.6	278.9
27,5°	94.8	126.2	171.7	236.0	277.2	293.0	301.4	303.6	302.1	299.1	295.4	293.5	292.4
30,0°	96.2	131.3	186.7	254.7	290.3	307.3	316.7	320.1	320.4	319.0	317.3	314.6	311.1
32,5°	99.4	139.7	207.1	277.4	308.5	325.2	335.4	340.9	345.4	348.8	348.3	344.4	343.0
35,0°	102.6	149.9	230.4	304.3	334.9	349.4	360.5	370.6	382.5	390.5	393.1	394.8	395.5
37,5°	105.1	161.5	257.0	334.9	367.0	381.3	392.1	408.3	427.3	440.7	451.1	455.5	456.8
40,0°	99.8	167.8	277.2	362.6	398.3	419.7	432.6	454.6	478.5	502.5	521.2	529.1	529.8
42,5°	89.4	170.7	290.4	376.4	420.6	454.2	477.0	502.3	533.6	568.4	599.5	613.8	615.2
45,0°	78.9	171.8	302.0	379.0	421.5	466.2	509.3	549.4	592.6	643.1	695.4	730.2	741.9
47,5°	71.3	179.8	327.6	398.3	424.9	463.7	517.2	581.2	650.1	725.8	808.6	874.3	910.6
50,0°	66.0	177.9	320.8	403.3	429.3	460.9	513.1	598.8	701.2	818.3	952.3	1075.0	1149.6
52,5°	68.2	173.6	285.7	356.2	389.0	436.7	512.1	625.8	757.8	927.2	1135.9	1300.1	1372.7
55,0°	63.8	171.7	277.4	341.3	359.4	398.9	485.5	640.4	823.9	1065.1	1308.3	1451.5	1461.7
57,5°	56.4	165.5	287.4	358.5	372.9	400.0	478.2	656.4	910.6	1157.5	1355.9	1390.9	1162.0
60,0°	50.0	159.1	294.5	369.0	389.3	428.2	505.7	715.4	965.5	1129.2	1110.8	895.4	607.0
62,5°	37.2	116.8	214.6	286.0	331.4	405.9	552.2	792.3	940.0	804.5	543.0	404.8	355.6
65,0°	24.3	56.9	106.1	158.9	208.1	296.4	467.2	650.4	578.4	314.3	241.2	256.4	245.5
67,5°	17.8	31.0	54.3	91.0	123.8	172.8	263.2	257.0	153.3	133.3	138.1	159.6	177.5
70,0°	16.3	23.3	30.8	46.1	60.5	69.6	73.4	54.9	69.3	68.4	84.2	121.4	141.6
72,5°	16.9	21.9	24.2	29.5	33.8	34.0	30.6	31.7	33.6	45.8	59.8	89.4	105.9
75,0°	13.4	18.6	20.3	24.0	23.3	23.4	23.1	18.8	23.6	34.4	41.2	59.0	72.3
77,5°	9.1	12.9	14.2	17.8	19.0	20.4	18.4	15.9	16.6	24.3	27.4	31.7	31.7
80,0°	5.3	7.9	10.4	12.9	15.6	16.4	15.8	13.3	10.9	11.6	8.1	7.6	8.5
82,5°	2.9	4.9	7.4	9.6	12.2	13.5	11.8	9.9	6.8	4.5	3.9	4.0	4.1
85,0°	1.5	2.5	4.2	5.9	6.7	7.3	6.1	4.3	2.7	2.1	1.8	1.8	1.9
87,5°	0.7	0.9	1.2	1.4	1.4	1.1	0.9	0.8	0.7	0.7	0.7	0.7	0.8
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Floodlight FL11	Order number: 5XA779416W01AA EAN: 4058352977606	LP number 59473_15
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	63.1	63.1	63.1	63.1	63.1	63.1	63.1	63.1	63.1	63.1	63.1	63.1	63.1
2,5°	79.7	80.2	80.6	81.0	81.6	81.7	62.1	60.9	59.8	59.0	58.1	57.3	56.6
5,0°	110.0	112.9	115.1	117.2	118.9	119.4	61.5	59.3	57.3	55.7	54.4	53.4	52.6
7,5°	171.7	179.1	184.9	189.4	192.4	193.4	61.3	58.0	55.5	53.7	52.5	51.7	51.2
10,0°	237.6	242.7	245.4	246.9	247.6	248.2	61.2	56.9	54.1	52.5	51.7	51.9	53.4
12,5°	251.8	251.1	250.6	250.2	250.0	250.3	61.2	56.1	53.3	52.2	53.1	57.2	64.0
15,0°	252.2	252.2	252.5	252.9	253.1	253.7	61.5	55.6	53.1	53.9	59.8	68.9	75.7
17,5°	257.2	258.1	259.1	259.9	260.7	261.3	63.2	56.5	54.9	60.1	71.4	79.5	82.6
20,0°	264.2	265.7	267.2	268.6	269.5	270.1	65.4	58.3	59.2	71.4	81.7	86.0	81.1
22,5°	271.4	273.9	276.0	277.5	278.4	278.9	68.3	61.1	67.0	82.8	90.4	85.8	77.7
25,0°	279.8	282.7	285.4	287.1	288.2	288.6	69.9	64.1	78.9	92.7	94.3	83.9	73.8
27,5°	292.4	293.8	296.1	298.3	299.5	300.2	70.6	67.3	90.5	101.2	95.4	82.0	69.0
30,0°	309.4	311.8	316.7	321.4	324.3	325.7	71.6	72.8	99.5	105.5	94.2	77.4	63.9
32,5°	343.6	347.7	354.2	360.9	365.5	367.3	74.4	79.7	103.8	103.4	90.0	71.8	60.1
35,0°	397.2	401.5	408.3	415.6	421.1	423.2	76.8	87.3	103.6	98.0	83.9	67.8	57.8
37,5°	458.6	460.7	465.4	471.6	476.4	478.5	76.9	87.8	98.3	92.9	82.0	68.9	57.0
40,0°	528.0	528.2	530.0	533.8	537.7	539.5	72.2	82.0	89.2	88.4	82.0	71.0	51.7
42,5°	611.5	609.4	609.9	613.1	616.6	618.5	64.1	70.0	71.9	73.5	74.3	64.9	39.5
45,0°	743.1	741.9	741.6	744.2	746.4	746.1	55.6	57.5	51.3	46.6	48.1	40.8	26.9
47,5°	929.3	940.3	946.8	950.9	952.0	952.1	49.6	52.6	47.8	33.1	29.7	23.0	18.5
50,0°	1186.8	1199.7	1193.9	1180.9	1171.0	1166.6	43.0	45.2	43.8	27.1	20.4	14.7	14.0
52,5°	1377.4	1351.4	1302.2	1241.2	1194.2	1175.1	34.5	30.7	24.5	19.0	15.3	12.7	12.1
55,0°	1335.8	1154.0	1000.3	884.4	811.9	786.2	27.7	20.2	15.6	13.2	12.9	11.5	11.1
57,5°	856.0	629.6	507.8	449.5	423.5	415.0	25.0	17.2	13.2	11.6	11.3	11.0	10.5
60,0°	425.3	369.0	340.9	319.6	305.0	299.2	21.1	15.1	12.0	11.1	10.6	10.6	10.0
62,5°	310.9	275.1	252.5	237.6	230.7	228.5	16.7	12.2	10.4	9.8	9.3	9.0	8.7
65,0°	219.7	206.4	201.0	199.3	195.9	193.2	13.3	10.0	8.6	8.2	7.4	7.0	6.7
67,5°	179.9	174.3	169.7	168.9	165.6	163.0	10.9	8.9	7.8	7.2	6.3	5.7	5.5
70,0°	145.7	142.7	140.2	139.8	131.6	126.6	9.4	7.7	6.9	6.1	5.4	5.1	4.9
72,5°	106.5	102.6	94.0	86.1	78.6	74.7	8.5	6.9	5.7	4.8	4.5	4.4	4.3
75,0°	73.0	61.6	50.5	44.8	39.9	37.4	7.2	5.7	4.4	3.9	3.8	3.8	3.8
77,5°	26.2	19.7	16.1	14.7	13.9	13.5	5.5	4.3	3.3	3.1	3.1	3.1	3.1
80,0°	8.9	8.9	7.9	7.5	7.3	7.3	3.4	2.7	2.4	2.4	2.4	2.4	2.5
82,5°	4.5	4.8	4.6	4.5	4.4	4.3	2.1	1.9	1.8	1.8	1.9	1.9	1.9
85,0°	2.1	2.0	1.8	1.7	1.6	1.6	1.3	1.2	1.3	1.3	1.4	1.4	1.4
87,5°	0.7	0.7	0.7	0.6	0.6	0.6	0.7	0.8	0.9	0.9	0.9	1.0	1.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Floodlight FL11	Order number: 5XA779416W01AA EAN: 4058352977606	LP number 59473_15
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0,0°	63.1	63.1	63.1	63.1	63.1	63.1	63.1	63.1	63.1	63.1	63.1	0.1	0.1
2,5°	55.9	55.3	54.6	54.1	53.7	53.3	53.0	52.7	52.5	52.2	52.1	0.8	0.9
5,0°	51.8	51.3	50.7	50.4	50.1	49.9	49.8	49.7	49.7	49.5	49.5	1.8	2.6
7,5°	51.1	51.5	52.4	53.8	55.4	57.0	58.5	59.7	60.5	60.9	61.0	3.4	6.0
10,0°	56.6	60.9	65.0	68.2	70.5	72.2	72.9	73.1	73.2	73.1	72.9	5.6	11.6
12,5°	69.9	74.3	76.5	76.5	74.7	72.8	70.9	69.3	68.0	67.1	66.7	7.7	19.4
15,0°	79.5	78.6	75.4	71.9	68.4	65.1	62.3	60.1	58.5	57.4	56.9	9.7	29.1
17,5°	79.2	74.4	69.4	64.6	60.3	56.9	54.4	52.6	51.3	50.4	50.1	11.7	40.8
20,0°	75.0	68.8	62.9	58.1	54.7	52.2	50.2	48.7	47.7	47.0	46.8	13.9	54.7
22,5°	69.9	62.8	57.6	54.0	51.4	49.5	48.1	47.0	46.2	45.6	45.4	16.2	70.9
25,0°	64.4	58.1	54.0	51.3	49.7	48.5	47.5	46.6	45.7	45.1	44.8	18.6	89.5
27,5°	60.3	55.0	51.7	49.8	48.7	47.9	46.6	45.1	43.7	42.7	42.3	21.1	110.6
30,0°	57.0	52.8	50.1	47.9	45.6	42.8	39.3	35.6	32.2	29.8	29.0	23.9	134.4
32,5°	54.2	50.4	45.9	40.5	34.3	27.8	21.9	18.5	17.0	16.6	16.5	27.2	161.6
35,0°	50.1	42.2	33.7	25.9	19.5	16.9	16.0	15.5	15.2	15.1	15.1	31.7	193.2
37,5°	42.2	30.1	22.1	18.2	16.5	15.4	14.7	14.3	14.1	14.0	14.0	37.0	230.2
40,0°	31.0	21.8	18.4	16.6	15.2	14.2	13.6	13.4	13.3	13.3	13.3	43.1	273.4
42,5°	24.7	20.1	17.1	15.3	14.4	13.8	13.4	13.4	13.4	13.5	13.6	49.9	323.3
45,0°	21.6	18.6	16.2	14.8	14.2	14.2	14.1	14.3	14.5	14.6	14.6	58.5	381.8
47,5°	17.9	16.9	15.7	14.7	14.6	15.0	15.2	15.4	15.5	15.5	15.5	70.4	452.3
50,0°	13.9	14.0	14.1	14.5	15.1	15.6	15.8	15.4	14.8	14.4	14.2	84.8	537.1
52,5°	11.8	11.8	12.3	13.2	14.0	14.4	14.0	13.0	12.0	11.3	11.0	94.7	631.8
55,0°	10.7	10.7	10.8	11.0	11.2	11.0	10.5	9.7	9.1	8.6	8.4	91.4	723.2
57,5°	9.9	9.4	9.0	8.6	8.3	8.0	7.7	7.4	7.3	7.1	7.1	77.1	800.3
60,0°	9.1	8.2	7.4	6.9	6.7	6.5	6.3	6.2	6.3	6.4	6.4	63.9	864.2
62,5°	7.8	6.9	6.3	5.9	5.9	5.7	5.6	5.5	5.5	5.6	5.6	49.6	913.8
65,0°	6.2	5.5	5.2	5.2	5.2	5.2	5.1	5.0	4.9	4.9	4.9	33.4	947.2
67,5°	5.0	4.8	4.7	4.7	4.7	4.7	4.6	4.5	4.4	4.4	4.3	19.8	967.0
70,0°	4.6	4.5	4.4	4.3	4.3	4.3	4.3	4.2	4.1	4.0	4.0	12.3	979.3
72,5°	4.2	4.1	4.1	4.0	4.0	4.0	3.9	3.9	3.8	3.7	3.7	8.3	987.6
75,0°	3.8	3.8	3.8	3.8	3.8	3.7	3.6	3.5	3.4	3.3	3.3	5.5	993.1
77,5°	3.1	3.2	3.2	3.1	3.1	3.0	2.9	2.8	2.7	2.7	2.7	3.1	996.2
80,0°	2.5	2.5	2.5	2.4	2.4	2.4	2.3	2.2	2.2	2.1	2.1	1.7	998.0
82,5°	1.9	1.9	1.9	1.9	1.9	1.9	1.9	1.8	1.8	1.8	1.8	1.2	999.1
85,0°	1.4	1.4	1.4	1.5	1.5	1.5	1.5	1.5	1.5	1.4	1.4	0.6	999.7
87,5°	1.1	1.1	1.1	1.1	1.2	1.2	1.2	1.2	1.1	1.1	1.1	0.3	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Floodlight FL11	Order number: 5XA779416W01AA EAN: 4058352977606	LP number 59473_15
----------------------------------	--	------------------------------

siteco

Dimming levels table environmental temperature: 10°C

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	----	----	----	----
99	252	254	93539	1008.6
95	237	251	89260	948.4
90	222	249	84795	888.5
85	206	246	79918	824.6
80	192	244	75341	769.0
75	178	241	70744	713.6
70	164	238	66023	658.3
65	150	235	61201	603.8
60	137	231	56579	553.0
55	124	228	51848	502.5
50	111	224	46921	452.2
45	99	219	42320	405.9
40	87	215	37534	359.7
35	76	210	33100	317.8
30	64	204	28102	272.5
25	53	197	23407	230.9
20	42	188	18724	190.4
15	31	177	14000	143.0
10	21	163	9562	102.4
5	10	136	4628	55.3
1	3	91	1288	27.6

Dimming levels table environmental temperature: 25°C

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	----	----	----	----
95	----	----	----	----
90	----	----	----	----
85	----	----	----	----
81	193	244	73806	767.6
80	190	244	72807	755.6
75	176	241	68368	700.6
70	161	237	63565	642.1
65	148	234	59269	591.2
60	134	231	54424	536.9
55	122	227	50127	490.7
50	109	223	45406	440.9
45	97	219	40891	394.8
40	85	214	36233	349.0
35	74	209	31929	307.5
30	63	203	27340	266.4
25	52	196	22761	225.1
20	41	187	18151	184.9
15	30	176	13465	137.1
10	20	161	9063	97.6
5	10	136	4610	54.8
1	3	92	1284	27.4

Photometric test report

Family Floodlight FL11	Order number: 5XA779416W01AA EAN: 4058352977606	LP number 59473_15
----------------------------------	--	------------------------------

Luminousfluxs table	siteco
----------------------------	---------------

Temperature °C	Luminous flux lm	Power consumption W
10.0	94090.0	1016.5
25.0	74530.0	776.4