




Photometric test report

Family Floodlight FL11	Order number: 5XA779417W01AA EAN: 4058352977644	LP number 59473_13
	Version standard bracket Optic asymmetric distribution PL64 with Back Light Control Cover toughened safety glass Lamps LED 5000 K CRI ≥ 70 Controlgear ECG-DALI Rated values Ta = 10 °C Net luminous flux = 95470 lm Power consumption = 1016.6 W Luminous efficacy = 93.9 lm/W	serial documentation 30.10.2023
		

Luminous intensity in cd/klm C180-0 C240-60 C245-65 C270-90 **Imax: 1462 cd/klm**

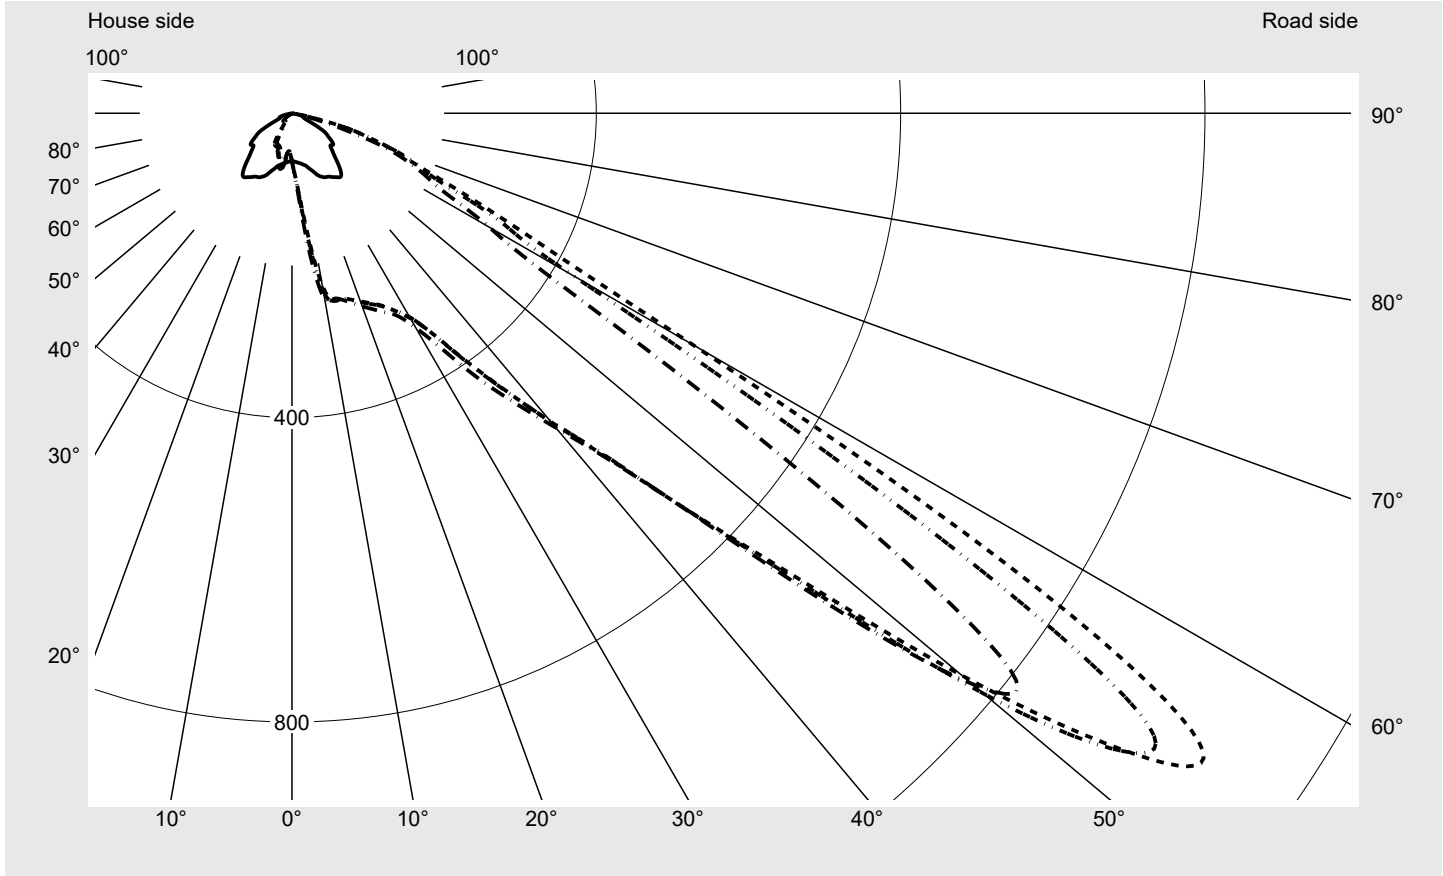

Luminaire output ratios	
Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%


Luminous intensity class acc. to EN13201-2	
Class:	G6
Imax 70°	145.7
Imax 80°	16.4
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0

Measurement conditions
DIN EN 13032 and DIN 5032

Photometric test report

Family Floodlight FL11	Order number: 5XA779417W01AA EAN: 4058352977644	LP number 59473_13
---	--	-------------------------------------

Envelope curve in cd/klm **KMK 55°** **KMK 52,5°** **KMK 50°** **KMK 47,5°** **siteco**

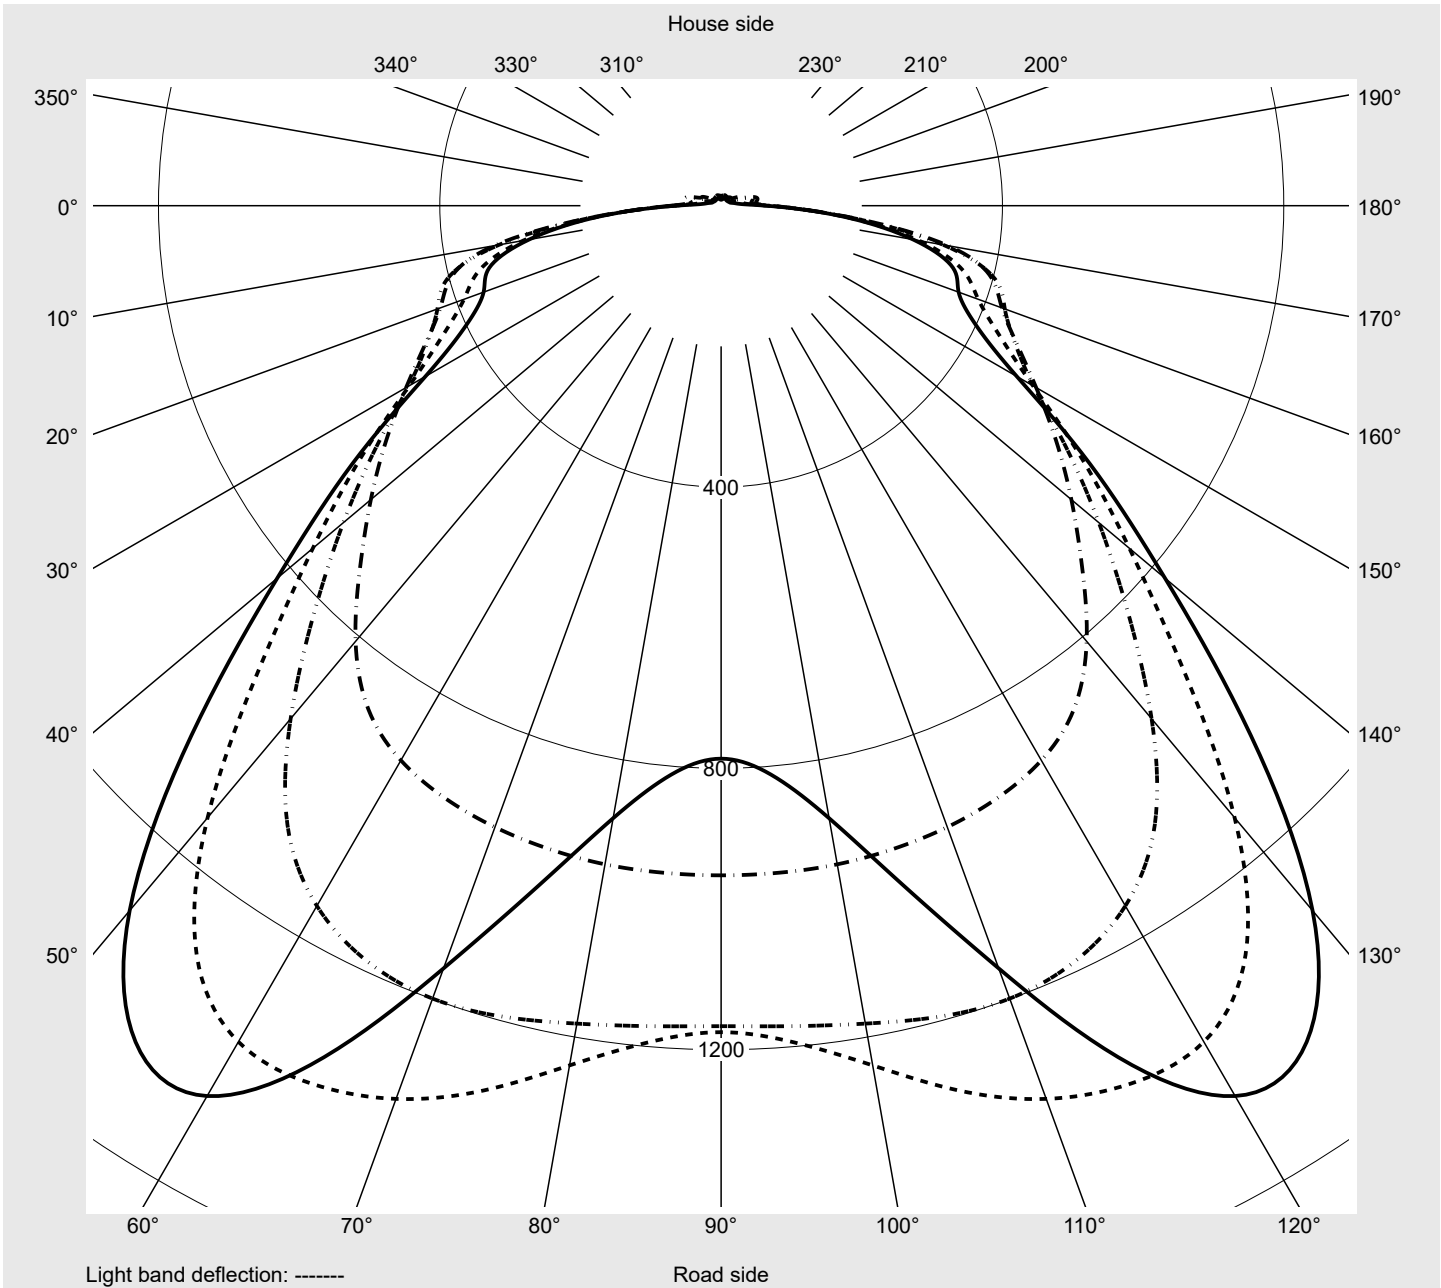

Photometric test report

Family Floodlight FL11	Order number: 5XA779417W01AA EAN: 4058352977644	LP number 59473_13
---	--	-------------------------------------



Table of values for luminous intensities Maximum luminous intensity

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	63.1	63.1	63.1	63.1	63.1	63.1	63.1	63.1	63.1	63.1	63.1	63.1	63.1
2,5°	63.4	64.7	66.1	67.6	69.2	70.8	72.3	73.7	75.1	76.3	77.4	78.2	79.1
5,0°	64.4	67.5	71.0	74.6	78.0	81.5	84.9	88.4	92.1	95.9	99.7	103.4	106.9
7,5°	65.7	70.6	76.4	81.9	87.5	93.9	101.5	110.2	120.0	130.7	141.9	152.8	163.0
10,0°	67.1	74.4	82.2	90.0	99.5	111.7	126.9	145.4	165.5	184.9	203.0	217.9	229.6
12,5°	69.2	79.1	89.2	101.1	117.5	139.6	166.3	194.5	219.9	238.4	248.9	252.3	252.6
15,0°	71.6	84.3	97.4	115.2	140.8	174.2	209.2	237.6	252.0	255.5	255.0	253.8	252.6
17,5°	76.3	91.9	109.1	135.3	172.4	213.9	246.0	259.0	260.5	259.6	258.2	257.2	256.7
20,0°	81.3	100.8	123.0	158.6	204.9	242.6	264.2	267.8	267.6	266.1	264.6	263.5	263.1
22,5°	87.8	111.1	139.8	186.4	237.8	267.8	276.0	278.3	277.5	275.7	273.0	271.0	270.2
25,0°	92.0	119.6	155.9	212.2	260.8	280.4	287.7	290.0	288.6	285.6	282.2	279.6	278.9
27,5°	94.8	126.2	171.7	236.0	277.2	293.0	301.4	303.6	302.1	299.1	295.4	293.5	292.4
30,0°	96.2	131.3	186.7	254.7	290.3	307.3	316.7	320.1	320.4	319.0	317.3	314.6	311.1
32,5°	99.4	139.7	207.1	277.4	308.5	325.2	335.4	340.9	345.4	348.8	348.3	344.4	343.0
35,0°	102.6	149.9	230.4	304.3	334.9	349.4	360.5	370.6	382.5	390.5	393.1	394.8	395.5
37,5°	105.1	161.5	257.0	334.9	367.0	381.3	392.1	408.3	427.3	440.7	451.1	455.5	456.8
40,0°	99.8	167.8	277.2	362.6	398.3	419.7	432.6	454.6	478.5	502.5	521.2	529.1	529.8
42,5°	89.4	170.7	290.4	376.4	420.6	454.2	477.0	502.3	533.6	568.4	599.5	613.8	615.2
45,0°	78.9	171.8	302.0	379.0	421.5	466.2	509.3	549.4	592.6	643.1	695.4	730.2	741.9
47,5°	71.3	179.8	327.6	398.3	424.9	463.7	517.2	581.2	650.1	725.8	808.6	874.3	910.6
50,0°	66.0	177.9	320.8	403.3	429.3	460.9	513.1	598.8	701.2	818.3	952.3	1075.0	1149.6
52,5°	68.2	173.6	285.7	356.2	389.0	436.7	512.1	625.8	757.8	927.2	1135.9	1300.1	1372.7
55,0°	63.8	171.7	277.4	341.3	359.4	398.9	485.5	640.4	823.9	1065.1	1308.3	1451.5	1461.7
57,5°	56.4	165.5	287.4	358.5	372.9	400.0	478.2	656.4	910.6	1157.5	1355.9	1390.9	1162.0
60,0°	50.0	159.1	294.5	369.0	389.3	428.2	505.7	715.4	965.5	1129.2	1110.8	895.4	607.0
62,5°	37.2	116.8	214.6	286.0	331.4	405.9	552.2	792.3	940.0	804.5	543.0	404.8	355.6
65,0°	24.3	56.9	106.1	158.9	208.1	296.4	467.2	650.4	578.4	314.3	241.2	256.4	245.5
67,5°	17.8	31.0	54.3	91.0	123.8	172.8	263.2	257.0	153.3	133.3	138.1	159.6	177.5
70,0°	16.3	23.3	30.8	46.1	60.5	69.6	73.4	54.9	69.3	68.4	84.2	121.4	141.6
72,5°	16.9	21.9	24.2	29.5	33.8	34.0	30.6	31.7	33.6	45.8	59.8	89.4	105.9
75,0°	13.4	18.6	20.3	24.0	23.3	23.4	23.1	18.8	23.6	34.4	41.2	59.0	72.3
77,5°	9.1	12.9	14.2	17.8	19.0	20.4	18.4	15.9	16.6	24.3	27.4	31.7	31.7
80,0°	5.3	7.9	10.4	12.9	15.6	16.4	15.8	13.3	10.9	11.6	8.1	7.6	8.5
82,5°	2.9	4.9	7.4	9.6	12.2	13.5	11.8	9.9	6.8	4.5	3.9	4.0	4.1
85,0°	1.5	2.5	4.2	5.9	6.7	7.3	6.1	4.3	2.7	2.1	1.8	1.8	1.9
87,5°	0.7	0.9	1.2	1.4	1.4	1.1	0.9	0.8	0.7	0.7	0.7	0.7	0.8
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Floodlight FL11	Order number: 5XA779417W01AA EAN: 4058352977644	LP number 59473_13
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	63.1	63.1	63.1	63.1	63.1	63.1	63.1	63.1	63.1	63.1	63.1	63.1	63.1
2,5°	79.7	80.2	80.6	81.0	81.6	81.7	62.1	60.9	59.8	59.0	58.1	57.3	56.6
5,0°	110.0	112.9	115.1	117.2	118.9	119.4	61.5	59.3	57.3	55.7	54.4	53.4	52.6
7,5°	171.7	179.1	184.9	189.4	192.4	193.4	61.3	58.0	55.5	53.7	52.5	51.7	51.2
10,0°	237.6	242.7	245.4	246.9	247.6	248.2	61.2	56.9	54.1	52.5	51.7	51.9	53.4
12,5°	251.8	251.1	250.6	250.2	250.0	250.3	61.2	56.1	53.3	52.2	53.1	57.2	64.0
15,0°	252.2	252.2	252.5	252.9	253.1	253.7	61.5	55.6	53.1	53.9	59.8	68.9	75.7
17,5°	257.2	258.1	259.1	259.9	260.7	261.3	63.2	56.5	54.9	60.1	71.4	79.5	82.6
20,0°	264.2	265.7	267.2	268.6	269.5	270.1	65.4	58.3	59.2	71.4	81.7	86.0	81.1
22,5°	271.4	273.9	276.0	277.5	278.4	278.9	68.3	61.1	67.0	82.8	90.4	85.8	77.7
25,0°	279.8	282.7	285.4	287.1	288.2	288.6	69.9	64.1	78.9	92.7	94.3	83.9	73.8
27,5°	292.4	293.8	296.1	298.3	299.5	300.2	70.6	67.3	90.5	101.2	95.4	82.0	69.0
30,0°	309.4	311.8	316.7	321.4	324.3	325.7	71.6	72.8	99.5	105.5	94.2	77.4	63.9
32,5°	343.6	347.7	354.2	360.9	365.5	367.3	74.4	79.7	103.8	103.4	90.0	71.8	60.1
35,0°	397.2	401.5	408.3	415.6	421.1	423.2	76.8	87.3	103.6	98.0	83.9	67.8	57.8
37,5°	458.6	460.7	465.4	471.6	476.4	478.5	76.9	87.8	98.3	92.9	82.0	68.9	57.0
40,0°	528.0	528.2	530.0	533.8	537.7	539.5	72.2	82.0	89.2	88.4	82.0	71.0	51.7
42,5°	611.5	609.4	609.9	613.1	616.6	618.5	64.1	70.0	71.9	73.5	74.3	64.9	39.5
45,0°	743.1	741.9	741.6	744.2	746.4	746.1	55.6	57.5	51.3	46.6	48.1	40.8	26.9
47,5°	929.3	940.3	946.8	950.9	952.0	952.1	49.6	52.6	47.8	33.1	29.7	23.0	18.5
50,0°	1186.8	1199.7	1193.9	1180.9	1171.0	1166.6	43.0	45.2	43.8	27.1	20.4	14.7	14.0
52,5°	1377.4	1351.4	1302.2	1241.2	1194.2	1175.1	34.5	30.7	24.5	19.0	15.3	12.7	12.1
55,0°	1335.8	1154.0	1000.3	884.4	811.9	786.2	27.7	20.2	15.6	13.2	12.9	11.5	11.1
57,5°	856.0	629.6	507.8	449.5	423.5	415.0	25.0	17.2	13.2	11.6	11.3	11.0	10.5
60,0°	425.3	369.0	340.9	319.6	305.0	299.2	21.1	15.1	12.0	11.1	10.6	10.6	10.0
62,5°	310.9	275.1	252.5	237.6	230.7	228.5	16.7	12.2	10.4	9.8	9.3	9.0	8.7
65,0°	219.7	206.4	201.0	199.3	195.9	193.2	13.3	10.0	8.6	8.2	7.4	7.0	6.7
67,5°	179.9	174.3	169.7	168.9	165.6	163.0	10.9	8.9	7.8	7.2	6.3	5.7	5.5
70,0°	145.7	142.7	140.2	139.8	131.6	126.6	9.4	7.7	6.9	6.1	5.4	5.1	4.9
72,5°	106.5	102.6	94.0	86.1	78.6	74.7	8.5	6.9	5.7	4.8	4.5	4.4	4.3
75,0°	73.0	61.6	50.5	44.8	39.9	37.4	7.2	5.7	4.4	3.9	3.8	3.8	3.8
77,5°	26.2	19.7	16.1	14.7	13.9	13.5	5.5	4.3	3.3	3.1	3.1	3.1	3.1
80,0°	8.9	8.9	7.9	7.5	7.3	7.3	3.4	2.7	2.4	2.4	2.4	2.4	2.5
82,5°	4.5	4.8	4.6	4.5	4.4	4.3	2.1	1.9	1.8	1.8	1.9	1.9	1.9
85,0°	2.1	2.0	1.8	1.7	1.6	1.6	1.3	1.2	1.3	1.3	1.4	1.4	1.4
87,5°	0.7	0.7	0.7	0.6	0.6	0.6	0.7	0.8	0.9	0.9	0.9	1.0	1.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Floodlight FL11	Order number: 5XA779417W01AA EAN: 4058352977644	LP number 59473_13
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0,0°	63.1	63.1	63.1	63.1	63.1	63.1	63.1	63.1	63.1	63.1	63.1	0.1	0.1
2,5°	55.9	55.3	54.6	54.1	53.7	53.3	53.0	52.7	52.5	52.2	52.1	0.8	0.9
5,0°	51.8	51.3	50.7	50.4	50.1	49.9	49.8	49.7	49.7	49.5	49.5	1.8	2.6
7,5°	51.1	51.5	52.4	53.8	55.4	57.0	58.5	59.7	60.5	60.9	61.0	3.4	6.0
10,0°	56.6	60.9	65.0	68.2	70.5	72.2	72.9	73.1	73.2	73.1	72.9	5.6	11.6
12,5°	69.9	74.3	76.5	76.5	74.7	72.8	70.9	69.3	68.0	67.1	66.7	7.7	19.4
15,0°	79.5	78.6	75.4	71.9	68.4	65.1	62.3	60.1	58.5	57.4	56.9	9.7	29.1
17,5°	79.2	74.4	69.4	64.6	60.3	56.9	54.4	52.6	51.3	50.4	50.1	11.7	40.8
20,0°	75.0	68.8	62.9	58.1	54.7	52.2	50.2	48.7	47.7	47.0	46.8	13.9	54.7
22,5°	69.9	62.8	57.6	54.0	51.4	49.5	48.1	47.0	46.2	45.6	45.4	16.2	70.9
25,0°	64.4	58.1	54.0	51.3	49.7	48.5	47.5	46.6	45.7	45.1	44.8	18.6	89.5
27,5°	60.3	55.0	51.7	49.8	48.7	47.9	46.6	45.1	43.7	42.7	42.3	21.1	110.6
30,0°	57.0	52.8	50.1	47.9	45.6	42.8	39.3	35.6	32.2	29.8	29.0	23.9	134.4
32,5°	54.2	50.4	45.9	40.5	34.3	27.8	21.9	18.5	17.0	16.6	16.5	27.2	161.6
35,0°	50.1	42.2	33.7	25.9	19.5	16.9	16.0	15.5	15.2	15.1	15.1	31.7	193.2
37,5°	42.2	30.1	22.1	18.2	16.5	15.4	14.7	14.3	14.1	14.0	14.0	37.0	230.2
40,0°	31.0	21.8	18.4	16.6	15.2	14.2	13.6	13.4	13.3	13.3	13.3	43.1	273.4
42,5°	24.7	20.1	17.1	15.3	14.4	13.8	13.4	13.4	13.4	13.5	13.6	49.9	323.3
45,0°	21.6	18.6	16.2	14.8	14.2	14.2	14.1	14.3	14.5	14.6	14.6	58.5	381.8
47,5°	17.9	16.9	15.7	14.7	14.6	15.0	15.2	15.4	15.5	15.5	15.5	70.4	452.3
50,0°	13.9	14.0	14.1	14.5	15.1	15.6	15.8	15.4	14.8	14.4	14.2	84.8	537.1
52,5°	11.8	11.8	12.3	13.2	14.0	14.4	14.0	13.0	12.0	11.3	11.0	94.7	631.8
55,0°	10.7	10.7	10.8	11.0	11.2	11.0	10.5	9.7	9.1	8.6	8.4	91.4	723.2
57,5°	9.9	9.4	9.0	8.6	8.3	8.0	7.7	7.4	7.3	7.1	7.1	77.1	800.3
60,0°	9.1	8.2	7.4	6.9	6.7	6.5	6.3	6.2	6.3	6.4	6.4	63.9	864.2
62,5°	7.8	6.9	6.3	5.9	5.9	5.7	5.6	5.5	5.5	5.6	5.6	49.6	913.8
65,0°	6.2	5.5	5.2	5.2	5.2	5.2	5.1	5.0	4.9	4.9	4.9	33.4	947.2
67,5°	5.0	4.8	4.7	4.7	4.7	4.7	4.6	4.5	4.4	4.4	4.3	19.8	967.0
70,0°	4.6	4.5	4.4	4.3	4.3	4.3	4.3	4.2	4.1	4.0	4.0	12.3	979.3
72,5°	4.2	4.1	4.1	4.0	4.0	4.0	3.9	3.9	3.8	3.7	3.7	8.3	987.6
75,0°	3.8	3.8	3.8	3.8	3.8	3.7	3.6	3.5	3.4	3.3	3.3	5.5	993.1
77,5°	3.1	3.2	3.2	3.1	3.1	3.0	2.9	2.8	2.7	2.7	2.7	3.1	996.2
80,0°	2.5	2.5	2.5	2.4	2.4	2.4	2.3	2.2	2.2	2.1	2.1	1.7	998.0
82,5°	1.9	1.9	1.9	1.9	1.9	1.9	1.9	1.8	1.8	1.8	1.8	1.2	999.1
85,0°	1.4	1.4	1.4	1.5	1.5	1.5	1.5	1.5	1.5	1.4	1.4	0.6	999.7
87,5°	1.1	1.1	1.1	1.1	1.2	1.2	1.2	1.2	1.1	1.1	1.1	0.3	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Floodlight FL11	Order number: 5XA779417W01AA EAN: 4058352977644	LP number 59473_13
----------------------------------	--	------------------------------

siteco

Dimming levels table environmental temperature: 10°C

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	----	----	----	----
99	252	254	94909	1008.7
95	237	251	90553	948.6
90	222	249	86009	888.6
85	206	246	81045	824.7
80	192	244	76392	769.1
75	178	241	71718	713.7
70	164	238	66917	658.4
65	150	235	62015	603.8
60	137	231	57316	553.1
55	124	228	52510	502.5
50	112	224	47892	455.9
45	99	219	42838	405.9
40	88	215	38386	363.4
35	76	210	33487	317.9
30	65	204	28833	276.2
25	53	197	23668	230.9
20	42	188	18927	190.4
15	31	177	14146	143.0
10	21	163	9659	102.4
5	10	136	4673	55.3
1	3	91	1300	27.7

Dimming levels table environmental temperature: 25°C

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	----	----	----	----
95	----	----	----	----
90	----	----	----	----
85	205	246	78692	814.9
85	204	246	78352	811.0
80	190	244	73884	755.6
75	176	241	69364	700.6
70	162	238	64807	645.9
65	148	234	60099	591.2
60	135	231	55527	541.0
55	122	227	50800	490.7
50	109	223	46001	440.9
45	97	219	41414	394.8
40	86	214	37082	352.9
35	74	209	32318	307.5
30	63	203	27664	266.4
25	52	196	23023	225.1
20	41	187	18352	184.9
15	31	177	14052	141.7
10	20	161	9156	97.6
5	10	136	4656	54.8
1	3	92	1297	27.4

Photometric test report

Family Floodlight FL11	Order number: 5XA779417W01AA EAN: 4058352977644	LP number 59473_13
----------------------------------	--	------------------------------

Luminousfluxs table **sITeco**

Temperature °C	Luminous flux lm	Power consumption W
10.0	95470.0	1016.6
25.0	78930.0	818.1