

## Photometric test report

Family  
DL® 20 LED

Order number: 5XA51283NA008P  
EAN: 4058352271780

LP number  
59487\_29



Version	post-top mounting
Optic	asymmetric, wide distribution (ST1.2a)
Cover	toughened safety glass
Lamps	LED 4000 K   CRI ≥ 70
Controlgear	ECG Plus
Rated values	Net luminous flux = 5340 lm Power consumption = 41.9 W Luminous efficacy = 127.4 lm/W

serial  
documentation  
07.12.2023

siteco

Luminous intensity in cd/klm


C180-0

C205-25

C210-30

C270-90

Imax: 411 cd/klm

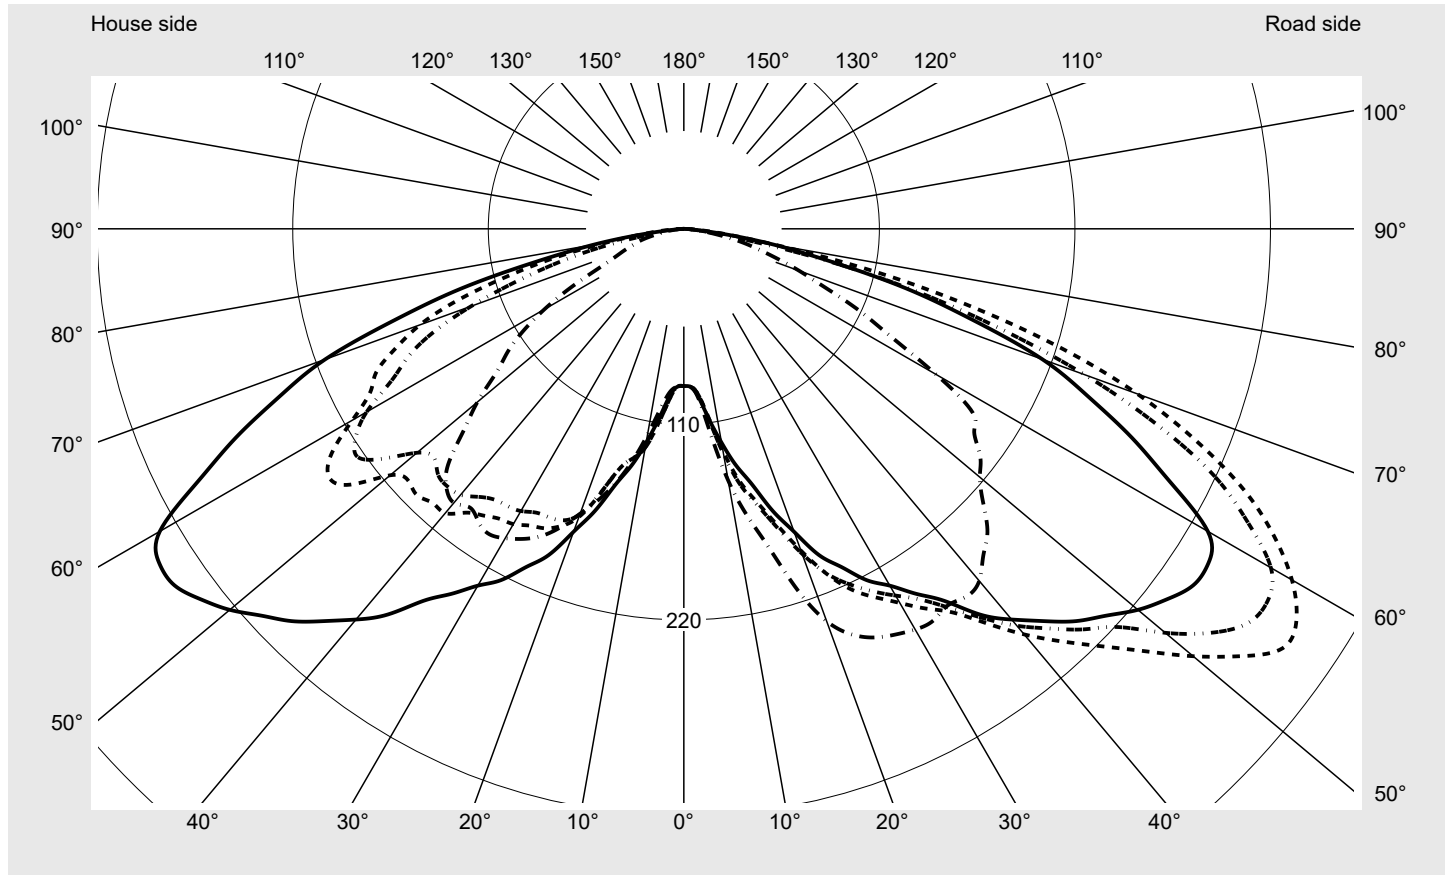

Luminaire output ratios

Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%

Luminous intensity class acc. to EN13201-2

Class:	G6
Imax 70°	272.5
Imax 80°	53.2
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0


Measurement conditions

DIN EN 13032 and DIN 5032

**Photometric test report**

<b>Family</b> <b>DL® 20 LED</b>	<b>Order number: 5XA51283NA008P</b> <b>EAN: 4058352271780</b>	<b>LP number</b> <b>59487_29</b>
------------------------------------	--	-------------------------------------

**Envelope curve in cd/klm**      **KMK 55°**    **KMK 52,5°**    **KMK 50°**    **KMK 47,5°**      **siteco**

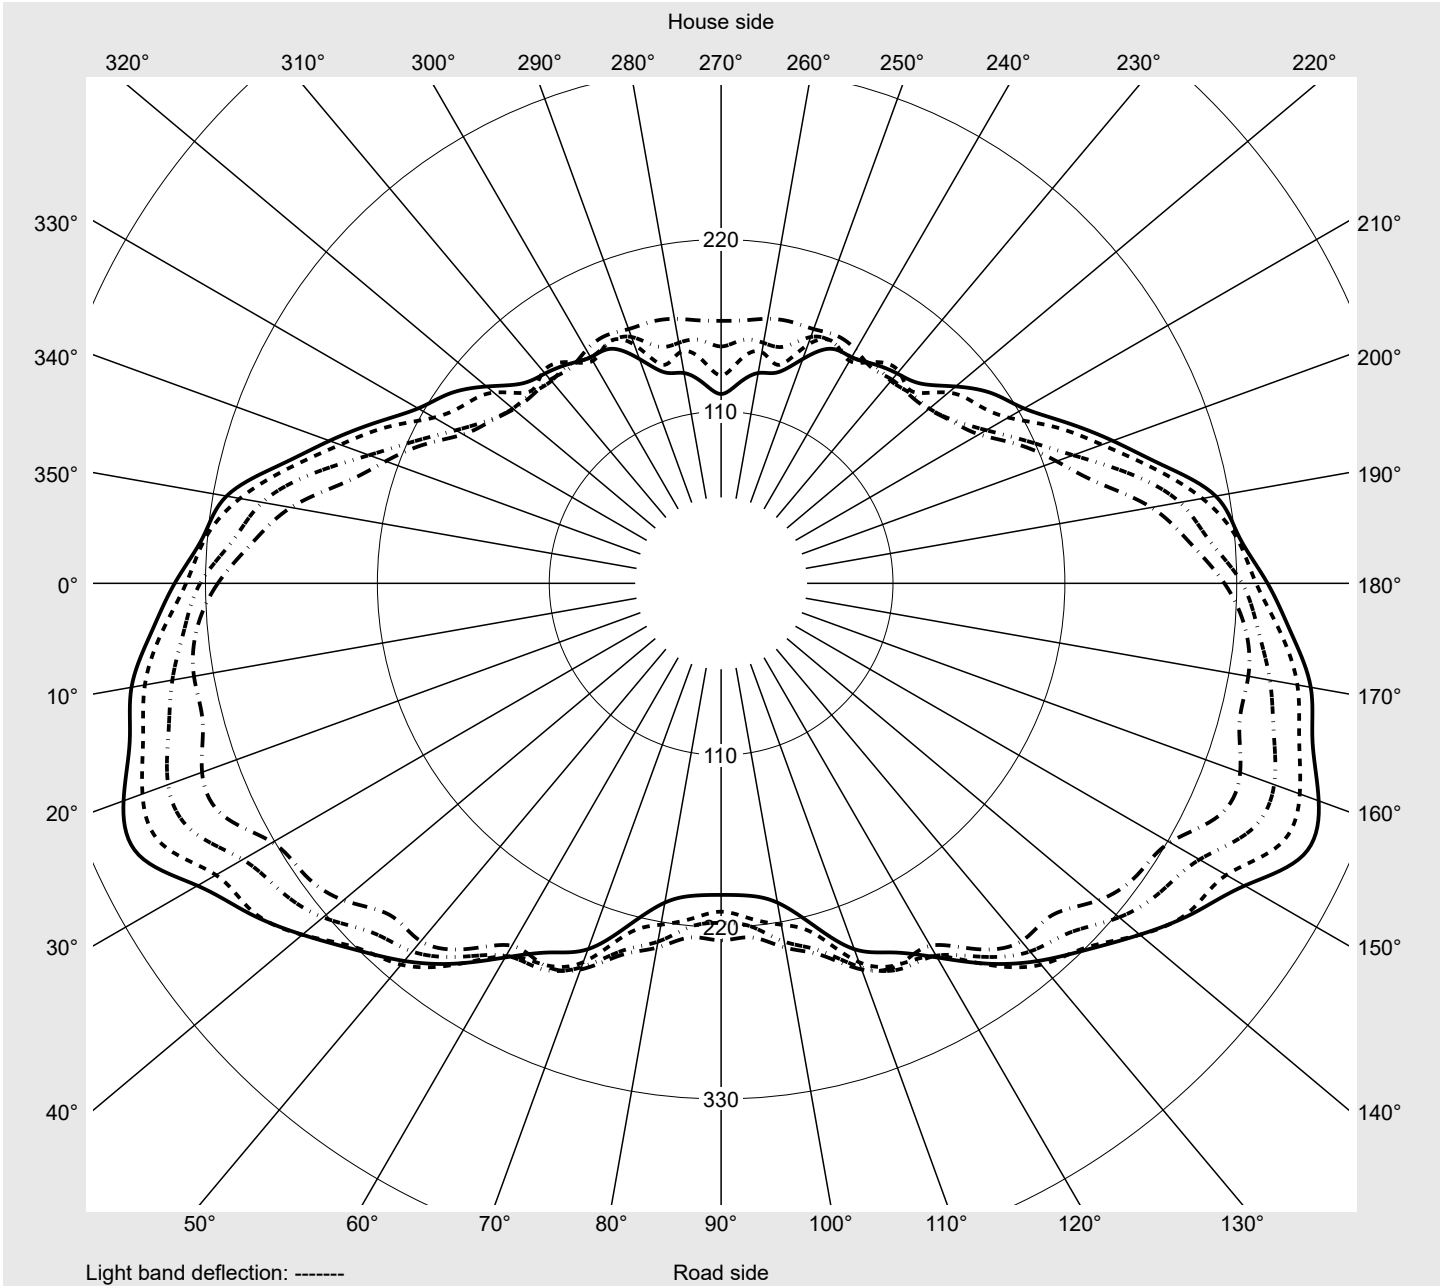

## Photometric test report

Family <b>DL® 20 LED</b>	Order number: <b>5XA51283NA008P</b> EAN: <b>4058352271780</b>	LP number <b>59487_29</b>
Table of values for luminous intensities		Maximum luminous intensity
		<b>siteco</b>

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	88.5	88.5	88.5	88.5	88.5	88.5	88.5	88.5	88.5	88.5	88.5	88.5	88.5
2,5°	89.1	88.8	88.7	88.8	88.8	88.8	89.0	89.0	88.9	89.0	89.1	89.2	89.2
5,0°	95.0	95.0	94.4	94.2	94.0	93.8	93.8	93.9	94.0	94.2	94.4	94.7	95.0
7,5°	107.9	107.4	106.9	107.2	107.3	107.3	108.0	108.7	109.4	110.4	111.2	112.2	113.4
10,0°	122.1	122.9	123.4	124.9	125.9	126.9	128.8	129.7	130.6	132.5	133.3	134.4	136.6
12,5°	136.6	137.9	140.2	142.4	143.9	145.6	147.8	148.0	148.8	150.6	150.3	151.3	153.8
15,0°	149.2	151.9	154.9	157.0	157.6	159.3	161.5	161.8	163.4	166.0	166.0	167.2	170.6
17,5°	166.4	168.4	171.4	172.3	172.7	174.8	177.1	179.2	183.1	187.2	189.2	191.7	195.8
20,0°	181.4	185.4	188.4	189.2	190.3	192.7	194.5	196.9	200.8	203.5	206.5	209.8	213.8
22,5°	198.6	202.0	205.4	206.2	208.6	210.1	209.8	210.1	211.3	211.7	215.4	219.4	223.3
25,0°	209.9	214.8	217.9	219.7	223.8	224.1	220.7	219.6	218.7	217.8	221.6	226.1	230.2
27,5°	222.8	227.4	229.3	230.9	235.0	233.7	229.8	228.3	225.1	225.2	228.7	232.4	236.4
30,0°	231.8	237.9	239.9	240.8	243.6	243.0	238.2	235.4	233.0	231.6	236.0	239.0	242.0
32,5°	243.5	250.4	252.6	251.0	253.2	253.3	247.2	244.2	243.2	239.9	241.4	243.5	247.4
35,0°	255.5	265.0	265.7	263.7	263.4	263.4	260.3	256.0	255.8	250.0	249.8	250.7	250.1
37,5°	273.4	285.9	282.5	279.6	280.8	279.7	275.9	272.9	267.3	263.8	261.5	258.5	255.2
40,0°	286.9	301.4	304.8	299.5	300.3	297.8	291.5	288.8	281.6	272.6	267.6	264.3	260.5
42,5°	299.3	315.0	322.9	317.0	321.4	314.8	305.0	301.1	293.2	283.4	277.4	272.3	261.8
45,0°	312.1	322.8	330.4	331.6	333.3	332.1	318.6	307.2	298.2	289.6	283.1	273.2	261.4
47,5°	322.1	336.9	342.6	343.5	353.5	351.7	331.6	325.2	315.5	300.1	299.0	285.8	267.8
50,0°	333.4	345.0	356.7	366.1	376.7	374.0	353.5	343.8	332.6	316.0	307.6	291.8	275.2
52,5°	342.4	359.3	374.5	383.0	394.1	394.9	373.3	366.1	349.9	329.8	318.6	298.0	275.5
55,0°	349.7	366.3	383.2	391.9	407.0	411.3	387.0	368.5	349.8	331.5	315.5	297.1	276.5
57,5°	349.9	363.2	378.2	392.7	410.1	408.7	389.4	364.3	344.6	322.1	301.2	279.9	269.2
60,0°	340.4	354.4	369.2	386.1	402.5	395.0	381.3	354.5	330.9	303.2	275.1	253.3	247.9
62,5°	308.5	331.8	352.4	366.5	381.2	374.3	357.7	326.0	303.9	273.2	249.2	235.2	226.2
65,0°	278.1	300.7	316.7	333.1	343.1	347.8	329.5	296.4	276.9	248.5	224.6	215.0	195.2
67,5°	245.9	260.8	278.7	298.7	308.0	312.3	288.5	263.1	247.3	212.8	192.2	177.8	155.7
70,0°	214.7	218.9	232.0	256.8	272.5	271.5	240.0	222.3	211.1	170.2	150.1	136.7	118.2
72,5°	170.3	180.3	189.5	209.5	223.5	221.7	186.3	173.9	161.8	132.2	115.0	99.9	87.6
75,0°	129.4	136.2	139.7	150.5	162.7	164.5	134.2	124.1	119.8	94.3	76.8	68.9	63.7
77,5°	84.1	91.7	89.7	93.7	104.1	107.1	80.8	75.0	77.3	55.3	46.0	41.3	40.1
80,0°	51.7	51.9	48.0	46.2	49.9	53.2	33.9	36.4	41.0	24.0	23.0	22.8	23.5
82,5°	23.2	23.6	22.2	20.6	22.4	25.5	13.7	16.2	19.6	10.1	10.0	10.6	11.6
85,0°	6.0	6.0	6.0	6.0	7.3	10.7	5.4	7.3	9.1	4.5	4.3	4.4	4.7
87,5°	2.0	2.0	2.0	1.9	1.9	2.4	1.8	1.7	1.7	1.6	1.6	1.5	1.6
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

## Photometric test report

<b>Family</b> <b>DL® 20 LED</b>	<b>Order number: 5XA51283NA008P</b> <b>EAN: 4058352271780</b>	<b>LP number</b> <b>59487_29</b>
------------------------------------	--	-------------------------------------

**siteco**

Table of values for luminous intensities		Maximum luminous intensity											
C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	88.5	88.5	88.5	88.5	88.5	88.5	88.5	88.5	88.5	88.5	88.5	88.5	88.5
2,5°	89.3	89.3	89.4	89.4	89.3	89.2	88.9	88.9	89.1	89.0	89.1	89.2	89.1
5,0°	95.3	95.5	95.9	96.0	96.0	96.2	95.9	96.3	96.8	97.0	97.1	97.1	97.0
7,5°	114.1	114.8	115.9	116.2	116.5	116.9	108.5	109.1	109.9	110.3	110.7	111.0	111.0
10,0°	137.6	139.1	141.4	141.9	142.8	143.8	122.7	123.4	124.3	124.4	124.8	125.0	124.9
12,5°	154.6	156.8	160.6	161.9	163.9	165.6	135.1	134.1	134.2	133.1	132.3	132.2	132.0
15,0°	171.6	174.9	179.5	181.2	183.7	186.1	147.0	144.2	142.8	141.2	139.7	139.6	139.1
17,5°	197.6	201.3	206.8	208.7	210.9	213.3	163.3	160.1	158.5	157.4	156.2	155.7	154.2
20,0°	217.8	222.9	228.2	230.9	233.2	234.9	180.7	177.8	175.7	174.5	172.5	170.9	168.2
22,5°	229.6	235.6	240.4	244.8	246.9	247.0	195.8	192.5	188.2	185.5	181.1	177.5	174.5
25,0°	237.2	243.2	246.8	252.2	254.6	253.6	208.5	203.2	196.4	192.4	185.8	179.1	176.3
27,5°	243.6	249.3	251.5	257.0	259.0	257.3	219.9	212.2	204.1	197.0	188.2	180.0	177.5
30,0°	248.1	251.6	253.3	258.6	261.3	260.3	229.3	219.8	210.1	200.7	191.8	183.3	179.4
32,5°	250.8	253.5	256.5	260.6	261.5	261.3	238.2	230.6	217.0	205.1	193.4	184.8	178.6
35,0°	251.6	255.3	258.9	260.7	259.9	258.7	248.7	239.2	223.2	209.3	196.9	185.9	180.1
37,5°	255.6	257.3	260.4	261.7	259.4	260.9	260.3	247.0	231.5	217.8	201.3	190.0	182.0
40,0°	262.6	262.4	261.7	260.2	260.1	258.5	274.1	257.4	239.5	223.2	208.8	195.3	186.1
42,5°	267.2	267.0	258.6	253.4	249.5	249.3	283.3	267.7	246.0	225.6	209.2	196.7	189.5
45,0°	266.6	267.0	254.6	243.7	238.6	241.5	295.2	268.4	246.4	227.0	212.1	195.5	185.0
47,5°	269.3	263.0	246.2	236.8	227.5	228.5	301.0	279.6	249.3	228.5	210.0	190.6	180.6
50,0°	272.3	261.4	243.3	232.9	220.5	217.4	313.7	298.2	270.9	239.8	215.7	196.0	181.8
52,5°	269.2	258.0	232.4	221.8	215.4	210.1	331.4	312.8	285.8	259.4	236.4	212.2	199.8
55,0°	260.7	249.2	226.1	207.5	200.7	199.4	333.1	321.4	292.5	266.7	243.6	223.9	211.9
57,5°	248.6	231.5	221.9	193.0	182.3	192.8	324.6	302.6	280.6	258.2	234.8	218.9	207.6
60,0°	233.2	208.6	194.3	174.6	161.0	163.9	308.1	283.8	270.6	239.5	215.3	206.0	191.9
62,5°	211.0	184.4	158.7	148.5	139.5	131.3	289.1	265.4	245.6	221.5	198.8	185.6	171.6
65,0°	183.8	160.4	128.4	126.1	118.6	108.9	260.0	241.7	221.3	205.2	190.9	171.6	151.9
67,5°	150.3	133.3	100.8	100.3	97.5	85.7	232.2	215.5	203.1	187.5	175.4	153.0	133.3
70,0°	112.0	99.3	77.8	78.8	76.7	69.1	203.4	186.8	176.9	170.2	157.9	127.3	116.4
72,5°	80.4	69.5	60.4	59.6	56.6	54.0	160.4	150.2	142.9	139.9	133.0	99.2	93.1
75,0°	56.7	48.6	47.0	44.1	42.0	41.9	116.1	110.2	104.7	106.2	102.0	73.1	64.7
77,5°	37.8	33.1	32.6	33.3	31.8	31.4	79.5	74.8	68.9	74.3	72.9	48.1	41.4
80,0°	22.8	20.7	20.9	21.4	20.8	19.9	47.3	43.9	37.9	40.3	43.4	23.3	22.9
82,5°	12.2	11.3	11.8	11.7	11.3	11.1	22.0	20.4	17.3	18.6	23.9	10.2	11.2
85,0°	4.8	4.8	5.1	5.0	4.9	4.9	6.0	6.3	6.0	7.2	12.1	5.2	4.9
87,5°	1.5	1.5	1.6	1.4	1.4	1.4	2.0	2.0	2.0	1.9	2.7	1.8	1.7
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

## Photometric test report

Family <b>DL® 20 LED</b>	Order number: <b>5XA51283NA008P</b> EAN: <b>4058352271780</b>	LP number <b>59487_29</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
		<b>siteco</b>

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
$\gamma$	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0,0°	88.5	88.5	88.5	88.5	88.5	88.5	88.5	88.5	88.5	88.5	88.5	0.1	0.1
2,5°	89.1	89.1	89.1	88.9	88.9	88.8	88.8	88.9	88.7	88.7	89.0	1.1	1.2
5,0°	96.7	96.5	95.9	95.4	94.8	94.1	93.6	93.2	92.5	92.2	92.5	2.3	3.5
7,5°	110.7	110.2	109.5	108.5	107.7	106.2	105.1	104.2	102.8	102.4	102.6	3.9	7.4
10,0°	124.4	124.2	123.3	122.5	122.0	120.4	119.3	119.1	117.7	117.2	117.7	6.1	13.4
12,5°	131.4	132.1	131.9	131.9	132.9	132.4	132.9	133.7	133.0	133.1	133.8	8.4	21.9
15,0°	138.2	139.3	140.1	140.5	142.3	143.0	144.5	146.4	146.4	147.1	148.1	11.0	32.8
17,5°	152.1	152.1	152.8	153.3	154.7	156.0	157.2	158.6	159.5	160.1	160.0	14.2	47.0
20,0°	165.1	163.1	163.5	164.0	164.6	167.1	169.2	170.3	172.0	171.6	170.5	17.7	64.7
22,5°	171.4	168.9	169.5	170.3	171.3	175.5	178.1	178.9	182.7	183.4	181.8	20.9	85.6
25,0°	173.5	170.8	172.7	173.5	174.3	180.2	184.0	185.0	189.9	192.6	190.8	24.0	109.6
27,5°	173.6	172.2	175.8	177.6	177.9	183.4	188.1	190.7	196.1	197.9	196.7	27.0	136.7
30,0°	174.9	173.5	178.6	182.9	182.9	186.9	190.4	194.2	199.7	201.4	201.0	30.0	166.6
32,5°	174.7	173.5	180.8	184.4	185.0	187.3	192.5	198.1	202.7	202.9	203.7	33.0	199.6
35,0°	173.3	174.4	181.5	185.6	186.5	188.3	194.2	199.5	201.8	202.1	201.4	36.0	235.6
37,5°	174.5	176.0	183.3	189.9	190.9	190.1	196.1	202.1	203.2	200.3	197.6	39.4	275.0
40,0°	179.5	179.6	185.1	190.4	191.5	192.3	198.9	202.1	203.8	202.5	201.2	42.9	317.9
42,5°	178.5	177.1	181.1	183.0	188.5	188.5	195.7	195.7	199.8	199.5	197.6	45.8	363.7
45,0°	175.1	173.4	176.1	178.1	178.3	181.1	188.7	188.0	187.8	189.1	187.5	48.1	411.8
47,5°	173.4	170.5	170.1	168.3	172.5	174.9	173.2	173.3	171.9	169.0	168.0	50.4	462.1
50,0°	174.0	171.7	169.1	170.4	167.0	169.8	167.8	156.9	156.3	156.3	151.6	53.4	515.6
52,5°	189.9	173.5	177.1	172.9	164.4	170.3	162.5	144.8	150.2	143.9	133.1	56.9	572.5
55,0°	196.0	180.8	175.3	171.1	167.1	165.6	152.8	139.8	136.7	128.5	121.2	58.9	631.4
57,5°	191.0	175.2	161.9	155.6	160.3	154.5	140.2	129.5	123.3	113.1	107.3	58.7	690.0
60,0°	175.3	161.7	143.8	142.2	148.1	140.1	125.6	115.5	107.1	96.7	90.5	56.5	746.5
62,5°	159.2	137.0	125.3	128.8	123.2	116.5	109.7	100.5	90.2	77.4	72.0	52.5	799.0
65,0°	141.4	119.2	106.0	111.5	96.4	90.6	93.7	78.0	66.1	58.5	53.7	47.7	846.7
67,5°	127.9	100.8	85.8	87.6	72.2	69.7	74.2	59.2	45.9	43.2	42.3	41.9	888.6
70,0°	110.1	75.8	59.5	66.7	46.1	47.3	55.7	42.1	35.2	35.4	35.7	35.2	923.8
72,5°	86.3	58.3	39.8	39.2	30.1	31.4	37.8	30.6	28.7	28.4	29.7	28.0	951.8
75,0°	65.3	44.3	27.1	24.2	23.7	23.4	26.2	25.4	23.9	23.5	24.8	20.7	972.5
77,5°	48.8	32.1	17.4	16.9	18.0	18.3	18.6	19.5	19.5	18.6	18.1	13.9	986.4
80,0°	31.4	16.4	10.7	11.3	12.5	13.5	13.2	13.7	13.9	13.2	12.3	7.8	994.2
82,5°	18.1	7.0	6.3	6.8	7.7	8.0	7.9	8.4	8.7	8.0	7.8	3.8	998.0
85,0°	9.0	3.6	3.4	3.4	3.8	3.8	3.7	3.8	3.9	3.7	3.5	1.5	999.5
87,5°	2.1	1.6	1.6	1.5	1.6	1.4	1.4	1.4	1.3	1.2	1.2	0.5	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

## Photometric test report

<b>Family</b> DL® 20 LED	<b>Order number: 5XA51283NA008P</b> <b>EAN: 4058352271780</b>	<b>LP number</b> 59487_29
-----------------------------	--	------------------------------

<b>Dimming levels table</b>	environmental temperature: 25°C	<b>sITeco</b>
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Luminous flux [lm]	Power consumption [W] start of lifetime	Power consumption [W] end of lifetime	Power consumption [W] average
100	254	5340	41.9	43.0	42.4
95	240	5066	39.5	40.5	40.0
90	227	4810	37.3	38.4	37.8
85	213	4531	35.0	35.9	35.4
80	200	4270	32.9	33.8	33.3
75	187	4007	30.7	31.6	31.2
70	174	3744	28.7	29.4	29.0
65	161	3477	26.6	27.3	27.0
60	148	3207	24.5	25.2	24.8
55	135	2936	22.5	23.1	22.8
50	122	2662	20.4	21.0	20.7
45	110	2408	18.6	19.0	18.8
40	97	2130	16.6	17.0	16.8
35	85	1871	14.8	15.1	15.0
30	73	1611	13.0	13.3	13.2
25	60	1327	11.1	11.4	11.2
20	48	1063	9.4	9.6	9.5
15	36	796	7.6	7.8	7.7
12	28	617	6.5	6.6	6.6