


Photometric test report

Family Streetlight 21 midi LED	Order number: 5XE3F31Y08MB EAN: 4058352924167	LP number 59559_14
	Version post-top or side-entry mounting, Smart Interface up/down Optic pedestrian crossing, asymmetric left distribution (PC-L) Cover toughened safety glass Lamps LED 3000 K CRI ≥ 70 Controlgear EVG SITECO iQ - Smart Interface Rated values Net luminous flux = 17070 lm Power consumption = 129.3 W Luminous efficacy = 132 lm/W	serial documentation 07.02.2024



Luminous intensity in cd/klm C180-0 C270-90 C290-110 C295-115 **Imax: 1555 cd/klm**

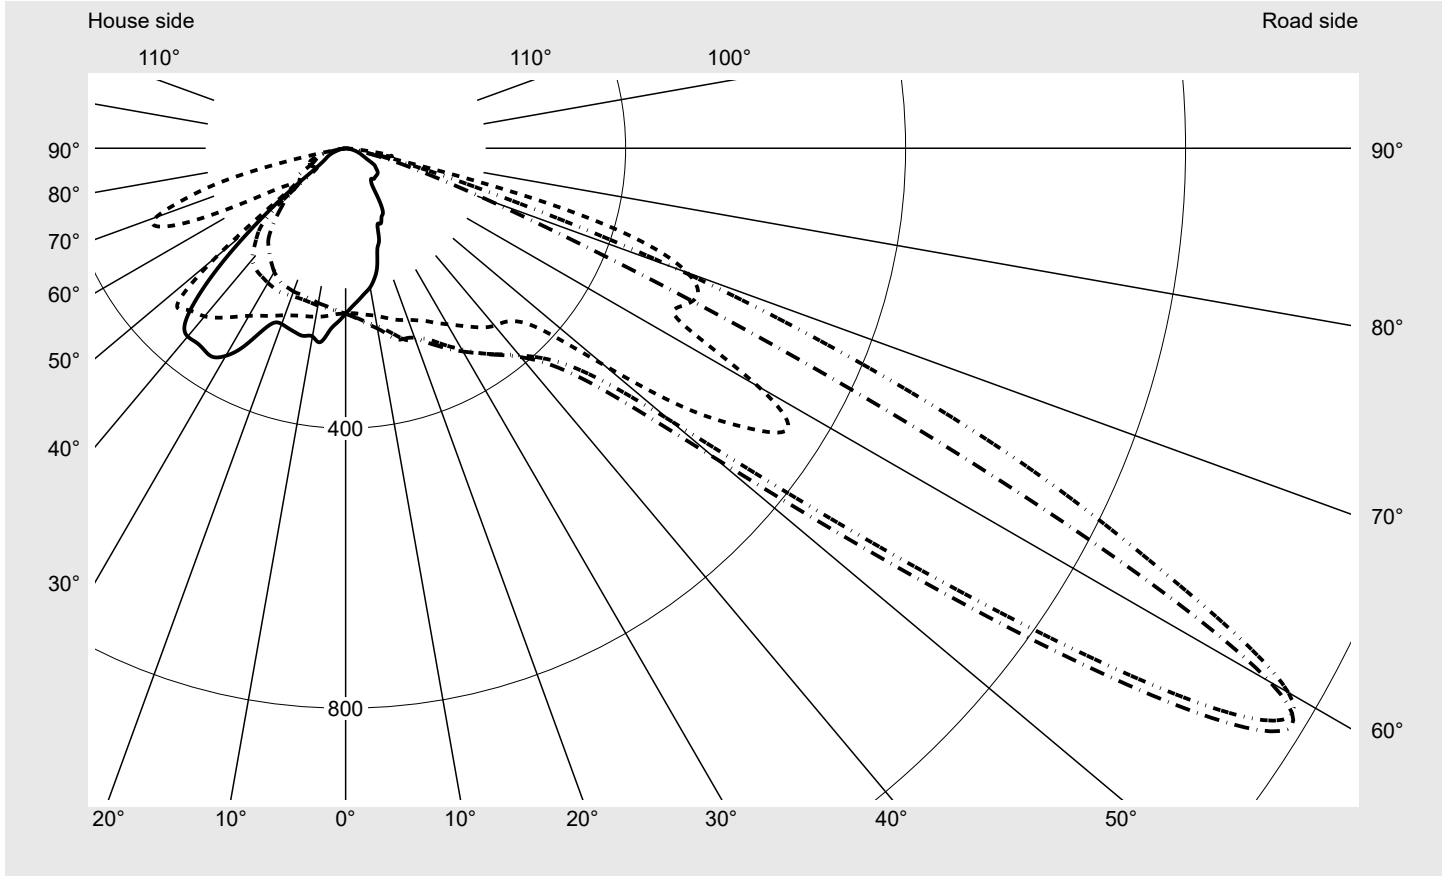

Luminaire output ratios

Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%

Luminous intensity class acc. to EN13201-2

Class:	G3
Imax 70°	818.0
Imax 80°	67.6
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0


Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family Streetlight 21 midi LED	Order number: 5XE3F31Y08MB EAN: 4058352924167	LP number 59559_14
--	--	------------------------------

Envelope curve in cd/klm **KMK 60°** **KMK 57.5°** **KMK 55°** **KMK 52.5°** **siteco**

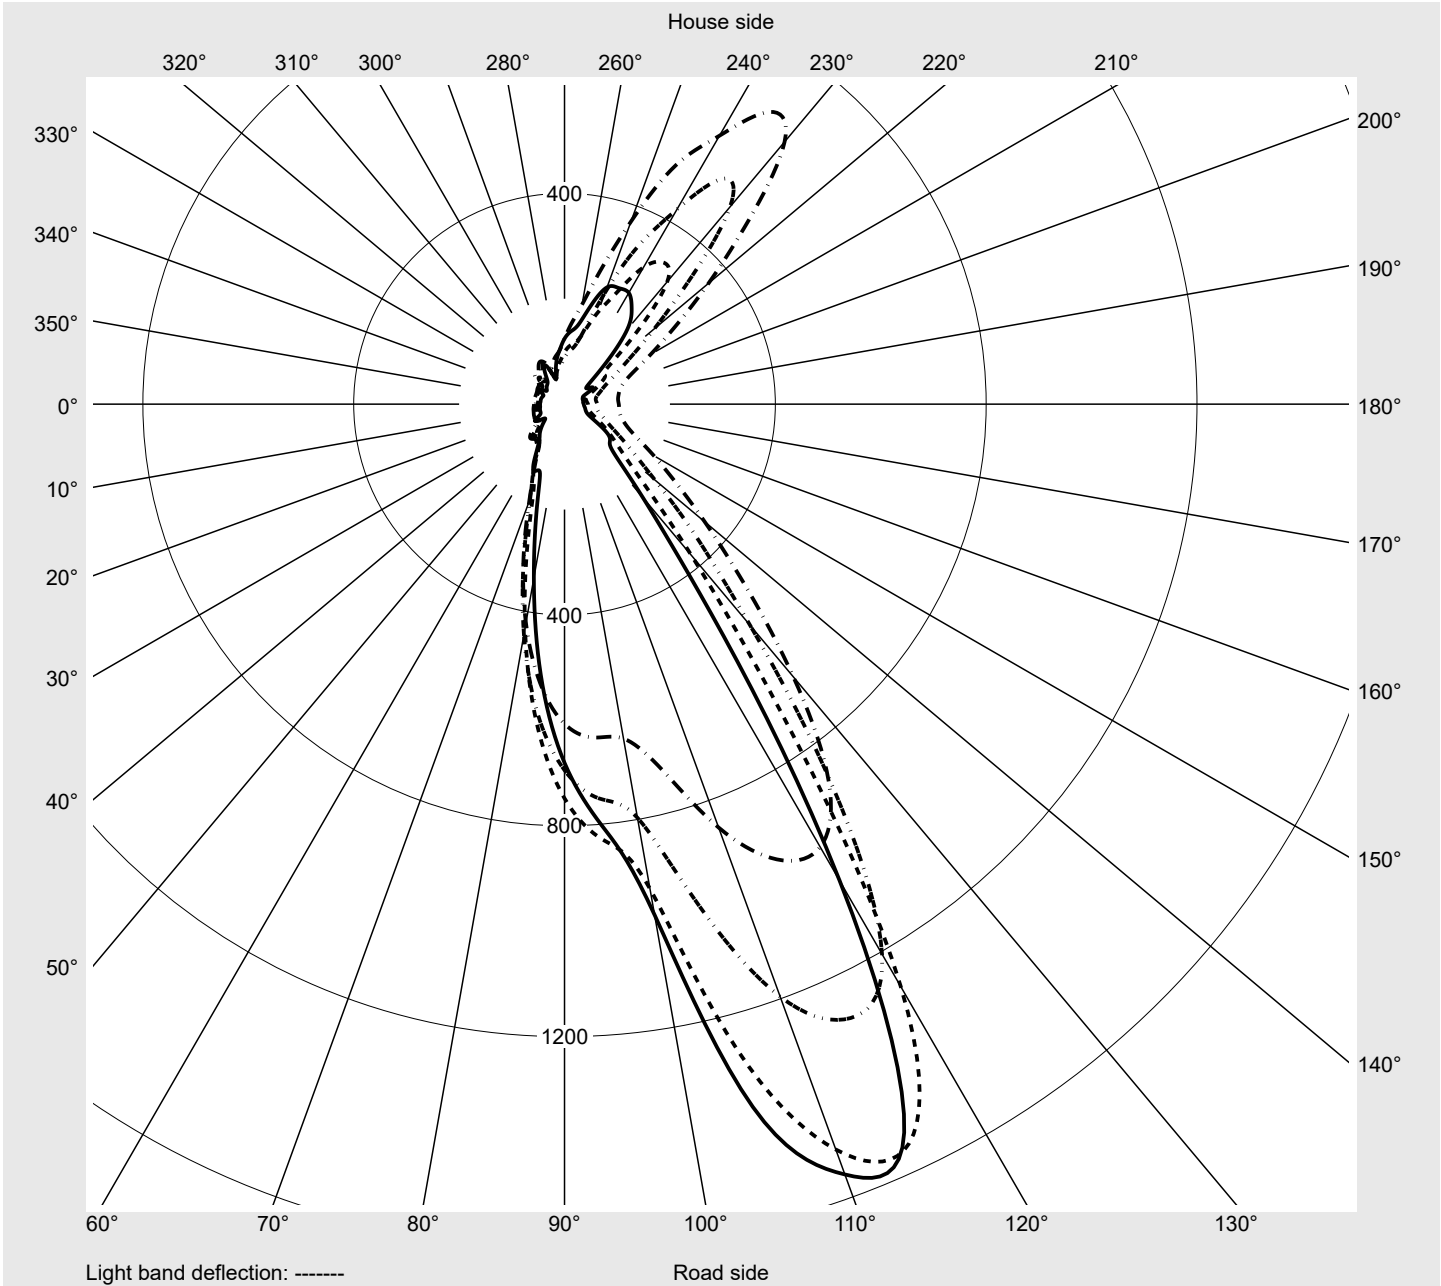

Photometric test report

Family Streetlight 21 midi LED	Order number: 5XE3F31Y08MB EAN: 4058352924167	LP number 59559_14
---	--	-------------------------------------

siteco

Table of values for luminous intensities		Maximum luminous intensity													
C-planes	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	
γ	Luminous intensity in cd/klm														
0,0°	236.4	236.4	236.4	236.4	236.4	236.4	236.4	236.4	236.4	236.4	236.4	236.4	236.4	236.4	
2,5°	225.9	227.1	227.1	227.5	227.7	227.7	228.1	228.3	228.7	229.7	230.5	231.3	232.3	233.1	
5,0°	217.3	216.7	216.9	217.3	217.9	218.5	219.3	220.3	221.3	222.7	224.3	225.9	227.7	229.5	
7,5°	209.1	208.9	209.3	209.9	210.9	212.1	213.3	214.5	215.7	217.5	219.5	221.9	224.5	227.5	
10,0°	201.7	201.1	201.5	202.5	203.3	203.9	205.5	207.7	210.5	213.1	215.5	217.9	220.9	224.7	
12,5°	190.3	190.9	191.9	193.1	195.3	196.9	199.1	202.3	204.7	207.1	211.1	215.1	219.1	223.5	
15,0°	174.1	173.3	175.1	177.9	181.7	185.1	188.7	192.5	196.7	201.9	206.9	211.9	218.1	223.3	
17,5°	150.7	152.7	154.1	156.7	160.7	166.1	172.5	179.9	186.9	194.1	201.7	209.7	216.9	224.5	
20,0°	139.5	139.1	140.7	143.1	146.3	150.3	155.5	163.3	173.7	184.5	194.5	204.7	215.3	224.3	
22,5°	118.7	120.3	121.9	125.7	131.5	137.7	143.7	150.9	159.5	171.7	185.7	197.9	211.1	222.7	
25,0°	118.5	118.7	118.5	117.9	117.7	120.5	129.5	139.3	148.7	158.7	173.7	190.1	205.3	221.3	
27,5°	111.0	112.6	113.9	116.1	118.5	118.3	117.7	123.7	137.5	148.7	161.9	180.3	199.7	218.7	
30,0°	106.6	107.0	108.0	108.4	111.0	115.3	118.9	117.3	122.7	138.1	152.7	169.5	191.7	213.5	
32,5°	90.8	96.4	101.2	104.8	106.8	108.4	113.6	118.3	117.7	125.5	142.5	159.1	181.9	207.5	
35,0°	68.6	71.0	78.4	89.4	101.6	105.8	106.6	112.6	118.9	118.5	130.7	147.5	169.5	198.5	
37,5°	59.8	62.4	67.0	74.0	85.8	101.6	106.0	106.6	114.1	118.9	121.5	136.7	158.9	189.5	
40,0°	57.0	59.4	63.6	68.8	75.2	86.4	104.8	106.6	108.4	116.7	117.7	128.3	147.1	178.1	
42,5°	59.4	61.6	65.0	69.0	73.4	79.0	93.2	109.6	107.4	110.4	116.1	121.7	135.5	165.3	
45,0°	59.0	61.0	64.0	68.0	72.8	77.4	83.2	103.0	109.2	106.2	112.0	115.3	121.9	149.3	
47,5°	58.8	60.2	62.4	65.0	68.6	73.0	77.4	86.2	107.6	103.6	105.4	109.0	112.0	136.9	
50,0°	58.6	59.8	61.2	62.6	64.6	67.2	69.8	73.2	97.2	99.0	96.6	100.4	106.0	130.1	
52,5°	57.8	58.8	59.8	60.6	61.8	62.8	64.4	65.4	80.8	91.6	87.0	91.6	102.0	136.1	
55,0°	54.8	55.4	56.8	58.2	59.4	59.6	61.8	59.2	66.6	84.0	79.2	84.8	98.6	139.9	
57,5°	50.8	51.4	52.6	53.8	55.8	58.4	63.0	53.2	57.2	74.2	76.6	82.6	101.2	140.7	
60,0°	46.6	46.4	47.2	47.8	48.2	54.0	64.4	47.6	50.2	61.8	73.0	83.6	108.4	138.7	
62,5°	36.0	37.8	38.6	39.6	40.4	48.6	58.0	43.0	45.2	52.8	64.4	84.4	111.8	125.5	
65,0°	29.8	30.6	32.0	33.8	35.6	43.6	49.2	39.0	41.2	46.2	56.0	83.4	105.2	109.4	
67,5°	25.0	26.6	27.8	29.4	33.0	40.0	40.4	34.6	36.8	39.4	48.8	75.8	87.4	83.2	
70,0°	21.8	22.4	23.4	25.2	29.2	35.4	32.8	30.4	30.8	32.2	41.0	61.8	68.0	57.2	
72,5°	17.6	18.6	19.2	21.0	25.2	29.8	26.6	24.6	24.8	26.4	33.4	48.6	55.2	41.6	
75,0°	14.4	14.6	15.0	16.6	20.4	24.0	20.8	18.8	19.4	20.4	24.8	37.0	42.6	30.8	
77,5°	9.8	10.8	11.0	12.6	16.2	17.8	14.6	13.8	13.8	14.4	16.4	23.4	24.8	23.4	
80,0°	7.0	7.2	7.2	8.2	11.2	11.0	9.2	8.8	7.8	8.2	9.2	10.2	12.2	15.2	
82,5°	4.0	4.4	4.4	4.4	5.2	6.4	4.8	4.2	4.2	4.4	4.8	5.4	6.2	7.8	
85,0°	1.2	1.2	1.4	1.6	2.0	1.6	1.6	1.8	1.8	2.0	2.2	2.2	2.6	3.0	
87,5°	0.4	0.4	0.4	0.4	0.4	0.6	0.6	0.6	0.6	0.8	0.8	1.0	1.0	1.2	
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	

Photometric test report

Family Streetlight 21 midi LED	Order number: 5XE3F31Y08MB EAN: 4058352924167	LP number 59559_14
Table of values for luminous intensities		Maximum luminous intensity
siteco		

C-planes	70°	75°	80°	85°	90°	95°	100°	105°	110°	115°	120°	125°	130°	135°
γ	Luminous intensity in cd/klm													
0,0°	236.4	236.4	236.4	236.4	236.4	236.4	236.4	236.4	236.4	236.4	236.4	236.4	236.4	236.4
2,5°	233.7	234.5	234.9	235.3	235.9	237.3	238.3	239.1	240.3	240.9	241.5	242.1	242.7	243.3
5,0°	231.5	233.5	234.9	236.1	237.7	240.1	242.1	244.3	245.7	246.9	248.1	249.1	250.5	251.7
7,5°	230.3	232.9	235.3	237.5	240.1	243.5	246.7	249.3	251.9	254.1	256.5	258.7	260.7	263.5
10,0°	228.7	232.7	236.1	239.3	242.9	247.3	250.9	254.3	257.9	261.5	265.7	269.7	273.9	277.3
12,5°	228.3	233.5	238.3	242.5	247.3	252.3	256.7	260.9	266.1	271.7	277.3	280.1	276.7	272.7
15,0°	229.1	235.3	241.5	246.9	252.5	257.9	263.3	269.3	276.5	282.7	281.9	276.3	275.5	276.5
17,5°	231.1	237.7	244.5	251.3	257.3	263.3	270.3	279.1	287.3	284.9	281.9	283.5	283.3	281.9
20,0°	232.1	239.3	246.9	254.7	260.9	268.1	277.7	288.5	291.1	288.5	292.1	292.3	289.9	286.3
22,5°	233.1	241.3	249.7	258.3	266.1	274.9	287.9	296.1	294.5	299.7	302.1	300.1	295.1	289.1
25,0°	233.9	244.1	253.3	263.1	272.5	284.5	298.9	301.1	305.3	311.5	312.1	307.7	299.3	290.9
27,5°	234.3	246.7	257.5	268.9	281.5	296.1	308.1	310.3	318.9	323.7	322.7	315.3	304.5	294.7
30,0°	233.1	248.5	261.5	275.1	290.3	307.5	315.1	322.7	331.9	335.3	332.3	322.5	311.3	302.5
32,5°	231.9	250.3	266.7	282.5	300.3	318.1	323.3	335.9	345.8	347.0	341.4	331.7	323.9	317.9
35,0°	227.7	251.1	271.1	290.7	311.3	326.9	334.1	349.0	358.8	359.6	352.8	343.4	340.6	350.0
37,5°	223.5	251.5	275.7	299.7	322.7	336.1	347.4	363.2	371.2	372.8	366.4	360.2	370.8	398.2
40,0°	216.3	248.9	277.7	305.9	330.9	345.8	362.0	378.4	386.2	389.6	386.8	393.0	424.0	456.6
42,5°	204.3	242.3	277.9	310.5	336.7	354.8	375.4	395.2	405.0	413.6	421.8	448.0	492.6	519.0
45,0°	189.1	236.3	282.5	322.3	350.4	370.0	389.6	412.8	432.8	453.8	482.8	532.2	573.9	579.9
47,5°	180.5	241.9	305.7	356.0	388.8	406.0	420.2	444.6	484.6	531.2	583.9	637.5	650.1	612.3
50,0°	183.7	269.9	361.2	435.4	482.4	498.2	500.8	529.8	604.1	688.3	748.7	767.3	703.7	586.5
52,5°	195.3	300.3	421.6	531.2	606.5	634.9	644.3	719.3	854.8	953.0	970.4	874.0	675.5	482.4
55,0°	190.5	296.9	443.6	588.5	694.5	750.9	796.8	984.4	1196.3	1285.0	1204.9	889.0	547.8	349.2
57,5°	171.3	269.9	431.4	606.9	747.9	829.2	933.4	1269.4	1504.9	1547.3	1276.0	724.9	374.6	211.7
60,0°	136.9	202.3	335.1	516.0	680.5	801.2	984.0	1380.4	1555.3	1524.9	1043.9	484.8	230.9	134.5
62,5°	101.2	138.5	239.9	403.6	541.4	663.1	899.8	1252.8	1328.0	1153.3	657.9	260.7	115.1	99.2
65,0°	84.0	106.6	192.3	383.6	531.8	647.7	904.0	1121.9	1069.7	717.7	354.2	157.7	83.4	59.8
67,5°	64.0	71.2	124.7	339.4	544.6	692.3	944.4	1006.8	779.7	391.6	187.7	113.8	64.6	44.8
70,0°	46.0	49.6	70.2	258.5	519.2	668.3	818.0	771.1	501.4	216.5	123.7	83.6	48.0	38.2
72,5°	34.6	36.0	43.6	182.5	444.0	509.2	511.8	440.0	250.7	122.7	80.8	49.4	37.4	38.0
75,0°	25.6	22.4	27.2	108.2	278.7	295.9	230.9	196.7	117.7	68.8	45.8	24.8	29.0	29.8
77,5°	19.0	19.0	19.6	38.0	65.6	75.6	68.2	55.4	40.2	27.4	19.2	16.4	19.8	21.8
80,0°	12.4	17.6	16.6	33.0	65.6	67.6	44.8	24.2	19.4	15.2	11.8	10.6	10.6	14.4
82,5°	7.0	9.4	11.0	20.0	40.6	44.8	29.0	14.6	10.4	8.6	7.2	6.4	5.8	6.2
85,0°	3.6	4.2	4.6	5.6	6.8	8.2	8.6	7.0	4.8	4.0	3.4	3.0	2.8	2.4
87,5°	1.2	1.4	1.4	1.6	1.6	1.6	1.6	1.6	1.4	1.4	1.2	1.2	1.0	1.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 21 midi LED	Order number: 5XE3F31Y08MB EAN: 4058352924167	LP number 59559_14
---	--	-------------------------------------



Table of values for luminous intensities Maximum luminous intensity

C-planes	140°	145°	150°	155°	160°	165°	170°	175°	180°	185°	190°	195°	200°	205°
γ	Luminous intensity in cd/klm													
0,0°	236.4	236.4	236.4	236.4	236.4	236.4	236.4	236.4	236.4	236.4	236.4	236.4	236.4	236.4
2,5°	243.9	244.5	245.1	245.7	246.3	246.7	247.7	248.1	248.3	248.9	248.9	248.5	248.1	247.5
5,0°	252.9	254.1	255.5	256.5	257.7	258.7	259.9	260.9	261.3	262.1	261.9	261.1	260.3	259.3
7,5°	266.1	268.5	270.9	272.9	274.7	275.9	277.5	278.9	279.5	280.1	280.3	279.1	278.3	276.5
10,0°	278.1	276.5	273.9	271.9	270.9	270.7	271.1	272.3	273.1	273.7	274.3	274.3	275.1	276.3
12,5°	271.9	272.3	272.5	272.5	272.7	272.5	272.9	274.1	274.7	275.3	275.9	276.1	277.1	278.1
15,0°	276.3	275.5	274.7	273.5	272.9	271.9	271.7	272.5	273.1	273.3	274.1	274.9	276.5	277.9
17,5°	279.5	277.1	274.9	272.7	271.3	269.7	269.1	269.7	270.1	270.3	271.3	272.7	274.9	277.3
20,0°	281.9	277.9	274.5	271.7	269.3	267.5	266.5	266.9	267.3	267.3	268.1	269.7	271.7	274.5
22,5°	283.1	277.9	273.7	270.5	269.1	268.3	268.5	269.9	270.3	270.1	270.3	270.1	270.7	271.9
25,0°	283.9	278.9	275.7	275.5	277.7	281.9	286.1	289.9	291.5	290.3	287.7	283.3	278.9	276.1
27,5°	287.9	285.7	288.3	296.3	305.9	313.5	318.3	321.1	321.7	320.1	317.7	312.1	303.9	293.7
30,0°	299.3	305.5	318.7	330.3	337.7	341.8	342.6	342.4	342.4	341.2	340.8	339.1	334.3	324.9
32,5°	326.1	343.0	357.2	364.8	365.8	362.4	358.2	354.6	353.4	354.0	356.8	360.6	362.4	358.6
35,0°	370.6	388.0	396.6	392.8	379.6	366.6	357.6	353.0	352.0	353.8	359.4	368.2	378.8	388.6
37,5°	420.8	431.4	422.4	401.0	378.8	364.0	355.2	351.2	350.0	352.6	358.8	368.8	383.0	402.2
40,0°	472.2	462.8	437.0	410.0	386.2	368.4	358.0	352.6	351.0	354.0	362.6	374.4	391.0	413.6
42,5°	515.2	489.2	458.4	425.0	395.2	370.6	353.4	343.2	339.8	344.0	356.4	374.2	398.8	428.0
45,0°	548.6	509.2	460.0	408.2	364.4	332.3	312.1	300.3	296.5	300.5	314.3	334.9	365.4	408.4
47,5°	550.4	474.8	401.0	339.3	295.5	264.9	245.7	235.5	231.9	234.3	244.9	265.1	295.7	341.0
50,0°	483.4	376.4	301.7	246.7	207.3	183.1	169.5	163.3	161.1	161.5	166.9	178.9	201.5	240.3
52,5°	347.2	255.9	195.7	152.5	127.3	114.1	107.0	104.2	103.0	102.0	104.2	109.0	120.1	144.1
55,0°	224.3	158.5	119.5	94.8	80.4	70.0	63.6	62.4	62.2	60.4	60.2	64.6	73.6	86.2
57,5°	143.9	111.4	88.0	68.8	56.0	48.8	45.8	45.2	44.6	42.8	41.8	42.0	47.8	61.0
60,0°	112.2	101.8	72.6	51.8	44.2	41.2	39.4	37.4	36.4	35.4	35.8	35.6	36.8	44.0
62,5°	92.2	85.6	59.2	37.0	35.8	35.6	35.0	33.0	31.8	31.0	31.4	29.8	29.8	30.4
65,0°	65.4	62.8	47.2	33.0	32.8	33.0	31.6	29.8	28.4	28.0	28.4	28.4	26.8	27.0
67,5°	40.6	46.4	40.6	31.4	31.0	29.8	28.0	26.2	24.6	24.6	25.0	26.0	25.6	25.0
70,0°	35.8	36.6	32.8	26.8	26.0	24.8	23.6	21.8	20.4	20.6	21.0	21.2	21.4	21.6
72,5°	28.2	26.8	25.2	21.4	20.2	18.6	17.6	16.8	15.6	15.4	15.4	15.8	16.4	17.4
75,0°	21.6	19.8	19.0	16.2	14.8	13.4	12.6	12.4	11.6	11.2	10.8	11.2	12.0	13.0
77,5°	16.8	13.8	13.8	12.0	10.4	9.8	9.4	9.6	8.8	8.4	8.2	8.0	8.2	8.6
80,0°	13.2	10.6	8.8	8.0	6.8	6.4	6.2	6.2	5.2	5.2	5.2	5.0	5.0	5.4
82,5°	7.4	6.2	5.2	4.4	4.4	3.6	3.4	3.2	2.6	2.6	2.6	2.8	3.0	3.2
85,0°	2.2	2.6	2.0	1.8	1.6	1.2	1.2	1.0	1.0	1.0	1.0	1.0	1.2	1.2
87,5°	1.0	0.8	0.8	0.6	0.6	0.4	0.4	0.4	0.4	0.4	0.4	0.4	0.4	0.4
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 21 midi LED	Order number: 5XE3F31Y08MB EAN: 4058352924167	LP number 59559_14
---	--	-------------------------------------

siteco

Table of values for luminous intensities		Maximum luminous intensity													
C-planes	210°	215°	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°	275°	
γ	Luminous intensity in cd/klm														
0,0°	236.4	236.4	236.4	236.4	236.4	236.4	236.4	236.4	236.4	236.4	236.4	236.4	236.4	236.4	
2,5°	246.9	246.3	245.5	244.5	243.5	242.7	241.5	240.5	239.9	239.1	238.3	237.7	236.9	236.1	
5,0°	258.3	257.3	255.9	254.3	252.5	250.7	249.1	247.3	246.3	244.3	242.5	240.9	239.5	237.9	
7,5°	274.7	272.1	270.3	267.3	263.9	261.3	258.5	255.3	252.9	250.3	247.3	244.5	242.3	240.1	
10,0°	278.7	282.1	284.5	282.9	278.3	273.5	268.5	263.5	259.7	255.5	251.5	247.9	244.5	241.3	
12,5°	278.7	278.9	278.1	278.1	281.5	284.3	279.5	272.5	266.3	260.9	255.5	250.7	246.1	242.3	
15,0°	279.7	280.9	281.7	280.9	279.1	277.1	281.7	281.9	273.5	266.3	259.5	253.1	247.7	243.1	
17,5°	279.7	282.1	283.7	284.5	284.7	283.1	279.1	280.9	283.3	273.5	265.1	257.1	250.5	245.3	
20,0°	277.9	281.3	284.7	287.3	289.3	289.9	287.7	282.5	283.9	283.5	271.5	261.7	253.9	247.7	
22,5°	275.3	279.1	283.3	288.3	293.1	296.5	297.5	293.7	287.1	290.7	281.1	268.9	258.9	251.3	
25,0°	275.3	277.7	282.1	288.3	295.5	302.5	306.3	306.1	298.3	293.1	293.7	277.1	264.3	255.3	
27,5°	285.1	281.7	284.3	290.5	298.5	307.7	314.9	317.3	310.7	301.3	299.5	285.1	269.7	258.5	
30,0°	311.5	297.9	291.7	295.3	303.5	313.1	322.5	326.3	322.3	311.5	302.3	295.1	276.5	262.5	
32,5°	347.8	331.1	313.7	305.9	309.7	319.7	330.1	335.5	333.5	322.7	309.3	304.7	285.1	267.5	
35,0°	387.4	374.4	353.8	331.7	322.9	329.1	340.6	346.6	345.0	333.9	319.7	311.5	295.1	273.9	
37,5°	418.8	420.4	402.4	373.6	347.6	343.8	353.4	359.4	356.2	345.4	331.3	318.5	305.1	280.5	
40,0°	438.6	459.0	457.4	431.4	392.0	368.4	371.2	374.4	370.4	361.6	347.2	329.9	313.5	286.7	
42,5°	459.6	489.8	509.8	499.4	460.0	414.4	397.8	395.0	390.8	381.0	361.0	338.9	318.3	291.3	
45,0°	458.2	506.2	549.2	569.1	547.2	492.8	447.8	430.4	418.6	399.4	372.6	348.8	325.9	297.7	
47,5°	401.8	474.6	549.0	609.9	627.9	590.7	528.8	488.6	449.8	416.0	382.0	353.2	323.7	292.5	
50,0°	299.7	379.6	481.2	596.9	683.7	681.1	615.3	556.6	467.4	388.2	325.9	279.3	239.3	207.5	
52,5°	188.9	255.9	356.8	495.2	649.5	676.7	588.1	500.4	368.6	261.7	191.9	154.1	124.1	103.2	
55,0°	110.8	150.3	222.3	339.4	488.6	522.0	426.6	330.9	225.9	146.7	112.2	100.4	87.8	75.2	
57,5°	78.4	94.0	103.6	194.3	303.3	327.9	299.9	232.7	185.5	141.1	118.7	110.8	98.4	83.8	
60,0°	62.4	52.2	61.6	112.2	185.5	222.1	243.9	243.1	235.9	193.7	153.5	138.5	124.1	103.6	
62,5°	39.0	38.0	49.4	83.2	119.1	157.3	201.1	288.9	333.3	299.3	235.3	204.5	183.5	147.3	
65,0°	28.4	31.4	42.2	76.0	97.2	115.5	149.5	296.7	419.8	428.0	352.4	292.9	251.9	193.5	
67,5°	26.0	26.8	35.6	65.2	78.6	89.6	98.8	229.7	426.4	504.4	448.0	359.6	291.5	207.9	
70,0°	22.0	23.8	30.0	43.4	60.0	69.4	71.2	147.3	352.0	477.6	471.6	374.0	288.1	189.5	
72,5°	17.8	18.6	22.8	27.2	38.2	51.4	53.0	89.8	228.3	349.0	379.8	309.1	240.5	147.9	
75,0°	13.8	14.2	16.4	19.8	20.6	24.2	36.2	54.8	128.1	204.9	236.3	213.7	178.7	104.4	
77,5°	10.4	10.6	12.2	13.4	14.4	15.8	19.8	30.4	58.4	94.0	107.2	97.2	84.0	49.0	
80,0°	7.2	8.0	9.4	8.6	8.8	9.2	11.4	15.6	22.4	29.4	24.2	15.8	12.4	10.8	
82,5°	4.4	4.8	5.0	4.4	4.4	4.8	5.8	7.2	9.0	10.2	8.6	5.2	3.4	4.2	
85,0°	1.6	1.6	1.6	1.6	1.8	2.0	2.2	2.4	2.8	3.0	2.6	2.0	1.6	2.0	
87,5°	0.4	0.4	0.4	0.6	0.6	0.8	0.8	1.0	1.0	1.0	1.2	1.2	1.2	1.4	
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	

Photometric test report

Family Streetlight 21 midi LED	Order number: 5XE3F31Y08MB EAN: 4058352924167	LP number 59559_14
---	--	-------------------------------------



Table of values for luminous intensities	Maximum luminous intensity
---	-----------------------------------

C-planes	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°	330°	335°	340°	345°
γ	Luminous intensity in cd/klm													
0,0°	236.4	236.4	236.4	236.4	236.4	236.4	236.4	236.4	236.4	236.4	236.4	236.4	236.4	236.4
2,5°	235.1	234.5	233.3	232.7	231.9	231.3	230.7	229.7	229.1	228.5	228.1	227.9	227.7	227.3
5,0°	235.7	233.9	231.5	229.3	227.5	225.9	224.7	223.3	222.1	220.7	219.7	218.9	218.1	217.5
7,5°	236.7	233.1	229.5	226.7	224.3	221.9	219.5	217.5	216.1	214.7	213.3	212.1	211.1	210.3
10,0°	236.9	232.3	228.1	224.5	221.3	218.5	215.9	213.7	211.3	208.3	205.9	204.3	203.7	203.1
12,5°	236.9	231.3	226.3	221.9	218.5	215.1	211.1	207.3	205.3	202.9	199.5	197.5	195.5	193.3
15,0°	236.9	230.5	224.9	219.9	215.5	210.5	205.9	201.9	197.7	193.1	189.1	185.1	181.5	177.9
17,5°	238.5	230.9	224.3	218.5	212.5	206.3	199.3	193.1	186.1	179.5	172.5	165.5	159.9	156.1
20,0°	240.3	231.7	224.5	217.7	209.3	200.5	190.9	181.7	172.3	162.5	155.1	149.7	145.7	142.5
22,5°	243.3	233.7	225.1	215.7	205.1	192.7	180.7	167.7	156.3	148.7	142.3	136.1	130.3	124.7
25,0°	246.5	235.7	226.1	214.1	199.3	184.3	168.9	154.9	145.5	136.5	126.5	118.5	116.5	117.3
27,5°	248.1	235.9	224.1	209.3	192.1	174.3	156.3	144.7	132.7	119.5	114.7	116.3	116.5	114.7
30,0°	250.3	236.1	222.1	203.9	183.1	161.9	147.5	133.5	118.3	114.3	115.7	112.6	108.2	106.2
32,5°	253.1	237.5	219.5	196.3	172.5	151.1	136.5	120.3	114.5	115.7	109.6	104.4	103.2	102.8
35,0°	257.5	239.3	217.3	188.7	160.7	140.7	124.7	114.5	116.3	108.8	102.8	102.6	99.0	86.4
37,5°	262.3	240.7	213.5	180.1	150.3	129.7	115.7	114.9	110.6	102.6	103.0	97.6	80.4	69.4
40,0°	264.7	238.5	207.1	171.9	141.1	121.5	113.6	113.0	102.6	100.8	99.4	81.2	70.6	65.0
42,5°	263.9	231.5	193.9	157.5	129.5	117.1	112.8	105.0	95.8	100.0	84.4	71.8	67.4	64.8
45,0°	264.1	223.5	179.5	140.9	115.7	112.4	109.8	97.4	90.2	89.4	74.0	69.8	67.4	63.6
47,5°	253.9	209.7	162.3	124.1	104.6	106.0	102.0	91.8	87.4	74.4	69.4	66.6	63.4	61.0
50,0°	180.5	153.3	125.5	107.2	98.2	96.2	90.6	87.0	80.2	66.0	64.0	62.4	60.0	59.0
52,5°	93.2	82.8	73.4	86.0	93.0	86.0	78.2	80.2	65.4	60.0	59.2	57.6	57.0	57.2
55,0°	69.0	58.8	51.0	79.4	88.8	76.2	66.2	69.8	55.2	54.6	54.8	53.8	54.4	54.8
57,5°	73.2	59.2	50.6	82.6	83.8	66.2	57.0	57.8	49.6	47.4	53.8	51.2	49.6	50.6
60,0°	85.6	63.0	52.8	79.0	77.2	58.0	50.4	47.6	44.0	44.0	55.6	45.8	43.6	45.2
62,5°	107.6	72.0	54.8	64.6	63.0	50.4	44.2	41.0	39.2	41.2	51.8	38.4	36.2	36.8
65,0°	127.5	79.6	55.8	53.4	48.2	41.8	39.0	36.2	35.0	37.6	47.2	35.6	30.6	30.2
67,5°	127.9	76.6	55.6	48.0	38.6	32.8	33.4	31.6	31.2	32.0	39.4	33.6	27.2	26.2
70,0°	110.4	70.8	53.6	44.4	34.2	27.2	28.6	27.0	27.2	26.8	31.2	31.0	23.6	22.2
72,5°	82.6	58.0	47.8	40.6	31.2	23.6	24.0	22.0	22.8	22.0	23.6	26.0	20.0	18.0
75,0°	53.2	41.0	39.4	37.2	27.8	20.0	20.0	18.0	17.8	18.0	17.6	19.4	16.2	14.0
77,5°	26.2	24.2	27.0	23.8	19.4	14.8	14.6	13.4	13.0	13.4	12.6	13.6	11.8	10.2
80,0°	9.6	11.2	13.0	12.0	10.4	8.6	8.6	8.2	8.4	9.0	8.2	8.4	7.2	6.8
82,5°	5.0	5.8	6.2	5.8	5.2	4.6	4.4	4.4	4.6	5.0	4.8	4.0	3.2	3.4
85,0°	2.4	2.6	2.4	2.4	2.4	2.4	2.2	2.2	2.0	2.0	1.8	1.6	1.2	1.2
87,5°	1.4	1.4	1.4	1.4	1.4	1.4	1.2	1.2	1.0	0.8	0.6	0.6	0.4	0.4
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 21 midi LED	Order number: 5XE3F31Y08MB EAN: 4058352924167	LP number 59559_14
--	--	------------------------------



Table of values for luminous intensities	Maximum luminous intensity
---	-----------------------------------

C-planes	350°	355°	Phi-zone	Total Phi-zone
Luminous intensity in cd / Luminous flux in lm/klm				
0,0°	236.4	236.4	0.4	0.4
2,5°	227.5	227.7	2.8	3.2
5,0°	217.3	217.3	5.7	8.9
7,5°	209.9	209.5	8.7	17.6
10,0°	202.1	201.7	11.5	29.1
12,5°	191.9	191.1	14.3	43.4
15,0°	175.1	173.1	17.0	60.4
17,5°	153.7	152.7	19.4	79.8
20,0°	140.1	138.7	21.8	101.6
22,5°	121.5	120.3	24.2	125.8
25,0°	118.5	118.7	26.8	152.6
27,5°	113.2	112.2	29.8	182.4
30,0°	106.4	106.2	33.1	215.5
32,5°	100.2	95.8	36.5	252.0
35,0°	75.0	68.8	39.7	291.6
37,5°	64.0	60.8	43.0	334.6
40,0°	61.0	58.0	46.8	381.4
42,5°	62.4	60.2	50.9	432.3
45,0°	61.2	59.4	54.2	486.5
47,5°	59.8	58.8	56.3	542.9
50,0°	58.8	58.6	56.6	599.5
52,5°	57.6	57.6	54.6	654.1
55,0°	55.0	54.6	52.6	706.7
57,5°	50.6	50.4	51.6	758.2
60,0°	45.8	45.8	48.4	806.6
62,5°	37.4	37.2	42.1	848.7
65,0°	30.0	29.6	38.6	887.3
67,5°	25.8	25.6	35.2	922.5
70,0°	21.6	21.4	29.7	952.2
72,5°	17.4	17.8	21.5	973.7
75,0°	13.4	13.8	13.5	987.2
77,5°	9.8	10.0	6.5	993.7
80,0°	6.2	6.6	3.5	997.2
82,5°	3.6	4.0	1.9	999.1
85,0°	1.0	1.0	0.7	999.8
87,5°	0.4	0.4	0.2	1000.0
90,0°	0.0	0.0	0.0	1000.0

Photometric test report

Family Streetlight 21 midi LED	Order number: 5XE3F31Y08MB EAN: 4058352924167	LP number 59559_14
--	--	------------------------------

Dimming levels table	environmental temperature: 25°C	siteco
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W]
				start of lifetime	end of lifetime	average
100	254	254	17070	129.3	141.6	135.4
95	241	252	16196	120.4	131.7	126.0
90	229	250	15390	112.4	122.8	117.6
85	216	248	14516	104.1	113.8	109.0
80	203	246	13643	96.3	105.0	100.6
75	190	243	12769	88.7	96.9	92.8
70	178	241	11962	82.1	89.4	85.8
65	165	238	11089	75.0	81.8	78.4
60	152	235	10215	68.1	74.2	71.2
55	140	232	9409	62.1	67.6	64.8
50	127	229	8535	55.6	60.5	58.0
45	114	225	7661	49.3	53.7	51.5
40	102	221	6855	43.6	47.4	45.5
35	89	216	5981	37.7	41.0	39.4
30	76	210	5108	32.0	34.7	33.4
25	63	203	4234	26.5	28.6	27.6
20	51	195	3427	21.6	23.3	22.5
15	38	184	2554	16.4	17.6	17.0
11	29	175	1949	12.8	13.8	13.3

Dimming levels table	environmental temperature: 5°C
-----------------------------	--------------------------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W]
				start of lifetime	end of lifetime	average
100	254	254	17070	125.6	130.4	128.0
95	241	252	16196	117.3	121.8	119.6
90	229	250	15390	109.9	114.0	112.0
85	216	248	14516	102.2	106.0	104.1
80	203	246	13642	94.8	98.3	96.6
75	191	244	12836	88.1	91.3	89.7
70	178	241	11962	81.0	84.0	82.5
65	165	238	11089	74.2	77.0	75.6
60	152	235	10215	67.6	70.0	68.8
55	140	232	9409	61.6	63.9	62.8
50	127	229	8535	55.3	57.3	56.3
45	114	225	7661	49.0	50.9	50.0
40	102	221	6855	43.5	45.1	44.3
35	89	216	5981	37.7	39.1	38.4
30	76	210	5107	32.0	33.2	32.6
25	64	204	4301	26.9	27.9	27.4
20	51	195	3427	21.6	22.3	22.0
15	38	184	2554	16.5	17.0	16.8
11	29	175	1949	12.9	13.3	13.1

Photometric test report

Family Streetlight 21 midi LED	Order number: 5XE3F31Y08MB EAN: 4058352924167	LP number 59559_14
--	--	------------------------------

Dimming levels table	environmental temperature: 15°C	siteco
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W]
				start of lifetime	end of lifetime	average
100	254	254	17070	127.2	133.1	130.2
95	241	252	16196	118.5	124.0	121.2
90	229	250	15389	110.9	116.1	113.5
85	216	248	14516	102.9	107.6	105.2
80	203	246	13642	95.3	99.6	97.4
75	191	244	12836	88.5	92.6	90.6
70	178	241	11962	81.4	85.0	83.2
65	165	238	11088	74.5	77.8	76.2
60	152	235	10215	67.8	70.8	69.3
55	140	232	9408	61.8	64.5	63.2
50	127	229	8535	55.4	57.8	56.6
45	114	225	7661	49.1	51.3	50.2
40	102	221	6855	43.5	45.4	44.4
35	89	216	5981	37.7	39.3	38.5
30	76	210	5107	31.9	33.3	32.6
25	64	204	4301	26.9	28.0	27.4
20	51	195	3427	21.5	22.4	22.0
15	38	184	2554	16.4	17.0	16.7
11	29	175	1949	12.9	13.3	13.1

Photometric test report

Family Streetlight 21 midi LED	Order number: 5XE3F31Y08MB EAN: 4058352924167	LP number 59559_14
--	--	-------------------------------------

Luminousfluxs table	sITeco
----------------------------	---------------

Temperature °C	Luminous flux lm	Power consumption W
25.0	17070.0	129.3
5.0	17070.0	125.6
15.0	17070.0	127.2