


# Photometric test report

<b>Family</b> <b>Streetlight 21 midi LED</b>	<b>Order number: 5XE3G31Y08MB</b> <b>EAN: 4058352924181</b>	<b>LP number</b> <b>59560_14</b>
	<b>Version</b> post-top or side-entry mounting, Smart Interface up/down <b>Optic</b> pedestrian crossing, asymmetric right distribution (PC-R) <b>Cover</b> toughened safety glass <b>Lamps</b> LED 3000 K   CRI ≥ 70 <b>Controlgear</b> EVG SITECO iQ - Smart Interface <b>Rated values</b> Net luminous flux = 17070 lm Power consumption = 129.3 W Luminous efficacy = 132 lm/W	<b>serial documentation</b> <b>07.02.2024</b>



**Luminous intensity in cd/klm** C180-0 C250-70 C255-75 C270-90 **Imax: 1555 cd/klm**

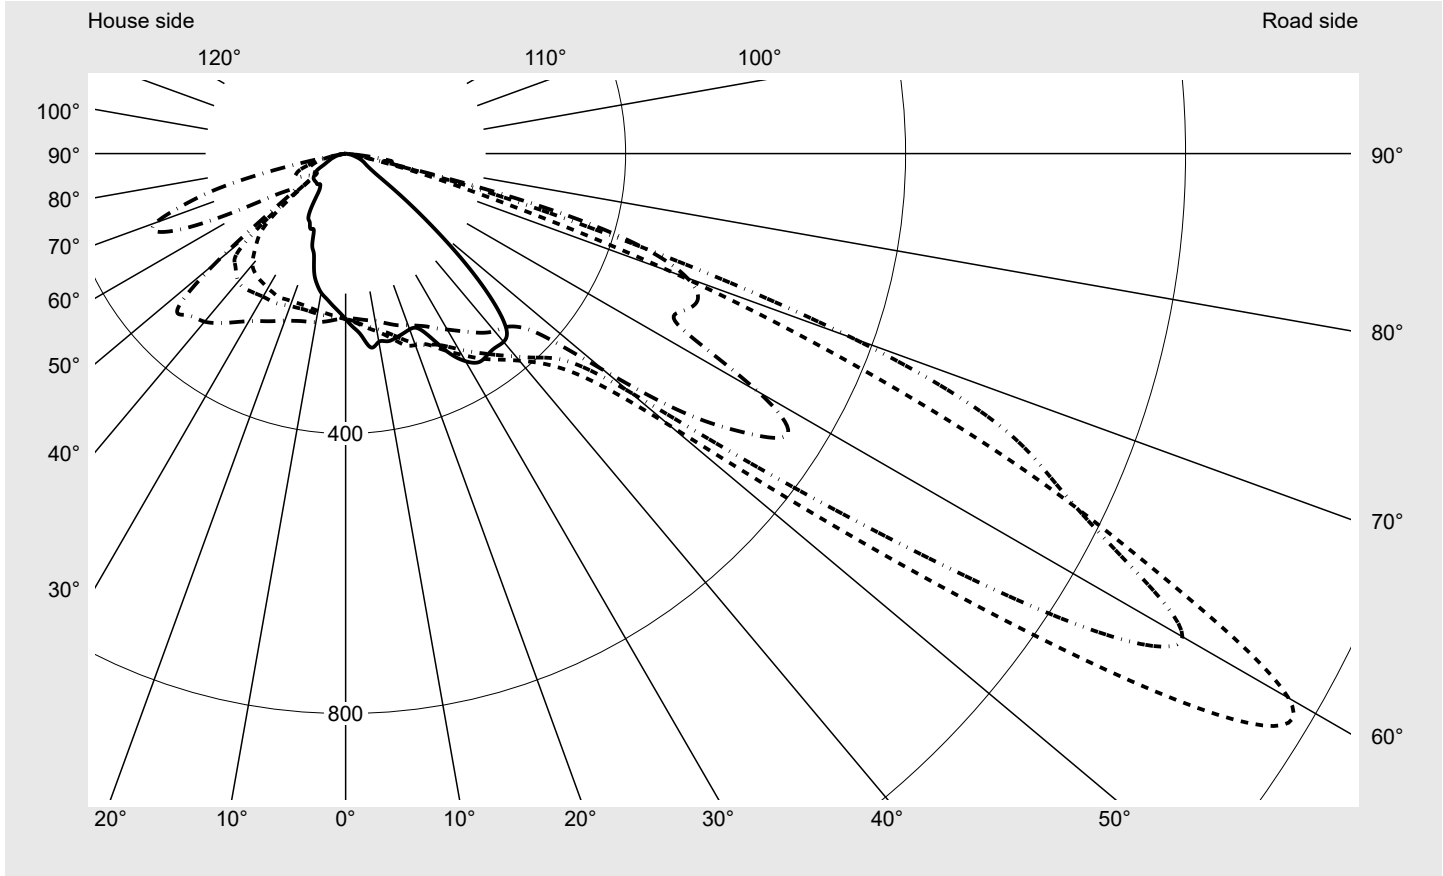

Luminaire output ratios	
Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%


Luminous intensity class acc. to EN13201-2	
Class:	G3
Imax 70°	818.0
Imax 80°	67.6
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0

**Measurement conditions**  
DIN EN 13032 and DIN 5032

**Photometric test report**

<b>Family</b> Streetlight 21 midi LED	<b>Order number: 5XE3G31Y08MB</b> <b>EAN: 4058352924181</b>	<b>LP number</b> 59560_14
--	--	------------------------------

**Envelope curve in cd/klm**      **KMK 60°**    **KMK 57.5°**    **KMK 55°**    **KMK 52.5°**      **siteco**

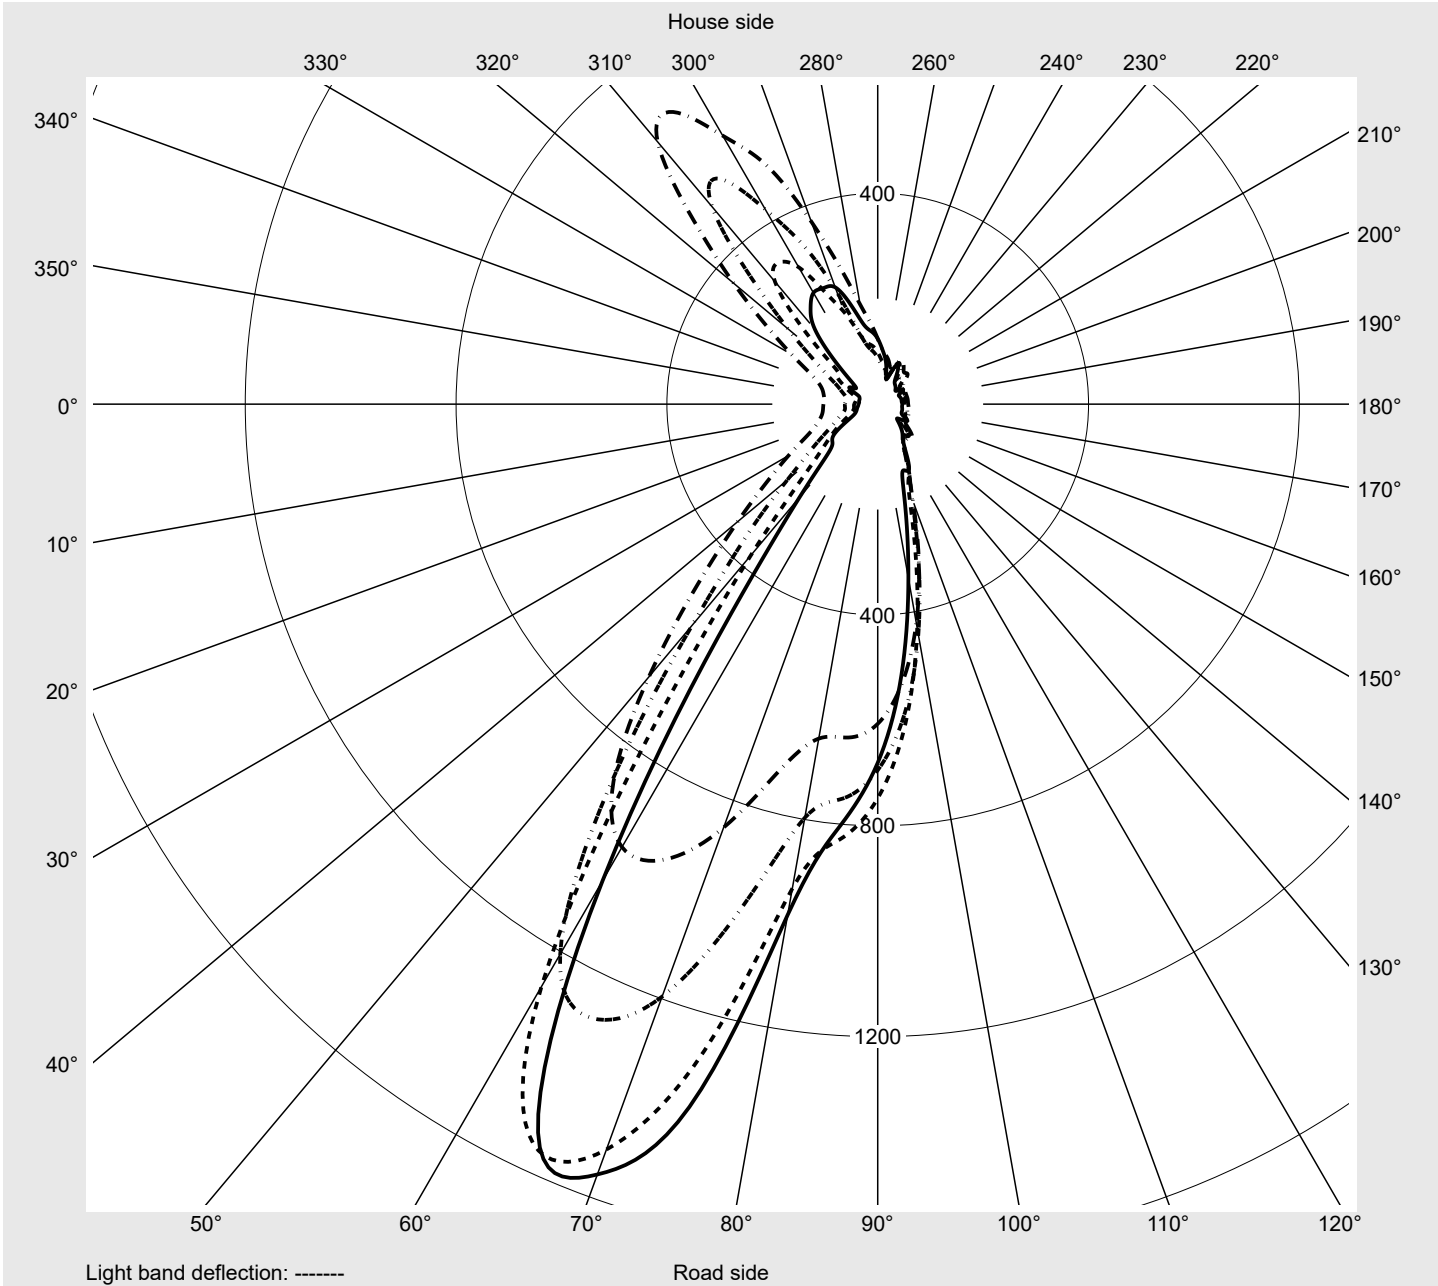

## Photometric test report

<b>Family</b> <b>Streetlight 21 midi LED</b>	<b>Order number: 5XE3G31Y08MB</b> <b>EAN: 4058352924181</b>	<b>LP number</b> <b>59560_14</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
<b>siteco</b>		

C-planes	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°
$\gamma$	Luminous intensity in cd/klm													
0,0°	236.4	236.4	236.4	236.4	236.4	236.4	236.4	236.4	236.4	236.4	236.4	236.4	236.4	236.4
2,5°	248.3	248.1	247.7	246.7	246.3	245.7	245.1	244.5	243.9	243.3	242.7	242.1	241.5	240.9
5,0°	261.3	260.9	259.9	258.7	257.7	256.5	255.5	254.1	252.9	251.7	250.5	249.1	248.1	246.9
7,5°	279.5	278.9	277.5	275.9	274.7	272.9	270.9	268.5	266.1	263.5	260.7	258.7	256.5	254.1
10,0°	273.1	272.3	271.1	270.7	270.9	271.9	273.9	276.5	278.1	277.3	273.9	269.7	265.7	261.5
12,5°	274.7	274.1	272.9	272.5	272.7	272.5	272.5	272.3	271.9	272.7	276.7	280.1	277.3	271.7
15,0°	273.1	272.5	271.7	271.9	272.9	273.5	274.7	275.5	276.3	276.5	275.5	276.3	281.9	282.7
17,5°	270.1	269.7	269.1	269.7	271.3	272.7	274.9	277.1	279.5	281.9	283.3	283.5	281.9	284.9
20,0°	267.3	266.9	266.5	267.5	269.3	271.7	274.5	277.9	281.9	286.3	289.9	292.3	292.1	288.5
22,5°	270.3	269.9	268.5	268.3	269.1	270.5	273.7	277.9	283.1	289.1	295.1	300.1	302.1	299.7
25,0°	291.5	289.9	286.1	281.9	277.7	275.5	275.7	278.9	283.9	290.9	299.3	307.7	312.1	311.5
27,5°	321.7	321.1	318.3	313.5	305.9	296.3	288.3	285.7	287.9	294.7	304.5	315.3	322.7	323.7
30,0°	342.4	342.4	342.6	341.8	337.7	330.3	318.7	305.5	299.3	302.5	311.3	322.5	332.3	335.3
32,5°	353.4	354.6	358.2	362.4	365.8	364.8	357.2	343.0	326.1	317.9	323.9	331.7	341.4	347.0
35,0°	352.0	353.0	357.6	366.6	379.6	392.8	396.6	388.0	370.6	350.0	340.6	343.4	352.8	359.6
37,5°	350.0	351.2	355.2	364.0	378.8	401.0	422.4	431.4	420.8	398.2	370.8	360.2	366.4	372.8
40,0°	351.0	352.6	358.0	368.4	386.2	410.0	437.0	462.8	472.2	456.6	424.0	393.0	386.8	389.6
42,5°	339.8	343.2	353.4	370.6	395.2	425.0	458.4	489.2	515.2	519.0	492.6	448.0	421.8	413.6
45,0°	296.5	300.3	312.1	332.3	364.4	408.2	460.0	509.2	548.6	579.9	573.9	532.2	482.8	453.8
47,5°	231.9	235.5	245.7	264.9	295.5	339.2	401.0	474.8	550.4	612.3	650.1	637.5	583.9	531.2
50,0°	161.1	163.3	169.5	183.1	207.3	246.7	301.7	376.4	483.4	586.5	703.7	767.3	748.7	688.3
52,5°	103.0	104.2	107.0	114.2	127.3	152.5	195.7	255.9	347.2	482.4	675.5	874.0	970.4	953.0
55,0°	62.2	62.4	63.6	70.0	80.4	94.8	119.5	158.5	224.3	349.2	547.8	889.0	1204.9	1285.0
57,5°	44.6	45.2	45.8	48.8	56.0	68.8	88.0	111.4	143.9	211.7	374.6	724.9	1276.0	1547.3
60,0°	36.4	37.4	39.4	41.2	44.2	51.8	72.6	101.8	112.2	134.5	230.9	484.8	1043.9	1524.9
62,5°	31.8	33.0	35.0	35.6	35.8	37.0	59.2	85.6	92.2	99.2	115.1	260.7	657.9	1153.3
65,0°	28.4	29.8	31.6	33.0	32.8	33.0	47.2	62.8	65.4	59.8	83.4	157.7	354.2	717.7
67,5°	24.6	26.2	28.0	29.8	31.0	31.4	40.6	46.4	40.6	44.8	64.6	113.8	187.7	391.6
70,0°	20.4	21.8	23.6	24.8	26.0	26.8	32.8	36.6	35.8	38.2	48.0	83.6	123.7	216.5
72,5°	15.6	16.8	17.6	18.6	20.2	21.4	25.2	26.8	28.2	38.0	37.4	49.4	80.8	122.7
75,0°	11.6	12.4	12.6	13.4	14.8	16.2	19.0	19.8	21.6	29.8	29.0	24.8	45.8	68.8
77,5°	8.8	9.6	9.4	9.8	10.4	12.0	13.8	13.8	16.8	21.8	19.8	16.4	19.2	27.4
80,0°	5.2	6.2	6.2	6.4	6.8	8.0	8.8	10.6	13.2	14.4	10.6	10.6	11.8	15.2
82,5°	2.6	3.2	3.4	3.6	4.4	4.4	5.2	6.2	7.4	6.2	5.8	6.4	7.2	8.6
85,0°	1.0	1.0	1.2	1.2	1.6	1.8	2.0	2.6	2.2	2.4	2.8	3.0	3.4	4.0
87,5°	0.4	0.4	0.4	0.4	0.6	0.6	0.8	0.8	1.0	1.0	1.0	1.2	1.2	1.4
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

## Photometric test report

<b>Family</b> <b>Streetlight 21 midi LED</b>	<b>Order number: 5XE3G31Y08MB</b> <b>EAN: 4058352924181</b>	<b>LP number</b> <b>59560_14</b>
---	--	-------------------------------------

**siteco**

<b>Table of values for luminous intensities</b>	<b>Maximum luminous intensity</b>
---	-----------------------------------

C-planes	70°	75°	80°	85°	90°	95°	100°	105°	110°	115°	120°	125°	130°	135°
$\gamma$	<b>Luminous intensity in cd/klm</b>													
0,0°	236.4	236.4	236.4	236.4	236.4	236.4	236.4	236.4	236.4	236.4	236.4	236.4	236.4	236.4
2,5°	240.3	239.1	238.3	237.3	235.9	235.3	234.9	234.5	233.7	233.1	232.3	231.3	230.5	229.7
5,0°	245.7	244.3	242.1	240.1	237.7	236.1	234.9	233.5	231.5	229.5	227.7	225.9	224.3	222.7
7,5°	251.9	249.3	246.7	243.5	240.1	237.5	235.3	232.9	230.3	227.5	224.5	221.9	219.5	217.5
10,0°	257.9	254.3	250.9	247.3	242.9	239.3	236.1	232.7	228.7	224.7	220.9	217.9	215.5	213.1
12,5°	266.1	260.9	256.7	252.3	247.3	242.5	238.3	233.5	228.3	223.5	219.1	215.1	211.1	207.1
15,0°	276.5	269.3	263.3	257.9	252.5	246.9	241.5	235.3	229.1	223.3	218.1	211.9	206.9	201.9
17,5°	287.3	279.1	270.3	263.3	257.3	251.3	244.5	237.7	231.1	224.5	216.9	209.7	201.7	194.1
20,0°	291.1	288.5	277.7	268.1	260.9	254.7	246.9	239.3	232.1	224.3	215.3	204.7	194.5	184.5
22,5°	294.5	296.1	287.9	274.9	266.1	258.3	249.7	241.3	233.1	222.7	211.1	197.9	185.7	171.7
25,0°	305.3	301.1	298.9	284.5	272.5	263.1	253.3	244.1	233.9	221.3	205.3	190.1	173.7	158.7
27,5°	318.9	310.3	308.1	296.1	281.5	268.9	257.5	246.7	234.3	218.7	199.7	180.3	161.9	148.7
30,0°	331.9	322.7	315.1	307.5	290.3	275.1	261.5	248.5	233.1	213.5	191.7	169.5	152.7	138.1
32,5°	345.8	335.9	323.3	318.1	300.3	282.5	266.7	250.3	231.9	207.5	181.9	159.1	142.5	125.5
35,0°	358.8	349.0	334.1	326.9	311.3	290.7	271.1	251.1	227.7	198.5	169.5	147.5	130.7	118.5
37,5°	371.2	363.2	347.4	336.1	322.7	299.7	275.7	251.5	223.5	189.5	158.9	136.7	121.5	118.9
40,0°	386.2	378.4	362.0	345.8	330.9	305.9	277.7	248.9	216.3	178.1	147.1	128.3	117.7	116.7
42,5°	405.0	395.2	375.4	354.8	336.7	310.5	277.9	242.3	204.3	165.3	135.5	121.7	116.1	110.4
45,0°	432.8	412.8	389.6	370.0	350.4	322.3	282.5	236.3	189.1	149.3	121.9	115.3	112.0	106.2
47,5°	484.6	444.6	420.2	406.0	388.8	356.0	305.7	241.9	180.5	136.9	112.0	109.0	105.4	103.6
50,0°	604.1	529.8	500.8	498.2	482.4	435.4	361.2	269.9	183.7	130.1	106.0	100.4	96.6	99.0
52,5°	854.8	719.3	644.3	634.9	606.5	531.2	421.6	300.3	195.3	136.1	102.0	91.6	87.0	91.6
55,0°	1196.3	984.4	796.8	750.9	694.5	588.5	443.6	296.9	190.5	139.9	98.6	84.8	79.2	84.0
57,5°	1504.9	1269.4	933.4	829.2	747.9	606.9	431.4	269.9	171.3	140.7	101.2	82.6	76.6	74.2
60,0°	1555.3	1380.4	984.0	801.2	680.5	516.0	335.1	202.3	136.9	138.7	108.4	83.6	73.0	61.8
62,5°	1328.0	1252.8	899.8	663.1	541.4	403.6	239.9	138.5	101.2	125.5	111.8	84.4	64.4	52.8
65,0°	1069.7	1121.9	904.0	647.7	531.8	383.6	192.3	106.6	84.0	109.4	105.2	83.4	56.0	46.2
67,5°	779.7	1006.8	944.4	692.3	544.6	339.4	124.7	71.2	64.0	83.2	87.4	75.8	48.8	39.4
70,0°	501.4	771.1	818.0	668.3	519.2	258.5	70.2	49.6	46.0	57.2	68.0	61.8	41.0	32.2
72,5°	250.7	440.0	511.8	509.2	444.0	182.5	43.6	36.0	34.6	41.6	55.2	48.6	33.4	26.4
75,0°	117.7	196.7	230.9	295.9	278.7	108.2	27.2	22.4	25.6	30.8	42.6	37.0	24.8	20.4
77,5°	40.2	55.4	68.2	75.6	65.6	38.0	19.6	19.0	19.0	23.4	24.8	23.4	16.4	14.4
80,0°	19.4	24.2	44.8	67.6	65.6	33.0	16.6	17.6	12.4	15.2	12.2	10.2	9.2	8.2
82,5°	10.4	14.6	29.0	44.8	40.6	20.0	11.0	9.4	7.0	7.8	6.2	5.4	4.8	4.4
85,0°	4.8	7.0	8.6	8.2	6.8	5.6	4.6	4.2	3.6	3.0	2.6	2.2	2.2	2.0
87,5°	1.4	1.6	1.6	1.6	1.6	1.6	1.4	1.4	1.2	1.2	1.0	1.0	0.8	0.8
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

## Photometric test report

<b>Family</b> <b>Streetlight 21 midi LED</b>	<b>Order number: 5XE3G31Y08MB</b> <b>EAN: 4058352924181</b>	<b>LP number</b> <b>59560_14</b>
---	--	-------------------------------------



<b>Table of values for luminous intensities</b>	<b>Maximum luminous intensity</b>
---	-----------------------------------

C-planes	140°	145°	150°	155°	160°	165°	170°	175°	180°	185°	190°	195°	200°	205°
$\gamma$	<b>Luminous intensity in cd/klm</b>													
0,0°	236.4	236.4	236.4	236.4	236.4	236.4	236.4	236.4	236.4	236.4	236.4	236.4	236.4	236.4
2,5°	228.7	228.3	228.1	227.7	227.7	227.5	227.1	227.1	225.9	227.7	227.5	227.3	227.7	227.9
5,0°	221.3	220.3	219.3	218.5	217.9	217.3	216.9	216.7	217.3	217.3	217.3	217.5	218.1	218.9
7,5°	215.7	214.5	213.3	212.1	210.9	209.9	209.3	208.9	209.1	209.5	209.9	210.3	211.1	212.1
10,0°	210.5	207.7	205.5	203.9	203.3	202.5	201.5	201.1	201.7	201.7	202.1	203.1	203.7	204.3
12,5°	204.7	202.3	199.1	196.9	195.3	193.1	191.9	190.9	190.3	191.1	191.9	193.3	195.5	197.5
15,0°	196.7	192.5	188.7	185.1	181.7	177.9	175.1	173.3	174.1	173.1	175.1	177.9	181.5	185.1
17,5°	186.9	179.9	172.5	166.1	160.7	156.7	154.1	152.7	150.7	152.7	153.7	156.1	159.9	165.5
20,0°	173.7	163.3	155.5	150.3	146.3	143.1	140.7	139.1	139.5	138.7	140.1	142.5	145.7	149.7
22,5°	159.5	150.9	143.7	137.7	131.5	125.7	121.9	120.3	118.7	120.3	121.5	124.7	130.3	136.1
25,0°	148.7	139.3	129.5	120.5	117.7	117.9	118.5	118.7	118.5	118.7	118.5	117.3	116.5	118.5
27,5°	137.5	123.7	117.7	118.3	118.5	116.1	114.0	112.6	111.0	112.2	113.2	114.8	116.5	116.3
30,0°	122.7	117.3	118.9	115.3	111.0	108.4	108.0	107.0	106.6	106.2	106.4	106.2	108.2	112.6
32,5°	117.7	118.3	113.6	108.4	106.8	104.8	101.2	96.4	90.8	95.8	100.2	102.8	103.2	104.4
35,0°	118.9	112.6	106.6	105.8	101.6	89.4	78.4	71.0	68.6	68.8	75.0	86.4	99.0	102.6
37,5°	114.2	106.6	106.0	101.6	85.8	74.0	67.0	62.4	59.8	60.8	64.0	69.4	80.4	97.6
40,0°	108.4	106.6	104.8	86.4	75.2	68.8	63.6	59.4	57.0	58.0	61.0	65.0	70.6	81.2
42,5°	107.4	109.6	93.2	79.0	73.4	69.0	65.0	61.6	59.4	60.2	62.4	64.8	67.4	71.8
45,0°	109.2	103.0	83.2	77.4	72.8	68.0	64.0	61.0	59.0	59.4	61.2	63.6	67.4	69.8
47,5°	107.6	86.2	77.4	73.0	68.6	65.0	62.4	60.2	58.8	58.8	59.8	61.0	63.4	66.6
50,0°	97.2	73.2	69.8	67.2	64.6	62.6	61.2	59.8	58.6	58.6	58.8	59.0	60.0	62.4
52,5°	80.8	65.4	64.4	62.8	61.8	60.6	59.8	58.8	57.8	57.6	57.6	57.2	57.0	57.6
55,0°	66.6	59.2	61.8	59.6	59.4	58.2	56.8	55.4	54.8	54.6	55.0	54.8	54.4	53.8
57,5°	57.2	53.2	63.0	58.4	55.8	53.8	52.6	51.4	50.8	50.4	50.6	50.6	49.6	51.2
60,0°	50.2	47.6	64.4	54.0	48.2	47.8	47.2	46.4	46.6	45.8	45.8	45.2	43.6	45.8
62,5°	45.2	43.0	58.0	48.6	40.4	39.6	38.6	37.8	36.0	37.2	37.4	36.8	36.2	38.4
65,0°	41.2	39.0	49.2	43.6	35.6	33.8	32.0	30.6	29.8	29.6	30.0	30.2	30.6	35.6
67,5°	36.8	34.6	40.4	40.0	33.0	29.4	27.8	26.6	25.0	25.6	25.8	26.2	27.2	33.6
70,0°	30.8	30.4	32.8	35.4	29.2	25.2	23.4	22.4	21.8	21.4	21.6	22.2	23.6	31.0
72,5°	24.8	24.6	26.6	29.8	25.2	21.0	19.2	18.6	17.6	17.8	17.4	18.0	20.0	26.0
75,0°	19.4	18.8	20.8	24.0	20.4	16.6	15.0	14.6	14.4	13.8	13.4	14.0	16.2	19.4
77,5°	13.8	13.8	14.6	17.8	16.2	12.6	11.0	10.8	9.8	10.0	9.8	10.2	11.8	13.6
80,0°	7.8	8.8	9.2	11.0	11.2	8.2	7.2	7.2	7.0	6.6	6.2	6.8	7.2	8.4
82,5°	4.2	4.2	4.8	6.4	5.2	4.4	4.4	4.4	4.0	4.0	3.6	3.4	3.2	4.0
85,0°	1.8	1.8	1.6	1.6	2.0	1.6	1.4	1.2	1.2	1.0	1.0	1.2	1.2	1.6
87,5°	0.6	0.6	0.6	0.6	0.4	0.4	0.4	0.4	0.4	0.4	0.4	0.4	0.4	0.6
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

## Photometric test report

<b>Family</b> <b>Streetlight 21 midi LED</b>	<b>Order number: 5XE3G31Y08MB</b> <b>EAN: 4058352924181</b>	<b>LP number</b> <b>59560_14</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
<b>siteco</b>		

C-planes	210°	215°	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°	275°
$\gamma$	Luminous intensity in cd/klm													
0,0°	236.4	236.4	236.4	236.4	236.4	236.4	236.4	236.4	236.4	236.4	236.4	236.4	236.4	236.4
2,5°	228.1	228.5	229.1	229.7	230.7	231.3	231.9	232.7	233.3	234.5	235.1	236.1	236.9	237.7
5,0°	219.7	220.7	222.1	223.3	224.7	225.9	227.5	229.3	231.5	233.9	235.7	237.9	239.5	240.9
7,5°	213.3	214.7	216.1	217.5	219.5	221.9	224.3	226.7	229.5	233.1	236.7	240.1	242.3	244.5
10,0°	205.9	208.3	211.3	213.7	215.9	218.5	221.3	224.5	228.1	232.3	236.9	241.3	244.5	247.9
12,5°	199.5	202.9	205.3	207.3	211.1	215.1	218.5	221.9	226.3	231.3	236.9	242.3	246.1	250.7
15,0°	189.1	193.1	197.7	201.9	205.9	210.5	215.5	219.9	224.9	230.5	236.9	243.1	247.7	253.1
17,5°	172.5	179.5	186.1	193.1	199.3	206.3	212.5	218.5	224.3	230.9	238.5	245.3	250.5	257.1
20,0°	155.1	162.5	172.3	181.7	190.9	200.5	209.3	217.7	224.5	231.7	240.3	247.7	253.9	261.7
22,5°	142.3	148.7	156.3	167.7	180.7	192.7	205.1	215.7	225.1	233.7	243.3	251.3	258.9	268.9
25,0°	126.5	136.5	145.5	154.9	168.9	184.3	199.3	214.1	226.1	235.7	246.5	255.3	264.3	277.1
27,5°	114.8	119.5	132.7	144.7	156.3	174.3	192.1	209.3	224.1	235.9	248.1	258.5	269.7	285.1
30,0°	115.7	114.4	118.3	133.5	147.5	161.9	183.1	203.9	222.1	236.1	250.3	262.5	276.5	295.1
32,5°	109.6	115.7	114.6	120.3	136.5	151.1	172.5	196.3	219.5	237.5	253.1	267.5	285.1	304.7
35,0°	102.8	108.8	116.3	114.6	124.7	140.7	160.7	188.7	217.3	239.3	257.5	273.9	295.1	311.5
37,5°	103.0	102.6	110.6	114.9	115.7	129.7	150.3	180.1	213.5	240.7	262.3	280.5	305.1	318.5
40,0°	99.4	100.8	102.6	113.0	113.6	121.5	141.1	171.9	207.1	238.5	264.7	286.7	313.5	329.9
42,5°	84.4	100.0	95.8	105.0	112.8	117.1	129.5	157.5	193.9	231.5	263.9	291.3	318.3	338.9
45,0°	74.0	89.4	90.2	97.4	109.8	112.4	115.7	140.9	179.5	223.5	264.1	297.7	325.9	348.8
47,5°	69.4	74.4	87.4	91.8	102.0	106.0	104.6	124.1	162.3	209.7	253.9	292.5	323.7	353.2
50,0°	64.0	66.0	80.2	87.0	90.6	96.2	98.2	107.2	125.5	153.3	180.5	207.5	239.3	279.3
52,5°	59.2	60.0	65.4	80.2	78.2	86.0	93.0	86.0	73.4	82.8	93.2	103.2	124.1	154.1
55,0°	54.8	54.6	55.2	69.8	66.2	76.2	88.8	79.4	51.0	58.8	69.0	75.2	87.8	100.4
57,5°	53.8	47.4	49.6	57.8	57.0	66.2	83.8	82.6	50.6	59.2	73.2	83.8	98.4	110.8
60,0°	55.6	44.0	44.0	47.6	50.4	58.0	77.2	79.0	52.8	63.0	85.6	103.6	124.1	138.5
62,5°	51.8	41.2	39.2	41.0	44.2	50.4	63.0	64.6	54.8	72.0	107.6	147.3	183.5	204.5
65,0°	47.2	37.6	35.0	36.2	39.0	41.8	48.2	53.4	55.8	79.6	127.5	193.5	251.9	292.9
67,5°	39.4	32.0	31.2	31.6	33.4	32.8	38.6	48.0	55.6	76.6	127.9	207.9	291.5	359.6
70,0°	31.2	26.8	27.2	27.0	28.6	27.2	34.2	44.4	53.6	70.8	110.4	189.5	288.1	374.0
72,5°	23.6	22.0	22.8	22.0	24.0	23.6	31.2	40.6	47.8	58.0	82.6	147.9	240.5	309.1
75,0°	17.6	18.0	17.8	18.0	20.0	20.0	27.8	37.2	39.4	41.0	53.2	104.4	178.7	213.7
77,5°	12.6	13.4	13.0	13.4	14.6	14.8	19.4	23.8	27.0	24.2	26.2	49.0	84.0	97.2
80,0°	8.2	9.0	8.4	8.2	8.6	8.6	10.4	12.0	13.0	11.2	9.6	10.8	12.4	15.8
82,5°	4.8	5.0	4.6	4.4	4.4	4.6	5.2	5.8	6.2	5.8	5.0	4.2	3.4	5.2
85,0°	1.8	2.0	2.0	2.2	2.2	2.4	2.4	2.4	2.4	2.6	2.4	2.0	1.6	2.0
87,5°	0.6	0.8	1.0	1.2	1.2	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.2	1.2
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

## Photometric test report

<b>Family</b> <b>Streetlight 21 midi LED</b>	<b>Order number: 5XE3G31Y08MB</b> <b>EAN: 4058352924181</b>	<b>LP number</b> <b>59560_14</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>

C-planes	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°	330°	335°	340°	345°
$\gamma$	Luminous intensity in cd/klm													
0,0°	236.4	236.4	236.4	236.4	236.4	236.4	236.4	236.4	236.4	236.4	236.4	236.4	236.4	236.4
2,5°	238.3	239.1	239.9	240.5	241.5	242.7	243.5	244.5	245.5	246.3	246.9	247.5	248.1	248.5
5,0°	242.5	244.3	246.3	247.3	249.1	250.7	252.5	254.3	255.9	257.3	258.3	259.3	260.3	261.1
7,5°	247.3	250.3	252.9	255.3	258.5	261.3	263.9	267.3	270.3	272.1	274.7	276.5	278.3	279.1
10,0°	251.5	255.5	259.7	263.5	268.5	273.5	278.3	282.9	284.5	282.1	278.7	276.3	275.1	274.3
12,5°	255.5	260.9	266.3	272.5	279.5	284.3	281.5	278.1	278.1	278.9	278.7	278.1	277.1	276.1
15,0°	259.5	266.3	273.5	281.9	281.7	277.1	279.1	280.9	281.7	280.9	279.7	277.9	276.5	274.9
17,5°	265.1	273.5	283.3	280.9	279.1	283.1	284.7	284.5	283.7	282.1	279.7	277.3	274.9	272.7
20,0°	271.5	283.5	283.9	282.5	287.7	289.9	289.3	287.3	284.7	281.3	277.9	274.5	271.7	269.7
22,5°	281.1	290.7	287.1	293.7	297.5	296.5	293.1	288.3	283.3	279.1	275.3	271.9	270.7	270.1
25,0°	293.7	293.1	298.3	306.1	306.3	302.5	295.5	288.3	282.1	277.7	275.3	276.1	278.9	283.3
27,5°	299.5	301.3	310.7	317.3	314.9	307.7	298.5	290.5	284.3	281.7	285.1	293.7	303.9	312.1
30,0°	302.3	311.5	322.3	326.3	322.5	313.1	303.5	295.3	291.7	297.9	311.5	324.9	334.3	339.1
32,5°	309.3	322.7	333.5	335.5	330.1	319.7	309.7	305.9	313.7	331.1	347.8	358.6	362.4	360.6
35,0°	319.7	333.9	345.0	346.6	340.6	329.1	322.9	331.7	353.8	374.4	387.4	388.6	378.8	368.2
37,5°	331.3	345.4	356.2	359.4	353.4	343.8	347.6	373.6	402.4	420.4	418.8	402.2	383.0	368.8
40,0°	347.2	361.6	370.4	374.4	371.2	368.4	392.0	431.4	457.4	459.0	438.6	413.6	391.0	374.4
42,5°	361.0	381.0	390.8	395.0	397.8	414.4	460.0	499.4	509.8	489.8	459.6	428.0	398.8	374.2
45,0°	372.6	399.4	418.6	430.4	447.8	492.8	547.2	569.1	549.2	506.2	458.2	408.4	365.4	334.9
47,5°	382.0	416.0	449.8	488.6	528.8	590.7	627.9	609.9	549.0	474.6	401.8	341.0	295.7	265.1
50,0°	325.9	388.2	467.4	556.6	615.3	681.1	683.7	596.9	481.2	379.6	299.7	240.3	201.5	178.9
52,5°	191.9	261.7	368.6	500.4	588.1	676.7	649.5	495.2	356.8	255.9	188.9	144.1	120.1	109.0
55,0°	112.2	146.7	225.9	330.9	426.6	522.0	488.6	339.4	222.3	150.3	110.8	86.2	73.6	64.6
57,5°	118.7	141.1	185.5	232.7	299.9	327.9	303.3	194.3	103.6	94.0	78.4	61.0	47.8	42.0
60,0°	153.5	193.7	235.9	243.1	243.9	222.1	185.5	112.2	61.6	52.2	62.4	44.0	36.8	35.6
62,5°	235.3	299.3	333.3	288.9	201.1	157.3	119.1	83.2	49.4	38.0	39.0	30.4	29.8	29.8
65,0°	352.4	428.0	419.8	296.7	149.5	115.5	97.2	76.0	42.2	31.4	28.4	27.0	26.8	28.4
67,5°	448.0	504.4	426.4	229.7	98.8	89.6	78.6	65.2	35.6	26.8	26.0	25.0	25.6	26.0
70,0°	471.6	477.6	352.0	147.3	71.2	69.4	60.0	43.4	30.0	23.8	22.0	21.6	21.4	21.2
72,5°	379.8	349.0	228.3	89.8	53.0	51.4	38.2	27.2	22.8	18.6	17.8	17.4	16.4	15.8
75,0°	236.3	204.9	128.1	54.8	36.2	24.2	20.6	19.8	16.4	14.2	13.8	13.0	12.0	11.2
77,5°	107.2	94.0	58.4	30.4	19.8	15.8	14.4	13.4	12.2	10.6	10.4	8.6	8.2	8.0
80,0°	24.2	29.4	22.4	15.6	11.4	9.2	8.8	8.6	9.4	8.0	7.2	5.4	5.0	5.0
82,5°	8.6	10.2	9.0	7.2	5.8	4.8	4.4	4.4	5.0	4.8	4.4	3.2	3.0	2.8
85,0°	2.6	3.0	2.8	2.4	2.2	2.0	1.8	1.6	1.6	1.6	1.6	1.2	1.2	1.0
87,5°	1.2	1.0	1.0	1.0	0.8	0.8	0.6	0.6	0.4	0.4	0.4	0.4	0.4	0.4
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

## Photometric test report

<b>Family</b> Streetlight 21 midi LED	<b>Order number: 5XE3G31Y08MB</b> <b>EAN: 4058352924181</b>	<b>LP number</b> 59560_14
--	--	------------------------------

**siteco**

<b>Table of values for luminous intensities</b>	<b>Maximum luminous intensity</b>
---	-----------------------------------

C-planes	350°	355°	Phi-zone	Total Phi-zone
<b>Luminous intensity in cd/lm</b>				
<b>Luminous flux in lm/klm</b>				
0,0°	236.4	236.4	0.4	0.4
2,5°	248.9	248.9	2.8	3.2
5,0°	261.9	262.1	5.7	8.9
7,5°	280.3	280.1	8.7	17.6
10,0°	274.3	273.7	11.5	29.1
12,5°	275.9	275.3	14.3	43.4
15,0°	274.1	273.3	17.0	60.4
17,5°	271.3	270.3	19.4	79.8
20,0°	268.1	267.3	21.8	101.6
22,5°	270.3	270.1	24.2	125.8
25,0°	287.7	290.3	26.8	152.6
27,5°	317.7	320.1	29.8	182.4
30,0°	340.8	341.2	33.1	215.5
32,5°	356.8	354.0	36.5	252.0
35,0°	359.4	353.8	39.7	291.6
37,5°	358.8	352.6	43.0	334.6
40,0°	362.6	354.0	46.8	381.4
42,5°	356.4	344.0	50.9	432.3
45,0°	314.3	300.5	54.2	486.5
47,5°	244.9	234.3	56.3	542.9
50,0°	166.9	161.5	56.6	599.5
52,5°	104.2	102.0	54.6	654.1
55,0°	60.2	60.4	52.6	706.7
57,5°	41.8	42.8	51.6	758.2
60,0°	35.8	35.4	48.4	806.6
62,5°	31.4	31.0	42.1	848.7
65,0°	28.4	28.0	38.6	887.3
67,5°	25.0	24.6	35.2	922.5
70,0°	21.0	20.6	29.7	952.2
72,5°	15.4	15.4	21.5	973.7
75,0°	10.8	11.2	13.5	987.2
77,5°	8.2	8.4	6.5	993.7
80,0°	5.2	5.2	3.5	997.2
82,5°	2.6	2.6	1.9	999.1
85,0°	1.0	1.0	0.7	999.8
87,5°	0.4	0.4	0.2	1000.0
90,0°	0.0	0.0	0.0	1000.0



## Photometric test report

<b>Family</b> Streetlight 21 midi LED	<b>Order number: 5XE3G31Y08MB</b> <b>EAN: 4058352924181</b>	<b>LP number</b> 59560_14
--	--	------------------------------

<b>Dimming levels table</b>	environmental temperature: 25°C	<b>siteco</b>
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W]
				start of lifetime	end of lifetime	average
100	254	254	17070	129.3	141.6	135.4
95	241	252	16196	120.4	131.7	126.0
90	229	250	15390	112.4	122.8	117.6
85	216	248	14516	104.1	113.8	109.0
80	203	246	13643	96.3	105.0	100.6
75	190	243	12769	88.7	96.9	92.8
70	178	241	11962	82.1	89.4	85.8
65	165	238	11089	75.0	81.8	78.4
60	152	235	10215	68.1	74.2	71.2
55	140	232	9409	62.1	67.6	64.8
50	127	229	8535	55.6	60.5	58.0
45	114	225	7661	49.3	53.7	51.5
40	102	221	6855	43.6	47.4	45.5
35	89	216	5981	37.7	41.0	39.4
30	76	210	5108	32.0	34.7	33.4
25	63	203	4234	26.5	28.6	27.6
20	51	195	3427	21.6	23.3	22.5
15	38	184	2554	16.4	17.6	17.0
11	29	175	1949	12.8	13.8	13.3

<b>Dimming levels table</b>	environmental temperature: 5°C
-----------------------------	--------------------------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W]
				start of lifetime	end of lifetime	average
100	254	254	17070	125.6	130.4	128.0
95	241	252	16196	117.3	121.8	119.6
90	229	250	15390	109.9	114.0	112.0
85	216	248	14516	102.2	106.0	104.1
80	203	246	13642	94.8	98.3	96.6
75	191	244	12836	88.1	91.3	89.7
70	178	241	11962	81.0	84.0	82.5
65	165	238	11089	74.2	77.0	75.6
60	152	235	10215	67.6	70.0	68.8
55	140	232	9409	61.6	63.9	62.8
50	127	229	8535	55.3	57.3	56.3
45	114	225	7661	49.0	50.9	50.0
40	102	221	6855	43.5	45.1	44.3
35	89	216	5981	37.7	39.1	38.4
30	76	210	5107	32.0	33.2	32.6
25	64	204	4301	26.9	27.9	27.4
20	51	195	3427	21.6	22.3	22.0
15	38	184	2554	16.5	17.0	16.8
11	29	175	1949	12.9	13.3	13.1

## Photometric test report

<b>Family</b> Streetlight 21 midi LED	<b>Order number: 5XE3G31Y08MB</b> <b>EAN: 4058352924181</b>	<b>LP number</b> 59560_14
--	--	------------------------------

<b>Dimming levels table</b>	environmental temperature: 15°C	<b>siteco</b>
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W]
				start of lifetime	end of lifetime	average
100	254	254	17070	127.2	133.1	130.2
95	241	252	16196	118.5	124.0	121.2
90	229	250	15389	110.9	116.1	113.5
85	216	248	14516	102.9	107.6	105.2
80	203	246	13642	95.3	99.6	97.4
75	191	244	12836	88.5	92.6	90.6
70	178	241	11962	81.4	85.0	83.2
65	165	238	11088	74.5	77.8	76.2
60	152	235	10215	67.8	70.8	69.3
55	140	232	9408	61.8	64.5	63.2
50	127	229	8535	55.4	57.8	56.6
45	114	225	7661	49.1	51.3	50.2
40	102	221	6855	43.5	45.4	44.4
35	89	216	5981	37.7	39.3	38.5
30	76	210	5107	31.9	33.3	32.6
25	64	204	4301	26.9	28.0	27.4
20	51	195	3427	21.5	22.4	22.0
15	38	184	2554	16.4	17.0	16.7
11	29	175	1949	12.9	13.3	13.1

**Photometric test report**

<b>Family</b> Streetlight 21 midi LED	<b>Order number: 5XE3G31Y08MB</b> <b>EAN: 4058352924181</b>	<b>LP number</b> 59560_14
--	--	------------------------------

<b>Luminousfluxs table</b>	<b>sITeco</b>
----------------------------	---------------

Temperature °C	Luminous flux lm	Power consumption W
25.0	17070.0	129.3
5.0	17070.0	125.6
15.0	17070.0	127.2