
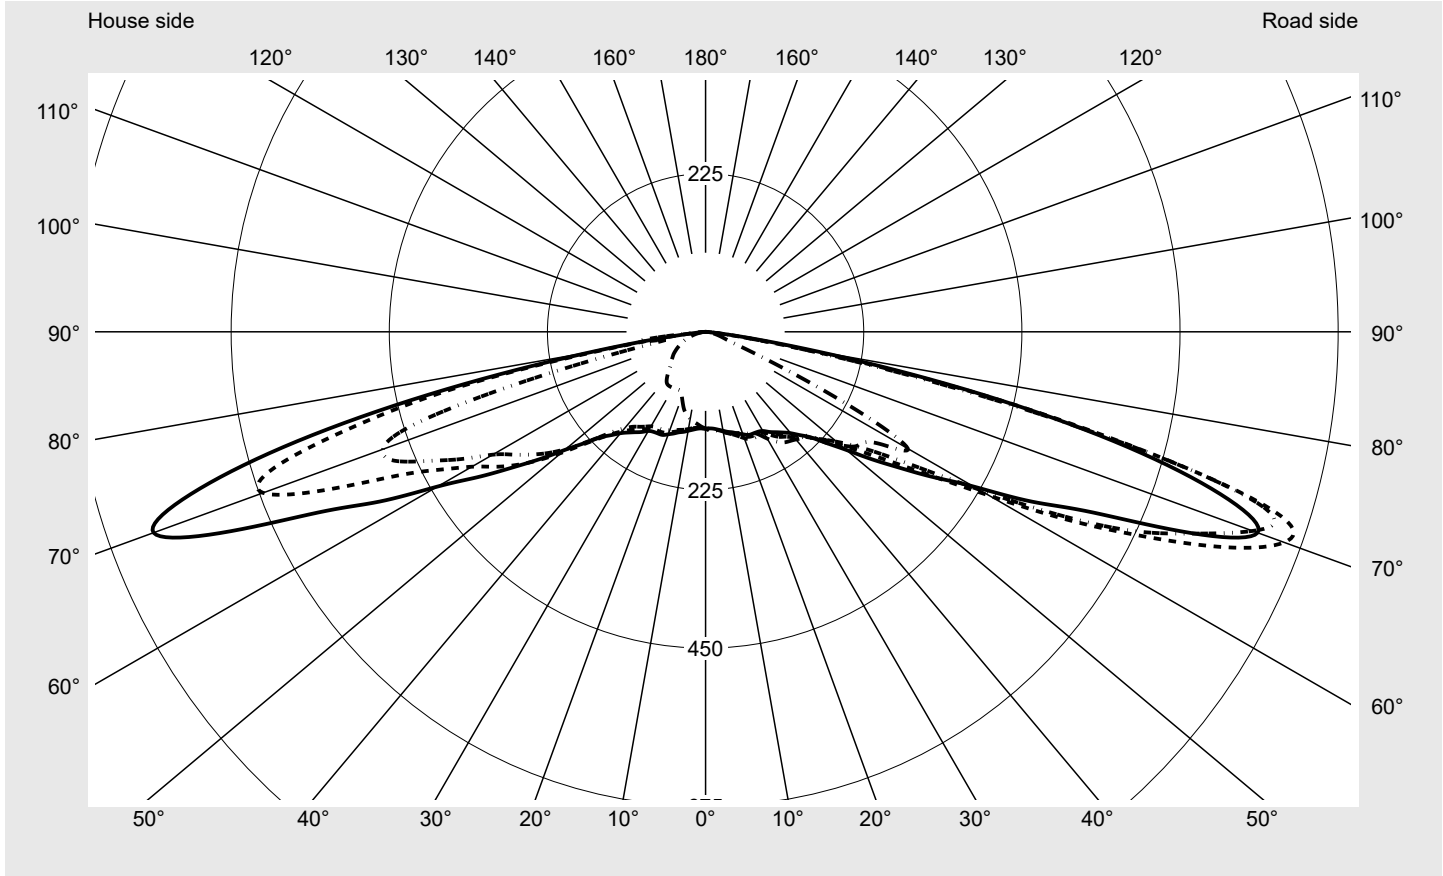


Photometric test report

Family Streetlight 31 mini toolless	Order number: 5XH6A31T08GA EAN: 4069025103543	LP number 59580_274
	Version post-top or side-entry mounting, Smart Interface up/down Optic asymmetric, extremely wide distribution (P1.0a) Cover toughened safety glass Lamps LED 3000 K CRI ≥ 70 Controlgear ECG SITECO - Smart Interface Rated values Net luminous flux = 5710 lm Power consumption = 39.3 W Luminous efficacy = 145.3 lm/W	serial documentation 11.04.2024



Luminous intensity in cd/klm C180-0 C185-5 C190-10 C270-90 **Imax: 876 cd/klm**



Luminaire output ratios	
Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%


Luminous intensity class acc. to EN13201-2	
Class:	G1
Imax 70°	876.0
Imax 80°	162.9
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0

Measurement conditions
DIN EN 13032 and DIN 5032

Photometric test report

Family Streetlight 31 mini toolless	Order number: 5XH6A31T08GA EAN: 4069025103543	LP number 59580_274
--	--	--------------------------------------

Envelope curve in cd/klm **KMK 70°** **KMK 67.5°** **KMK 65°** **KMK 62.5°** **siteco**

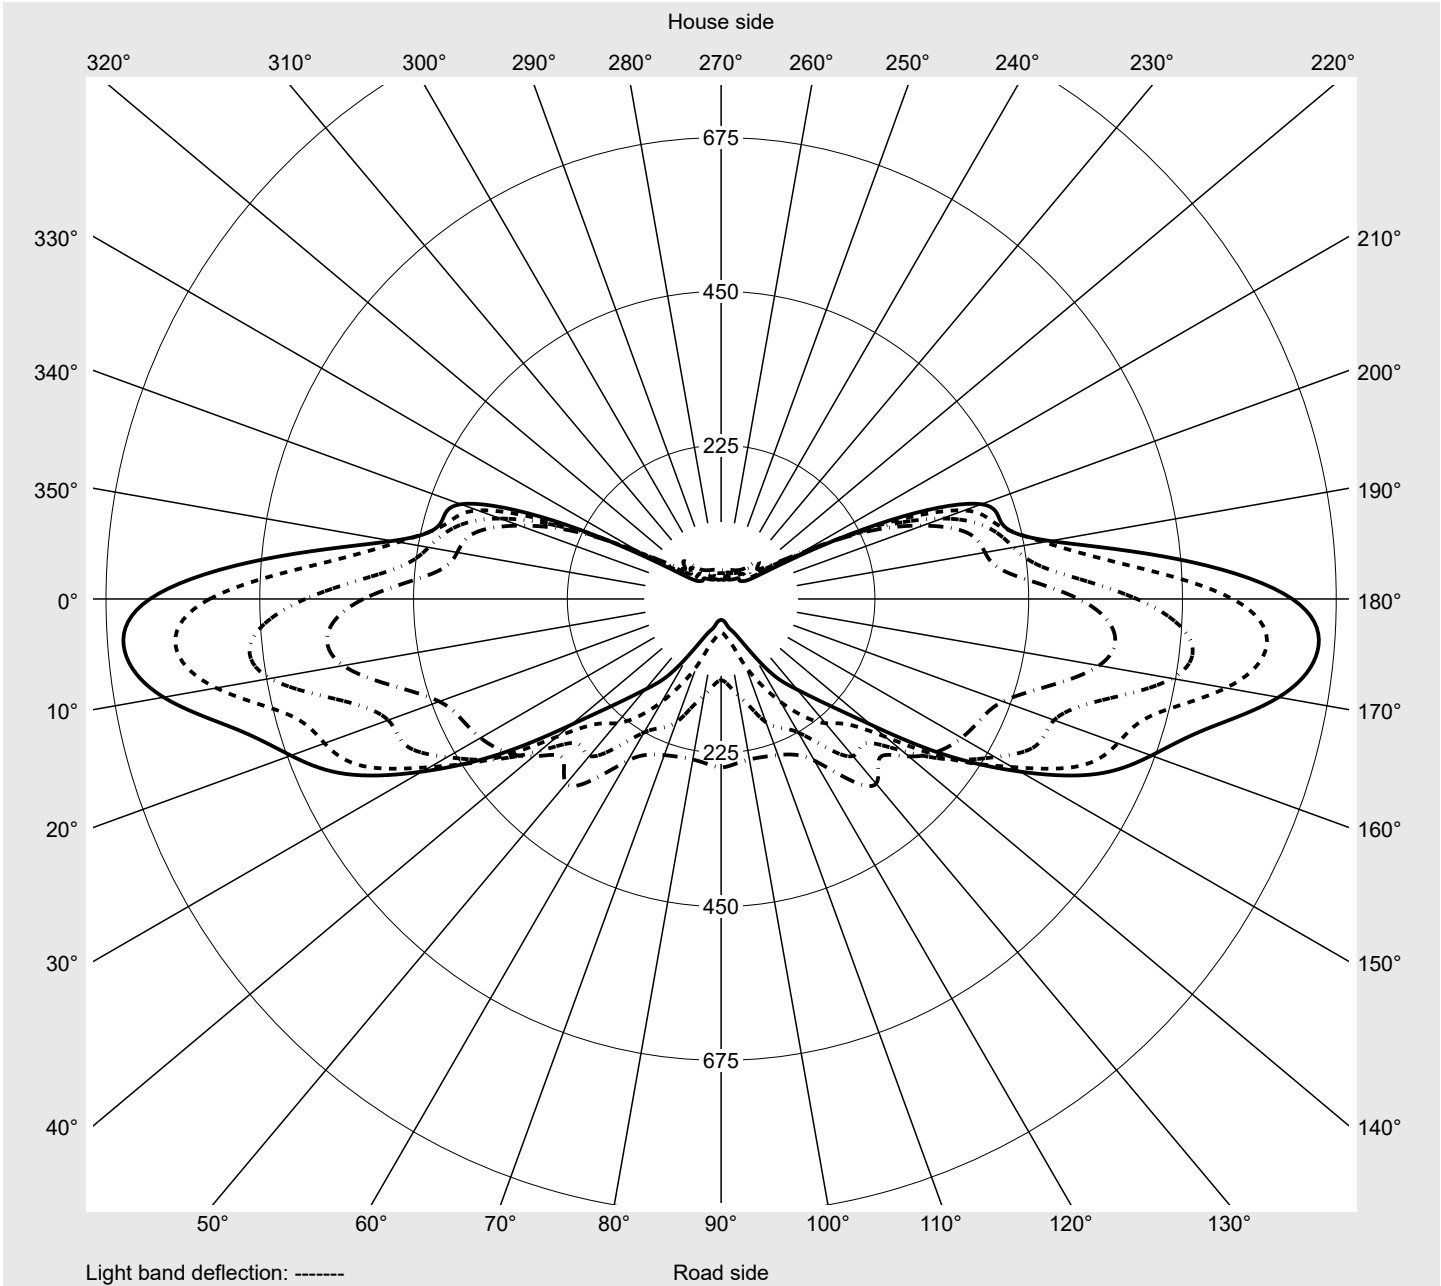

Photometric test report

Family Streetlight 31 mini toolless	Order number: 5XH6A31T08GA EAN: 4069025103543	LP number 59580_274
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	137.7	137.7	137.7	137.7	137.7	137.7	137.7	137.7	137.7	137.7	137.7	137.7	137.7
2,5°	137.6	137.8	138.1	138.4	138.7	138.9	139.1	139.2	139.4	139.6	139.8	140.0	140.2
5,0°	138.5	139.2	139.6	140.3	140.5	140.9	141.1	141.2	141.4	141.4	141.4	141.3	141.2
7,5°	140.5	141.3	142.0	142.6	143.1	143.3	143.5	143.3	143.1	142.9	142.6	142.4	142.2
10,0°	143.0	144.0	144.7	145.4	145.8	145.8	145.8	145.5	145.2	145.0	145.0	144.8	144.8
12,5°	145.8	146.9	147.9	148.9	149.3	149.4	149.3	149.0	148.9	149.1	149.1	149.3	149.3
15,0°	148.1	149.7	151.3	152.6	153.4	153.6	153.4	153.2	153.5	153.9	154.4	154.3	153.8
17,5°	151.7	153.6	155.7	157.5	158.7	158.8	158.8	159.1	159.4	159.8	159.7	159.2	158.2
20,0°	155.1	158.1	161.0	163.3	164.2	164.1	164.6	165.3	165.7	165.4	164.5	163.2	161.8
22,5°	158.8	161.7	165.4	168.6	169.9	170.3	170.6	171.2	171.3	170.6	169.1	167.3	166.1
25,0°	159.7	162.7	166.1	169.6	172.1	174.1	175.7	176.2	175.6	174.6	173.5	172.8	171.9
27,5°	160.5	163.1	166.1	169.3	172.0	175.1	178.4	179.6	178.9	178.4	178.4	178.1	176.9
30,0°	162.9	166.0	168.1	170.2	171.6	174.4	178.2	181.1	182.4	182.5	182.5	182.3	182.5
32,5°	168.9	172.1	174.5	175.7	174.6	174.4	176.5	180.0	185.2	187.4	187.6	188.9	191.5
35,0°	174.4	178.4	182.5	184.8	182.5	180.4	176.7	177.9	185.6	194.2	194.3	195.4	199.0
37,5°	180.6	184.7	188.1	190.0	189.4	187.5	184.0	179.4	184.8	195.6	197.1	198.4	207.5
40,0°	188.3	193.0	196.0	196.4	195.8	194.5	193.8	189.1	183.5	191.7	198.6	205.7	221.9
42,5°	199.5	201.6	203.3	202.7	200.8	199.7	201.6	201.1	191.3	187.7	204.5	218.7	240.8
45,0°	212.8	213.5	214.0	210.6	206.9	204.9	205.5	210.8	207.3	188.5	215.7	238.2	261.1
47,5°	234.8	228.3	226.8	222.0	215.4	211.2	210.0	219.7	224.9	198.8	232.6	260.4	279.8
50,0°	261.5	249.9	243.2	238.9	228.9	221.6	220.2	228.8	245.1	220.2	254.2	283.6	303.5
52,5°	297.7	280.2	266.1	259.2	247.5	239.7	238.5	246.0	265.8	247.9	282.3	316.4	335.3
55,0°	337.4	322.0	301.1	288.9	277.4	268.8	266.3	269.5	288.8	278.7	319.2	344.1	347.3
57,5°	385.1	381.6	359.0	337.9	321.9	309.6	301.3	298.3	309.3	319.9	348.2	353.7	371.5
60,0°	440.3	466.2	448.4	408.8	375.5	357.0	344.2	340.3	341.9	339.0	355.2	362.7	338.2
62,5°	523.2	577.6	561.4	494.1	438.7	418.3	406.4	388.4	358.4	328.4	352.8	320.5	273.2
65,0°	608.4	689.1	670.0	574.3	518.4	508.2	462.7	409.5	345.5	298.5	299.9	263.6	225.5
67,5°	748.5	800.9	750.1	654.7	617.4	578.3	491.9	407.7	313.8	258.9	237.3	209.1	173.7
70,0°	835.7	876.0	828.3	735.0	669.9	605.9	505.2	395.6	286.5	216.9	173.1	138.8	95.3
72,5°	767.9	847.4	834.6	753.0	675.5	624.1	476.4	338.3	269.5	155.5	103.4	68.3	45.4
75,0°	601.3	627.5	623.8	596.1	588.3	536.2	347.0	224.8	141.1	94.6	57.6	37.7	31.5
77,5°	377.2	369.4	340.9	324.6	382.3	290.7	181.7	68.8	46.5	55.4	30.3	22.6	19.4
80,0°	162.9	136.5	129.6	138.8	127.6	130.2	48.4	27.0	26.4	29.1	16.9	12.4	11.1
82,5°	43.8	36.6	34.8	35.5	31.5	36.1	19.4	15.8	10.2	11.2	8.3	6.4	6.1
85,0°	4.0	3.8	4.0	5.1	5.8	5.1	4.0	3.4	3.4	3.3	3.4	2.9	2.4
87,5°	1.6	1.6	1.6	1.6	1.4	1.4	1.4	1.2	1.1	1.0	1.0	0.9	0.8
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 31 mini toolless	Order number: 5XH6A31T08GA EAN: 4069025103543	LP number 59580_274
Table of values for luminous intensities		Maximum luminous intensity



C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	137.7	137.7	137.7	137.7	137.7	137.7	137.7	137.7	137.7	137.7	137.7	137.7	137.7
2,5°	140.3	140.4	140.6	140.7	140.6	140.7	137.3	136.8	136.5	136.2	136.0	135.7	135.4
5,0°	141.1	141.1	141.1	141.0	141.0	140.9	137.8	137.0	136.4	135.7	135.0	134.3	133.8
7,5°	142.0	142.0	142.0	141.9	141.9	141.9	139.4	138.3	137.3	136.3	135.2	134.2	133.3
10,0°	144.7	144.6	144.5	144.5	144.5	144.5	141.8	140.4	139.1	137.7	136.2	134.7	133.2
12,5°	149.0	148.6	148.1	147.8	147.6	147.5	144.3	142.7	141.1	139.3	137.4	135.6	134.0
15,0°	153.2	152.3	151.4	150.5	149.8	149.5	146.4	144.4	142.4	140.2	138.1	136.0	133.8
17,5°	157.0	155.4	153.9	152.4	151.3	151.0	149.2	146.7	143.9	141.2	138.5	135.7	132.9
20,0°	160.4	158.8	156.9	154.9	153.7	153.4	152.3	149.1	145.6	142.2	138.6	135.3	132.1
22,5°	165.5	164.5	162.2	159.4	157.3	156.6	155.1	151.1	147.4	143.6	139.6	135.8	131.5
25,0°	170.8	168.7	166.0	162.7	159.8	158.7	156.2	152.3	148.5	144.4	140.4	136.2	130.8
27,5°	176.0	174.0	171.6	168.7	166.2	165.0	156.9	153.1	149.2	145.0	140.9	135.8	128.2
30,0°	184.5	184.6	183.8	180.6	177.2	175.4	159.5	155.3	150.8	146.5	141.8	134.9	123.5
32,5°	195.4	197.6	198.7	194.5	188.1	184.6	164.6	159.9	154.5	149.5	143.2	133.0	116.6
35,0°	205.3	212.3	214.6	208.3	197.4	192.2	170.0	164.9	159.2	153.4	144.3	128.6	108.6
37,5°	220.1	229.7	229.4	219.5	203.8	196.1	176.3	170.3	164.6	157.3	143.9	122.6	101.1
40,0°	239.9	248.1	246.3	233.7	211.7	199.9	185.0	179.2	172.3	162.5	142.6	115.1	94.4
42,5°	259.0	266.7	261.1	245.8	218.9	204.2	197.3	191.9	183.9	169.6	139.8	107.7	88.8
45,0°	276.7	281.0	272.9	255.5	228.0	209.9	214.7	210.8	199.3	178.4	137.7	99.9	85.4
47,5°	294.0	298.2	291.4	276.4	250.6	234.4	237.9	233.7	216.5	188.6	139.4	93.3	84.2
50,0°	322.1	330.4	318.6	300.5	266.7	251.3	267.9	259.4	235.1	201.0	143.1	91.2	85.4
52,5°	348.5	350.6	342.2	322.0	287.4	267.8	300.3	283.5	253.9	216.6	153.4	94.5	87.8
55,0°	363.6	368.7	344.6	319.7	295.6	274.8	330.8	304.6	274.6	235.8	169.5	102.0	89.2
57,5°	371.4	338.9	325.0	316.3	309.8	299.1	357.3	325.2	301.8	259.9	193.8	115.5	89.8
60,0°	311.8	300.4	292.0	295.6	316.6	332.1	383.9	349.6	330.6	283.7	214.3	128.4	88.8
62,5°	251.4	243.1	239.2	238.5	242.0	246.4	424.5	392.1	373.3	313.8	231.2	134.7	84.5
65,0°	208.3	192.0	163.2	143.3	126.9	119.0	484.3	434.6	404.0	344.1	241.6	131.4	74.2
67,5°	138.1	105.2	74.8	60.9	52.4	49.2	589.7	479.2	419.0	378.8	255.5	121.3	59.0
70,0°	65.5	51.0	43.8	35.2	31.7	30.6	669.9	488.6	425.5	405.3	271.8	102.8	48.7
72,5°	37.7	35.0	33.9	26.0	23.8	23.5	643.4	428.4	419.5	405.8	255.3	81.7	43.6
75,0°	27.9	25.6	24.4	19.8	17.9	17.5	513.0	241.7	319.6	334.9	189.4	58.8	35.0
77,5°	18.2	17.0	15.9	14.2	12.4	12.4	350.6	78.7	160.1	216.5	109.0	42.1	26.4
80,0°	11.5	10.3	9.6	8.1	7.6	7.5	145.4	68.9	132.5	123.3	59.1	28.9	17.3
82,5°	5.9	5.1	4.8	4.2	3.9	4.0	45.8	92.4	98.2	54.2	31.1	19.5	11.7
85,0°	2.2	2.0	1.8	1.6	1.6	1.5	3.8	6.6	9.0	5.6	8.5	7.6	5.3
87,5°	0.8	0.6	0.5	0.5	0.5	0.5	1.7	1.8	1.8	1.8	1.8	1.7	1.7
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 31 mini toolless	Order number: 5XH6A31T08GA EAN: 4069025103543	LP number 59580_274
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0,0°	137.7	137.7	137.7	137.7	137.7	137.7	137.7	137.7	137.7	137.7	137.7	0.2	0.2
2,5°	135.3	135.0	134.9	134.9	134.7	134.7	134.9	134.9	135.0	135.1	135.1	1.6	1.9
5,0°	133.2	132.7	132.4	132.1	131.9	131.7	131.8	131.7	131.8	131.8	131.8	3.3	5.1
7,5°	132.4	131.5	130.8	130.0	129.4	129.1	128.9	128.9	128.8	128.8	128.9	4.9	10.1
10,0°	131.9	130.7	129.6	128.6	127.8	126.9	126.4	126.0	125.8	125.8	125.6	6.6	16.6
12,5°	132.1	130.2	128.2	126.5	125.0	123.7	122.6	121.8	121.3	121.2	121.1	8.3	24.9
15,0°	131.3	129.1	126.7	124.4	122.2	120.3	118.7	117.3	116.5	116.0	115.9	10.0	34.9
17,5°	130.2	127.4	124.7	121.4	117.9	114.7	111.9	109.7	108.3	107.5	107.3	11.7	46.7
20,0°	128.7	125.0	120.6	115.6	110.7	106.5	103.3	100.9	99.4	98.7	98.5	13.4	60.0
22,5°	126.5	120.4	113.3	106.9	101.5	97.5	94.6	93.0	92.2	92.0	91.9	15.0	75.0
25,0°	122.9	113.4	104.7	97.9	93.4	91.1	90.1	90.1	90.3	90.8	91.0	16.6	91.7
27,5°	116.8	105.0	96.2	91.1	89.0	88.7	89.2	89.9	90.7	91.3	91.4	18.3	110.0
30,0°	108.8	97.0	90.0	87.8	87.6	87.9	89.0	90.3	91.2	92.0	92.2	20.0	130.0
32,5°	101.0	90.7	87.2	87.1	86.9	87.4	88.7	90.5	91.8	92.7	92.7	22.0	152.0
35,0°	93.8	87.1	86.7	86.6	86.4	87.1	88.8	90.7	92.3	92.8	92.7	24.1	176.0
37,5°	89.0	86.6	86.7	86.0	85.9	86.8	88.2	89.9	91.1	91.2	90.8	26.1	202.1
40,0°	86.3	86.8	85.9	85.4	85.7	86.0	86.4	86.9	87.0	86.2	85.5	28.3	230.5
42,5°	86.3	86.6	85.4	85.2	84.9	84.4	83.0	81.7	80.6	79.4	78.7	30.7	261.1
45,0°	86.9	86.1	84.8	83.6	82.2	80.6	78.7	76.5	74.5	72.5	71.7	33.3	294.4
47,5°	88.0	86.7	83.6	80.8	78.1	76.1	74.1	71.8	69.7	67.7	66.9	36.5	330.9
50,0°	90.6	89.1	81.1	76.3	73.1	71.2	69.0	67.0	65.3	63.7	63.1	40.4	371.3
52,5°	92.5	90.6	77.8	71.4	68.2	66.2	64.1	62.3	60.9	59.7	59.1	44.9	416.2
55,0°	91.0	89.5	75.1	67.0	63.6	61.4	59.1	57.8	56.7	55.7	55.6	49.6	465.8
57,5°	87.1	90.3	71.6	62.0	58.0	56.1	54.5	53.4	52.6	51.2	51.1	54.7	520.5
60,0°	79.8	88.3	67.6	57.7	53.6	51.4	49.9	49.0	48.1	46.8	46.6	59.3	579.8
62,5°	68.5	77.9	63.2	52.8	48.6	46.4	45.1	44.2	43.2	42.2	41.9	62.7	642.5
65,0°	57.6	63.2	56.5	47.7	44.1	41.7	40.4	40.3	38.7	37.8	37.8	64.7	707.2
67,5°	48.5	48.6	48.1	41.8	38.5	36.5	35.2	35.0	33.6	33.4	33.2	66.2	773.4
70,0°	40.7	38.1	39.3	35.9	33.1	31.1	30.1	30.0	28.5	28.1	28.5	67.0	840.4
72,5°	34.1	30.9	31.6	30.4	28.1	26.2	25.0	24.7	23.5	22.9	22.9	63.1	903.6
75,0°	28.3	25.1	25.1	24.8	23.1	21.3	20.1	19.5	18.5	17.9	18.2	48.2	951.8
77,5°	22.0	19.5	18.9	19.3	17.9	16.5	15.2	14.3	13.9	13.4	13.5	27.9	979.7
80,0°	15.2	13.6	13.0	13.6	12.6	11.5	10.6	9.9	9.4	9.2	9.2	13.1	992.8
82,5°	10.2	9.1	8.0	8.7	8.1	7.4	6.8	6.2	5.7	5.6	5.7	5.7	998.5
85,0°	5.1	4.8	4.6	4.6	4.6	4.0	3.6	3.3	3.0	3.1	3.1	1.1	999.6
87,5°	1.6	1.6	1.6	1.4	1.4	1.5	1.5	1.4	1.3	1.4	1.2	0.4	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Streetlight 31 mini toolless	Order number: 5XH6A31T08GA EAN: 4069025103543	LP number 59580_274
---	--	-------------------------------

Dimming levels table	environmental temperature: 25°C	siteco
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W]
				start of lifetime	end of lifetime	average
100	254	254	5710	39.3	40.7	40.0
95	240	252	5433	37.0	38.4	37.7
90	225	250	5133	34.6	35.9	35.2
85	211	247	4848	32.4	33.5	33.0
80	197	245	4558	30.1	31.2	30.6
75	184	242	4286	28.1	29.0	28.6
70	170	239	3988	25.9	26.8	26.4
65	157	236	3708	23.9	24.7	24.3
60	144	233	3425	22.0	22.7	22.4
55	131	230	3138	20.0	20.7	20.4
50	118	226	2846	18.1	18.7	18.4
45	106	222	2575	16.2	16.7	16.4
40	93	217	2276	14.3	14.8	14.6
35	81	212	1998	12.5	13.0	12.8
30	69	206	1716	10.8	11.1	11.0
25	57	199	1431	9.0	9.3	9.2
20	45	191	1143	7.3	7.5	7.4
15	33	179	852	5.5	5.7	5.6
10	22	164	583	4.1	4.2	4.2
9	19	159	508	3.7	3.8	3.8

Dimming levels table	environmental temperature: 5°C
-----------------------------	--------------------------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W]
				start of lifetime	end of lifetime	average
100	254	254	5820	39.8	41.3	40.6
95	240	252	5534	37.5	38.9	38.2
90	226	250	5246	35.3	36.5	35.9
85	212	247	4953	33.0	34.1	33.6
80	198	245	4655	30.7	31.8	31.2
75	184	242	4355	28.5	29.5	29.0
70	171	240	4072	26.4	27.4	26.9
65	158	237	3786	24.4	25.2	24.8
60	145	233	3497	22.4	23.2	22.8
55	132	230	3203	20.4	21.2	20.8
50	119	226	2907	18.5	19.1	18.8
45	106	222	2607	16.5	17.0	16.8
40	94	218	2328	14.7	15.1	14.9
35	82	213	2045	12.9	13.3	13.1
30	69	206	1736	11.0	11.3	11.2
25	57	199	1447	9.2	9.5	9.4
20	45	191	1155	7.4	7.6	7.5
15	33	179	861	5.6	5.8	5.7
10	22	164	588	4.1	4.2	4.2
9	19	159	513	3.7	3.8	3.8

Photometric test report

Family Streetlight 31 mini toolless	Order number: 5XH6A31T08GA EAN: 4069025103543	LP number 59580_274
---	--	--------------------------------------

Dimming levels table	environmental temperature: 15°C	sITeco
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W]
				start of lifetime	end of lifetime	average
100	254	254	5770	39.5	41.0	40.2
95	240	252	5488	37.3	38.6	38.0
90	225	250	5183	34.8	36.1	35.4
85	212	247	4914	32.8	33.9	33.3
80	198	245	4621	30.4	31.6	31.0
75	184	242	4324	28.3	29.3	28.8
70	171	240	4044	26.2	27.1	26.6
65	158	237	3761	24.3	25.0	24.6
60	144	233	3452	22.1	22.8	22.5
55	132	230	3184	20.3	21.0	20.6
50	119	226	2891	18.3	19.0	18.6
45	106	222	2593	16.3	16.9	16.6
40	94	218	2315	14.6	15.0	14.8
35	81	212	2011	12.6	13.1	12.8
30	69	206	1727	10.9	11.2	11.0
25	57	199	1440	9.1	9.4	9.2
20	45	191	1150	7.3	7.6	7.4
15	33	179	857	5.6	5.8	5.7
10	22	164	586	4.1	4.2	4.2
9	19	159	511	3.7	3.8	3.8

Photometric test report

Family Streetlight 31 mini toolless	Order number: 5XH6A31T08GA EAN: 4069025103543	LP number 59580_274
---	--	--------------------------------------

Luminousfluxs table	siteco
----------------------------	---------------

Temperature °C	Luminous flux lm	Power consumption W
25.0	5710.0	39.3
5.0	5820.0	39.8
15.0	5770.0	39.5