



# Photometric test report

<b>Family</b> <b>Streetlight 31 mini toolless</b>	<b>Order number: 5XH6D3AB08JA</b> <b>EAN: 4069025104199</b>	<b>LP number</b> <b>59078_607</b>
	<b>Version</b> post-top or side-entry mounting <b>Optic</b> asymmetric, wide distribution (ST1.0a G) <b>Cover</b> toughened safety glass <b>Lamps</b> LED 3000 K   CRI ≥ 70 <b>Controlgear</b> ECG SITECO <b>Rated values</b> Net luminous flux = 12140 lm Power consumption = 81.1 W Luminous efficacy = 149.7 lm/W	<b>serial documentation</b> <b>11.04.2024</b>





**Luminous intensity in cd/klm** C180-0 C195-15 C200-20 C270-90 **Imax: 489 cd/klm**



Luminaire output ratios	
Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%


Luminous intensity class acc. to EN13201-2	
Class:	G4
Imax 70°	461.5
Imax 80°	96.1
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0

Measurement conditions
DIN EN 13032 and DIN 5032

# Photometric test report

<b>Family</b> <b>Streetlight 31 mini toolless</b>	<b>Order number: 5XH6D3AB08JA</b> <b>EAN: 4069025104199</b>	<b>LP number</b> <b>59078_607</b>
--	--	--------------------------------------

**Envelope curve in cd/klm**      **KMK 67.5°**    **KMK 65°**    **KMK 62.5°**    **KMK 60°**      **siteco**

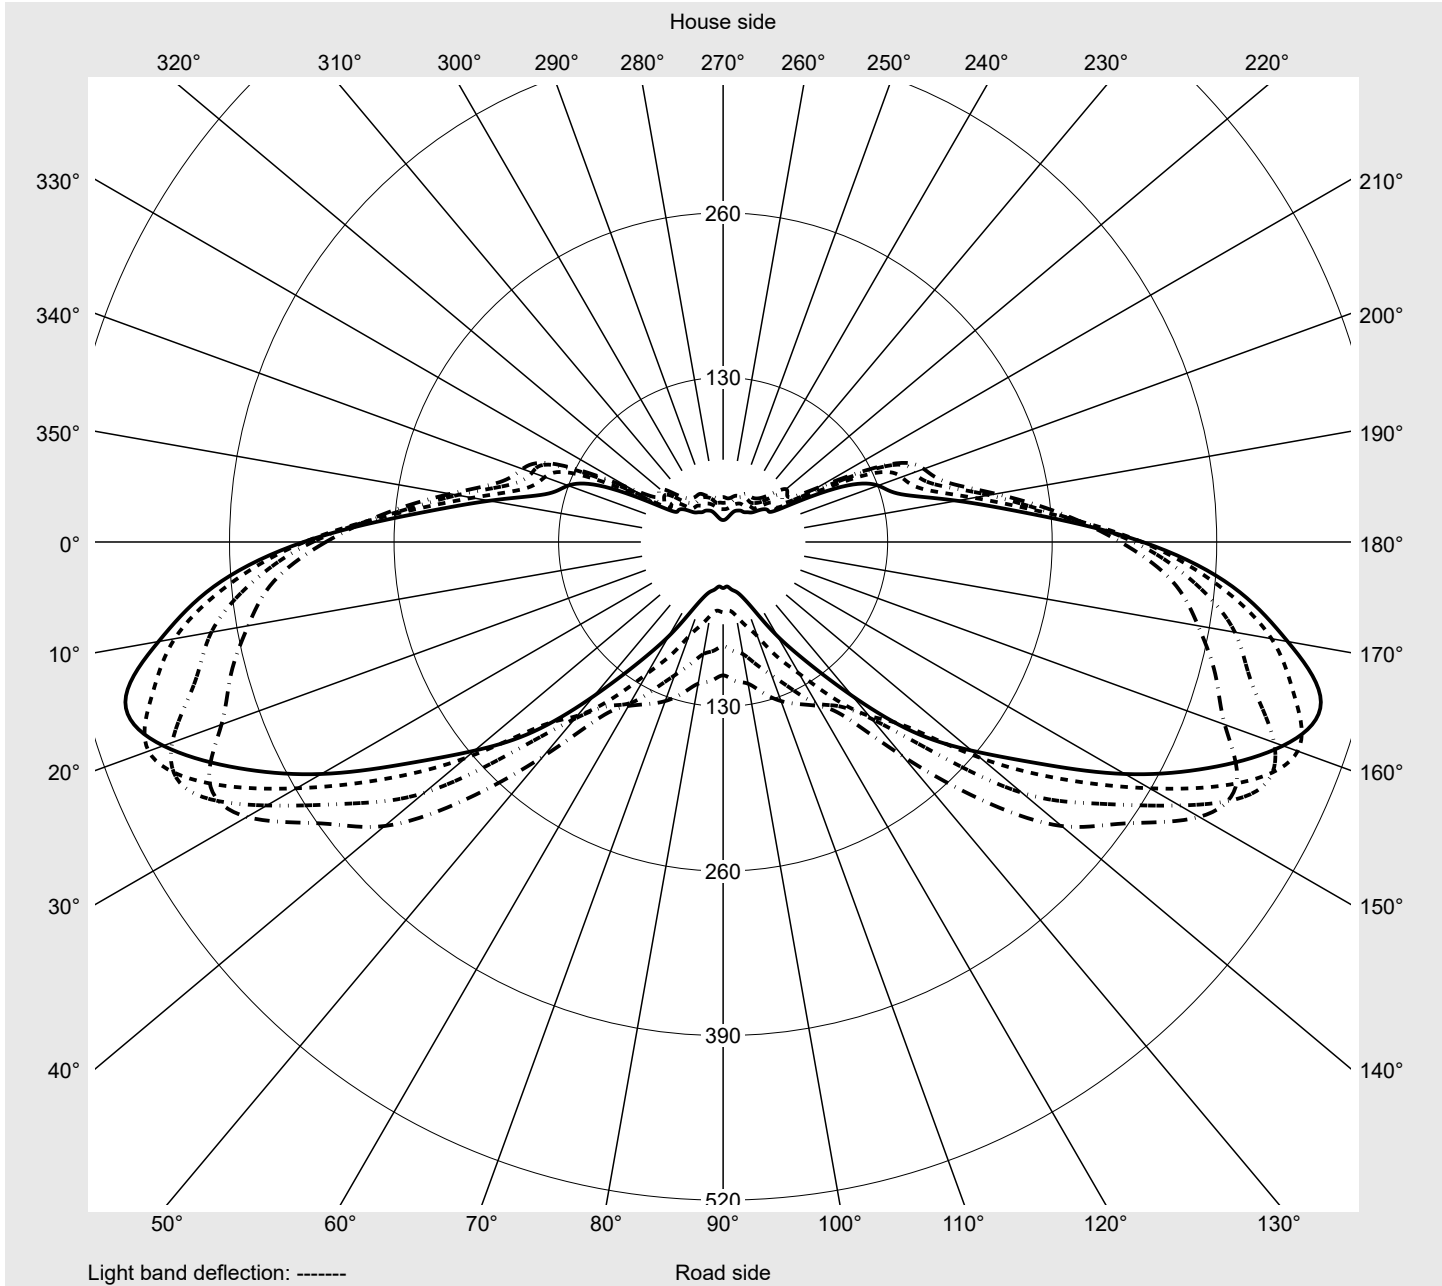

## Photometric test report

<b>Family</b> Streetlight 31 mini toolless	<b>Order number: 5XH6D3AB08JA</b> <b>EAN: 4069025104199</b>	<b>LP number</b> <b>59078_607</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
		<b>siteco</b>

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
$\gamma$	Luminous intensity in cd/klm												
0,0°	272.5	272.5	272.5	272.5	272.5	272.5	272.5	272.5	272.5	272.5	272.5	272.5	272.5
2,5°	277.0	276.4	275.2	274.5	273.0	273.7	272.9	273.0	271.2	271.2	271.1	271.2	271.4
5,0°	274.1	274.0	274.4	271.9	270.1	269.9	268.3	270.2	270.2	270.8	270.6	270.2	268.6
7,5°	279.4	277.3	274.8	274.9	272.6	273.0	273.3	271.7	269.4	269.4	269.0	268.1	269.4
10,0°	280.5	276.6	274.8	277.0	280.8	278.6	272.2	269.6	269.1	273.3	273.9	275.3	275.6
12,5°	289.2	286.8	282.7	281.0	277.9	277.4	280.6	282.2	279.8	279.6	278.5	279.4	279.1
15,0°	288.1	289.0	288.6	282.0	281.9	284.6	284.1	287.9	291.2	290.4	290.4	287.4	286.6
17,5°	286.5	287.8	285.5	285.9	286.0	290.2	291.3	295.8	292.3	291.9	293.7	291.6	289.1
20,0°	291.5	292.4	288.6	292.7	293.0	298.5	297.4	298.5	297.9	297.2	297.4	296.1	295.5
22,5°	294.2	287.4	289.6	295.1	298.6	301.7	301.5	304.4	301.6	303.0	304.1	302.2	302.9
25,0°	290.1	291.1	297.6	301.1	304.1	306.9	304.1	310.9	311.8	314.8	310.7	306.6	305.0
27,5°	287.5	292.3	300.5	303.1	307.5	314.6	310.4	317.0	314.8	313.0	306.9	305.5	309.4
30,0°	292.0	294.2	306.8	308.2	318.6	321.3	321.7	325.9	317.9	312.7	313.6	314.2	314.2
32,5°	296.6	303.4	310.5	316.2	324.8	328.0	325.1	324.3	321.7	320.6	319.3	318.8	318.9
35,0°	293.7	307.9	314.0	322.5	330.7	330.2	333.2	331.9	324.2	323.3	323.9	327.2	329.1
37,5°	303.1	313.9	324.1	334.6	336.2	339.9	336.6	332.6	330.2	336.0	331.7	335.5	336.0
40,0°	308.1	323.2	333.3	337.1	341.8	344.1	345.3	335.2	345.8	340.1	337.1	341.4	336.8
42,5°	310.4	331.9	338.8	346.6	352.2	343.4	360.7	346.8	357.8	348.2	345.1	344.2	337.4
45,0°	314.3	336.1	345.1	351.3	352.5	350.5	355.5	355.4	363.9	365.9	352.7	349.6	341.3
47,5°	314.4	339.7	350.1	358.2	355.5	358.5	354.9	364.8	369.6	371.3	360.1	351.7	330.9
50,0°	313.6	338.4	355.7	357.1	362.9	365.7	359.9	376.6	390.1	379.0	360.1	337.0	305.4
52,5°	310.1	339.8	351.2	364.1	368.6	376.4	380.3	400.7	411.0	378.8	346.4	308.8	268.0
55,0°	309.7	336.3	357.1	363.3	377.6	395.3	407.2	415.4	395.9	359.4	318.0	267.3	223.8
57,5°	310.0	338.2	361.6	380.5	390.8	408.7	436.4	415.4	373.0	331.3	278.8	218.4	176.1
60,0°	313.9	356.4	381.1	402.5	421.8	447.8	434.4	387.7	349.1	287.7	221.2	169.0	149.6
62,5°	324.3	374.3	410.6	432.6	463.2	465.3	416.3	360.4	308.4	234.2	182.3	158.2	147.0
65,0°	330.8	392.8	440.0	467.1	483.1	450.2	389.2	326.5	265.4	207.0	179.3	149.5	120.1
67,5°	331.5	403.9	453.0	489.0	470.7	422.7	366.6	305.3	256.5	211.8	158.8	115.9	86.0
70,0°	323.2	394.9	447.7	461.5	422.9	385.2	351.0	344.3	283.9	188.9	118.3	74.2	48.5
72,5°	316.1	359.3	401.7	388.4	373.1	363.3	394.6	409.8	286.0	144.6	69.3	39.5	28.1
75,0°	244.1	257.5	289.2	299.7	316.8	366.8	438.0	374.9	196.5	72.3	32.2	23.3	21.1
77,5°	127.1	147.2	181.9	217.4	238.2	288.7	316.5	219.1	70.5	28.0	20.6	17.9	17.0
80,0°	33.5	53.0	71.3	80.0	84.1	96.1	90.3	66.5	20.1	17.3	16.8	12.6	12.6
82,5°	6.2	9.7	17.5	24.9	29.9	37.4	35.4	17.1	10.8	10.9	11.3	8.2	8.1
85,0°	1.2	1.4	2.0	2.7	3.3	4.8	5.6	4.1	4.1	4.6	5.2	4.0	3.9
87,5°	0.3	0.4	0.5	0.5	0.6	0.7	0.9	1.0	1.1	1.2	1.5	1.2	1.2
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

## Photometric test report

<b>Family</b> Streetlight 31 mini toolless	<b>Order number: 5XH6D3AB08JA</b> <b>EAN: 4069025104199</b>	<b>LP number</b> 59078_607
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>

siteco

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
$\gamma$	Luminous intensity in cd/klm												
0,0°	272.5	272.5	272.5	272.5	272.5	272.5	272.5	272.5	272.5	272.5	272.5	272.5	272.5
2,5°	271.5	272.2	271.7	270.4	271.3	272.5	277.7	275.7	275.6	274.8	274.5	271.8	269.8
5,0°	268.1	267.6	267.2	266.5	266.4	264.7	276.0	275.8	273.8	271.3	270.7	265.9	261.6
7,5°	270.3	271.6	268.7	269.2	266.8	266.3	278.8	275.9	273.3	272.2	266.5	262.4	258.5
10,0°	279.4	277.9	273.7	272.9	271.2	273.0	280.7	276.5	269.2	264.4	259.9	255.3	249.5
12,5°	278.6	280.8	279.4	279.3	278.5	273.8	288.2	284.0	274.9	264.3	256.9	253.0	246.5
15,0°	285.1	284.0	283.9	287.7	288.0	286.1	289.0	286.8	275.9	263.3	253.3	246.3	239.9
17,5°	290.0	288.1	290.0	288.8	291.7	294.1	287.2	284.3	275.6	258.5	253.6	241.8	228.9
20,0°	293.4	292.3	296.4	290.0	290.0	292.8	293.7	285.3	273.7	258.3	246.8	237.9	222.9
22,5°	298.9	295.2	298.5	293.0	293.5	293.4	291.1	289.6	273.2	253.8	240.0	225.4	215.1
25,0°	303.5	300.9	298.5	297.3	296.1	297.7	289.2	283.4	273.0	251.9	234.0	219.6	206.1
27,5°	304.9	305.2	302.5	301.1	299.3	305.5	291.3	285.0	274.1	248.8	231.4	212.9	194.9
30,0°	312.7	305.3	305.5	302.9	307.6	302.7	288.7	284.3	265.7	245.1	225.0	207.3	188.4
32,5°	319.2	313.3	310.5	312.2	306.2	306.2	283.1	279.6	263.4	240.9	219.4	196.1	184.6
35,0°	323.5	319.3	312.4	309.8	305.1	299.3	286.6	274.8	263.2	233.8	209.8	191.2	183.1
37,5°	329.9	320.0	318.1	311.8	303.1	304.5	285.3	273.8	256.8	228.8	203.4	183.6	178.0
40,0°	326.8	319.2	316.0	314.5	307.7	304.6	283.4	268.2	254.7	221.7	195.2	181.8	177.4
42,5°	328.9	324.7	313.0	313.8	302.9	300.2	281.7	262.2	243.7	213.5	188.7	181.1	170.7
45,0°	329.9	314.5	297.4	287.6	275.9	276.6	282.8	256.2	236.6	207.6	182.1	178.0	160.5
47,5°	308.8	280.5	261.8	246.2	234.1	234.1	281.8	246.6	228.8	198.6	177.3	171.6	143.5
50,0°	269.9	239.9	221.1	206.5	191.4	192.8	272.7	241.8	218.0	191.2	173.4	161.4	125.2
52,5°	227.6	201.2	180.4	164.6	155.8	152.3	269.6	232.4	205.8	183.3	167.5	141.2	105.0
55,0°	184.5	161.5	142.3	135.6	131.5	128.0	268.2	229.8	198.7	172.6	162.6	121.1	89.1
57,5°	150.6	141.1	134.8	129.7	120.0	120.9	267.6	224.3	189.9	170.2	151.9	105.1	75.3
60,0°	141.3	133.7	123.7	113.7	110.2	105.4	266.2	219.0	182.8	168.7	145.2	84.3	62.4
62,5°	128.2	112.1	99.9	90.0	86.2	82.4	261.4	213.3	174.7	160.5	141.7	72.1	56.8
65,0°	99.2	79.4	68.2	59.3	54.4	55.5	258.5	201.1	162.6	150.0	126.5	62.8	50.1
67,5°	61.3	47.3	40.9	38.1	35.3	36.4	247.6	187.6	145.7	130.3	103.1	53.3	43.3
70,0°	35.3	31.8	30.3	27.9	27.8	26.8	240.7	174.2	128.1	108.1	85.0	47.0	35.7
72,5°	25.9	25.3	24.5	22.6	23.1	21.7	230.1	158.9	112.6	89.8	64.6	36.7	31.7
75,0°	20.7	20.5	19.8	18.7	18.3	18.0	194.3	130.2	78.9	63.6	43.0	28.7	26.2
77,5°	16.6	16.2	15.3	14.6	14.3	14.6	118.7	58.0	20.8	29.3	25.7	17.5	17.8
80,0°	11.9	12.1	11.0	10.7	10.4	10.4	32.3	9.7	6.1	12.2	12.9	9.1	9.1
82,5°	8.0	7.6	7.6	7.4	6.9	6.2	5.0	2.7	2.9	3.9	4.1	3.0	1.6
85,0°	3.7	4.1	4.1	3.7	3.3	3.0	1.2	1.0	1.0	0.7	0.6	0.5	0.2
87,5°	1.1	1.3	1.2	1.1	1.0	1.0	0.3	0.2	0.2	0.2	0.1	0.1	0.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

## Photometric test report

<b>Family</b> <b>Streetlight 31 mini toolless</b>	<b>Order number: 5XH6D3AB08JA</b> <b>EAN: 4069025104199</b>	<b>LP number</b> <b>59078_607</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
		<b>siteco</b>

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0,0°	272.5	272.5	272.5	272.5	272.5	272.5	272.5	272.5	272.5	272.5	272.5	0.4	0.4
2,5°	268.5	268.9	268.2	267.9	268.1	267.2	267.4	267.3	267.8	267.2	267.4	3.2	3.7
5,0°	258.3	254.5	252.2	250.1	250.6	249.2	250.4	252.1	254.6	253.9	255.1	6.3	10.0
7,5°	253.2	249.6	246.9	243.4	241.8	240.1	238.5	238.0	237.2	236.5	235.9	9.4	19.4
10,0°	246.6	241.3	236.8	232.4	231.2	227.8	225.6	222.2	220.8	221.0	221.4	12.4	31.8
12,5°	242.7	233.6	227.3	222.1	217.3	215.3	212.9	212.5	209.4	207.8	209.0	15.4	47.2
15,0°	233.0	224.6	215.3	210.9	206.2	200.4	196.3	196.0	195.2	190.0	189.7	18.4	65.6
17,5°	223.4	215.6	205.0	198.1	192.0	188.0	182.3	180.3	179.7	177.1	177.0	21.1	86.7
20,0°	214.7	202.7	194.1	186.2	181.6	179.9	175.0	171.4	172.3	169.2	166.4	23.9	110.6
22,5°	204.1	193.6	184.4	178.0	171.6	170.7	170.7	168.1	164.5	164.2	163.2	26.7	137.3
25,0°	189.5	182.2	178.9	173.9	167.7	164.7	164.2	162.4	163.3	162.0	159.6	29.4	166.7
27,5°	186.1	181.6	171.6	167.3	164.1	158.7	157.7	154.0	150.5	149.0	147.0	32.0	198.7
30,0°	181.3	178.3	168.4	164.0	159.7	154.5	144.9	141.4	133.3	128.4	127.6	34.5	233.3
32,5°	177.7	168.8	163.3	159.4	151.2	146.4	135.1	123.5	114.9	107.7	107.0	36.9	270.1
35,0°	178.3	165.2	156.5	148.1	142.4	131.6	119.3	106.1	96.7	90.9	87.8	39.0	309.1
37,5°	171.2	159.1	148.6	141.6	129.9	113.6	100.4	89.5	80.3	75.0	73.4	41.2	350.3
40,0°	161.1	148.6	139.0	131.3	114.8	96.2	81.8	73.1	68.4	65.6	64.8	43.1	393.4
42,5°	151.2	140.3	126.0	117.4	100.5	81.3	70.4	66.6	62.3	61.2	60.6	45.0	438.4
45,0°	137.4	125.8	116.7	102.3	84.9	69.6	62.1	58.5	57.5	58.4	58.8	46.2	484.6
47,5°	122.6	111.6	104.9	87.4	70.5	62.3	56.9	55.3	55.3	54.1	55.2	46.5	531.1
50,0°	105.9	101.5	94.5	74.3	62.2	56.1	53.6	51.7	51.0	50.8	49.9	46.3	577.4
52,5°	92.1	89.6	74.0	62.8	54.7	52.6	50.1	48.1	46.4	46.3	45.2	45.6	623.0
55,0°	80.1	75.2	59.7	53.1	49.2	47.3	46.2	43.5	42.4	41.7	40.8	44.6	667.6
57,5°	72.2	65.6	52.2	46.3	45.2	44.5	42.2	40.0	38.3	37.8	37.8	43.9	711.6
60,0°	64.9	53.5	45.3	42.3	42.0	42.0	39.0	37.8	35.5	34.7	35.5	43.4	755.0
62,5°	58.2	46.5	40.2	38.0	38.7	38.9	37.6	35.3	31.6	31.2	30.9	42.7	797.7
65,0°	48.5	38.6	35.4	35.0	33.2	33.2	32.2	30.1	27.6	26.1	25.9	41.1	838.8
67,5°	40.0	33.3	30.7	28.8	28.4	27.4	25.8	22.4	19.4	17.8	17.3	38.7	877.5
70,0°	33.9	28.1	26.6	25.0	23.5	19.0	16.2	11.9	9.1	7.5	6.5	36.0	913.6
72,5°	26.8	22.8	22.0	19.8	14.7	10.1	6.8	4.3	3.5	3.1	3.2	33.2	946.7
75,0°	21.1	16.5	14.5	11.7	7.0	3.9	2.7	1.7	1.5	1.6	1.9	27.1	973.8
77,5°	13.6	9.9	6.4	3.8	2.2	1.3	1.2	0.7	0.6	0.8	1.1	17.1	991.0
80,0°	5.6	2.8	1.3	0.3	0.4	0.2	0.2	0.3	0.2	0.3	0.5	6.1	997.1
82,5°	0.8	0.2	0.1	0.0	0.0	0.0	0.0	0.1	0.0	0.1	0.1	2.2	999.3
85,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.6	999.9
87,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.1	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

## Photometric test report

<b>Family</b> Streetlight 31 mini toolless	<b>Order number: 5XH6D3AB08JA</b> <b>EAN: 4069025104199</b>	<b>LP number</b> <b>59078_607</b>
---	--	--------------------------------------

<b>Dimming levels table</b>	environmental temperature: 25°C	<b>siteco</b>
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W]
				start of lifetime	end of lifetime	average
100	254	254	12140	81.1	88.3	84.7
95	238	252	11517	75.8	82.3	79.0
90	223	249	10918	70.8	76.8	73.8
85	209	247	10340	66.2	71.9	69.1
80	194	244	9705	61.4	66.5	64.0
75	180	241	9098	56.8	61.6	59.2
70	167	239	8519	52.7	57.0	54.8
65	153	235	7884	48.3	52.2	50.2
60	140	232	7282	44.2	47.8	46.0
55	127	229	6667	40.1	43.3	41.7
50	115	225	6088	36.4	39.3	37.8
45	102	221	5451	32.4	34.9	33.6
40	90	216	4851	28.7	31.0	29.8
35	78	211	4243	25.1	27.0	26.0
30	66	205	3625	21.6	23.1	22.4
25	55	198	3052	18.4	19.7	19.0
20	43	189	2416	15.0	16.0	15.5
15	32	178	1826	11.8	12.6	12.2
10	21	163	1230	8.3	9.0	8.6
9	19	159	1121	7.5	8.1	7.8

<b>Dimming levels table</b>	environmental temperature: 5°C
-----------------------------	--------------------------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W]
				start of lifetime	end of lifetime	average
100	254	254	12530	82.1	89.4	85.8
95	239	252	11909	77.0	83.7	80.4
90	224	249	11273	72.0	78.2	75.1
85	210	247	10666	67.4	73.1	70.2
80	196	245	10044	62.8	68.1	65.4
75	182	242	9410	58.3	63.1	60.7
70	168	239	8762	53.7	58.2	56.0
65	155	236	8149	49.5	53.6	51.6
60	142	233	7528	45.4	49.1	47.2
55	129	229	6894	41.3	44.6	43.0
50	116	225	6250	37.2	40.2	38.7
45	104	221	5647	33.5	36.1	34.8
40	92	217	5034	29.7	32.1	30.9
35	79	211	4361	25.8	27.8	26.8
30	68	206	3783	22.5	24.1	23.3
25	56	199	3147	19.0	20.4	19.7
20	44	190	2502	15.5	16.6	16.0
15	33	179	1904	12.3	13.1	12.7
10	21	163	1244	8.5	9.1	8.8
9	19	159	1134	7.7	8.3	8.0

## Photometric test report

<b>Family</b> Streetlight 31 mini toolless	<b>Order number: 5XH6D3AB08JA</b> <b>EAN: 4069025104199</b>	<b>LP number</b> <b>59078_607</b>
---	--	--------------------------------------

<b>Dimming levels table</b>	environmental temperature: 15°C	<b>siteco</b>
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W]
				start of lifetime	end of lifetime	average
100	254	254	12350	81.6	88.8	85.2
95	239	252	11747	76.6	83.2	79.9
90	224	249	11128	71.6	77.7	74.6
85	209	247	10492	66.7	72.3	69.5
80	195	244	9885	62.0	67.3	64.6
75	181	242	9263	57.5	62.3	59.9
70	167	239	8627	53.0	57.4	55.2
65	154	236	8024	48.9	52.9	50.9
60	141	232	7411	44.8	48.4	46.6
55	128	229	6786	40.7	44.0	42.4
50	116	225	6200	36.9	39.9	38.4
45	103	221	5554	32.9	35.6	34.2
40	91	216	4947	29.2	31.5	30.4
35	79	211	4332	25.6	27.6	26.6
30	67	205	3707	22.0	23.6	22.8
25	55	198	3076	18.5	19.9	19.2
20	44	190	2488	15.4	16.4	15.9
15	32	178	1839	11.9	12.7	12.3
10	21	163	1238	8.4	9.1	8.8
9	19	159	1128	7.6	8.2	7.9

**Photometric test report**

<b>Family</b> Streetlight 31 mini toolless	<b>Order number: 5XH6D3AB08JA</b> <b>EAN: 4069025104199</b>	<b>LP number</b> <b>59078_607</b>
---	--	--------------------------------------

<b>Luminousfluxs table</b>	<b>sITeco</b>
----------------------------	---------------

Temperature °C	Luminous flux lm	Power consumption W
25.0	12140.0	81.1
5.0	12530.0	82.1
15.0	12350.0	81.6