
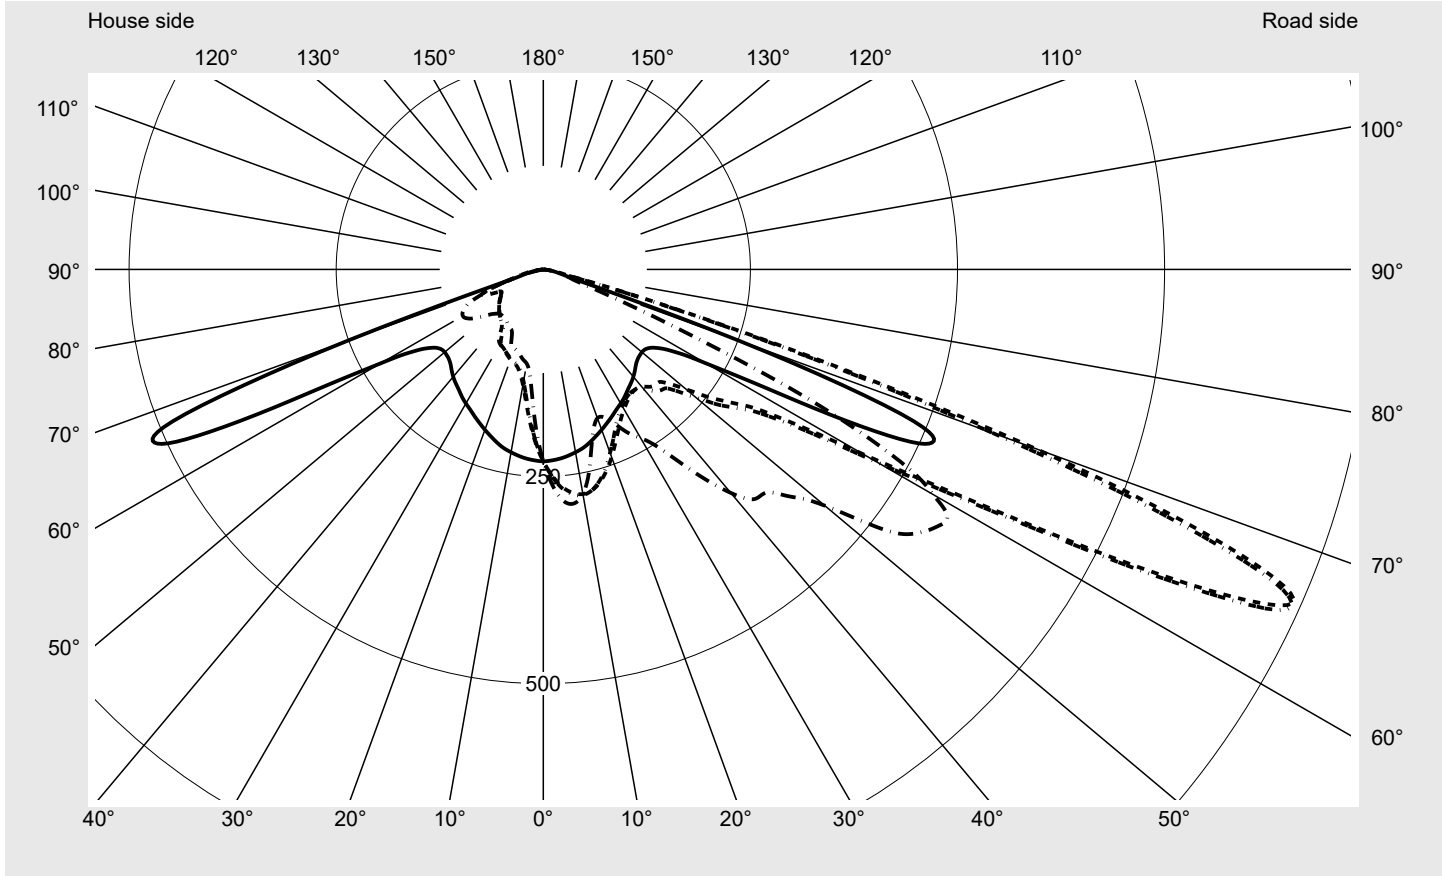


Photometric test report

Family Streetlight 31 mini toolless	Order number: 5XH6H31T08HA EAN: 4069025104458	LP number 59066_1647
	Version post-top or side-entry mounting, Smart Interface up/down Optic asymmetric distribution (PL52) Cover toughened safety glass Lamps LED 3000 K CRI ≥ 70 Controlgear ECG SITECO - Smart Interface Rated values Net luminous flux = 9070 lm Power consumption = 68.2 W Luminous efficacy = 133 lm/W	serial documentation 11.04.2024



Luminous intensity in cd/klm C180-0 C215-35 C217,5-37,5 C270-90 **Imax: 990 cd/klm**




Luminaire output ratios	
Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%
Measurement conditions	
DIN EN 13032 and DIN 5032	

Luminous intensity class acc. to EN13201-2	
Class:	G3
Imax 70°	685.4
Imax 80°	32.5
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0

Photometric test report

Family Streetlight 31 mini toolless	Order number: 5XH6H31T08HA EAN: 4069025104458	LP number 59066_1647
---	--	--------------------------------

Envelope curve in cd/klm **KMK 66°** **KMK 65°** **KMK 64°** **KMK 63°** **siteco**

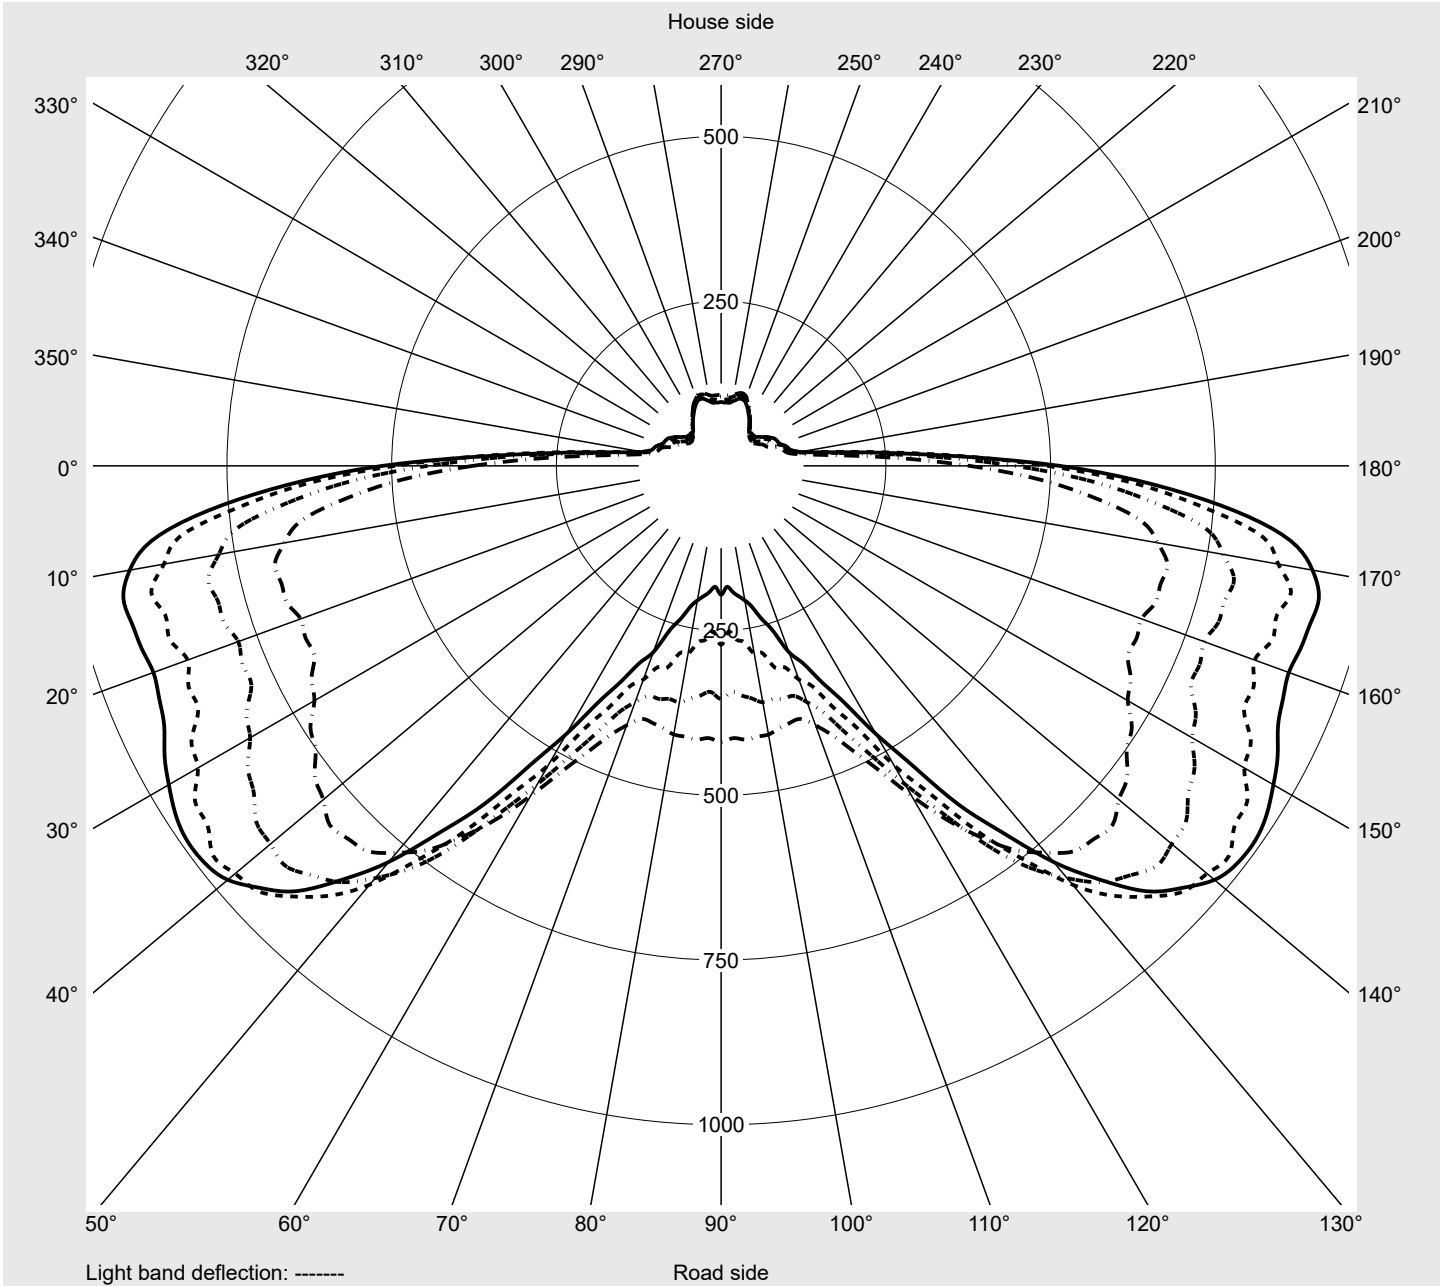

Photometric test report

Family Streetlight 31 mini toolless	Order number: 5XH6H31T08HA EAN: 4069025104458	LP number 59066_1647
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	0,0° 180,0°	2,5° 177,5°	5,0° 175,0°	7,5° 172,5°	10,0° 170,0°	12,5° 167,5°	15,0° 165,0°	17,5° 162,5°	20,0° 160,0°	22,5° 157,5°	25,0° 155,0°	27,5° 152,5°	30,0° 150,0°	32,5° 147,5°	35,0° 145,0°
γ	Luminous intensity in cd/klm														
0,0°	231.6	231.6	231.6	231.6	231.6	231.6	231.6	231.6	231.6	231.6	231.6	231.6	231.6	231.6	231.6
2,5°	230.8	232.1	233.5	235.0	236.4	238.0	239.2	240.8	242.2	243.7	244.7	246.0	247.0	248.4	249.3
5,0°	229.3	232.1	235.0	237.8	240.5	243.5	246.0	248.8	251.2	253.8	255.7	258.0	259.7	261.9	263.5
7,5°	227.0	231.2	235.4	239.5	243.3	247.2	250.8	254.3	257.4	260.6	263.2	265.8	268.0	270.2	272.1
10,0°	224.1	229.7	235.1	240.2	244.8	249.6	253.9	257.8	261.5	264.7	267.4	269.7	272.0	273.9	275.3
12,5°	220.8	227.4	233.9	239.8	245.2	250.5	255.1	259.2	262.7	265.7	268.2	270.0	271.5	272.2	272.9
15,0°	216.3	223.7	231.1	237.8	243.7	249.2	254.1	258.2	261.5	263.8	265.7	266.4	266.8	266.1	265.4
17,5°	211.1	219.7	227.9	235.1	241.3	247.0	251.9	255.6	258.4	259.9	260.5	260.0	258.9	256.8	254.3
20,0°	206.0	215.3	224.3	232.1	238.6	244.3	249.2	252.2	254.3	254.4	254.0	251.4	249.2	244.8	241.1
22,5°	200.8	211.2	221.0	229.4	236.2	241.9	246.2	248.6	249.4	248.2	246.1	242.2	237.9	232.5	227.1
25,0°	195.8	207.2	218.1	226.9	234.0	239.6	243.3	244.7	244.4	241.7	238.3	232.4	227.1	220.2	214.2
27,5°	190.9	203.6	215.3	225.0	232.4	237.9	240.9	241.5	239.8	235.9	230.6	223.8	216.8	209.7	203.2
30,0°	186.8	200.6	213.2	223.7	231.5	237.0	239.4	238.8	235.9	230.4	223.9	216.1	208.4	201.0	194.9
32,5°	182.5	197.3	211.0	222.2	230.5	235.8	237.5	236.0	232.1	225.4	217.9	209.1	201.4	194.1	188.7
35,0°	177.6	193.9	208.6	220.8	229.5	234.6	235.6	233.2	228.2	220.8	212.4	203.4	195.6	189.1	184.4
37,5°	173.5	191.2	207.1	220.1	228.6	233.4	234.1	231.1	225.0	216.7	207.7	198.7	191.0	185.4	182.5
40,0°	169.1	188.4	205.3	218.3	227.6	232.7	233.2	229.4	222.7	214.0	204.7	196.0	189.0	185.2	184.7
42,5°	164.0	184.7	202.5	217.7	227.6	233.1	233.4	229.1	221.7	212.6	203.4	195.4	190.3	189.1	192.0
45,0°	159.1	180.8	200.1	216.8	227.3	232.5	231.9	226.5	218.1	208.1	198.9	191.2	187.9	188.7	194.7
46,0°	157.8	179.9	200.1	217.5	228.1	233.2	232.3	226.3	217.0	206.6	197.0	189.7	186.7	188.6	195.5
47,0°	156.7	179.5	200.9	218.9	230.0	235.2	233.9	227.5	217.7	206.9	197.3	190.6	188.6	192.0	200.3
48,0°	156.1	179.8	202.1	221.0	232.4	237.9	236.5	229.8	219.7	209.2	199.4	193.6	192.4	197.4	207.1
49,0°	155.6	180.5	204.0	224.2	235.9	242.0	239.9	233.7	223.2	212.9	202.9	198.6	198.0	205.1	215.2
50,0°	155.4	181.5	206.6	227.9	240.4	246.6	244.9	238.4	227.9	217.4	208.6	204.7	205.9	213.5	225.4
51,0°	155.6	183.4	210.0	232.5	245.5	252.1	250.6	244.1	233.8	223.6	215.5	212.7	215.0	223.6	236.0
52,0°	156.5	186.4	214.6	238.5	252.7	259.8	258.3	251.4	241.1	231.7	224.6	222.9	226.3	235.7	248.7
53,0°	158.2	190.2	220.0	245.5	260.8	268.3	266.7	259.9	249.5	240.4	233.8	233.0	237.2	247.0	259.7
54,0°	160.8	195.0	227.2	254.3	270.6	278.7	276.8	269.9	259.3	250.3	244.2	244.0	248.1	257.9	270.2
55,0°	165.0	202.0	236.7	266.3	283.7	292.2	290.2	283.0	272.0	262.5	256.4	256.1	260.8	270.5	281.8
56,0°	170.4	210.7	248.2	280.4	298.7	307.9	305.3	298.2	286.1	276.2	269.4	269.7	273.9	283.6	294.0
57,0°	177.7	223.0	262.3	299.8	316.8	329.5	324.0	318.7	302.6	295.2	285.9	289.1	290.8	303.2	311.4
58,0°	188.5	238.1	282.9	322.2	342.1	354.2	349.7	342.4	327.5	318.8	311.1	314.1	318.0	331.0	340.5
59,0°	202.8	259.2	308.4	353.4	373.8	388.0	382.3	376.1	359.5	353.2	345.2	351.7	355.6	371.7	381.9
60,0°	226.7	292.6	348.5	400.9	422.6	439.3	432.7	428.0	410.5	408.2	401.1	412.1	417.2	437.5	446.9
61,0°	258.9	337.3	402.8	461.1	485.1	504.4	496.9	495.0	478.9	479.9	474.0	489.2	495.1	517.8	526.5
62,0°	305.9	397.9	474.0	538.2	566.1	585.7	580.0	579.3	566.8	569.4	566.9	583.1	592.2	615.2	626.6
63,0°	376.8	485.7	572.4	643.8	673.0	693.9	690.7	691.1	679.0	682.7	681.2	701.0	712.7	739.1	751.5
64,0°	445.5	568.1	665.1	744.5	774.1	797.4	790.9	791.3	779.9	786.4	786.6	812.3	825.4	852.0	865.8
65,0°	495.0	632.1	738.6	829.7	858.7	886.0	873.6	877.2	861.5	875.0	875.6	906.4	916.8	946.9	951.5
66,0°	513.8	658.5	782.3	871.9	911.4	929.3	925.7	922.2	917.0	923.1	932.7	952.3	967.9	982.2	990.2
67,0°	508.5	661.1	795.9	889.2	934.5	951.1	947.5	940.1	933.8	932.2	938.8	945.2	958.1	960.7	964.9
68,0°	466.0	617.4	764.5	863.0	925.7	939.0	938.7	922.0	913.7	896.4	897.6	890.7	899.1	886.6	886.2
69,0°	371.7	497.6	641.9	733.7	818.0	835.7	853.6	833.8	831.3	805.0	808.8	792.2	799.4	776.0	771.5
70,0°	249.4	329.2	462.6	512.5	616.1	619.2	684.6	658.9	685.4	649.9	668.6	640.4	659.0	623.9	631.0
71,0°	120.6	165.3	231.1	264.3	329.8	356.3	414.7	435.7	481.5	475.9	492.1	480.1	491.4	471.4	468.5
72,0°	57.4	71.1	94.1	106.4	137.1	155.7	195.8	224.8	285.6	304.7	329.0	324.3	338.2	325.6	326.9

Photometric test report

Family Streetlight 31 mini toolless	Order number: 5XH6H31T08HA EAN: 4069025104458	LP number 59066_1647
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	37,5° 142,5°	40,0° 140,0°	42,5° 137,5°	45,0° 135,0°	47,5° 132,5°	50,0° 130,0°	52,5° 127,5°	55,0° 125,0°	57,5° 122,5°	60,0° 120,0°	62,5° 117,5°	65,0° 115,0°	67,5° 112,5°	70,0° 110,0°	72,5° 107,5°
γ	Luminous intensity in cd/klm														
0,0°	231.6	231.6	231.6	231.6	231.6	231.6	231.6	231.6	231.6	231.6	231.6	231.6	231.6	231.6	231.6
2,5°	250.6	251.2	252.4	253.0	254.3	254.8	255.7	256.1	257.0	257.4	258.3	258.7	259.6	259.8	260.5
5,0°	265.5	266.7	268.4	269.4	271.0	271.9	273.4	273.9	275.2	275.7	277.0	277.3	278.4	278.6	279.4
7,5°	273.9	275.4	276.8	277.9	279.1	280.0	280.8	281.5	282.1	282.5	283.0	283.5	283.7	284.0	284.2
10,0°	276.5	277.5	278.1	278.5	278.5	278.7	278.5	278.5	277.9	277.8	277.1	277.1	276.5	276.5	275.8
12,5°	272.7	272.7	271.5	271.0	269.2	268.5	266.3	265.5	262.9	262.2	259.5	259.0	256.6	256.4	254.1
15,0°	263.6	262.1	259.2	257.0	253.5	250.9	247.5	245.1	241.5	239.2	235.9	234.3	231.3	230.0	227.6
17,5°	250.9	247.5	243.2	239.5	235.1	231.3	227.1	223.6	219.8	216.9	213.7	211.6	209.1	207.4	205.7
20,0°	235.6	231.8	225.5	221.6	215.9	212.5	207.7	205.2	201.3	199.5	196.7	195.5	193.5	193.1	191.7
22,5°	221.1	215.7	209.8	205.4	200.9	197.8	194.8	192.9	191.1	190.2	189.4	189.2	189.2	189.4	189.8
25,0°	207.5	202.8	197.5	194.4	191.1	189.7	188.6	188.6	189.4	190.0	191.6	192.5	194.4	195.2	197.3
27,5°	197.7	193.5	190.0	188.3	187.7	188.4	190.0	192.4	195.5	198.5	201.5	203.9	206.2	207.7	209.5
30,0°	190.2	187.3	185.7	186.1	188.0	191.3	195.8	200.9	206.5	211.1	215.5	217.9	220.1	221.0	222.6
32,5°	185.1	183.8	184.2	186.7	191.2	197.3	204.6	211.8	219.6	225.3	230.7	233.3	235.9	236.5	238.9
35,0°	182.5	182.9	185.7	190.5	197.4	205.9	215.5	224.8	234.4	242.3	249.2	253.7	257.2	259.8	263.6
37,5°	182.7	185.8	191.6	199.1	209.1	220.7	233.2	245.6	258.3	268.5	277.7	283.9	289.9	294.3	299.7
40,0°	187.9	194.3	203.9	215.0	229.1	243.5	259.2	274.0	289.7	301.3	312.2	318.8	325.4	328.9	334.1
42,5°	199.3	210.1	224.3	239.2	256.1	273.1	289.7	304.7	319.3	330.8	340.2	346.9	351.7	354.8	358.5
45,0°	204.5	217.9	233.2	249.0	265.0	280.5	294.0	306.4	317.4	327.0	334.8	340.6	344.7	348.4	352.6
46,0°	206.5	220.9	237.3	253.7	269.6	284.3	296.6	307.8	317.5	325.9	333.1	338.9	343.3	347.8	353.1
47,0°	212.7	228.1	245.0	261.0	276.5	289.8	301.0	310.7	319.2	326.6	334.2	340.8	346.4	352.1	358.9
48,0°	220.9	236.3	253.2	268.7	283.5	295.6	305.5	313.6	321.4	328.4	336.6	344.1	351.5	358.4	366.8
49,0°	230.7	245.4	262.5	276.7	290.9	301.0	310.1	316.8	324.1	330.9	339.9	348.5	358.2	365.9	376.3
50,0°	240.7	256.0	271.5	285.4	297.9	307.1	314.6	320.4	327.1	334.5	344.0	354.1	364.5	374.0	385.5
51,0°	251.4	266.4	281.1	293.5	304.7	312.7	318.9	324.1	330.5	338.5	348.6	359.7	371.7	383.2	397.5
52,0°	263.7	277.7	290.8	301.8	311.4	318.2	323.3	328.0	334.7	343.1	354.5	367.8	383.9	399.7	418.6
53,0°	273.9	286.9	298.6	308.1	316.2	322.1	326.7	331.5	338.9	349.1	364.7	382.0	402.7	421.5	442.5
54,0°	283.5	295.3	306.0	314.2	320.6	325.7	330.5	336.3	347.4	362.2	382.9	403.3	427.0	448.0	468.4
55,0°	293.9	304.3	313.9	320.8	327.0	332.2	339.4	350.0	367.8	386.9	411.5	433.6	455.3	472.0	486.9
56,0°	305.8	315.2	324.4	330.5	338.2	345.8	359.1	374.9	398.3	418.2	442.5	458.6	472.7	484.1	495.5
57,0°	326.3	332.2	344.5	348.0	361.4	371.7	397.0	411.3	439.6	451.4	468.8	475.4	484.0	490.3	499.6
58,0°	355.1	362.7	375.0	381.7	400.5	418.3	444.6	461.3	478.0	482.6	488.9	489.6	490.8	493.8	501.5
59,0°	399.4	405.6	421.8	431.9	458.5	477.3	502.4	507.9	514.5	509.9	507.2	500.1	495.8	495.0	499.9
60,0°	466.4	472.7	495.5	509.7	542.1	553.6	566.0	559.6	554.3	538.4	524.6	508.9	496.8	490.4	488.2
61,0°	548.8	556.9	585.1	600.9	627.0	625.8	625.2	606.8	588.1	560.5	536.1	511.6	489.7	475.0	464.7
62,0°	648.8	661.9	690.0	699.6	708.4	696.2	680.6	650.3	616.5	577.3	539.0	501.5	470.3	452.2	441.2
63,0°	776.9	788.2	806.0	800.6	793.3	766.4	735.4	688.6	636.5	578.4	522.3	479.1	443.2	419.1	402.8
64,0°	888.9	892.8	897.9	878.6	856.9	816.8	768.4	702.3	624.6	557.9	497.0	447.2	404.8	381.9	366.0
65,0°	971.8	962.7	954.7	924.1	885.4	829.8	752.1	676.0	590.1	524.8	450.2	405.9	362.2	345.2	320.4
66,0°	988.9	977.5	948.3	913.1	852.2	784.8	701.4	626.6	537.4	470.0	405.4	362.7	324.0	301.0	263.1
67,0°	949.7	932.5	888.7	849.7	775.5	711.3	627.4	556.9	475.6	420.4	360.1	318.1	277.7	257.2	212.6
68,0°	855.2	831.2	772.5	730.8	655.3	598.9	524.2	472.3	406.6	355.2	298.2	265.8	236.2	218.4	168.6
69,0°	731.2	703.7	643.1	604.5	535.5	491.5	437.0	393.4	330.4	293.0	253.4	228.5	201.7	185.0	134.8
70,0°	577.9	565.0	499.2	476.7	415.0	393.7	332.9	307.3	263.9	243.4	207.5	190.7	164.7	152.0	105.1
71,0°	434.8	414.3	373.8	351.6	310.3	282.6	253.4	237.7	210.9	192.0	167.9	152.1	133.3	121.0	84.2
72,0°	303.8	292.7	265.7	246.0	214.4	207.7	189.9	180.5	162.0	149.7	132.0	120.1	105.5	96.4	69.2

Photometric test report

Family Streetlight 31 mini toolless	Order number: 5XH6H31T08HA EAN: 4069025104458	LP number 59066_1647
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	75,0° 105,0°	77,5° 102,5°	80,0° 100,0°	82,5° 97,5°	85,0° 95,0°	87,5° 92,5°	90,0°	182,5° 357,5°	185,0° 355,0°	187,5° 352,5°	190,0° 350,0°	192,5° 347,5°	195,0° 345,0°	197,5° 342,5°	200,0° 340,0°
γ	Luminous intensity in cd/klm														
0,0°	231.6	231.6	231.6	231.6	231.6	231.6	231.6	231.6	231.6	231.6	231.6	231.6	231.6	231.6	231.6
2,5°	260.4	260.9	260.8	261.4	261.2	261.6	261.3	229.1	227.6	225.9	224.4	222.7	221.6	219.9	218.8
5,0°	279.4	280.0	280.0	280.6	280.5	281.0	280.5	225.9	222.7	219.1	216.1	212.4	209.6	205.9	203.2
7,5°	284.2	284.2	284.5	284.5	284.7	284.7	284.9	221.9	216.9	211.7	206.8	201.5	196.9	191.7	187.1
10,0°	275.8	275.1	275.4	274.9	275.4	274.9	275.3	217.6	211.1	204.2	197.7	190.9	184.8	178.2	172.3
12,5°	254.3	252.3	253.2	251.7	253.1	251.8	253.1	212.7	204.8	196.5	188.9	180.5	173.5	165.6	159.3
15,0°	227.1	225.2	225.0	223.7	224.2	223.3	224.0	206.7	197.4	188.0	179.0	169.8	162.0	153.9	147.0
17,5°	204.7	203.5	203.0	202.2	202.2	201.8	202.0	200.6	190.0	179.6	169.5	159.8	151.4	143.4	136.9
20,0°	191.7	191.0	191.2	190.6	191.0	190.7	191.1	193.9	182.7	170.6	160.5	149.8	141.9	134.0	128.7
22,5°	190.2	191.0	191.7	192.5	193.0	193.5	193.6	187.7	175.0	162.5	151.4	141.0	133.0	126.4	121.7
25,0°	198.2	200.7	201.9	204.3	204.9	206.9	206.2	181.4	167.9	154.6	143.4	133.2	126.1	120.0	116.6
27,5°	211.3	214.1	217.1	219.8	221.7	222.7	222.7	175.7	161.0	147.6	136.1	126.7	120.0	115.4	112.9
30,0°	224.3	227.9	232.0	235.6	236.6	235.9	235.1	170.3	154.9	141.0	129.6	120.7	114.9	111.3	109.6
32,5°	240.8	246.6	251.4	255.8	254.7	253.5	252.0	164.7	148.5	134.3	123.3	115.0	110.3	107.5	106.2
35,0°	268.7	276.4	281.5	283.5	282.0	281.5	281.2	158.8	141.7	127.7	117.1	110.0	106.1	104.1	103.1
37,5°	304.7	311.0	314.1	315.7	315.8	317.2	317.5	153.0	135.2	121.2	111.2	105.0	102.3	100.8	100.0
40,0°	337.5	343.5	346.4	349.2	349.3	351.9	352.2	147.2	128.9	114.9	105.8	100.6	98.7	97.6	97.0
42,5°	362.4	367.0	370.2	372.4	373.5	375.5	376.2	140.9	122.3	108.9	100.8	96.8	95.4	94.4	93.6
45,0°	358.7	364.3	369.8	373.7	376.8	380.1	381.0	135.0	115.9	103.1	96.1	93.3	92.2	91.3	90.5
46,0°	360.7	368.3	375.1	380.1	383.5	387.2	388.4	133.0	113.9	101.2	94.6	92.0	91.1	90.0	89.3
47,0°	367.5	377.2	385.0	391.0	395.0	399.0	400.4	131.3	111.8	99.2	93.1	90.7	89.6	88.7	88.0
48,0°	375.6	387.1	395.5	402.4	406.0	410.7	411.8	129.8	110.0	97.6	91.9	89.5	88.6	87.5	86.9
49,0°	384.8	397.9	406.2	414.8	418.0	424.4	424.5	128.3	108.4	96.0	90.6	88.2	87.5	86.4	85.7
50,0°	396.0	410.0	420.8	430.9	436.2	442.8	443.7	127.4	106.8	94.6	89.3	87.2	86.4	85.4	84.6
51,0°	411.8	428.8	442.2	454.1	461.0	467.8	469.2	126.7	105.6	93.4	88.2	86.2	85.4	84.4	83.6
52,0°	435.8	454.7	468.9	482.4	489.8	498.2	499.3	126.4	104.5	92.2	87.3	85.4	84.6	83.6	82.4
53,0°	461.4	482.3	496.6	509.6	517.3	524.9	526.7	126.5	103.7	91.4	86.4	84.7	83.7	83.0	81.2
54,0°	486.3	504.2	516.5	527.8	535.2	541.5	543.7	127.4	103.5	90.7	85.9	84.1	83.1	82.4	79.9
55,0°	502.0	517.7	528.8	538.1	545.5	551.4	553.9	128.9	103.6	90.2	85.3	83.5	82.5	81.7	78.4
56,0°	509.0	524.3	535.7	545.5	553.6	559.9	562.2	131.6	104.4	90.1	85.0	83.0	82.2	81.4	76.7
57,0°	513.0	530.3	542.0	552.3	560.1	566.9	568.6	135.6	106.0	90.7	85.1	83.0	82.1	81.0	75.1
58,0°	516.1	532.7	545.9	556.0	564.9	570.9	573.3	141.7	109.0	92.0	85.5	83.4	82.3	81.1	73.4
59,0°	513.9	528.3	541.3	549.1	558.4	562.3	566.7	150.7	113.6	94.1	86.6	84.0	82.9	81.4	72.4
60,0°	498.1	506.1	517.8	523.8	534.2	538.2	543.3	166.2	121.4	98.4	88.8	85.7	84.6	82.5	72.4
61,0°	471.3	480.1	492.8	500.0	510.2	512.5	518.2	187.6	133.2	104.9	92.4	88.3	86.8	84.4	73.8
62,0°	444.4	449.1	458.1	462.5	469.4	469.7	475.2	219.1	151.6	114.8	98.2	92.8	90.7	87.5	77.2
63,0°	403.7	407.6	414.0	414.7	417.1	413.7	419.1	270.0	182.5	132.1	107.6	99.9	96.7	92.7	82.9
64,0°	366.1	362.5	364.3	356.0	349.6	343.7	353.8	321.3	216.4	151.0	117.3	106.4	102.2	97.8	88.9
65,0°	317.4	291.4	289.3	270.1	264.4	252.1	271.8	355.7	238.4	162.6	123.2	109.7	105.4	101.0	93.7
66,0°	241.7	220.2	207.4	199.1	191.1	184.2	195.6	348.6	231.5	157.6	121.4	108.9	105.4	101.7	96.3
67,0°	175.0	157.4	148.3	141.7	137.2	131.1	138.8	316.8	193.3	134.1	110.9	102.8	101.1	98.3	95.2
68,0°	117.8	104.2	99.6	95.9	93.4	89.4	95.1	258.3	142.7	99.1	89.6	86.6	89.3	87.2	87.0
69,0°	82.1	70.5	67.8	64.9	63.7	62.0	65.3	185.3	97.0	71.2	68.1	67.2	71.2	71.7	73.1
70,0°	58.7	49.5	49.0	46.5	46.8	44.7	48.0	111.0	62.7	49.7	50.0	48.0	52.3	52.4	56.6
71,0°	45.2	40.1	39.7	39.0	38.8	38.4	38.6	60.9	42.5	38.9	38.8	38.7	39.9	40.3	42.3
72,0°	40.2	36.8	36.7	35.7	35.4	34.9	35.2	39.6	35.4	33.9	34.1	34.4	35.0	34.9	35.7

Photometric test report

Family Streetlight 31 mini toolless	Order number: 5XH6H31T08HA EAN: 4069025104458	LP number 59066_1647
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	202,5° 337,5°	205,0° 335,0°	207,5° 332,5°	210,0° 330,0°	212,5° 327,5°	215,0° 325,0°	217,5° 322,5°	220,0° 320,0°	222,5° 317,5°	225,0° 315,0°	227,5° 312,5°	230,0° 310,0°	232,5° 307,5°	235,0° 305,0°	237,5° 302,5°
γ	Luminous intensity in cd/klm														
0,0°	231.6	231.6	231.6	231.6	231.6	231.6	231.6	231.6	231.6	231.6	231.6	231.6	231.6	231.6	231.6
2,5°	216.9	215.6	213.9	212.7	211.1	210.0	208.2	207.3	205.6	204.8	203.2	202.6	201.1	200.6	199.2
5,0°	199.3	196.5	192.8	190.4	186.8	184.7	181.1	179.2	176.0	174.3	171.1	169.9	167.1	165.9	163.4
7,5°	182.0	177.4	172.5	168.6	164.1	160.5	156.4	153.4	149.9	147.3	144.2	142.3	139.5	138.1	135.8
10,0°	165.9	160.5	154.8	150.1	145.3	141.4	137.3	134.5	131.1	128.9	126.3	124.6	122.8	121.6	120.0
12,5°	152.1	146.7	140.8	136.6	132.2	129.1	125.7	123.6	121.2	119.7	118.1	117.3	116.2	115.7	114.9
15,0°	140.4	135.2	130.6	127.1	123.8	121.6	119.7	118.5	117.5	116.7	115.8	114.9	114.1	113.3	112.5
17,5°	131.4	127.0	123.6	121.2	119.5	118.4	117.4	116.6	115.6	114.7	113.6	112.7	111.7	110.7	109.8
20,0°	123.7	120.9	118.4	117.4	116.5	115.8	114.7	113.9	112.8	112.1	110.9	110.2	109.2	108.4	107.5
22,5°	118.1	116.4	115.2	114.3	113.3	112.5	111.6	110.8	110.0	109.3	108.4	107.8	107.1	106.5	105.8
25,0°	114.4	113.2	112.0	111.3	110.1	109.4	108.6	108.0	107.1	106.8	106.2	105.8	105.2	104.9	104.2
27,5°	111.3	110.3	109.3	108.3	107.4	106.5	105.9	105.2	104.1	103.2	102.2	101.1	99.8	97.6	93.5
30,0°	108.2	107.5	106.3	105.5	104.8	104.2	102.6	99.3	96.3	94.4	92.4	90.9	88.8	87.0	86.2
32,5°	105.1	104.4	103.5	102.8	101.7	99.5	92.6	88.5	86.7	86.2	85.5	85.3	85.1	85.3	85.3
35,0°	102.2	101.2	99.9	98.0	95.0	88.5	84.3	84.0	83.7	83.7	83.8	84.0	84.1	83.8	83.3
37,5°	99.1	96.1	91.9	88.5	84.8	82.2	81.9	82.0	82.1	82.2	82.2	81.9	81.5	81.2	80.9
40,0°	95.6	87.2	82.1	80.5	79.7	79.7	79.8	80.2	80.3	80.1	79.7	79.5	79.1	78.9	78.5
42,5°	90.5	79.2	77.1	77.0	76.9	77.3	77.6	77.8	77.7	77.7	77.5	77.5	77.3	77.2	77.1
45,0°	85.6	74.9	74.0	74.0	74.3	74.7	75.0	75.3	75.4	75.7	75.9	76.0	76.0	76.0	76.2
46,0°	83.7	73.6	72.8	73.0	73.3	73.7	73.9	74.4	74.6	75.0	75.3	75.6	75.7	75.7	76.0
47,0°	81.8	72.1	71.7	71.9	72.1	72.5	72.8	73.3	73.7	74.3	74.6	75.0	75.2	75.6	75.8
48,0°	79.9	70.8	70.5	70.8	71.0	71.4	71.9	72.4	73.0	73.6	74.1	74.6	75.0	75.3	75.9
49,0°	77.8	69.7	69.4	69.8	69.8	70.5	70.7	71.4	72.0	72.8	73.4	74.1	74.7	75.3	75.9
50,0°	75.8	68.2	68.2	68.6	68.6	69.3	69.5	70.4	71.1	71.9	72.7	73.6	74.4	75.1	75.9
51,0°	73.8	66.9	67.1	67.4	67.5	68.1	68.6	69.4	70.2	71.2	72.1	73.1	73.9	75.0	76.0
52,0°	71.7	65.6	65.9	66.2	66.3	66.8	67.5	68.4	69.2	70.2	71.3	72.5	73.7	74.7	76.2
53,0°	69.7	64.5	64.7	65.0	65.2	65.8	66.5	67.4	68.4	69.5	70.6	71.9	73.4	74.7	76.4
54,0°	67.8	63.4	63.5	63.7	64.0	64.7	65.5	66.5	67.5	68.7	70.0	71.4	73.2	74.9	76.9
55,0°	65.8	62.1	62.2	62.4	62.7	63.5	64.2	65.3	66.5	67.8	69.2	71.0	73.0	75.0	77.3
56,0°	63.9	60.9	60.9	61.1	61.5	62.3	63.1	64.3	65.5	67.1	68.6	70.5	72.8	75.3	78.2
57,0°	62.0	59.8	59.6	60.0	60.3	61.3	61.8	63.3	64.3	66.1	67.9	70.1	72.6	75.4	78.9
58,0°	60.8	58.8	58.5	58.7	59.1	60.0	60.8	62.1	63.5	65.3	67.3	69.8	72.5	75.9	79.7
59,0°	60.1	58.3	57.8	57.6	57.9	58.7	59.6	61.0	62.6	64.3	66.6	69.3	72.5	76.2	80.4
60,0°	60.7	58.9	57.8	57.1	57.1	57.6	58.4	59.8	61.4	63.5	65.9	68.9	72.4	76.5	81.2
61,0°	63.4	61.1	59.5	57.7	57.0	57.0	57.5	58.7	60.3	62.6	65.3	68.5	72.3	76.6	81.6
62,0°	68.4	65.8	63.3	60.3	58.5	57.2	57.1	57.9	59.5	61.7	64.6	68.0	72.0	76.6	81.8
63,0°	75.8	73.2	70.4	65.9	62.8	59.6	58.3	57.8	59.0	60.9	63.7	67.5	71.7	76.5	82.0
64,0°	83.7	81.1	78.3	73.2	69.2	64.2	61.4	59.5	59.7	60.9	63.3	66.8	71.2	76.2	81.5
65,0°	90.3	88.1	86.0	80.4	76.5	70.1	66.8	63.0	62.7	62.6	64.2	66.3	70.5	75.6	80.8
66,0°	93.8	92.5	90.3	86.0	81.7	76.2	72.3	68.6	67.8	67.2	67.5	66.8	69.7	74.5	79.6
67,0°	93.7	93.4	91.5	88.1	84.0	79.2	76.0	73.6	73.6	73.8	73.9	69.4	69.4	73.2	78.0
68,0°	86.4	88.2	87.5	86.2	82.7	79.6	77.3	76.9	79.8	82.3	83.4	75.7	70.4	71.5	75.7
69,0°	73.6	76.6	77.2	78.6	76.4	75.6	74.9	77.8	84.4	89.9	91.4	82.7	73.1	70.4	73.0
70,0°	56.5	61.7	62.4	66.5	65.0	67.1	67.6	74.9	85.5	94.5	94.6	86.4	76.3	69.7	69.5
71,0°	43.3	46.4	48.7	52.5	53.6	55.7	57.8	66.7	80.5	91.6	90.7	83.8	75.0	68.7	65.8
72,0°	36.3	38.0	39.6	42.3	43.9	45.8	47.4	55.3	68.1	79.7	80.4	76.2	69.1	64.5	61.1

Photometric test report

Family Streetlight 31 mini toolless	Order number: 5XH6H31T08HA EAN: 4069025104458	LP number 59066_1647
Table of values for luminous intensities		Maximum luminous intensity
		sitEco

C-planes	240,0° 300,0°	242,5° 297,5°	245,0° 295,0°	247,5° 292,5°	250,0° 290,0°	252,5° 287,5°	255,0° 285,0°	257,5° 282,5°	260,0° 280,0°	262,5° 277,5°	265,0° 275,0°	267,5° 272,5°	270,0°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm													Luminous flux in lm/klm	
0,0°	231.6	231.6	231.6	231.6	231.6	231.6	231.6	231.6	231.6	231.6	231.6	231.6	231.6	0.3	0.3
2,5°	199.0	197.7	197.6	196.3	196.2	195.2	195.4	194.4	194.6	193.9	194.4	193.7	194.2	2.7	3.1
5,0°	162.6	160.2	159.8	157.6	157.4	155.7	155.7	154.3	154.3	153.4	153.9	152.8	153.7	5.3	8.4
7,5°	134.6	132.8	132.0	130.5	129.8	128.7	128.4	127.4	127.4	126.7	126.8	126.3	126.5	7.7	16.1
10,0°	119.2	118.1	117.7	116.8	116.6	116.1	115.9	115.7	115.5	115.3	115.3	115.2	115.4	9.8	25.9
12,5°	114.6	113.9	113.6	113.1	112.9	112.4	112.3	111.9	111.9	111.6	111.7	111.5	111.6	11.7	37.6
15,0°	111.8	110.9	110.3	109.5	109.3	108.7	108.4	107.9	107.7	107.5	107.4	107.3	107.4	13.3	50.9
17,5°	108.9	108.0	107.3	106.5	106.0	105.5	105.1	104.7	104.5	104.3	104.2	103.9	103.9	14.7	65.6
20,0°	106.8	105.8	105.1	104.4	103.9	103.4	103.1	102.6	102.5	102.2	102.1	101.9	101.9	16.0	81.5
22,5°	105.1	104.5	103.9	103.0	102.1	101.3	100.9	100.6	100.7	100.6	100.8	100.6	100.8	17.3	98.8
25,0°	103.1	99.7	96.7	92.5	91.6	90.1	90.5	89.5	90.2	89.3	90.1	89.2	90.1	18.6	117.5
27,5°	89.9	87.4	86.2	85.4	84.8	84.3	83.8	83.5	83.3	83.0	82.8	82.8	82.8	20.1	137.6
30,0°	85.9	85.5	85.4	84.9	84.6	84.1	83.5	83.0	82.5	82.2	81.8	81.6	81.6	21.7	159.3
32,5°	85.2	84.7	84.1	83.3	82.5	81.8	81.3	80.5	80.3	79.8	79.7	79.4	79.4	23.4	182.7
35,0°	82.8	82.3	81.8	81.1	80.4	79.6	79.0	78.4	77.9	77.6	77.2	77.0	76.9	25.4	208.1
37,5°	80.6	80.0	79.6	79.1	78.6	78.0	77.6	77.0	76.7	76.2	75.9	75.6	75.4	27.8	235.9
40,0°	78.4	78.3	78.0	77.6	77.3	77.1	76.9	76.5	76.0	75.6	75.2	74.7	74.7	30.5	266.3
42,5°	77.0	76.9	76.9	76.8	76.9	76.9	76.9	76.8	76.4	75.9	75.3	74.7	74.6	33.2	299.5
45,0°	76.4	76.6	76.9	77.1	77.3	77.6	77.8	77.9	77.7	77.1	76.6	75.9	75.7	24.0	323.5
46,0°	76.4	76.7	77.1	77.3	77.8	78.0	78.5	78.6	78.5	78.0	77.6	77.0	76.9	14.1	337.5
47,0°	76.4	76.9	77.5	78.0	78.5	79.0	79.5	79.8	79.8	79.5	79.0	78.5	78.3	14.5	352.0
48,0°	76.4	77.1	77.8	78.6	79.5	80.2	80.8	81.0	81.1	81.0	80.5	80.3	80.2	14.9	366.9
49,0°	76.6	77.5	78.4	79.6	80.5	81.7	82.3	83.0	82.9	83.0	82.5	82.5	82.1	15.4	382.3
50,0°	76.9	77.9	79.2	80.7	82.1	83.6	84.7	85.4	85.4	85.4	85.1	85.1	84.9	15.9	398.2
51,0°	77.2	78.5	80.2	82.1	84.0	85.9	87.2	88.1	88.2	88.2	88.0	88.2	88.0	16.6	414.7
52,0°	77.7	79.5	81.7	84.2	86.6	89.0	90.7	91.8	91.6	91.6	91.6	91.9	91.8	17.3	432.1
53,0°	78.4	80.7	83.4	86.3	89.3	92.2	94.3	95.2	95.1	95.1	95.2	95.6	95.6	18.1	450.2
54,0°	79.2	82.0	85.3	88.9	92.6	95.9	97.9	98.7	98.5	98.5	98.7	99.2	99.1	18.9	469.1
55,0°	80.2	83.7	87.6	92.1	96.3	100.0	102.2	102.6	102.2	102.1	102.3	102.9	102.9	19.8	488.9
56,0°	81.4	85.3	89.9	95.2	99.8	103.9	105.8	106.2	105.2	105.1	105.4	106.1	106.2	20.7	509.7
57,0°	82.7	87.2	92.2	98.3	103.1	107.7	109.2	109.4	108.0	107.7	107.9	108.7	108.6	21.8	531.5
58,0°	84.0	88.8	94.7	101.0	106.3	110.7	112.2	111.9	110.3	109.6	109.7	110.5	110.7	23.1	554.6
59,0°	85.1	90.5	96.6	103.4	108.9	113.2	114.5	113.8	111.8	110.8	110.9	111.6	111.9	24.7	579.3
60,0°	86.2	91.9	98.4	105.2	110.9	115.1	116.0	114.8	112.6	111.3	111.3	112.0	112.1	26.6	605.9
61,0°	86.9	92.7	99.5	106.2	112.1	115.8	116.5	114.8	112.3	110.9	110.9	111.4	111.6	28.9	634.8
62,0°	87.4	93.4	99.9	106.7	112.3	115.7	116.0	114.1	111.3	109.5	109.6	110.1	110.2	31.5	666.3
63,0°	87.5	93.4	99.9	106.2	111.5	114.5	114.5	112.2	109.4	107.4	107.4	107.6	107.9	34.6	700.8
64,0°	87.0	93.0	99.2	105.1	110.1	112.5	112.2	109.7	106.8	104.7	104.5	104.8	105.0	37.2	738.0
65,0°	86.3	91.8	97.8	103.0	107.9	109.4	109.3	106.2	103.5	100.9	101.1	100.9	101.7	38.6	776.6
66,0°	84.9	89.9	95.6	100.4	104.7	106.0	105.5	102.3	99.3	96.5	96.5	96.1	97.0	38.4	815.0
67,0°	82.9	87.5	92.7	97.1	101.1	101.6	100.6	96.3	92.6	88.2	87.9	86.7	87.7	36.9	852.0
68,0°	80.3	84.3	88.9	92.2	94.8	93.1	90.9	86.7	84.1	80.5	80.2	79.6	80.2	33.8	885.8
69,0°	77.1	80.4	83.8	84.6	86.9	85.4	84.3	80.8	77.6	74.7	74.5	73.7	74.3	29.4	915.2
70,0°	73.1	74.4	77.1	78.2	79.8	78.6	77.5	71.9	69.9	65.3	65.4	63.4	64.6	23.5	938.6
71,0°	67.4	68.7	70.6	71.4	71.9	69.3	67.3	63.6	61.4	57.9	57.4	57.0	57.5	17.0	955.6
72,0°	61.8	62.6	63.5	63.4	63.5	62.4	60.1	57.0	54.0	50.6	50.0	49.2	50.1	11.7	967.4

Photometric test report

Family Streetlight 31 mini toolless	Order number: 5XH6H31T08HA EAN: 4069025104458	LP number 59066_1647
---	--	--------------------------------

Table of values for luminous intensities	Maximum luminous intensity	siteco
---	-----------------------------------	---------------

C-planes	0,0° 180,0°	2,5° 177,5°	5,0° 175,0°	7,5° 172,5°	10,0° 170,0°	12,5° 167,5°	15,0° 165,0°	17,5° 162,5°	20,0° 160,0°	22,5° 157,5°	25,0° 155,0°	27,5° 152,5°	30,0° 150,0°	32,5° 147,5°	35,0° 145,0°
γ	Luminous intensity in cd/klm														
73,0°	35.2	38.4	44.0	47.9	56.3	63.4	78.3	94.3	136.6	163.2	187.0	188.9	200.9	197.3	202.2
74,0°	29.0	30.2	32.5	33.7	36.7	38.2	42.7	47.1	67.2	83.1	102.3	104.2	116.8	114.8	121.0
75,0°	25.0	25.4	26.8	27.6	29.1	29.4	31.0	31.7	38.9	45.5	55.5	56.9	63.5	63.0	66.6
76,0°	21.4	21.6	22.5	22.8	23.9	24.0	25.1	25.1	27.1	28.9	31.9	32.2	35.2	35.1	36.0
77,0°	18.6	18.6	19.3	19.2	20.1	20.2	20.9	21.1	22.2	22.6	24.0	24.1	25.4	25.3	25.9
78,0°	16.2	15.8	16.3	15.8	16.8	16.7	17.5	17.4	18.4	18.6	19.7	19.5	20.5	20.2	21.4
79,0°	13.6	13.4	13.5	13.1	13.6	13.7	14.3	14.4	15.1	15.3	16.1	16.2	16.7	16.8	17.5
80,0°	11.4	10.9	11.0	10.6	11.0	11.1	11.6	11.7	12.3	12.5	13.2	13.2	13.7	13.8	14.5
81,0°	8.8	8.2	8.4	8.2	8.4	8.5	9.0	9.1	9.6	9.8	10.3	10.3	10.8	11.1	11.6
82,0°	6.5	6.1	6.1	6.1	6.4	6.4	6.7	6.9	7.3	7.3	7.8	7.9	8.4	8.6	9.0
83,0°	4.6	4.3	4.4	4.4	4.6	4.6	5.0	5.0	5.3	5.4	5.8	5.9	6.1	6.3	6.7
84,0°	3.0	2.7	3.0	2.7	3.0	3.0	3.2	3.2	3.4	3.5	3.9	3.9	4.3	4.4	4.7
85,0°	1.9	1.9	1.9	1.9	2.0	1.9	2.0	2.0	2.2	2.2	2.5	2.5	2.7	2.7	3.0
86,0°	1.4	1.3	1.4	1.3	1.3	1.2	1.3	1.2	1.4	1.3	1.4	1.3	1.5	1.5	1.8
87,0°	1.1	1.1	1.1	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9
88,0°	0.9	0.9	0.9	0.9	0.9	0.9	0.8	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7
89,0°	0.9	0.9	0.9	0.9	0.9	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 31 mini toolless	Order number: 5XH6H31T08HA EAN: 4069025104458	LP number 59066_1647
		siteco

C-planes	37,5° 142,5°	40,0° 140,0°	42,5° 137,5°	45,0° 135,0°	47,5° 132,5°	50,0° 130,0°	52,5° 127,5°	55,0° 125,0°	57,5° 122,5°	60,0° 120,0°	62,5° 117,5°	65,0° 115,0°	67,5° 112,5°	70,0° 110,0°	72,5° 107,5°
γ	Luminous intensity in cd/klm														
73,0°	190.7	183.9	152.7	136.4	133.9	142.5	133.0	128.1	117.1	109.9	98.2	90.8	80.7	74.3	56.2
74,0°	109.9	98.2	75.3	71.3	84.6	97.3	90.8	89.9	82.8	80.3	71.4	67.9	60.4	56.5	43.6
75,0°	55.6	48.5	42.3	44.5	56.6	64.5	60.4	60.8	56.4	55.5	49.2	46.5	42.5	41.7	35.7
76,0°	31.8	31.5	30.6	31.9	37.0	40.7	38.8	39.4	36.7	36.8	34.1	33.6	32.3	32.5	29.7
77,0°	25.2	25.7	25.5	26.0	27.6	29.3	28.3	28.9	27.8	28.1	26.8	27.4	27.2	27.6	25.7
78,0°	20.8	21.8	21.6	22.5	22.5	23.8	22.8	23.4	22.4	23.5	24.4	26.3	27.6	25.5	22.8
79,0°	17.4	18.1	18.3	18.8	18.9	19.5	19.2	19.3	19.7	22.2	26.1	30.2	30.9	26.0	21.1
80,0°	14.4	15.0	15.3	15.7	15.7	16.2	16.1	16.4	17.5	21.5	27.2	32.5	31.5	25.4	18.8
81,0°	11.6	11.8	12.1	12.5	12.5	13.0	13.0	13.2	14.4	18.4	23.7	28.5	27.2	22.0	15.6
82,0°	9.1	9.6	9.7	10.1	10.2	10.4	10.2	10.4	11.0	14.0	18.2	22.0	20.7	17.1	12.4
83,0°	6.9	7.3	7.3	7.7	7.6	7.9	7.8	8.0	8.3	10.1	12.2	14.5	13.8	12.5	9.3
84,0°	4.6	5.1	5.1	5.3	5.3	5.7	5.6	5.8	5.7	6.4	7.3	8.9	8.6	8.4	6.5
85,0°	3.1	3.3	3.2	3.5	3.5	3.7	3.7	3.9	3.8	4.3	4.4	5.1	5.1	5.0	4.0
86,0°	1.7	2.0	1.8	2.1	2.0	2.2	2.0	2.5	2.2	2.5	2.2	2.6	2.2	2.6	2.1
87,0°	0.9	0.9	0.9	1.1	1.1	1.2	1.2	1.3	1.2	1.3	1.2	1.3	1.2	1.3	1.2
88,0°	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.9	0.8	0.9	0.9
89,0°	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 31 mini toolless	Order number: 5XH6H31T08HA EAN: 4069025104458	LP number 59066_1647
		siteco

C-planes	75,0° 105,0°	77,5° 102,5°	80,0° 100,0°	82,5° 97,5°	85,0° 95,0°	87,5° 92,5°	90,0°	182,5° 357,5°	185,0° 355,0°	187,5° 352,5°	190,0° 350,0°	192,5° 347,5°	195,0° 345,0°	197,5° 342,5°	200,0° 340,0°
γ	Luminous intensity in cd/klm														
73,0°	36.5	33.7	33.2	32.3	32.0	31.6	31.9	31.5	31.1	30.6	30.7	31.1	31.7	31.6	31.8
74,0°	33.0	30.9	30.5	29.4	29.3	28.7	29.6	27.3	27.8	27.4	27.8	28.0	28.7	28.4	28.9
75,0°	30.2	28.1	27.6	26.1	26.1	25.4	26.3	24.1	25.0	24.6	25.0	25.2	25.5	25.4	25.9
76,0°	27.1	24.6	23.7	22.6	22.4	22.0	22.5	21.3	22.0	21.5	21.9	21.9	22.2	22.5	22.8
77,0°	24.1	21.4	20.7	19.7	19.5	19.0	19.6	18.7	19.2	18.6	18.9	19.3	19.2	19.5	20.1
78,0°	21.3	18.4	18.0	16.8	16.7	16.3	16.8	16.3	16.7	15.7	16.3	16.3	16.4	16.6	17.4
79,0°	18.6	16.1	15.3	14.4	14.1	14.0	14.4	14.5	14.5	13.1	13.4	13.5	13.5	14.1	14.5
80,0°	15.8	13.7	12.8	12.1	11.8	11.9	12.1	12.4	12.1	10.6	10.9	11.0	11.1	11.6	12.1
81,0°	12.8	11.2	10.4	9.7	9.5	9.3	9.7	9.7	9.1	7.9	8.3	8.5	8.8	9.1	9.6
82,0°	10.3	9.1	8.3	7.7	7.5	7.3	7.6	7.1	6.6	5.9	6.1	6.4	6.7	7.0	7.3
83,0°	7.9	6.9	6.3	5.7	5.6	5.4	5.7	5.0	4.4	4.3	4.5	4.6	4.8	5.1	5.3
84,0°	5.7	4.7	4.4	3.9	3.8	3.7	4.0	3.0	2.8	2.8	3.0	3.1	3.2	3.3	3.4
85,0°	3.8	3.1	2.8	2.6	2.6	2.4	2.6	1.9	1.9	1.9	2.0	2.0	2.1	2.1	2.2
86,0°	2.1	1.9	1.8	1.4	1.7	1.4	1.7	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4
87,0°	1.2	1.2	0.9	0.9	0.9	0.9	0.9	0.9	1.1	1.2	1.2	1.2	1.2	1.2	1.2
88,0°	0.9	0.9	0.8	0.7	0.8	0.7	0.7	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9
89,0°	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 31 mini toolless	Order number: 5XH6H31T08HA EAN: 4069025104458	LP number 59066_1647
		siteco

C-planes	202,5° 337,5°	205,0° 335,0°	207,5° 332,5°	210,0° 330,0°	212,5° 327,5°	215,0° 325,0°	217,5° 322,5°	220,0° 320,0°	222,5° 317,5°	225,0° 315,0°	227,5° 312,5°	230,0° 310,0°	232,5° 307,5°	235,0° 305,0°	237,5° 302,5°
γ	Luminous intensity in cd/klm														
73,0°	32.4	33.6	34.6	36.5	37.7	38.8	39.5	43.3	51.1	60.7	64.6	64.9	59.5	56.5	55.0
74,0°	29.3	30.5	31.3	32.8	33.8	35.2	35.6	37.3	39.9	46.0	50.4	52.9	50.3	49.4	49.0
75,0°	26.3	27.3	28.1	29.6	30.5	31.9	32.4	33.7	34.9	37.7	40.0	42.8	42.6	43.5	43.4
76,0°	23.1	24.0	24.7	26.1	26.8	28.1	28.6	29.8	30.6	32.3	33.7	35.6	36.5	37.7	38.2
77,0°	20.1	21.2	21.9	23.1	23.7	24.7	25.2	26.3	26.8	28.5	29.7	31.2	31.8	33.2	33.2
78,0°	17.3	18.4	18.7	20.1	20.1	21.3	21.2	22.6	22.9	24.7	25.1	26.8	27.1	28.5	28.0
79,0°	14.8	15.6	16.1	16.8	16.9	17.6	18.0	19.0	19.5	20.7	21.3	22.6	22.9	23.7	23.8
80,0°	12.4	13.1	13.6	13.8	13.8	14.3	14.8	15.7	16.2	17.1	17.7	18.7	18.9	19.6	19.6
81,0°	9.8	10.3	10.5	10.8	10.9	11.2	11.5	12.2	12.5	13.2	13.7	14.5	14.7	15.4	15.3
82,0°	7.6	7.9	8.0	8.4	8.4	8.6	8.8	9.1	9.3	10.1	10.6	11.2	11.6	11.9	11.8
83,0°	5.4	5.8	5.8	6.0	6.0	6.3	6.3	6.6	6.7	7.3	7.6	8.0	8.3	8.6	8.8
84,0°	3.4	3.8	3.8	3.9	3.9	4.1	4.1	4.4	4.4	4.7	4.8	5.2	5.2	5.7	5.7
85,0°	2.2	2.4	2.4	2.5	2.5	2.6	2.5	2.7	2.6	2.8	2.8	3.2	3.1	3.4	3.3
86,0°	1.4	1.5	1.4	1.5	1.4	1.7	1.4	1.7	1.5	1.7	1.7	1.9	1.7	1.9	1.7
87,0°	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2
88,0°	0.9	0.9	0.9	0.9	0.9	0.9	1.1	1.1	0.9	1.1	1.1	0.9	0.9	0.9	0.9
89,0°	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

C-planes	240,0° 300,0°	242,5° 297,5°	245,0° 295,0°	247,5° 292,5°	250,0° 290,0°	252,5° 287,5°	255,0° 285,0°	257,5° 282,5°	260,0° 280,0°	262,5° 277,5°	265,0° 275,0°	267,5° 272,5°	270,0°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm													Luminous flux in lm/klm	
73,0°	55.3	55.3	56.5	56.4	56.6	53.7	51.4	47.7	44.6	42.3	41.2	41.2	41.9	7.8	975.2
74,0°	49.5	49.9	50.6	49.8	48.8	47.2	45.1	40.9	38.7	34.9	34.3	33.3	34.3	5.5	980.7
75,0°	44.6	44.5	44.7	43.5	43.0	40.6	37.0	34.1	31.5	28.9	27.7	27.1	27.9	4.0	984.7
76,0°	38.9	38.4	38.7	36.8	36.7	33.0	30.7	26.5	23.7	21.1	19.9	19.0	19.6	3.1	987.8
77,0°	33.7	33.5	32.9	32.2	29.8	27.3	24.6	20.8	18.0	15.0	13.6	12.3	12.5	2.6	990.3
78,0°	29.2	27.7	28.4	25.8	25.0	21.2	19.0	14.5	12.5	9.3	8.2	6.7	7.1	2.2	992.5
79,0°	24.0	23.3	23.3	21.3	19.6	16.7	14.1	10.8	8.0	5.7	3.9	3.0	3.1	1.8	994.3
80,0°	19.5	19.5	18.7	17.4	15.8	13.1	10.3	7.9	5.9	3.8	2.4	1.9	1.9	1.6	995.9
81,0°	15.8	15.3	14.9	13.4	11.8	9.6	7.9	5.9	4.0	2.8	1.7	1.4	1.4	1.2	997.1
82,0°	12.1	11.7	11.4	10.3	8.9	7.2	5.8	4.5	3.1	2.1	1.4	1.2	1.2	1.0	998.1
83,0°	8.8	8.6	8.4	7.6	6.6	5.3	4.4	3.3	2.4	1.4	1.2	1.2	1.2	0.7	998.8
84,0°	6.0	5.7	5.7	5.0	4.5	3.5	3.1	2.4	1.9	1.2	1.2	0.9	0.9	0.5	999.2
85,0°	3.5	3.5	3.7	3.1	2.8	2.4	2.1	1.7	1.4	1.2	0.9	0.9	0.9	0.3	999.5
86,0°	1.9	1.7	1.8	1.4	1.7	1.4	1.4	1.2	1.2	0.9	0.9	0.9	0.9	0.2	999.7
87,0°	1.2	1.2	1.2	1.2	1.1	0.9	1.1	0.9	0.9	0.9	0.9	0.9	0.9	0.1	999.8
88,0°	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.1	999.9
89,0°	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.1	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Streetlight 31 mini toolless	Order number: 5XH6H31T08HA EAN: 4069025104458	LP number 59066_1647
---	--	--------------------------------

Dimming levels table	environmental temperature: 25°C	siteco
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W] start of lifetime	Power consumption [W] end of lifetime	Power consumption [W] average
100	254	254	9070	68.2	74.4	71.3
95	238	252	8629	63.7	69.4	66.6
90	222	249	8170	59.1	64.4	61.8
85	207	247	7722	54.9	59.8	57.4
80	192	244	7262	50.8	55.3	53.0
75	178	241	6817	47.0	51.1	49.0
70	164	238	6360	43.2	47.0	45.1
65	150	235	5890	39.5	42.9	41.2
60	137	231	5442	36.1	39.2	37.7
55	124	228	4981	32.7	35.4	34.0
50	112	224	4548	29.7	32.1	30.9
45	99	219	4066	26.3	28.5	27.4
40	87	215	3613	23.3	25.2	24.2
35	76	210	3188	20.6	22.1	21.4
30	64	204	2716	17.6	18.9	18.2
25	53	197	2274	14.9	16.1	15.5
20	42	188	1825	12.3	13.2	12.8
15	31	177	1367	9.7	10.3	10.0
11	23	166	1030	8.1	8.3	8.2

Dimming levels table	environmental temperature: 5°C
-----------------------------	--------------------------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W] start of lifetime	Power consumption [W] end of lifetime	Power consumption [W] average
100	254	254	9350	69.0	75.3	72.2
95	238	252	8879	64.4	70.1	67.2
90	223	249	8423	60.1	65.4	62.8
85	208	247	7952	55.9	60.8	58.4
80	193	244	7470	51.7	56.2	54.0
75	179	241	7006	47.9	52.0	50.0
70	165	238	6532	44.1	47.9	46.0
65	152	235	6080	40.6	44.1	42.4
60	139	232	5617	37.2	40.3	38.8
55	126	228	5145	33.7	36.5	35.1
50	113	224	4663	30.3	32.9	31.6
45	101	220	4209	27.2	29.4	28.3
40	89	216	3746	24.2	26.1	25.2
35	77	210	3273	21.1	22.8	22.0
30	65	204	2794	18.1	19.5	18.8
25	54	197	2345	15.5	16.5	16.0
20	43	189	1890	12.8	13.7	13.2
15	31	177	1383	9.8	10.5	10.2
11	23	166	1041	8.2	8.4	8.3

Photometric test report

Family Streetlight 31 mini toolless	Order number: 5XH6H31T08HA EAN: 4069025104458	LP number 59066_1647
---	--	--------------------------------

Dimming levels table	environmental temperature: 15°C	siteco
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W] start of lifetime	Power consumption [W] end of lifetime	Power consumption [W] average
100	254	254	9220	68.6	74.8	71.7
95	238	252	8763	64.0	69.7	66.8
90	222	249	8290	59.5	64.7	62.1
85	207	247	7829	55.3	60.2	57.8
80	193	244	7388	51.4	55.9	53.6
75	178	241	6901	47.3	51.4	49.3
70	165	238	6468	43.8	47.6	45.7
65	151	235	5990	40.1	43.5	41.8
60	138	232	5534	36.6	39.7	38.2
55	125	228	5067	33.2	36.0	34.6
50	113	224	4628	30.1	32.6	31.4
45	100	220	4140	26.8	28.9	27.8
40	88	215	3683	23.7	25.6	24.6
35	76	210	3213	20.7	22.3	21.5
30	65	204	2777	18.0	19.4	18.7
25	53	197	2290	15.0	16.2	15.6
20	42	188	1838	12.4	13.3	12.8
15	31	177	1376	9.8	10.4	10.1
11	23	166	1037	8.1	8.3	8.2

Photometric test report

Family Streetlight 31 mini toolless	Order number: 5XH6H31T08HA EAN: 4069025104458	LP number 59066_1647
---	--	---------------------------------------

Luminousfluxs table	sITeco
----------------------------	---------------

Temperature °C	Luminous flux lm	Power consumption W
25.0	9070.0	68.2
5.0	9350.0	69.0
15.0	9220.0	68.6